

# LTC5597 Linduino Shield 100MHz to 70 GHz RMS Power Detector

## DESCRIPTION

Demonstration circuit DC3129A-KIT is a Linduino® evaluation kit for RMS Power Detector [LTC®5597](#). It is set up for quick evaluation of RMS RF power measurement using the [Arduino/Linduino compatible platform and software download available](#). When connected to PC with USB cable, accurate power level can be monitored using the graphic user interface.

The LTC5597 is a wide dynamic range linear-in-dB RMS RF Power Detector, operational from 100MHz to 70GHz. The Linduino (DC2026C) platform provides 10-bit ADC at 4.9mV/LSB resolution with 5V default reference voltage. Input dynamic range with 1dB accuracy is up to 35dB depending on frequency. The detector output slope is normally 6 LSB/dB. The DC3129A-KIT is optimized for wide operational frequency signals up to 70GHz using the 1.85mm edge mount connector. Input impedance is internally matched to 50Ω. It is suitable for RMS measurements of high crest factor waveforms up to 12dB peak-to-average. No external coupling capacitor is necessary if DC voltage at RF<sub>IN</sub> pin is kept below 1.0V. On board

3.3V regulator provides power to the shield by jumper JP1. Contact applications support for more information.

[Design files for this circuit board are available.](#)

## ABSOLUTE MAXIMUM INPUT RATINGS

|                                       |                |
|---------------------------------------|----------------|
| (Note 1)                              |                |
| Supply Voltage(V <sub>CC</sub> ):     | +3.8V          |
| DC Voltage at RF <sub>IN</sub> :      | -0.3V to 1.0V  |
| DC Voltage at FLTR:                   | -0.3V to 0.4V  |
| DC Voltage at EN:                     | -0.3V to 3.8V  |
| RF <sub>IN</sub> Input Power-Average: | +15dBm         |
| T <sub>JMAX</sub>                     | 150°C          |
| Case Operating Temperature Range      | -40°C to 105°C |
| Storage Temperature Range             | -65°C to 150°C |

Note 1: Voltage on all pins must not exceed V<sub>CC</sub> + 0.3V or be less than -0.3V.

CAUTION: This part is sensitive to electrostatic discharge (ESD). Observe proper ESD precautions when handling the LTC5597.

All registered trademarks and trademarks are the property of their respective owners.

## TEST SETUP

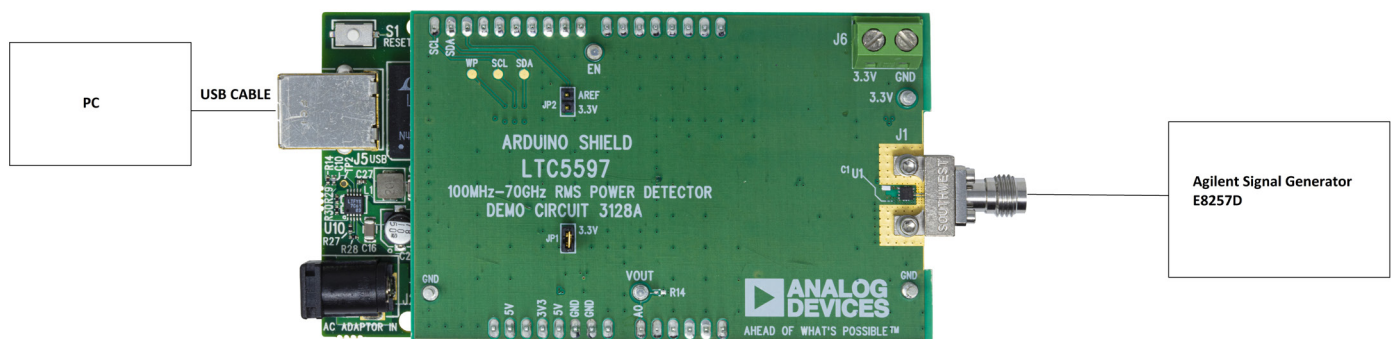


Figure 1. Test Setup for RF Performance Measurements

# DEMO MANUAL DC3129A-KIT

---

## NOTES ON TEST EQUIPMENT AND SETUP

- Use a high performance signal generator with accurate output power levels up to 70GHz, such as Agilent E8257D.
- DC3129A-KIT includes Linduino DC2026C, and the demo board DC3128A assembled with 1.85mm connector for best performance up to 70GHz.
- Connecting cable for RF signal should be rated up to 70GHz for the best performance.
- Optional input attenuation can be used to improve return loss, but also shifts the log intercept point accordingly.

---

## QUICK START PROCEDURE

1. Remove the DC3129A-KIT from its protective packaging in an ESD-safe working area, connect USB cable to PC (see Figure 1).
2. Set JP1 which provides the 3.3V to  $V_{CC}$  by the on board regulator.
3. Download and install [QuikEval](#) if it's not yet installed.
4. The Eval Kit comes with a Linduino board pre-loaded with firmware. Follow Figure 2 to re-load the firmware if necessary, which can be downloaded from [www.analog.com](http://www.analog.com).
5. Follow instruction from QuikEval which will automatically update the GUI.
6. Connect USB cable from PC to Linduino board. Connect the RF input to the signal generator at the 1.85mm connector, J1.
7. Set the frequency and power level (less than +10dBm) of the signal generator.
8. Open QuikEval, and set the frequency of signal to be measured. Push "READ" to measure RF power. Using the default calibration would be loading the nominal slope and intercept from LTC5597 data sheet values. See Figure 3.
9. For higher accuracy, Calibration can be performed using the GUI at various frequency with two point calibration. Set input power level to the corresponding calibration points on the GUI, and calibrate accordingly by clicking the corresponding button.
10. Read RF power using the GUI.

---

## DEMO BOARD USAGE NOTES

1. Evaluation DC3129A-KIT has provisions for inter-stage filter cap. Additional capacitor (C3) can be added to slow down the transient response to reduce the output ripple. The range for C3 is 10pF to 1nF.
2. Output power is calculated using slope and intercept.
3.  $\text{ADC count} \cdot 4.9\text{mV/slope} + \text{intercept} = \text{output power}$ . Slope is derived from two point calibration in the linear region of transfer function.
4. A minimum two point calibration is necessary for most applications. Additional calibration points will improve the accuracy of the power detection.

## DEMO BOARD USAGE NOTES

```

LTC5597Demo | Arduino 1.8.5
File Edit Sketch Tools Help
LTC5597Demo
#include <Arduino.h>
#include <stdint.h>

// Constants
#define ID_STRING "USBSP1,PIC,01,01,DC,DC590,-----\n"
#define EVAL_ID_STRING "LTC5597,C1s,D5596,01,01,DC,DC3120A,-----\n"

#define BUFFER_SIZE 64
#define BUFFER_LAST BUFFER_SIZE - 1

#define MEASURE_DELAY 5
#define NUM_AVERAGES 20

#define VOLT_PIN 0
#define ENABLE_PIN 7

#define SCALE 4.9

// Error codes
#define E_OK 0
#define E_NUM_NO_NEWLINE 1
#define E_BAD_COMMAND 2

// Globals
char buff[BUFFER_SIZE] = "Initial State";
char sm_buff[3] = "###";
    
```

Figure 2. Firmware Re-Load (Only If Necessary)

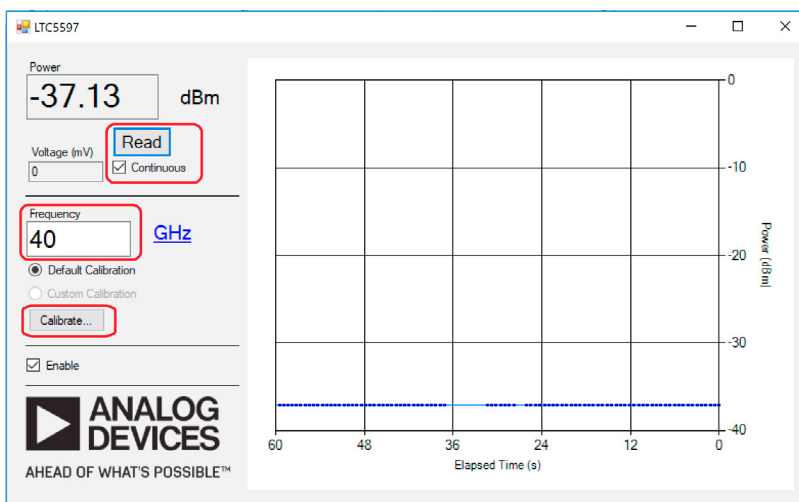


Figure 3. GUI





Figure 4. Calibration

# DEMO MANUAL DC3129A-KIT

## PARTS LIST

| ITEM                               | QTY | REFERENCE          | PART DESCRIPTION  | MANUFACTURER/PART NUMBER  |
|------------------------------------|-----|--------------------|---|---|
| <b>Required Circuit Components</b> |     |                    |   |   |
| 1                                  | 1   | C1                 | CAP, CX Series, (16kHz to 40GHz), 0.1µF, YD, 16V, 10%, 0402                 | MURATA, 935152424610-T3N  |
| 2                                  | 2   | C3, C14            | CAP, 0.01µF, X7R, 16V, 10%, 0402  | MURATA, GRM155R71C103KA01D<br>NIC, NMC0402X7R103K16TRPF                         |
| 3                                  | 1   | C4                 | CAP, 1µF, X5R, 10V, 10%, 0402   | MURATA, GRM155R61A105KE15D<br>AVX, 0402ZD105KAT2<br>TDK, C1005X5R1A105K050BB    |
| 4                                  | 1   | C8                 | CAP, 10pF, NP0, 50V, 10%, 0402  | AVX, 04025A100KAT2A   |
| 5                                  | 0   | C10                | CAP, OPTION, 0402   |   |
| 6                                  | 2   | C11, C15           | CAP, 0.1µF, X7R, 16V, 10%, 0402   | AVX, 0402YC104KAT2A<br>Taiyo Yuden, EMK105B7104KV-F<br>TDK, C1005X7R1C104K050BC |
| 7                                  | 2   | C12, C13           | CAP CER 10UF 6.3V X5R 0402  | TDK Corporation, C1005X5R0J106M050BC  |
| 8                                  | 5   | E1, E2, E3, E4, E5 | TEST POINT, TURRET, 0.064", MTG. HOLE                                       | MILL-MAX, 2308-2-00-80-00-00-07-0   |
| 9                                  | 1   | J1                 | CONN., SMA, 1.85mm, JACK TO EDGE LUNCH, DC-67GHz                            | SOUTHWEST MICROWAVE 1892-03A-6  |
| 10                                 | 1   | J2                 | CONN., HDR, FEMALE, 1x10, 2.54mm, THT, STR                                  | SULLINS CONNECTOR SOLUTIONS, PPPC101LFBN-RC                                     |
| 11                                 | 2   | J3, J4             | CONN., HDR, FEMALE, 1x8, 2.54mm, STR, THT                                   | SULLINS CONNECTOR SOLUTIONS, PPPC081LFBN-RC                                     |
| 12                                 | 1   | J5                 | CONN., HDR., FEMALE, 1x6, 2.54mm, THT, STR                                  | SULLINS CONNECTOR SOLUTIONS, PPPC061LFBN-RC                                     |
| 13                                 | 1   | J6                 | CONN., TERM. BLOCK, RCPT, 1x2, 5mm, SIDE ENTRY, THT                         | TE CONNECTIVITY, 282836-2   |
| 14                                 | 2   | JP1, JP2           | CONN., HDR, MALE, 1x2, 2mm, VERT, STR, THT, 10u" AU                         | SAMTEC, TMM-102-02-L-S  |
| 15                                 | 1   | LB1                | LABEL SPEC, DEMO BOARD SERIAL NUMBER  | BRADY, THT-96-717-10  |
| 16                                 | 1   | PCB1               | PCB, DC3128A  | ANALOG DEVICES INC., 600-DC3128A  |
| 17                                 | 1   | R1                 | RES., AEC-Q200, 2k OHMS, 1%, 1/16W, 0402                                    | VISHAY, CRCW04022K00FKED<br>NIC, NRC04F2001TRF                                  |
| 18                                 | 1   | R2                 | RES., 1 OHM, 1%, 1/16W, 0402  | VISHAY, CRCW04021R00FKED  |
| 19                                 | 0   | R8, R14            | RES., OPTION, 0402  |   |
| 20                                 | 3   | R9, R10, R11       | RES., 4.99k OHMS, 1%, 1/16W, 0402   | NIC, NRC04F4991TRF<br>VISHAY, CRCW04024K99FKED<br>YAGEO, RC0402FR-074K99L       |
| 21                                 | 1   | R12                | RES., 100 OHMS, 1%, 1/16W, 0402   | NIC, NRC04F1000TRF<br>YAGEO, RC0402FR-07100RL                                   |
| 22                                 | 1   | R13                | RES., 3k OHMS, 5%, 1/16W, 0402  | VISHAY, CRCW04023K00JNED  |
| 23                                 | 1   | STNCL1             | TOOL, STENCIL, 700-DC3128A  | ANALOG DEVICES INC., 830-DC3128A  |
| 24                                 | 1   | U1                 | IC, 100MHz to 70GHz Linear-in-dB RMS Power Detector with 35dB Dynamic Range | LINEAR TECH, LTC5597_DC#PBF   |
| 25                                 | 1   | U2                 | IC, LOW NOISE, LDO MICROPOWER REG., TSOT23-5                                | LINEAR TECH., LT1761ES5-3.3#PBF<br>LINEAR TECH., LT1761ES5-3.3#TRPBF            |
| 26                                 | 1   | U3                 | IC, MEMORY, EEPROM, 2Kb (256x8), TSSOP-8, 400kHz                            | MICROCHIP, 24LC025-I/ST<br>MICROCHIP, 24LC025T-I/ST                             |

## SCHEMATIC DIAGRAM

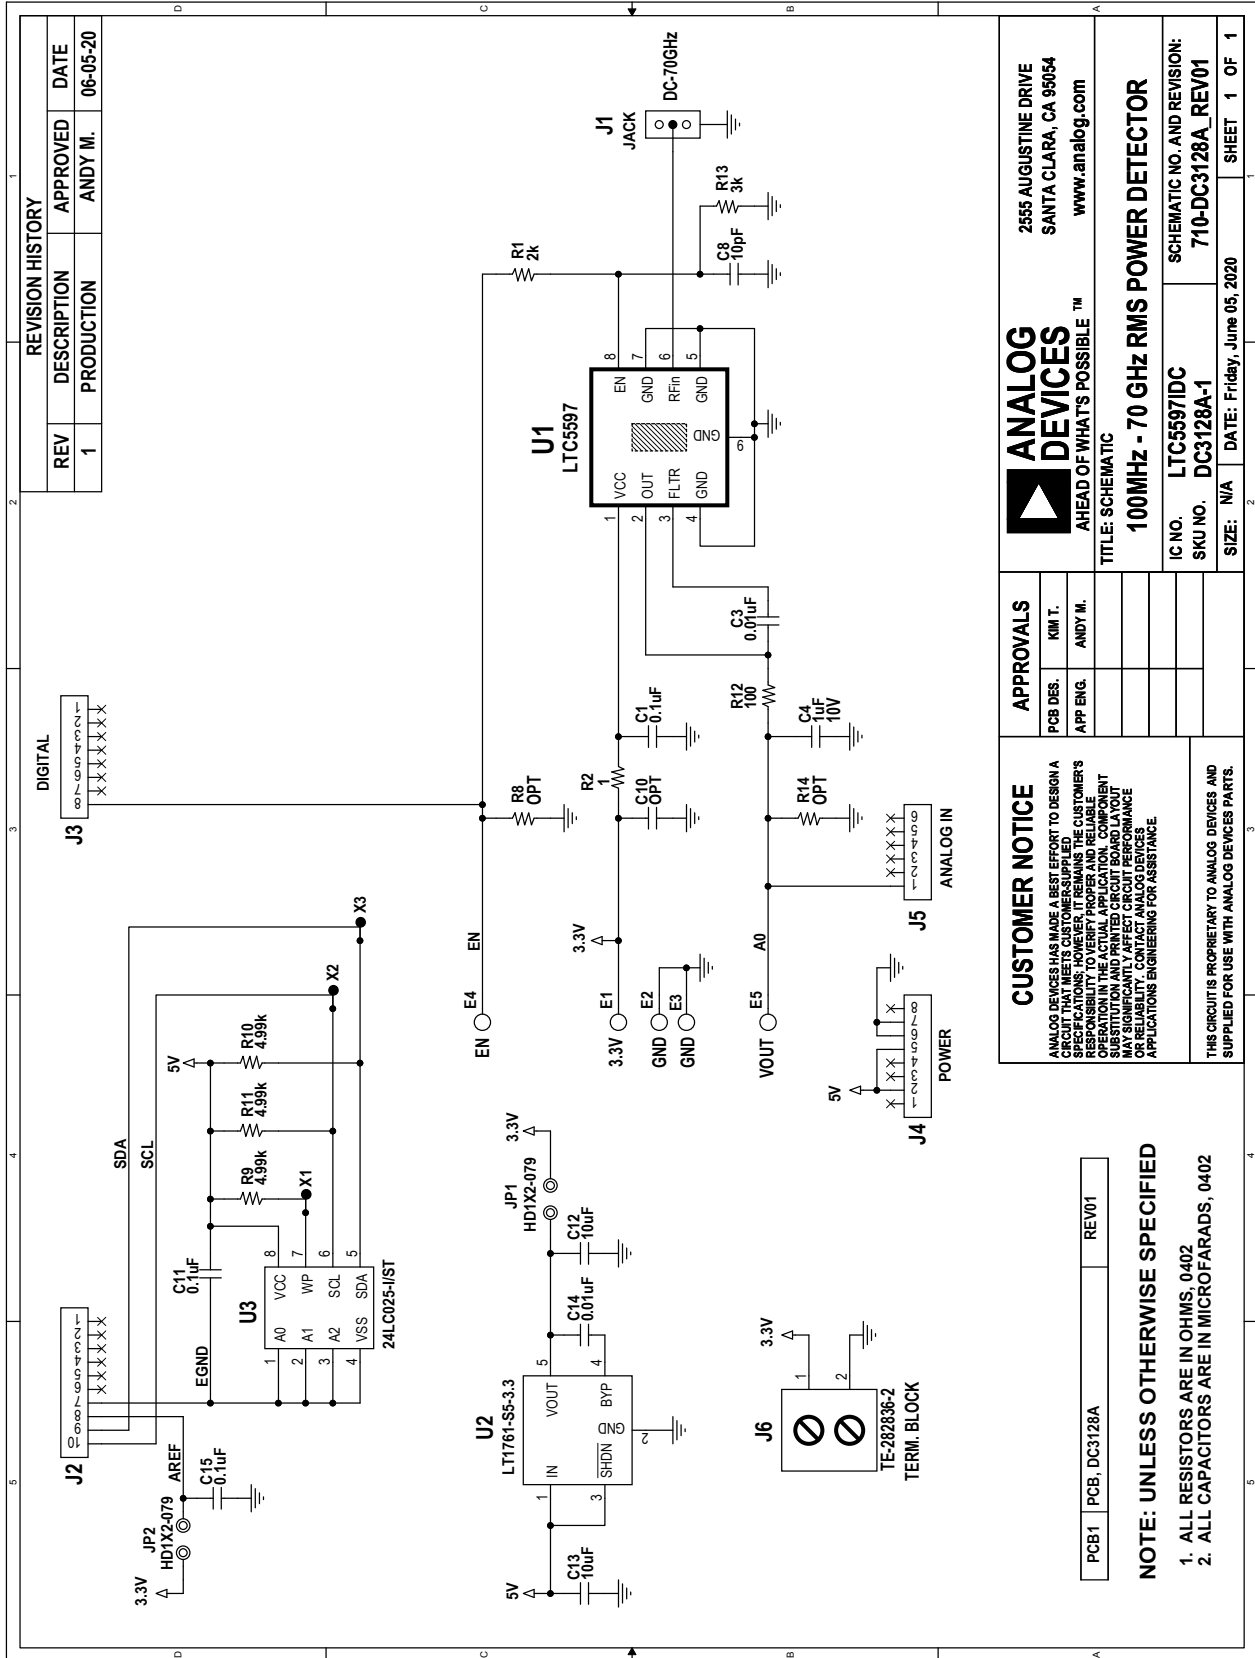

| REVISION HISTORY |             |          |          |
|------------------|-------------|----------|----------|
| REV              | DESCRIPTION | APPROVED | DATE     |
| 1                | PRODUCTION  | ANDY M.  | 06-05-20 |

|   |  |   |                             |
|---|--|---|-----------------------------|
| <b>ANALOG DEVICES</b><br>AHEAD OF WHAT'S POSSIBLE™<br>www.analog.com  |  | 2555 AUGUSTINE DRIVE<br>SANTA CLARA, CA 95054 |                             |
|   |  | TITLE: SCHEMATIC                              |                             |
| <b>100MHz - 70 GHz RMS POWER DETECTOR</b>   |  | IC NO. LTC5597DC                              | SCHMATIC NO. AND REVISION:  |
| APPROVALS<br>PCB DES. [ ]<br>APP ENG. [ ]<br>HW T. [ ]<br>ANDY M. [ ]   |  | SKU NO. DC3129A-1                             | 710-DC3129A_REV01           |
| <b>CUSTOMER NOTICE</b><br>ANALOG DEVICES HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER SUPPLIED REQUIREMENTS. CUSTOMERS ARE RESPONSIBLE TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY AFFECT PERFORMANCE. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE. |  | SIZE: N/A                                     | DATE: Friday, June 05, 2020 |
| THIS CIRCUIT IS PROPRIETARY TO ANALOG DEVICES AND SUPPLIED FOR USE WITH ANALOG DEVICES PARTS.   |  | SHEET 1                                       | OF 1                        |

PCB1 PCB, DC3129A REV01

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. ALL RESISTORS ARE IN OHMS. 0402
2. ALL CAPACITORS ARE IN MICROFARADS, 0402



## ESD Caution

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.