Load Cells and Weigh Modules

Load Cell Troubleshooting

Scope

Load cells are designed to sense force or weight under a wide range of adverse conditions; they are not only the most essential part of an electronic weighing system, but also the most vulnerable.

Load cells might be damaged because of (shock) overloading, lightning strikes or heavy electrical surges in general, chemical or moisture ingress, mishandling (dropping, lifting on cable, etc.), vibration or internal component malfunction. As a direct result the scale or system might (zero) drift, provide unstable/unreliable readings or not register at all.

This Technical Note is written to assist our customers with potential load cell problems. It describes basic field tests which can be performed on site, and provides the information necessary to interpret the results.

Proper field evaluation is absolutely critical to prevent similarly induced damage in the future! Under no circumstances should fault location, as described below, be attempted on load cells installed in a hazardous area!

In General

Carefully check the system integrity before evaluating the load cells:

• Check for force shunts (might be caused by dirt, mechanical misalignment or accompanying components such as stay or check rods).
• Check for damage, corrosion or significant wear in the areas of load introduction.
• Check cable connections to junction box and indicator.
• Check the measuring device or indicator with an accurate load cell simulator.

Visually inspect the load cells before performing the tests as described on the following pages. Pay particular attention to signs of corrosion (especially around the critical gage area), the integrity of the cable (might be compromised due to cuts, abrasions, etc.), and the condition of the cable entry.

The following test equipment is required to properly evaluate a load cell:
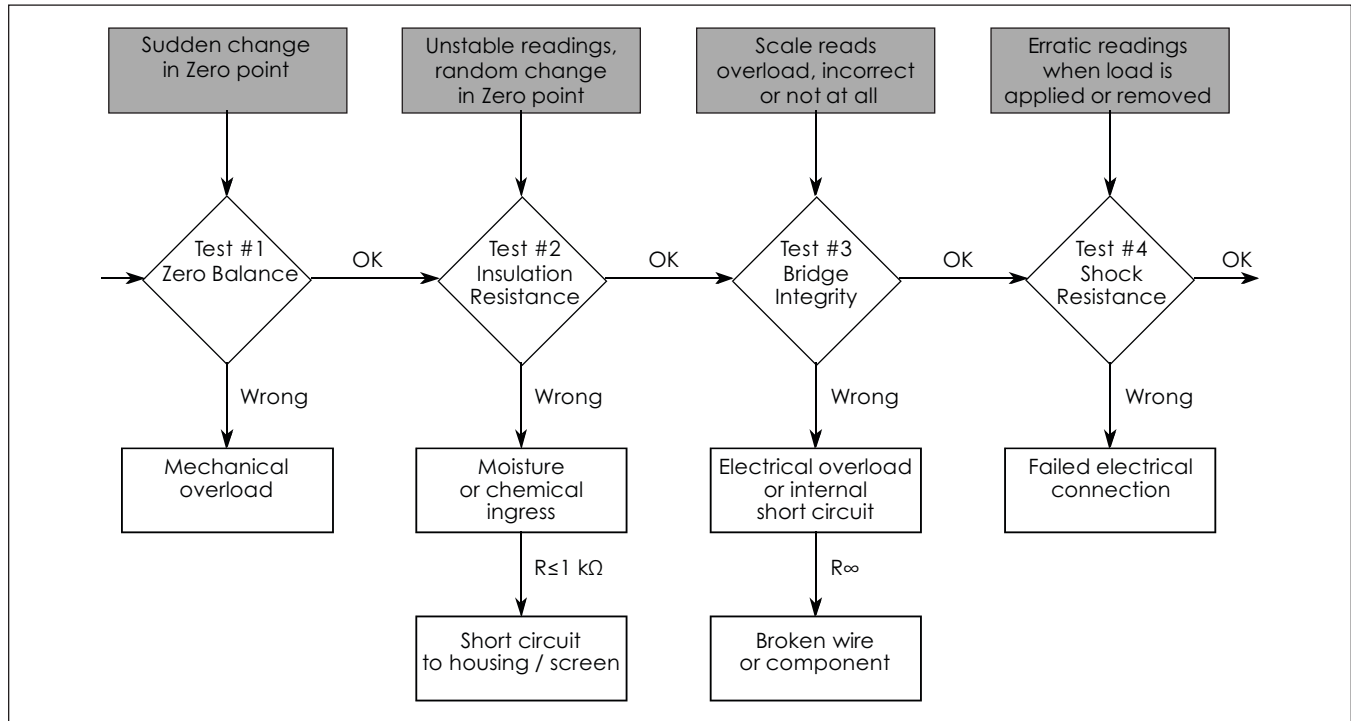
• A high quality, calibrated, digital volt- and ohmmeter with a measuring accuracy of ±0.5 Ω and ±0.1 mV, to measure the zero balance and integrity of the bridge circuit.
• A megohmmeter, capable of reading 5000 MΩ with an accuracy of 500 MΩ at 50 volts, to measure the insulation resistance. *Do not use megohmmeters which supply more than 50 volts to the load cell, in order to prevent permanent damage!*
• A means to lift the dead load (weighbridge, tank, hopper, conveyor, etc.) off the load cell to be able to measure the zero balance or to remove the load cell(s), i.e., a crane, hydraulic jack, etc.

Load cells are produced according to specifications and tolerances which are described in the applicable data sheet. More detailed information can be found on the calibration certificate which is packed with each load cell. The calibration certificate mentions the exact values for the input and output resistance, insulation resistance, zero balance, rated output and the correct wiring code; *it provides an important reference for the values which can be measured and should be filed with the system documentation set.*

Load Cell Troubleshooting

Test Procedures and Analysis

The diagram below represents a proposed sequence for testing load cells after a particular system malfunction. Isolate the fault location by moving a relatively small deadweight over each load cell, or by disconnecting load cell by load cell.

| Sudden change in Zero point	Unstable readings, random change in Zero point	Scale reads overload, incorrect or not at all	Erratic readings when load is applied or removed

Test #1 Zero Balance — OK → Test #2 Insulation Resistance — OK → Test #3 Bridge Integrity — OK → Test #4 Shock Resistance — OK →

Wrong ↓ Mechanical overload

Wrong ↓ Moisture or chemical ingress → R≤1 kΩ → Short circuit to housing / screen

Wrong ↓ Electrical overload or internal short circuit → R∞ → Broken wire or component

Wrong ↓ Failed electrical connection

Test #1: Zero Balance

The Zero Balance is defined as the load cell output in a "no-load" situation. Therefore, all weight (including dead load) has to be removed from the load cell. Low capacity load cells should be measured in the position in which the load cell is designed to measure force to prevent the weight of the element giving wrong results.

The load cell should be connected to a stable power supply, preferably a load cell indicator with an excitation voltage of at least 10 volts. Disconnect any other load cell for multiple load cell systems.

Measure the voltage across the load cell's output leads with a millivoltmeter and divide this value by the input or excitation voltage to obtain the Zero Balance in mV/V. Compare the Zero Balance to the original load cell calibration certificate (if available) or to the data sheet.

Analysis

Changes in Zero Balance usually occur if the load cell has been permanently deformed by overloading
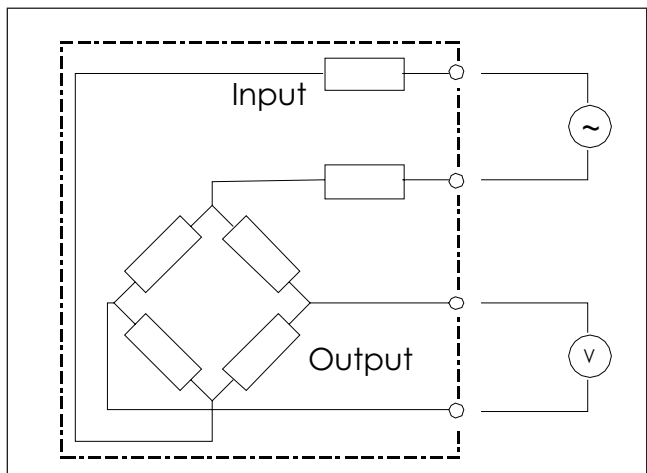
and/or excessive shocks. Load cells that experience progressive zero output changes per time period are most likely undergoing a change in the strain gage resistance because of chemical or moisture intrusion. However, in this case the insulation resistance and/or the bridge integrity will also be compromised.

Technical contact: vpgt.americas@vpgsensors.com, vpgt.asia@vpgsensors.com, and vpgt.emea@vpgsensors.com

VPGTransducers

Celtron • Revere • Sensortronics • Tedea-Huntleigh
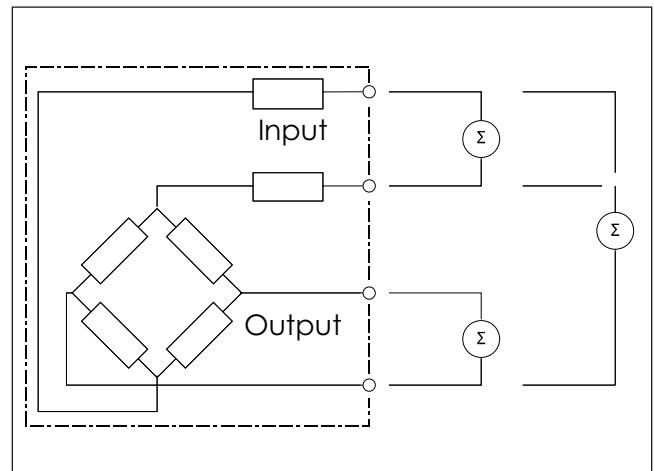
# Load Cell Troubleshooting

Test #4: Shock Resistance

The load cell should be connected to a stable power supply, preferably a load cell indicator with an excitation voltage of at least 10 volts. Disconnect all other load cells for multiple load cell systems.

With a voltmeter connected to the output leads, lightly rap on the load cell with a small mallet to mildly shock it. *Exercise extreme care not to overload low capacity load cells while testing their shock resistance.*

Watch the readings during the test. The readings should not become erratic, should remain reasonably stable and return to original zero readings.

Analysis

Erratic readings may indicate a failed electrical connection or a damaged glue layer between strain gage and element as a result of an electrical transient.
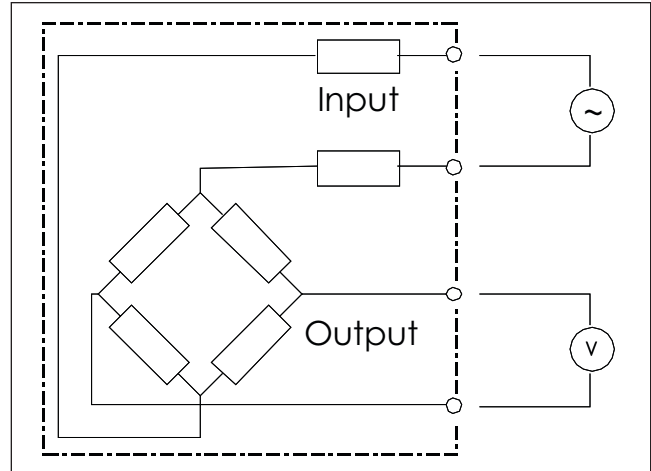
Load Cell Evaluation Form

The following load cell evaluation form should be used as a guide for the testing and evaluation of load cells. We recommend that this form be included in the customer dossier and used as the basis to discuss the test results and diagnostics with third parties.

If a load cell is returned to VPG Transducers, the Evaluation Form will assist our repair department in further diagnostics and repair of the cell.

Document Number: 11867
Revision: 14-Jan-2015

Load Cell Troubleshooting

Load Cell Evaluation Form

Company: _____   Contact person: _____
Address: _____   City / Country: _____
Tel. / Fax.: _____   Repair order: _____ Date:_____

Load cell type: _____   Serial number: _____
Capacity:_____   Accuracy grade: _____

Short description of system failure and application:_____
_____
_____
_____

Visual Inspection			
Label	❐ OK	❐ Unreadable	❐ Missing
Condition	❐ Like new ❐ Broken welds	❐ Cable cut ❐ Visual mechanical overload	❐ J-box damage ❐ Dents/cracks in parts
Corroded parts	❐ Weld(s) ❐ Housing/element	❐ J-box/cable entry ❐ Top/bottom plate	❐ Diaphragm ❐ Bellow/tube/cubs
Affected by chemicals	❐ No	❐ Unknown	❐ Yes: _____

Electrical Inspection				
Bridge Measurements	**Actual**	**Specification**	**Conclusion**	
Zero balance	mV/V	≤±1% of rated span	❐ OK	❐ Wrong
Input resistance	Ω	Ω±1%	❐ OK	❐ Wrong
Output resistance	Ω	Ω±1%	❐ OK	❐ Wrong
Output – to input –	Ω		❐ OK	❐ Wrong
Out put – to input +	Ω	difference ≤±1%	❐ OK	❐ Wrong
Insulation Resistance	**Actual**	**Specification**	**Conclusion**	
Bridge to housing	MΩ	≥5000 MΩ	❐ OK	❐ Wrong
Bridge to shield	MΩ	≥5000 MΩ	❐ OK	❐ Wrong
Shield to housing	MΩ	≥5000 MΩ	❐ OK	❐ Wrong

Expected Reason for Failure			
❐ Moisture ingress	❐ Short circuit	❐ Broken wire/component	❐ Excessive heat
❐ Electrical transients	❐ Mechanical overload	❐ Excessive corrosion	❐ Broken cable
❐ Other: _____			

Recommendation

❐ Return load cell to supplier for further evaluation and repair (if possible)
❐ Return load cell to supplier for warranty
❐ Load cell beyond (economic) repair
❐ _____