

FEATURES

Small surface-mount package: 3.35 mm × 2.5 mm × 0.98 mm
Equivalent input noise: 27 dBA SPL
Sensitivity: -35 dBV
Hearing aid-compatible voltage range: 0.9 V to 1.3 V
Low current consumption: 17 μ A
0.8 sec startup to within 0.2 dB of 1 kHz sensitivity
Flat frequency response
Good sensitivity and frequency response matching
Single-ended analog output
Compatible with Sn/Pb and Pb-free solder processes
RoHS/WEEE compliant

APPLICATIONS

Hearing aids
 Hearing aid accessories
 Assistive listening/alerting and signaling systems
 Audiometers
 Bone conduction devices
 Hearing protection

GENERAL DESCRIPTION

The ADMP801 is a high performance MEMS microphone with a unique combination of very low self-noise, tiny package volume (7.3 mm³), and low power consumption. Running from a 1 V supply, the ADMP801 consumes only 17 μ A of current while providing an equivalent input noise of 27 dBA SPL with an analog 4.5 k Ω impedance output. These features, combined with the benefits of MEMS technology, reflow solder compatibility, and a highly stable response over time and temperature, make the ADMP801 an ideal microphone choice for assistive listening devices (ALDs) such as hearing aids.

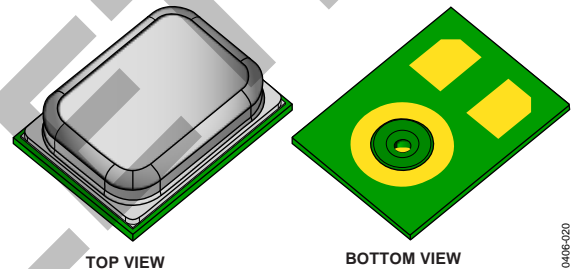


Figure 1. Isometric Views of the ADMP801 Microphone Package

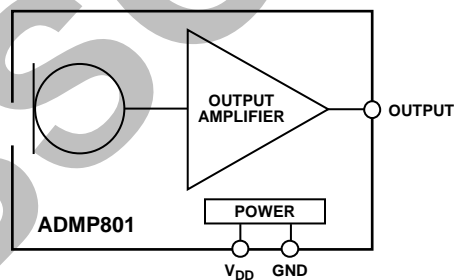
FUNCTIONAL BLOCK DIAGRAM


Figure 2.

NOTES

OBSOLETE