




# SuperSpeed Inter-Chip (SSIC) Protocol Trigger and Decode for Infiniium Series Oscilloscopes

Data Sheet

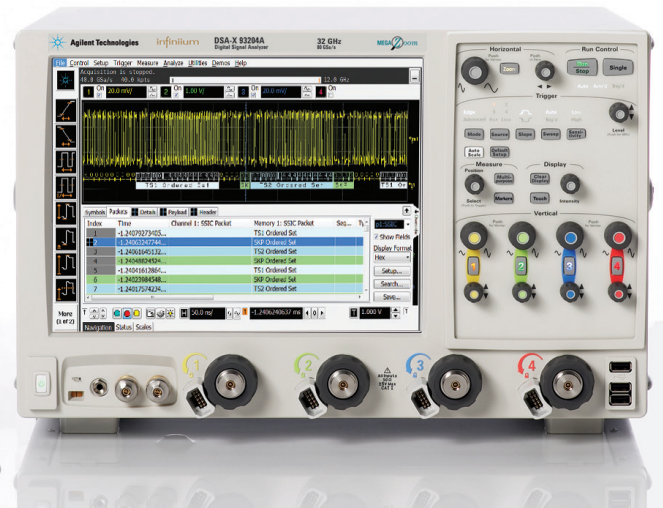

Anticipate \_\_\_ Accelerate \_\_\_ Achieve



Agilent Technologies


## SSIC description and features

SuperSpeed Inter-Chip (SSIC) standard was developed by the USB-IF standard body, leveraging MIPI Alliance MIPI M-PHY electrical layer to transfer USB 3.0 protocol. It allows USB 3.0 intellectual properties to be adopted into mobile designs. The serial bus interface provides content-rich points for debug and test. However, since this protocol transfers bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol requires significant effort; can't be done in real-time; and includes potential for human error. Also, traditional scope triggers are not sufficient for specifying protocol-level conditions.

### Extend your oscilloscope's capability with Agilent's SSIC protocol decoder

This application makes it easy to debug and test designs that include SSIC buses using your Infiniium Series oscilloscope.

- Set up your scope to show SSIC protocol decode in less than 30 seconds.

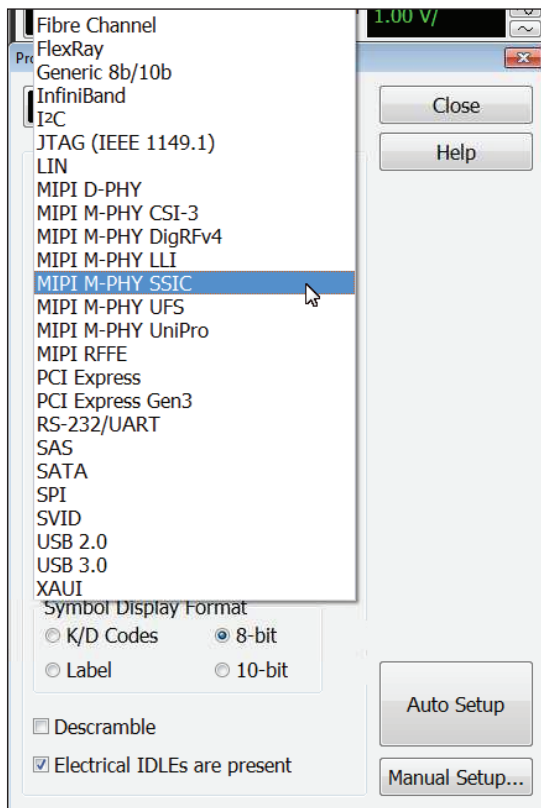


#### 30-second SSIC setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth, threshold and trigger levels.

- Get access to a rich set of integrated protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Use time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.

The following are the SSIC protocols and features that will be supported by the application.

1. Support SSIC specification v1.0 decode and triggering
2. Can be used together with N8805A USB 3.0 protocol decode to show both SSIC and classic USB 3.0 packets
3. Decodes High-Speed (HS-BURST) and Low-Speed Pulse Width Modulation (PWM-BURST) modes
4. Supports search capability for Host and Device transactions as well as symbol sequence and errors.

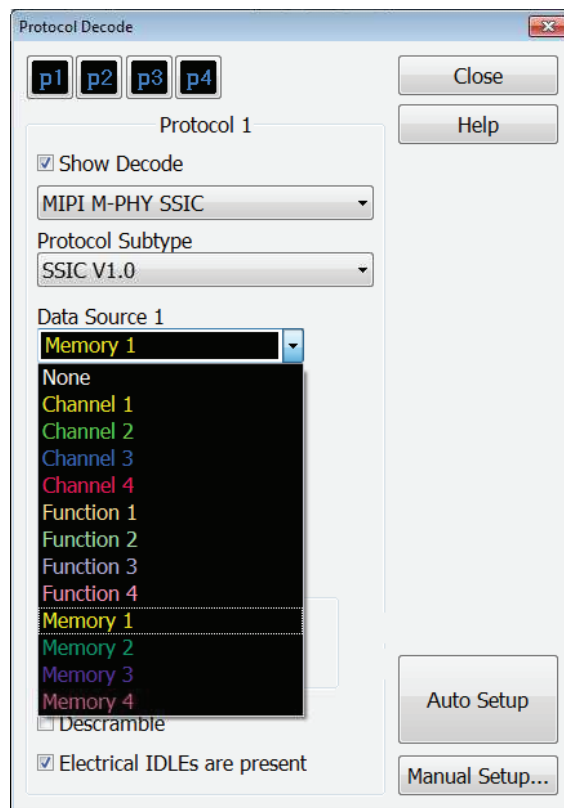

#### Support for live and saved waveforms

Perform and view decode information on both live and saved waveforms. Decode up to any combination of four live or saved waveforms or functions.


## SSIC setup, protocol triggering and search capabilities

Get access to a rich set of integrated protocol-level triggers.

The application includes a suite of configurable protocol-level trigger conditions specific to SSIC. When serial triggering is selected, the application uses software-based triggering.

With software-based protocol triggering, the oscilloscope takes signals acquired using either oscilloscope or digital channels and reconstructs protocol frames after each acquisition.

It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.

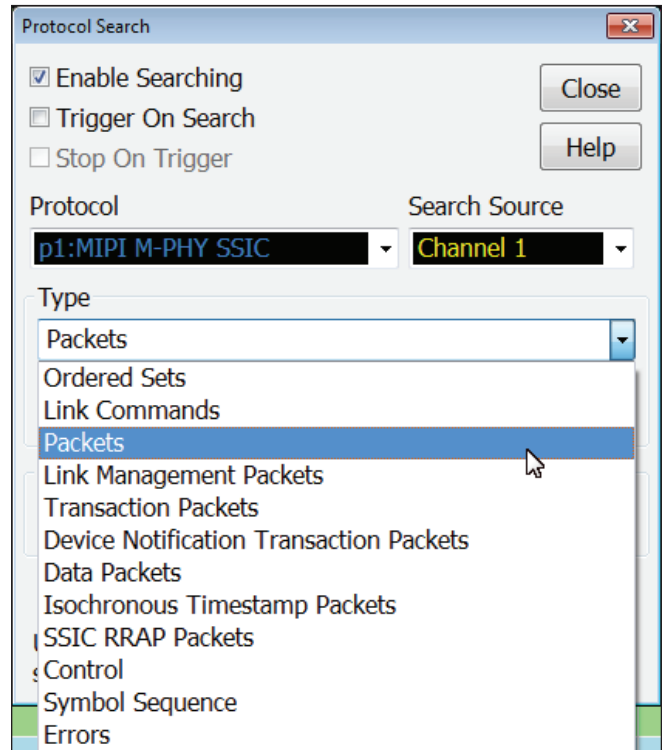



### **SSIC trigger and search setup**

*Quickly access the software-based trigger via the trigger or search menus. Software-based triggering enables quick setup of data, remote or error frames.*

# SSIC protocol decode


Get access to a rich set of integrated protocol-level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to SSIC. When serial triggering is selected, the application uses software-based triggering.

With software-based protocol triggering, the oscilloscope takes signals acquired using scope channels and reconstructs protocol frames after each acquisition. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.

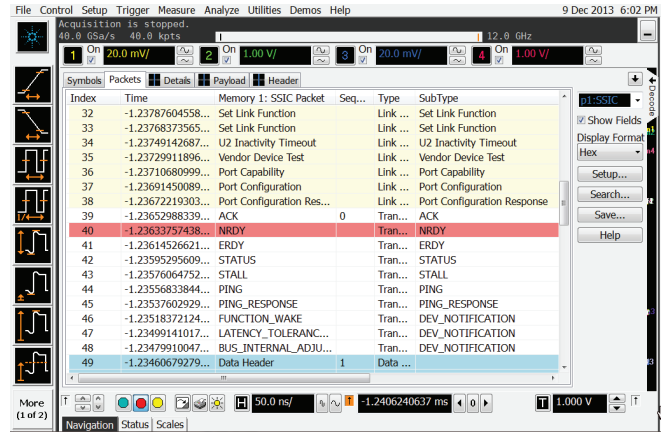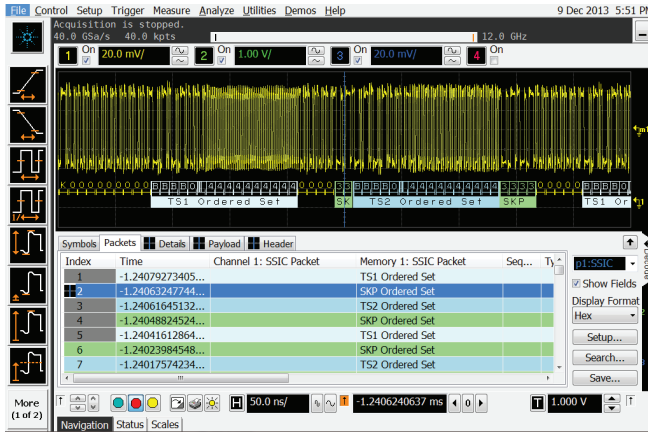


Quickly move between physical and SSIC protocol layer information using the time-correlated tracing marker. Display protocol content using embedded decode in the waveform area, or see protocol events in a compact listing format. Minor tick marks indicate clock transitions. Major tick marks indicate segments of the serial packet. SSIC measurements are automatically time-correlated with measurement on other oscilloscope channels.


**Compact protocol using the full screen listing**  
The protocol viewer window shows the index number, time stamp value identifier, packet type, and data values for each SSIC packet. Data in the listing window can be saved to a .csv or .txt file for off-line.

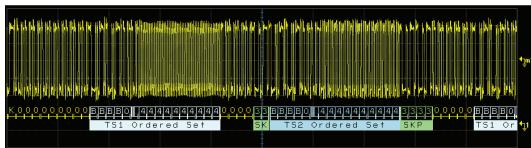

**SSIC decode embedded in waveform area**  
Utilize the oscilloscope waveform area to display decode information. Minor ticks indicate clock transitions, and major ticks show segments within each SSIC packet.

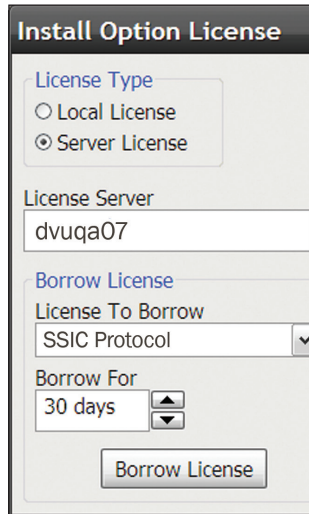

**Using multiple oscilloscopes?**  
Server-based licensing allows users to borrow an application for a specified period of time.

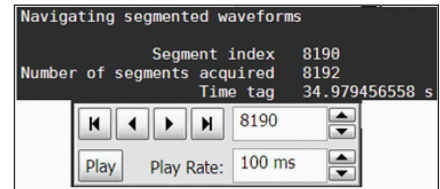

**Long time captures using segmented memory**  
In this example, SSIC traffic was captured for near 35 seconds. Segmented memory uses time tags to track time between segment acquisitions.

## SSIC protocol decode




### **Time correlation with other system activity**

Protocol measurements are automatically time-correlated with measurements taken on other analog or digital (on MSO models) channels.



### **Precise MSO triggering and display**

Mixed-signal oscilloscope measurement in a mobile system using both digital and analog acquisition channels.

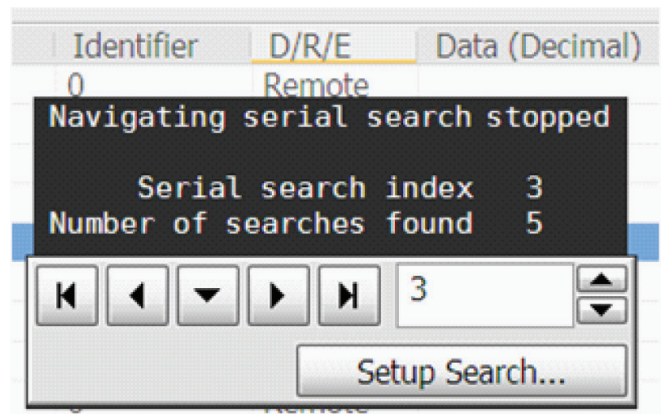

### **Post-acquisition searching**

Search acquired protocol listings using a menu that is identical to the trigger menu. Quickly move to next occurrence of a specified event.

## SSIC application specifications and characteristics

SSIC decode specifications	
SSIC sources	Analog channels 1, 2, 3, or 4 Any function and waveform memories
Data rate	The application relies on probing and trigger/measurement thresholds to properly condition the signal for triggering and decode. Differential probing may be required. Up to 11.6 Gbps
Protocol type	SuperSpeed Inter-Chip (SSIC) v1.0
Auto setup	Automatically configures oscilloscope settings for proper SSIC decode and software-based protocol search including memory depth, edge triggering, holdoff, sample rate and measurement thresholds
Decoded fields	All including extended frame format
Triggering (software-based)	Ordered sets Link commands Packets Link management packets Transaction packets Device notification transaction packets Data packets Isochronous timestamp packets SSIC RRAP packets Control Symbol sequence Errors

## Recommended oscilloscopes

The SSIC protocol decoder is compatible with Agilent Infiniium Series oscilloscopes with operating software revision 4.60 or higher. For oscilloscopes with earlier revisions, free upgrade software is available here: [www.agilent.com/find/scope-apps-sw](http://www.agilent.com/find/scope-apps-sw).

Data rate	Minimum bandwidth	Minimum channels	Compatible oscilloscopes
Gear 1 (Up to 1.46 Gbps)	6 GHz	2	Infiniium 9000, S-Series, 90000 and Z-Series
Gear 2 (Up to 2.92 Gbps)	12 GHz	2	Infiniium 90000 and Z-Series
Gear 3 (Up to 5.83 Gbps)	20 GHz	2	Infiniium 90000 and Z-Series

## Ordering information

To purchase the SSIC protocol decoder with a new or existing Infiniium Series oscilloscope, order the following options.

### Software options

Application	License type		Infiniium Z-Series	Infiniium S-Series	Infiniium 90000 Series	Infiniium 9000 Series
SSIC protocol decoder	Fixed	Factory-installed	N8819A-1FP	N8819B-1FP	Option 067	–
		User-installed	N8819A-1FP	N8819B-1FP	N8819A-1NL	N8819B-1NL
	Floating	Transportable	N8819A-1TP	N8819B-1TP	N8819A-1TP	N8819B-1TP
		Server-based	N5435A-064	N5435A-064	N5435A-064	N5435A-064
Serial data analysis with clock recovery (included in DSA model)	Fixed	Factory-installed	E2688A-1FP	N5384A-1FP	Option 003	Option 003
		User-installed	E2688A-1FP	N5384A-1FP	E2688A-1NL	N5384A-1NL
	Floating	Transportable	E2688A-1TP	N5384A-1TP	E2688A-1TP <sup>1,2</sup>	N5384A-1TP <sup>1,2</sup>
		Server-based	N5435A-003	N5435A-003	N5435A-003	N5435A-003

1. Requires software 5.00 and above.


2. Software 4.30 or above requires Windows 7. N2753A Infiniium Windows XP to 7 OS upgrade kit (oscilloscope already has M890 motherboard). N2754A Infiniium Windows XP to 7 OS and M890 motherboard upgrade kit (oscilloscope without M890 motherboard). Verify the M890 motherboard using the procedure found in the Windows 7 upgrade kit data sheet with the publication number 5990-8569EN.

### Other hardware, probes and accessories

Model number	Description	Quantity
1169A	InfiniiMax II 12-GHz differential probe amplifier	2
N5380B	InfiniiMax II SMA probe adapter	2
E2669A	Differential probe connectivity kit (contains needed probe heads)	1

## Related literature

Publication title	Publication type	Publication number
Infiniium 9000 Series Oscilloscopes	Data sheet	5990-3746EN
Infiniium 90000 X-Series Oscilloscopes	Data sheet	5990-5271EN
Infiniium 90000A Series Oscilloscopes	Data sheet	5989-7819EN
Infiniium 90000 Q-Series Oscilloscopes	Data sheet	5990-9712EN
Infiniium S-Series Oscilloscopes	Data sheet	5991-3904EN
Infiniium Z-Series Oscilloscopes	Data sheet	5991-3868EN
U7249B MIPI M-PHY Compliance Test Software for Infiniium oscilloscopes	Data sheet	5991-2401EN
N8805A USB 3.0 Super-Speed Protocol Trigger and Decode	Data sheet	5990-6002EN

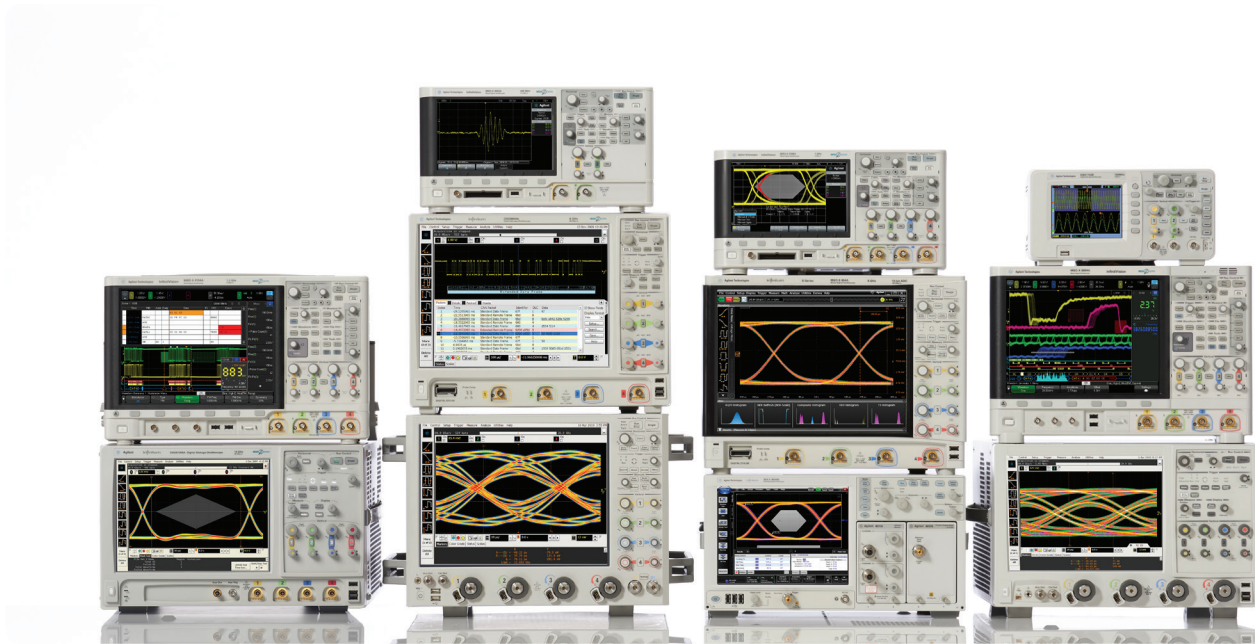

### Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications





**myAgilent**

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



**[www.axistandard.org](http://www.axistandard.org)**

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



**[www.lxistandard.org](http://www.lxistandard.org)**

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



**[www.pxisa.org](http://www.pxisa.org)**

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



**[www.agilent.com/quality](http://www.agilent.com/quality)**

Agilent Electronic Measurement Group  
DEKRA Certified ISO 9001:2008  
Quality Management System

**Agilent Channel Partners**

**[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)**

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

**Agilent Solution Partners**

**[www.agilent.com/find/solutionpartners](http://www.agilent.com/find/solutionpartners)**

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with solution partner convenience.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office.

The complete list is available at:

**[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)**

**Americas**

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

**Europe & Middle East**

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

*For other unlisted countries:*

**[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)**

*(BP-01-15-14)*

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2013, 2014

Published in USA, May 20, 2014

5991-3763EN

