




# PSA Series High-Performance Spectrum Analyzers

## Configuration Guide and PXA Cross Reference

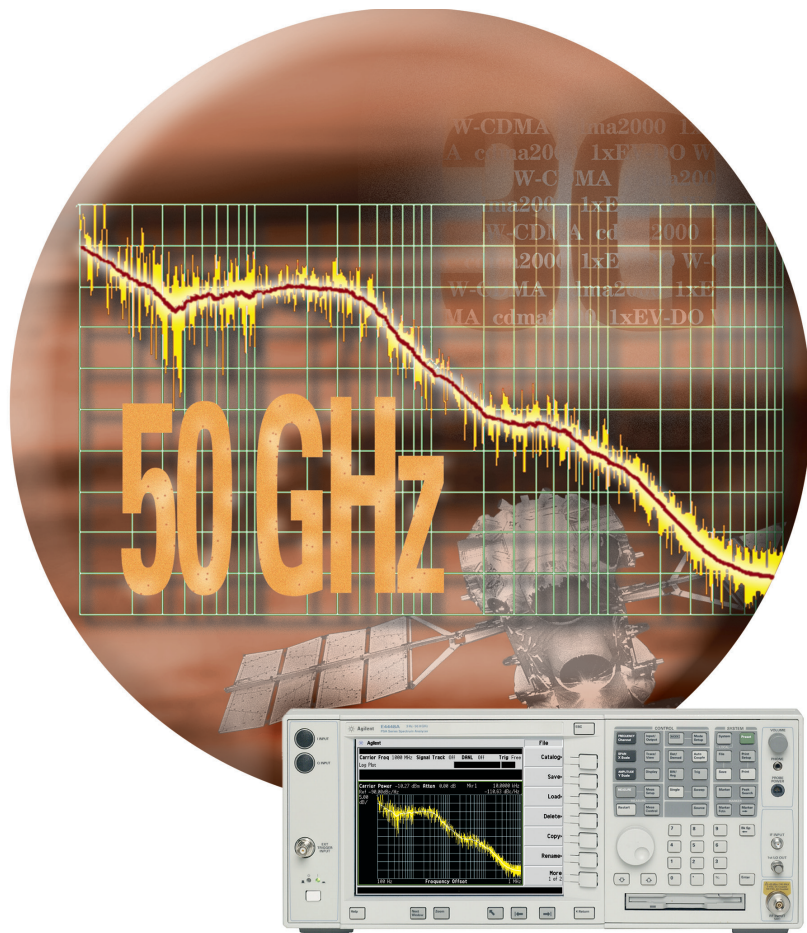

This PSA configuration guide with PXA cross reference will help you determine the right signal analysis tool to meet your needs whether you are:

- Selecting options to optimize your Agilent PSA Series high-performance spectrum analyzer
- Upgrading your high-performance spectrum analyzer
- Contemplating replacing your PSA with Agilent's next-generation high-performance signal analyzer, the N9030A PXA, which covers up to 50 GHz and beyond, and provides users with better performance, wider analysis bandwidth, faster measurements, and more powerful connectivity

In this document, options for the new PXA are listed alongside the PSA options as a reference for customers who wish to consider upgrading to the latest technologies found in the PXA.



## Option Availability and Compatibility

PSA Series available models and frequency ranges					Matching PXA options	
E4443A (3 Hz to 6.7 GHz)					N9030A-503 (3 Hz to 3.6 GHz)	
E4445A (3 Hz to 13.2 GHz)					N9030A-508 (3 Hz to 8.4 GHz)	
E4440A (3 Hz to 26.5 GHz)					N9030A-518 (3 Hz to 13.6 GHz)	
E4447A (3 Hz to 42.98 GHz)					N9030A-526 (3 Hz to 26.5 GHz)	
E4446A (3 Hz to 44 GHz)					N9030A-543 (3 Hz to 43 GHz)	
E4448A (3 Hz to 50 GHz)					N9030A-544 (3 Hz to 44 GHz)	
					N9030A-550 (3 Hz to 50 GHz)	
Option description	Option available for:	Compatibility/comments			Matching PXA options	
	E4443A/45A E4440A E4447A E4446A/48A					
Analysis bandwidths						
40 MHz bandwidth digitizer (includes Basic Mode) (Option 140)	•	•	•	•	Excludes Options 122, 107, H70, H20, H25, HN9, HB2, H7L, HY7, and HBA; For E4440A/43A/45A, Option 123 required for full analysis bandwidth above 3 GHz; Option HX excluded if Option 110 installed. For E4446A/48A, Option 123 is always required and Option HX excluded	N9030A-B40 (Analysis bandwidth, 40 MHz)
80 MHz bandwidth digitizer (includes Basic Mode) (Option 122)	•	•	•	•	Excludes Options 140, 107, H70, H20, H25, HN9, HB2, H7L, HY7, and HBA; For E4440A/43A/45A, Option 123 required for full analysis bandwidth above 3 GHz; Option HX excluded if Option 110 installed. For E4446A/48A, Option 123 is always required and Option HX excluded	N9030A-B1X (Analysis bandwidth, 160 MHz)
Switchable microwave ( $\mu$ W) preselector bypass (Option 123)	•	•	•	•	Excludes Options AYZ* and HN8	N9030A-MPB (Microwave preselector bypass)
Wide bandwidth (BW) digitizer external calibration wizard for Option 122/140 (Option 235)	•	•	•	•	PC software for use with Option 122/140	N/A. Calibration process for the WBIF included.
Measurement personalities digital wireless communication						
Flexible digital modulation analysis measurement personality (Option 241)	•	•	•	•	Can work with Options 122 or 140 with Option 123 for wide bandwidth analysis (up to 80 MHz or 40 MHz)	N9064A (VXA signal analyzer measurement application)
WLAN measurement personality (Option 217)	•	•	•	•	Requires Options 122 or 140; For E4440A/43A/45A, Option 123 recommended for measurements above 3 GHz. For E4446A/48A, Option 123 is always required	N9077A (WLAN 802.11 measurement application); Requires Option B25, B40, or B1X
GSM w/ EDGE measurement personality (Option 202)	•	•	•	•	Requires Option B7J	N9071A GSM/EDGE and EGDE-Evo measurement application
W-CDMA measurement (Option BAF)	•	•	•	•	Requires Option B7J; Option 1DS recommended; Option 110 compatible	N9073A-1FP W-CDMA measurement application
HSDPA/HSUPA measurement personality (Option 210)	•	•	•	•	Requires Option B7J and BAF; Option 1DS recommended; Option 110 compatible	N9073A-2FP HSDPA/HSUPA measurement application
cdmaOne measurement personality (Option BAC)	•	•	•	•	Requires Option B7J	N9072A cdma2000®/cdmaOne measurement application

Note: For E4446A/48A only, a special Option HY3 allows Options 123 and AYZ to co-exist in the same instrument but not operate simultaneously.

## Option Availability and Compatibility (continued)

Option description	Option available for:				Compatibility/comments	Matching PXA options
	E4443A/45A	E4440A	E4447A	E4446A/48A		
<b>Measurement personalities digital wireless communication - continued</b>						
cdma2000 measurement personality (Option B78)	•	•	•	•	Requires Option B7J; Option 1DS recommended; Option 110 compatible	N9072A cdma2000/cdmaOne measurement application
1xEV-DO measurement personality (Option 204)	•	•	•	•	Requires Option B7J; Option 1DS recommended; Option 110 compatible	N9076A 1xEV-DO measurement application
1xEV-DV measurement personality (Option 214)	•	•	•	•	Requires Options B7J and B78; Option 1DS recommended; Option 110 compatible	Contact Agilent
NADC, PDC measurement personality (Option BAE)	•	•	•	•	Requires Option B7J	Contact Agilent
TD-SCDMA power measurement personality (Option 211)	•	•	•	•		N9079A TD-SCDMA (HSPA/8PSK) measurement application
TD-SCDMA modulation analysis measurement personality (Option 212)	•	•	•	•	Requires Option B7J	N9079A TD-SCDMA (HSPA/8PSK) measurement application
HSPA/8PSK for TD-SCDMA modulation analysis measurement personality (Option 213)	•	•	•	•	Requires Options B7J and 212	N9079A TD-SCDMA (HSPA/8PSK) measurement application
<i>* Note: For E4446A/48A only, a special Option HY3 allows Options 123 and AYZ to co-exist in the same instrument but not operate simultaneously.</i>						
<b>Measurement personalities – general purpose applications</b>						
External source control measurement personality (Option 215)	•	•	•	•	Supported sources are ESG-C, PSG and MXG	N9030A-ESC (external source control), supported sources include PSG, MXG, and EXG
Noise figure measurement personality (Option 219)	•	•	•	•	Specifications available up to 3 GHz. Option 1DS or Option 110 needed for specified performance	N9069A noise figure measurement application
Phase noise measurement personality (Option 226)	•	•	•	•		N9068A phase noise measurement application
Built-in measuring receiver personality and PC software (Option 233)	•	•	•	•	Option 123 required for measurements above 3 GHz; Option 1DS or 110 may be required for certain specifications. AM/FM/PM triggering and CCITT filter are included as standard features (Firmware rev. >A.11.08)	Contact Agilent
Programming code compatibility suite measurement personality (Option 266)	•	•	•	•	Supports HP/Agilent 8566A/B, 8568A/B, 856xE/EC, and 859xE	N9061A Remote language compatibility application; supports 8566A/B, 8568A/B and 856xE/EC. Included with PXA at no charge.
EMC measurement personality (Option 239)	•	•	•	•	Allows the N9039A RF filter to be used with the PSA to make fully-compliant EMC measurements; excludes Option 117	N6141A EMC measurement application

## Option Availability and Compatibility (continued)

Option description	Option available for: Compatibility/comments				Matching PXA options
	E4443A/45A	E4440A	E4447A	E4446A/48A	
<b>Hardware and miscellaneous</b>					
Audio input 100 kOhm (Option 107)	•	•	•	•	Requires Option 233 to operate; excludes Options 122 and 140 Contact Agilent
RF internal preamplifier 100 kHz to 3 GHz (Option 1DS)	•	•	•	•	Excludes Option 110 N9030A-P03 (Preamp, 100 kHz to 3.6 GHz)
RF/μW internal preamplifier 10 MHz to the maximum frequency of PSA (Option 110)	•	•	•	•	Excludes Option 1DS N9030A-P08 (Preamp, 100 kHz to 8.4 GHz) N9030A-P13 (Preamp, 100 kHz to 13.6 GHz) N9030A-P26 (Preamp, 100 kHz to 26.5 GHz) N9030A-P43 (Preamp, 100 kHz to 43 GHz) N9030A-P44 (Preamp, 100 kHz to 44 GHz) N9030A-P50 (Preamp, 100 kHz to 50 GHz)
USB device side I/O interface (Option 111)	•	•	•	•	USB 2.0 1 type-B, slave (device side) only. Shipped standard for all PSA models starting September 2007 N9030A PXA ships standard with USB 2.0 ports: 1 type-B slave port and 6 type-A master ports
512 MB user memory (Option 115)	•	•	•	•	Shipped standard in all PSA instruments with SN prefix ≥ US/MY 4618 unless Option 117 license is activated N9030A PXA ships standard with 80 GB removable solid state drive
Secure memory erase (Option 117)	•	•	•	•	Activating Option 117 license disables Option 115 Excludes Option 239 N9030A ships standard with a removable solid state drive for instrument sanitization
Y-axis video output (Option 124)	•	•	•	•	Excludes Option H7L N9030A-YAV (Y-Axis video out)
BenchLink Web remote control software (Option 230)	•	•	•	•	PC software enabling remote control of the PSA through the Web N9030 PXA's Windows-based OS offers the web server enabling remote control to the PSA through the web.
External mixing (Option AYZ)		•	•	•	Excludes Options 123* and HN8 N9030A-EXM (External mixing)
Digital demodulation hardware (includes Basic Mode) (Option B7J)	•	•	•	•	Standard for all N9030A PXA models (IQ analyzer)
Replace type-N input connector with APC 3.5 connector (Option BAB)		•			Excludes Option HBA; required by Option E4440A-233 N9030A-C35 (APC 3.5 mm connector)
Commercial calibration certificate with test data (Option UK6)	•	•	•	•	N9030A-UK6 (Commercial calibration with test data)
<b>Special handling options<sup>1</sup></b>					
25 MHz IF output (Option H25)		•			Excludes Options 122, 140, H70, HY7, HB2, H20, and HX N9030A-CRP (Programmable IF output, 10 to 75 MHz, in 0.5 MHz increments)
21.4 MHz narrow bandwidth IF output (Option HX)	•	•	•	•	Nominal 10 MHz bandwidth; excludes HBA, HB2, H20, H25, 122, and 140 N9030A-CRP (Programmable IF output 10 to 75 MHz, in 0.5 MHz increments)
70 MHz IF output (Option H70)	•	•		•	Excludes Options 122, 140, HB2, H20, HY7, and H25 N9030A-CRP (Programmable IF output 10 to 75 MHz, in 0.5 MHz increments)
Improved gain 70 MHz IF output (Option HY7)	•	•		•	Excludes Options 122, 140, HB2, H20, H70, and H25 N9030A-CRP (Programmable IR output, 10 to 75 MHz, in 0.5 MHz increments); refer to the PXA specification guide for more information
Switched LO for Options 123 and AYZ (Option HY3)				•	Allows Options 123 and AYZ to co-exist in the same mmWave PSA instrument. Note that Option HY3 does not give the capability to operate Options 123 and AYZ simultaneously. PXA Option EXM can coexist with Option MPB
Rear panel RF input (Option HBA)	•	•			Excludes Options 122, 140, BAB, H26, HX, HB2, and H25 Contact Agilent

## Option Availability and Compatibility (continued)

Option description	Option available for:				Compatibility/comments	Matching PXA options
	E4443A/45A	E4440A	E4447A	E4446A/48A		
Auxiliary log video out (Option H7L)	•	•		•	While H7L can co-exist with H70/HY7, HNQ and 321.4 MHz IF output in the same instrument, they cannot function at the same time	N9030A-ALV (log video output)

Note: “•” indicates “available for the model;” blank indicates “not available”

1. Item descriptions for those special handling options that are not listed in this book but in the “Compatibility/comments” column are as follows:

- H20: 20 MHz IF output on the rear panel (available for E4440A/43A only)
- HN9: 80 MHz IF output at 321.4 MHz for RF input frequency less than 3.05 GHz
- HN8: Wide band preselector bypass (discontinued)
- HA5: Modified performance, only available for E4445A (discontinued)

\* Note: For E4446A/48A only, a special Option HY3 allows Options 123 and AYZ to co-exist in the same instrument but not operate simultaneously.

## PSA Accessories

Options	Description	Comment
<b>PSA specific accessories</b>		
015	6 GHz return loss measurement accessory kit	Recommended for Option 215 (external source control) users for return loss measurements
045	Millimeter wave accessory kit	Available for E4447A/46A/48A
1CM	Rack mount kit	
1CN	Front handle kit	
1CP	Rack mount kit with handles	
1CR	Rack slide kit	
<b>PC Software</b>		
230	BenchLink Web remote control software	
N6171A-M01	MATLAB basic signal analysis package	Adds MATLAB software environment and the Instrument Control Toolbox—use this configuration to configure, control, and acquire data from the PSA for basic signal analysis; not upgradable after the instrument is shipped
N6171A-M02	MATLAB standard signal analysis package	Adds MATLAB basic signal package plus the Communications and Signal Processing toolboxes—use this configuration to filter or demodulate signals, automate measurements, analyze or visualize data, or build test systems; not upgradable after the instrument is shipped
N6171A-M03	MATLAB advanced signal analysis packag	Adds MATLAB standard signal package plus the Filter Design Toolbox, RF Toolbox, and System Test—use System Test software to develop, manage, and execute test routines developed in MATLAB; not upgradable after the instrument is shipped
N9051A	Pulse measurement software	External PC operation
<b>Documentation</b>		
0B1	Extra manual set including CD-ROM	
0B0	Manual not included (retains CD-ROM version)	
0BW	Service manual, assembly level	For PSA Series calibration application software, select R-52A, or order N7810A standalone
ABA	Manual set: US-English localization	
AB1	Manual set: Korea-Korean localization	
AB2	Manual set: China-Chinese localization	
ABD	Manual set: Germany-German localization	
ABF	Manual set: France-French localization	
ABJ	Manual set: Japan-Japanese localization	

## PSA Accessories (continued)

Options	Description	Comment
<b>Warranty and calibration<sup>1</sup></b>		
Included	Calibration Assurance Plan, Return to Agilent, 3 years	Standard
R-50C-011-5	Calibration Assurance Plan, Return to Agilent, 5 years	
R-50C-016-3	Agilent Calibration + Uncertainties + Guardbanding, 3 years	
R-50C-016-5	Agilent Calibration + Uncertainties + Guardbanding, 5 years	
AMG	Agilent Calibration + Uncertainties + Guardbanding	Accredited calibration
A6J	ANSI Z540-1-1994 Calibration	
R-50C-021-3	ANSI Z540-1-1994 Calibration, 3 years	
R-50C-021-5	ANSI Z540-1-1994 Calibration, 5 years	
R-51B-001-5C	Warranty Assurance Plan, Return to Agilent, 5 years	
UK6	Commercial calibration certificate with data	To be ordered with PSA
<b>General spectrum analyzer accessories</b>		
11970K	Waveguide harmonic mixer, 18 to 26.5 GHz	Non-preselected
11970A	Waveguide harmonic mixer, 26.5 to 40 GHz	Non-preselected
11970Q	Waveguide harmonic mixer, 33 to 50 GHz	Non-preselected
11970U	Waveguide harmonic mixer, 40 to 60 GHz	Non-preselected
11970V	Waveguide harmonic mixer, 50 to 75 GHz	Non-preselected
11970W	Waveguide harmonic mixer, 75 to 110 GHz	Non-preselected
11974A	Preselected millimeter mixer, 26.5 to 40 GHz	
11974Q	Preselected millimeter mixer, 33 to 50 GHz	
11974U	Preselected millimeter mixer, 40 to 60 GHz	
11974V	Preselected millimeter mixer, 50 to 75 GHz	
87405B	Preamplifier, 10 MHz to 4 GHz	
87405C	Preamplifier, 100 MHz to 18 GHz	
82357B	USB/GPIB interface	
E5810A	LAN/GPIB gateway	
85024A	High-frequency active probe (single-ended input), 300 kHz to 3 GHz	
U1818A	High-frequency active differential probe, 100 kHz to 7 GHz	
U1818B	High-frequency active differential probe, 100 kHz to 12 GHz	
11867A	RF limiter, dc to 1.8 GHz	
N9355/6B	Power limiter, 0.01 to 18 GHz	
N9355/6C	Power limiter, 0.01 to 26 GHz	
N9355F	Power limiter, 0.01 to 50 GHz	

1. Options not available in all countries



# PSA Series – Upgrades

## Ordering instructions

To upgrade an existing PSA Series spectrum analyzer, order the corresponding model number followed by a “U” and the desired option number.  
For example: E444xAU-YYY (where x = 3, 5, 0, 7, 6, 8 and YYY = the option number)

For further information, such as number of slots required and time required by the service center, visit: [http://www.agilent.com/find/psa\\_upgrades](http://www.agilent.com/find/psa_upgrades)

Option description	Comments	Incompatible options	Customer upgradeable	Self maintainers with Options OBW and N7810A	Return to Agilent Service Center
<b>Hardware capabilities and performance</b>					
80 MHz bandwidth digitizer (Option 122)	Available for E4443A/45A/40A/46A/48A with SN prefix between US/MY4430 and 4530; Option 123 required for full analysis bandwidth above 3 GHz (for E4443A/45A/40A) and always required for E4446A/48A	107, H70, HY7, H20, HBA, HB2, H7L, H25, HNO, HN9, HA5, and HYX		•	•
40 MHz bandwidth digitizer (Option 140)	Available for E4443A/45A/40A/46A/48A with SN prefix between US/MY4430 and 4530; Option 123 required for full analysis bandwidth above 3 GHz (for E4443A/45A/40A) and always required for E4446A/48A	107, H70, HY7, H20, HBA, HB2, H7L, H25, HNO, HN9, HA5, and HYX		•	•
80 MB bandwidth digitizer upgrade kit (Option 322)	Available for E4443A/45A/40A/46A/48A with SN prefix ≥ US/MY4611, Option 123 required for full analysis bandwidth above 3 GHz (for E4443A/45A/40A), and always required for E4446A/48A)	107, H70, HY7, H20, HBA, HB2, H7L, H25, HNO, HN9, HA5, and HYX		•	•
40 MHz bandwidth digitizer upgrade kit (Option 340)	Available for E4443A/45A/40A/46A/48A with SN prefix ≥ US/MY4611, Option 123 required for full analysis bandwidth above 3 GHz (for E4443A/45A/40A), and always required for E4446A/48A)	107, H70, HY7, H20, HBA, HB2, H7L, H25, HNO, HN9, HA5, and HYX		•	•
Y-axis video output (Option 124)	Available for all PSA models with SN prefix ≥ US/MY4430	HA5, H7L		•	•
Switchable microwave preselector bypass (Option 123)	Available for E4443A/45A/40A with SN prefix ≥ US/MY4430 and E4447A/46A/48A; for earlier models, see Option 423	AYZ, HA5, HN8, HNO, and H26		•	•
Switchable microwave preselector bypass (Option 423)	Available for earlier E4443A/45A/40A models with SN prefix ≤ US/MY4402	H26, HA5, AYZ, HNO, and HN8		•	•
Gated sweep hardware (Option 426)	Available for all PSA models with SN prefix < US/MY4336, shipped standard for later PSA models (SN prefix ≥ US/MY4336)				•
Digital demodulation hardware (Option B7J)	Available for all PSA models with SN prefix ≥ US4142/MY4100			•	•
Digital demodulation hardware (for earlier PSA models) (Option 071)	Available for all earlier PSA models with SN prefix ≤ US4142/MY4100			•	•
RF internal preamplifier (Option 1DS)	Frequency coverage: 100 KHz to 3 GHz; available for all PSA models	HA5 and 110		•	•
64 MB flash memory (Option ANE)	Shipped standard in all PSA models with SN prefix ≥ US/MY4222; shipped standard in all E4447A/46A/48A			•	•

## PSA Series – Upgrades (continued)

Option description	Comments	Incompatible options	Customer upgradeable	Self maintainers with Options OBW and N7810A	Return to Agilent Service Center
<b>Hardware capabilities and performance, continued</b>					
Noise figure hardware kit for early PSA instruments (Option 119)	Required by Option 219 for all PSA models with SN prefix ≤ US4222/MY4100; standard for all PSA models with SN prefix ≥ US/MY4336	HA5		•	•
APC 3.5 mm connector (Option BAB)	Available for E4440A only	HBA		•	•
External mixing (Option AYZ)	Available for E4440A/47A/46A/48A	123 and HN8		•	•
Audio input 100 kΩ (Option 107)	Requires Option 233 to operate; available for PSA models with SN prefix ≥ US/MY4430	122, 140, and HA5		•	•
RF/μW internal preamplifier (Option 110)	Frequency coverage: 10 MHz to the maximum frequency of a PSA; available for all PSA models; for PSA models with Option 1DS installed, Option 1DS must be removed before installing Option 110	1DS, H26, HT1, and HA5		•	•
USB device side I/O interface (Option 111)	USB 2.0 standard device side only; available for PSA models with SN prefix ≥ US/MY4430. Shipped standard for all PSA models as of September 2007	HA5		•	•
512 MB user memory (Option 115)	Available for all PSA models and serial numbers. Shipped standard for all PSA models with SN prefix > US/MY4618 unless Option 117 license is activated	117, HT1, HA5, H26, HN8, HS1, HS7		•	•
Secure memory erase (Option 117)	Available for all PSA models and serial numbers. Activating Option 117 license disables Option 115	115, HT1, HA5, H26, HN8, HS1, HS7, 239		•	•



## PSA Series – Upgrades (continued)

Option description	Comments	Incompatible options	Customer upgradeable	Self maintainers with Options OBW and N7810A	Return to Agilent Service Center
<b>Measurement personalities</b>					
Flexible digital modulation analysis (Option 241)	Available for all PSA models; works with Option 122 or 140 with Option 123 for wide bandwidth analysis (up to 80 MHz or 40 MHz)	HA5	•		
WLAN measurement personality (Option 217)	Requires Option 122 or 140; available for E4443A/45A/40A/46A/48A; requires Option 123 for measurements above 3 GHz	HA5	•		
GSM w/ EDGE measurement personality (Option 202)	Requires Option B7J; available for all PSA models		•		
W-CDMA measurement personality (Option BAF)	Requires Option B7J; available for all PSA models; Option 1DS recommended		•		
HSDPA/HSUPA measurement personality (Option 210)	Requires Options B7J and BAF; available for all SA models; Option 1DS recommended		•		
cdmaOne measurement personality (Option BAC)	Requires Option B7J; available for all PSA models		•		
cdma2000 measurement personality (Option B78)	Requires Option B7J; available for all PSA models; Option 1DS recommended		•		
1xEV-DO measurement personality (Option 204)	Requires Option B7J; available for all PSA models; Option 1DS recommended		•		
1xEV-DV measurement personality (Option 214)	Requires Options B7J and B78; available for all PSA models; Option 1DS recommended		•		
TD-SCDMA power measurement personality (Option 211)	Available for all PSA models; for PSA models with SN prefix < US/MY4336, Option 426 is required		•		
TD-SCDMA modulation analysis measurement personality (Option 212)	Requires Option B7J; available for all PSA models		•		
HSPA/8PSK for TD-SCDMA modulation analysis measurement personality (Option 213)	Requires Options B7J and 212; available for all PSA models		•		

## PSA Series – Upgrades (continued)

Option description	Comments	Incompatible options	Customer upgradeable	Self maintainers with Options OBW and N7810A	Return to Agilent Service Center
<b>Measurement personalities, continued</b>					
NADC, PDC measurement personality (Option BAE)	Requires Option B7J; available for all PSA models		•		
External source control measurement personality (Option 215)	Available for all PSA models; for PSA models with SN prefix < US/MY4336, the gated sweep Option 426 is required	HA5	•		
Noise figure measurement personality (Option 219)	Available for all PSA models; for PSA models with SN prefix ≤ US4222/MY4100, Option 119 is required; Option 1DS or 110 is required to meet specifications	HA5	•		
Phase noise measurement personality (Option 226)	Available for all PSA models	HA5	•		
BenchLink web remote control software (Option 230)	PC software to run Web server		•		
Built-in measuring receiver personality and PC software (Option 233)	Available for all PSA models; Option 123 required for measurements above 3 GHz, Option 1DS or 110 may be required for certain specifications. AM/FM/PM triggering and CCITT filter are included as standard features for firmware rev. >A.11.08.	HA5	•		
Wide BW digitizer external calibration wizard (Option 235)	PC software for use with Option 122 or 140; available for E4443A/45A/40A/46A/48A only		•		
Programming code compatibility suite (Option 266)	Available for all PSA models		•		
EMC measurement personality (Option 239)	Available for all PSA models with SN prefix ≥ MY/SG/US4430	117	•		
Firmware upgrade (Option UE2)	Includes install note and PSA firmware CD-ROM; available for all PSA models		•		
<b>Special options</b>					
70 MHz IF output (Option H70)	Available for all PSA models except E4447A	122, 140, HB2, H20, H25, and HY7			•
Auxiliary log video output (Option H7L)	Available for all PSA models except E4447A	122, 140, and 124			•

With restriction of the PSA's internal memory space, not all of the measurement personalities will fit into the instrument simultaneously. Visit the "Memory Calculator" at <http://sa.tm.agilent.com/PSA/memory/> to ensure your PSA has sufficient memory space to accommodate the measurement personalities you want to install.

# PSA Series Ordering Information

## PSA Series spectrum analyzer

<b>E4443A</b>	3 Hz to 6.7 GHz
<b>E4445A</b>	3 Hz to 13.2 GHz
<b>E4440A</b>	3 Hz to 26.5 GHz
<b>E4447A</b>	3 Hz to 42.98 GHz
<b>E4446A</b>	3 Hz to 44 GHz
<b>E4448A</b>	3 Hz to 50 GHz

## Options

To add options to a product, use the following ordering scheme:

Model E444xA (x = 0, 3, 5, 6, 7 or 8)

Example options E4440A-B7J,  
E4448A-1DS

## Measurement personalities

E444xA-226	Phase noise	
E444xA-219	Noise figure	Requires Option 1DS or 110 to meet specifications
E444xA-241	Flexible digital modulation analysis	
E444xA-BAF	W-CDMA	Requires B7J
E444xA-210	HSDPA/HSUPA (for W-CDMA)	Requires B7J and BAF
E444xA-202	GSM w/ EDGE	Requires B7J
E444xA-B78	cdma2000	Requires B7J
E444xA-214	1xEV-DV	Requires B7J and B78
E444xA-204	1xEV-DO	Requires B7J
E444xA-BAC	cdmaOne	Requires B7J
E444xA-BAE	NADC, PCD	Requires B7J
E444xA-217	WLAN	Requires 122 or 140
E444xA-211	TD-SCDMA power measurement	
E444xA-212	TD-SCDMA modulation	Requires B7J
E444xA-213	HSPA for TD-SCDMA	Requires Options B7J and 212
E444xA-215	External source control	
E444xA-266	Programming code compatibility suite	
E444xA-233	Built-in measuring receiver personality	Includes AM/FM/PM triggering CCITT filter as standard features (Firmware rev. >A.11.08)
E444xA-239	N9039A RF preselector control	Excludes 117

## PSA Series Ordering Information (continued)

### Hardware

E444xA-1DS	RF internal preamplifier (100 kHz to 3 GHz)	Excludes 110
E444xA-110	RF/ $\mu$ W internal preamplifier (10 MHz to upper frequency limit of the PSA)	Excludes 1DS
E444xA-B7J	Digital demodulation hardware	
E444xA-122	80 MHz bandwidth digitizer	E4440A/43A/45A/46A/48A, excludes 140, 107, H70
E444xA-140	40 MHz bandwidth digitizer	E4440A/43A/45A/46A/48A, excludes 122, 107, H70
E444xA-123	Switchable MW preselector bypass	Excludes AYZ (For E4446A/ 48A, Option HY3 allows coexistence of 123 and AYZ)
E444xA-124	Y-axis video output	
E444xA-AYZ	External mixing	E4440A/47A/46A/48A only, excludes 123 (For E4446A/ 48A, Option HY3 allows coexistence of 123 and AYZ)
E444xA-107	Audio input 100 k $\Omega$	Requires 233 to operate; excludes 122, 140
E444xA-111	USB device side I/O interface	Shipped standard since September 2007
E444xA-115	512 MB user memory	Shipped standard in all PSA instruments with serial number prefix $\geq$ MY4615 unless 117 license is activated
E444xA-117	Secure memory erase	Excludes 115 and 239
E4440A-BAB	Replaces type-N input connector with APC 3.5 connector	
E444xA-H70	70 MHz IF output	Excludes 122, 140. Not available for E4447A
E444xA-HYX	21.4 MHz IF output	Available for all PSA models
E444xA-HY3	Switched LO for Options AYZ and 123	For E4446A/48A only

### PC software

E444xA-230	BenchLink Web Remote Control Software	
E444xA-235	Wide BW digitizer external calibration wizard	Requires 122 or 140 E4443A/45A/40A/46A/48A

### Accessories

E444xA-1CM	Rack mount kit
E444xA-1CN	Front handle kit
E444xA-1CP	Rack mount with handles
E444xA-1CR	Rack slide kit
E444xA-015	6 GHz return loss measurement accessory kit
E444xA-045	Millimeter wave accessory kit
E444xA-0B1	Extra manual set including CD ROM

## Related Literature

Publication title	Publication type	Publication number
<b>PSA/PXA in general</b>		
<i>Selecting the Right Signal Analyzer for Your Needs</i>	Selection Guide	5968-3413E
<i>PSA Series</i>	Brochure	5980-1283E
<i>PSA Series</i>	Data Sheet	5980-1284E
<i>PSA Series</i>	Configuration Guide	5989-2773EN
<i>Self-Guided Demonstration for Spectrum Analysis</i>	Product Note	5988-0735EN
<i>N9030A PXA Series</i>	Brochure	5990-3951EN
<i>N9030A PXA Series</i>	Data Sheet	5990-3952EN
<i>N9030A PXA Series</i>	Configuration Guide	5990-3953EN
<b>Wide bandwidth and vector signal analysis</b>		
<i>40/80 MHz Bandwidth Digitizer</i>	Technical Overview	5989-1115EN
<b>Measurement personalities and applications</b>		
<i>Phase Noise Measurement Personality</i>	Technical Overview	5988-3698EN
<i>Noise Figure Measurement Personality</i>	Technical Overview	5988-7884EN
<i>External Source Measurement Personality</i>	Technical Overview	5989-2240EN
<i>Flexible Digital Modulation Analysis Measurement Personality</i>	Technical Overview	5989-1119EN
<i>W-CDMA and HSDPA/HSUPA Measurement Personalities</i>	Technical Overview	5988-2388EN
<i>GSM with EDGE Measurement Personality</i>	Technical Overview	5988-2389EN
<i>cdma2000 and 1xEV-DV Measurement Personalities</i>	Technical Overview	5988-3694EN
<i>1xEV-DO Measurement Personality</i>	Technical Overview	5988-4828EN
<i>cdmaOne Measurement Personality</i>	Technical Overview	5988-3695EN
<i>WLAN Measurement Personality</i>	Technical Overview	5990-9642EN
<i>TD-SCDMA Measurement Personality</i>	Technical Overview	5989-0056EN
<i>Built-in Measuring Receiver Personality/Agilent N5531S Measuring Receiver</i>	Technical Overview	5989-4795EN
<i>BenchLink Web Remote Control Software</i>	Product Overview	5988-2610EN
<i>Programming Code Compatibility Suite</i>	Technical Overview	5989-1111EN
<b>Hardware options</b>		
<i>PSA Series Spectrum Analyzers Video Output (Option 124)</i>	Technical Overview	5989-1118EN
<i>PSA Series Spectrum Analyzers, Option H70, 70 MHz IF Output</i>	Product Overview	5988-5261EN
<b>Spectrum analyzer fundamentals</b>		
<i>Optimizing Dynamic Range for Distortion Measurements</i>	Product Note	5980-3079EN
<i>PSA Series Amplitude Accuracy</i>	Product Note	5980-3080EN
<i>PSA Series Swept and FFT Analysis</i>	Product Note	5980-3081EN
<i>PSA Series Measurement Innovations and Benefits</i>	Product Note	5980-3082EN
<i>Spectrum Analysis Basics</i>	Application Note 150	5952-0292
<i>Vector Signal Analysis Basics</i>	Application Note 150-15	5989-1121EN
<i>8 Hints for Millimeter Wave Spectrum Measurements</i>	Application Note	5988-5680EN
<i>Spectrum Analyzer Measurements to 325 GHz with the Use of External Mixers</i>	Application Note 1453	5988-9414EN
<i>Making Precompliance EMI Measurements</i>	Application Note 150-10	5989-1550EN

[www.agilent.com](http://www.agilent.com)  
[www.agilent.com/find/psa](http://www.agilent.com/find/psa)



### myAgilent

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.agilent.com/find/ThreeYearWarranty](http://www.agilent.com/find/ThreeYearWarranty)

Beyond product specification, changing the ownership experience. Agilent is the only test and measurement company that offers three-year warranty on all instruments, worldwide



### Agilent Assurance Plans

[www.Agilent.com/find/AssurancePlans](http://www.Agilent.com/find/AssurancePlans)

Five years of protection and no budgetary surprises to ensure your instruments are operating to specifications and you can continually rely on accurate measurements.



[www.agilent.com/quality](http://www.agilent.com/quality)



Agilent Electronic Measurement Group  
DEKRA Certified ISO 9001:2008  
Quality Management System

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:  
[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

(BP-09-27-13)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2013  
Published in USA, November 25, 2013  
5989-2773EN

cdma2000 is a registered certification mark of the Telecommunications Industry Association.



**Agilent Technologies**