


CAL LAB

LeCroy™
Digital Oscilloscopes

Get the Complete Picture

LC574A Series
Service Manual


LeCroy

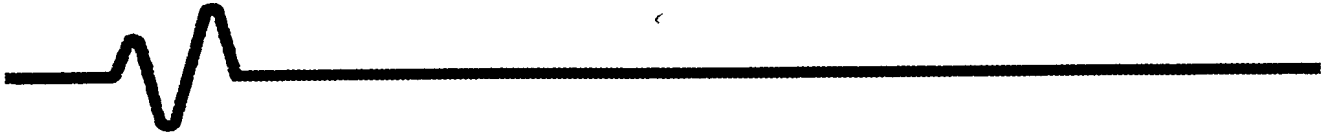

LeCroy Color Digital Oscilloscopes

LC574A, LC574AM & LC574AL

Service Manual

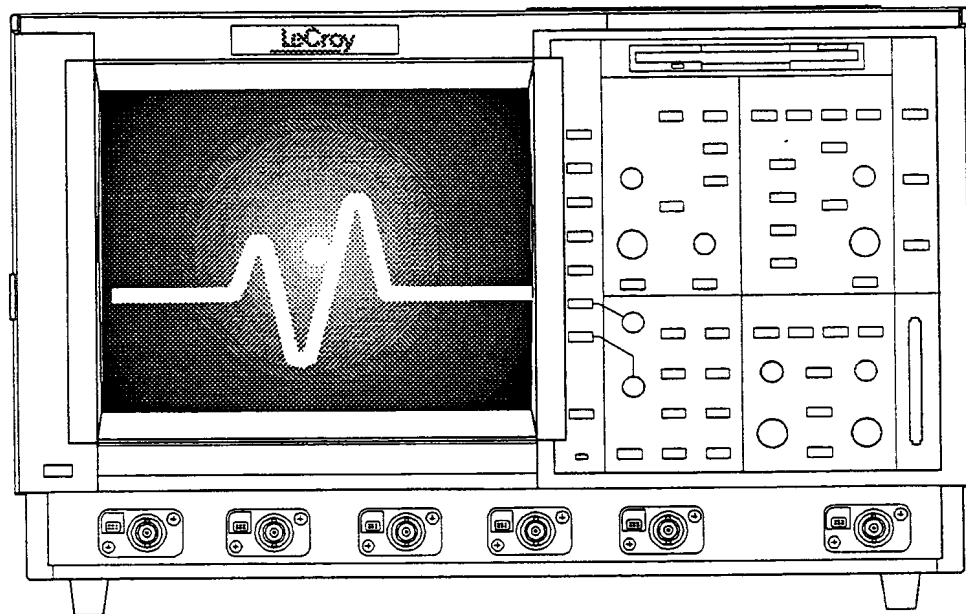

Version A February 1998

LeCroy



LeCroy Corporate Headquarters

700 Chestnut Ridge Road
Chestnut Ridge, NY 10977-6499
USA

Tel : (914) 425-2000
Fax : (914) 425-8967
<http://www.lecroy.com>

LeCroy European Headquarters

LeCroy Europe GMBH
Mannheimer Strasse 175
D-69123 Heidelberg
Germany

Tel : 49.6221.82700
Fax : 49.6221.834655

LeCroy European Manufacturing

LeCroy SA
2, Chemin Pre-de-la Fontaine
CH-1217 Meyrin 1 Geneva
Switzerland

Tel : 41 (22) 719-21-11
Fax : 41 (22) 782-39-15

Copyright © December 1997, LeCroy. All rights reserved.
Information in this publication supersedes all earlier versions.
Specifications subject to change.

LeCroy



Read this first

1.	Product and Client Care	1-1
1.1	As soon as your Scope is delivered	1-1
1.2	Warranty	1-1
1.3	Maintenance Agreements	1-1
1.4	Keeping you up to date	1-2
1.5	Service and Repair	1-2
1.6	How to Return a Product	1-2

General Information 2-1

2.1	Product Assistance	2-1
2.2	Addresses	2-1
2.3	Installation for Safe and Efficient Operation	2-6
	Operating Environment	2-6
	Power Requirements	2-7
	Cleaning and Maintenance	2-8
	Power On	2-8

Specifications

3.1	Leading Specifications	3-1
3.2	Signal Capture	3-1
3.3	Acquisition Modes	3-2
3.4	Timebase System	3-2
3.5	Triggering System	3-3
3.6	Smart trigger Types	3-3
3.7	Autosetup	3-3
3.8	Probes	3-4
3.9	9" Color Display	3-4
3.10	High Speed Acquisition	3-4
3.11	Large Sample Rate Window	3-4
3.12	Optimum Performance	3-4
3.13	Quick Diagnoses	3-5
3.14	Analog Persistence	3-5
3.15	Full Screen Grid	3-5
3.15	Easy documentation	3-5
3.16	8 Trace Display	3-5
3.17	Easy Documentation	3-6
3.18	Signal Viewing	3-6
3.19	Signal Analysis	3-6
3.20	Waveform Processing	3-7
3.21	Statistical Diagnostics	3-7
3.22	Internal Memory	3-7
3.23	Cursor Measurements	3-7
3.24	Additional Information	3-8



Theory of Operation

4.1	Processor Board	4-1
	MPC603e Processor	4-1
	Power Supplies	4-1
	32 bit Peripherals	4-1
	Figure 4-1 Processor Block Diagram	4-2
	DRAM	4-3
	Normal Access Timing	4-3
	Burst Access Timing	4-3
	Refresh Timing	4-3
	Memory Mapping	4-4
	VGA	4-4
	Bus Sizer, 16 and 8 bit Peripherals	4-5
	PCMCIA Interface	4-5
	Flash Prom	4-6
	NVRAM	4-6
	Interrupt Controller	4-6
	Floppy controller	4-6
	Centronics	4-6
	Small Peripheral Interface	4-7
	RTC	4-7
	Option GAL	4-7
	Front Panel	4-8
	Watchdog and Reset Generation	4-8
	Bus Error Generation	4-8
	I/O Structure	4-8
	Figure 4-2 Peripheral Decoding and Data Bus Size	4-9
4.2	F9384-31 Main Acquisition Board	4-10
4.2.1	Introduction	4-10
4.2.2	Microprocessor Control	4-10
	Microprocessor Control Diagram	4-11
4.2.3	Front End	4-15
	Front End Diagram	4-16
4.2.4	Trigger	4-18
	Trigger Block Diagram	4-20
4.2.5	Analog to Digital Converter	4-21
	ADC/Memories Block Diagram	4-22
4.2.6	Time Base	4-22
	Time Base Block Diagram	4-24
4.3	F9300-4 GPIB & RS232 Interface	4-26
4.3.1	RS232 Interface	4-26
4.3.2	GPIB Interface	4-26
4.4	Front Panel	4-26
4.5	F9300-7 Printer Controller	4-26
4.6	PSLC574 Power Supply	4-27
4.6.1	Power Supply Specifications	4-27
4.6.2	Power Supply Configurations	4-28
4.6.3	Power Supply Block Diagram	4-28

Performance Verification

5	Performance Verification Procedures	5-1
5.1	Introduction	5-1
5.1.1	List of Specifications	5-1
5.1.2	Calibration Cycle	5-1
5.2	Test Equipment Required	5-2
5.2.1	Test Records	5-2
5.3	Turn On	5-2
5.4	Input Impedance	5-3
5.4.1	Channel Input Impedance	5-3
5.4.1.a	DC 1M Ω	5-3
5.4.1.b	AC 1M Ω	5-4
5.4.1.c	DC 50 Ω	5-5
5.4.2	External Trigger Input Impedance	5-6
5.4.2.a	DC 1M Ω	5-6
5.4.2.b	DC 50 Ω	5-7
5.4.3	Ground	5-8
5.5	Leakage Current	5-9
5.5.1	Channel Leakage Current	5-9
5.5.1.a	DC 1M Ω	5-9
5.5.1.b	DC 50 Ω	5-10
5.5.2	External Trigger Leakage Current	5-10
5.5.2.a	DC 50 Ω	5-10
5.6	Average Noise Level	5-11
5.6.1	Peak to Peak Noise	5-11
5.6.1.a	DC 1M Ω	5-11
5.6.1.b	AC 1M Ω	5-13
5.6.1.c	DC 50 Ω	5-14
5.6.1.d	DC 50 Ω , 2 Channel Mode	5-15
5.6.1.e	DC 50 Ω , All Channels Combined	5-16
5.6.2	RMS Noise	5-18
5.6.2.a	DC 1M Ω	5-18
5.6.2.b	AC 1M Ω	5-19
5.6.2.c	DC 50 Ω	5-20
5.6.2.d	DC 50 Ω , 2 Channel Mode	5-21
5.6.2.e	DC 50 Ω , All Channels Combined	5-22
5.6.3	Ground Line Test	5-24
5.6.3.a	DC 1M Ω	5-24
5.6.3.b	DC 50 Ω	5-27
5.6.3.c	DC 50 Ω , 2 Channel Mode	5-28
5.6.3.d	DC 50 Ω , All Channels Combined	5-29
5.7	DC Accuracy	5-30
5.7.1	Positive DC Accuracy	5-30
5.7.1.a	DC 50 Ω	5-30



Performance Verification


5.7.1.b	DC 1M Ω	5-34
5.7.2	Negative DC Accuracy	5-37
5.7.2.a	DC 50 Ω	5-37
5.7.2.b	DC 1M Ω	5-38
5.8	Offset Accuracy	5-39
5.8.1	Positive Offset Accuracy	5-39
5.8.1.a	DC 50 Ω	5-39
5.8.1.b	DC 1M Ω	5-41
5.8.2	Negative Offset Accuracy	5-42
5.8.2.a	DC 50 Ω	5-42
5.8.2.b	DC 1M Ω	5-43
5.9	Bandwidth	5-45
5.9.1	Description	5-45
5.9.1.a	DC 50 Ω	5-45
5.9.1.b	DC 50 Ω with Bandwidth Limiter On	5-49
5.9.2	DC 1M Ω	5-52
5.10	Trigger Level	5-55
5.10.1	Description	5-55
5.10.2	Channel Trigger at 0 Division Threshold	5-55
5.10.2.a	DC Coupling	5-55
5.10.2.b	HFREJ Coupling	5-57
5.10.3	Channel Trigger at +3 Divisions Threshold	5-58
5.10.3.a	DC Coupling	5-58
5.10.3.b	HFREJ Coupling	5-59
5.10.4	Channel Trigger at -3 Divisions Threshold	5-60
5.10.4.a	DC Coupling	5-60
5.10.4.b	HFREJ Coupling	5-61
5.10.5	External Trigger at 0 Division Threshold	5-62
5.10.5.a	DC Coupling	5-62
5.10.5.b	HFREJ Coupling	5-64
5.10.6	External Trigger at +3 Divisions Threshold	5-65
5.10.6.a	DC Coupling	5-65
5.10.6.b	HFREJ Coupling	5-66
5.10.7	External Trigger at -3 Divisions Threshold	5-67
5.10.7.a	DC Coupling	5-67
5.10.7.b	HFREJ Coupling	5-68
5.10.8	External/10 Trigger at 0 Division Threshold	5-69
5.10.8.a	DC Coupling	5-69
5.10.8.b	HFREJ Coupling	5-71
5.10.9	External/10 Trigger at +3 Divisions Threshold	5-72
5.10.9.a	DC Coupling	5-72
5.10.9.b	HFREJ Coupling	5-73
5.10.10	External/10 Trigger at -3 Divisions Threshold	5-74
5.10.10.a	DC Coupling	5-74

Performance Verification

5.10.10.b	HFREJ Coupling	5-75
5.11	Smart Trigger	5-76
5.11.1	Trigger on Pulse Width 10 nsec	5-76
5.11.1.a	Pulse Width < 10 nsec	5-76
5.11.1.b	Pulse Width > 10 nsec	5-76
5.11.2	Trigger on Pulse Width 100 nsec	5-78
5.11.2.a	Pulse Width < 100 nsec	5-78
5.11.2.b	Pulse Width > 100 nsec	5-78
5.12	Time Base Accuracy	5-80
5.12.1	Description	5-80
5.12.2	500 MHz Clock Verification Procedure	5-80
5.13	Overshoot and Rise time	5-82
5.13.a	DC 50 Ω	5-82
5.13.b	DC 1M Ω	5-84
5.14	Overload	5-86
5.14.a	Channel Overload trip	5-86
5.14.b	External Overload Trip	5-87

Test Record

Table 1	LC574A Performance Certificate	1 of 12
Table 2	Impedance Test Record	2 of 12
Table 3	Leakage Voltage Test Record	2 of 12
Table 4	Peak to Peak Noise Test Record	3 of 12
Table 5	RMS Noise Test Record	3 of 12
Table 6	DC 1M Ω Ground Line Test Record	4 of 12
Table 7	DC 50 Ω Ground Line Test Record	4 of 12
Table 8	DC 50 Ω Positive DC Accuracy Test Record	5 of 12
Table 9	DC 1M Ω Positive DC Accuracy Test Record	5 of 12
Table 10	DC 50 Ω Negative DC Accuracy Test Record	6 of 12
Table 11	DC 1M Ω Negative DC Accuracy Test Record	6 of 12
Table 12	Positive Offset Test Record	7 of 12
Table 13	Negative Offset Test Record	7 of 12
Table 14	DC 50 Ω , 50 mv/div. Bandwidth Test Record	8 of 12
Table 15	DC 50 Ω , 100 mv/div. Bandwidth Test Record	8 of 12
Table 16	DC 50 Ω , Bandwidth Limiter Test Record	9 of 12
Table 17	DC 1M Ω , Bandwidth Test Record	9 of 12
Table 18	Channel DC Trigger Test Record	10 of 12
Table 19	Channel HFREJ Trigger Test Record	10 of 12
Table 20	External & Ext/10 DC and HFREJ Trigger Test Record	11 of 12
Table 21	Smart Trigger Test Record	11 of 12
Table 22	Time Base Test Record	12 of 12
Table 23	Rise time and Overshoot Test Record	12 of 12
Table 24	Overload Trip Test Record	12 of 12

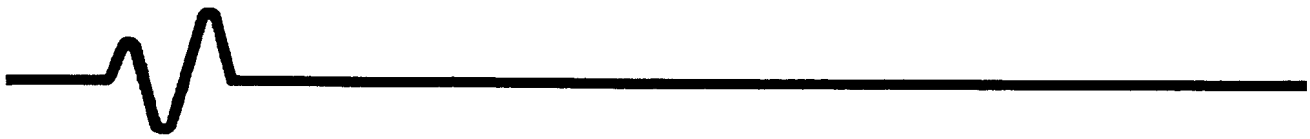

Maintenance

6.1	Introduction	6-1
6.1.1	Safety Precautions	6-1
6.1.2	Antistatic Precautions	6-1
6.2	Disassembly and Assembly Procedure	6-2
6.2.1	Disassembly Procedure	6-2
6.2.1.a	Removal of the Upper Cover Assembly	6-2
6.2.1.b	Removal of the Front Frame with Color Monitor	6-2
6.2.1.c	Removal of the Processor Board	6-3
6.2.1.d	Removal of the Power Supply	6-3
6.2.1.e	Removal of the Upper Shield	6-3
6.2.1.f	Removal of the Rear Panel	6-4
6.2.1.g	Removal of the Main Board	6-4
6.2.2	Assembly Procedure	6-5
6.3	Software Update Procedure	6-6
6.3.1	Upgrading Firmware	6-6
6.3.1.1	Update Procedure from Floppy	6-6
6.3.1.1.a	Creating the Disk	6-6
6.3.1.1.b	Performing the Update from Floppy	6-6
6.3.1.2	Update Procedure from Memory Card	6-6
6.3.1.2.a	Creating the Card	6-6
6.3.1.2.b	Performing the Update from Card	6-7
6.3.2	Changing Software Options	6-7
6.3.2.1	Software option Selection Gal	6-7
6.3.3	Processor Board Exchange Procedure	6-9
6.4	Equipment and Spare Parts Recommended for Service	6-10
6.4.1	Test Equipment Required	6-10
6.4.2	Spare Parts Recommended for Service	6-10
6.5	Calibration Procedures	6-11
6.5.1	Power Supply Calibration Procedure	6-11
6.5.2	Color Monitor Calibration Procedure	6-12
6.5.2.a	Adjustment of Screen Image Position and Size	6-12
6.5.2.b	Image Rotation Adjustment	6-14
6.5.2.c	Vertical Linearity Adjustment	6-14
6.5.2.d	Control of Screen Image Quality	6-15
6.5.2.e	Trapezium & Pin Cushion Adjustment	6-16
6.6	Troubleshooting and Flow Charts	6-16
6.6.1	Introduction	6-16
6.6.2	Line Fuses Replacement	6-16
6.6.3	Initial Troubleshooting Chart	6-16
6.6.4	Fan Problem	6-18
6.6.5	Power Supply Voltages Problem	6-19
6.6.6	Display Problem	6-20
6.6.7	Abnormal Image on Screen	6-21
6.6.8	Front Panel Controls Do not Operate	6-22
6.6.9	Remote Control GPIB & RS232 Problem	6-23
6.6.10	Performance Verification Fails	6-24
6.6.11	Floppy Disk Drive Problem	6-25

Maintenance

6.6.12	Graphic Printer Problem	6-26
6.6.13	Centronics Problem	6-27
6.6.14	Hard Disk Drive Problem	6-28

Replaceable Parts

LC574A, LC574AM, LC574AL	7-1
F9601-1-8 Processor with 8 Mbytes Memory	7-2
F9601-1-64 Processor with 64 Mbytes Memory	7-2
S9601-1 Processor without DRAM Memory	7-2
9384M-2 Acquisition Memory	7-5
9384MEM-2 Acquisition Memory	7-5
F9601-2 Centronics & VGA Interface	7-6
F9384-31 Main Acquisition Board	7-6
FPLC574-3 Main Board Front Panel	7-6
900022-01 Main Acquisition Board	7-7
F9354-4 Time Base Board	7-14
F9300-4 GPIB & RS232 Interface	7-15
F9601-6 Floppy Disk Drive	7-16
FP9604 Front Panel Assembly	7-16
F9602-5 Keypad Assembly	7-16
F9604-5 Front Panel	7-17
CD9610 Color Monitor	7-17
LC574A Mechanical	7-17
900024 Power Supply	7-19
PSLC574-2 Auxiliary Power Supply	7-20
LC574A Rear Panel	7-21
Upper Cover Assembly	7-21
Upper Shield Assembly	7-21
F9601-8 Main Switch	7-22
LCX6XX-HD01 Hard Disk Drive	7-22
F9300-8 Hard Disk Interface	7-22
LCXXX-GP01 Graphic Printer Assembly	7-23
CKTRIG Option	7-24
F9300-7 Printer Controller	7-24
GP01 Upper Cover	7-26
PP094 4GS/s Adapter	7-26
Box for PP092 Adapter	7-26
PP092 Adapter Board	7-27
Accessories for LC574A	7-27



Mechanical Parts

Figure 8-1: LC574A Cabinet	8-1
Figure 8-2: LC574A Assembly	8-2
Figure 8-3: LC574A Chassis	8-4
Figure 8-4: LC574A Lower Cover	8-5
Figure 8-5: LC574A Rear Panel Assembly	8-7
Figure 8-6: LC574A Rear Panel	8-8
Figure 8-7: LC574A Main Board Assembly	8-10
Figure 8-8: LC574A Main Board	8-11
Figure 8-9: LC574A Upper Shield	8-12
Figure 8-10: LC574A Monitor and Frame Assembly	8-14
Figure 8-11: CD9600 Monitor Assembly	8-15
Figure 8-12: CD9610 Monitor Assembly	8-16
Figure 8-13: CD9610 Magnetic Field Cancellation Coil	8-17
Figure 8-14: LC574A Front Panel Assembly	8-19
Figure 8-15: LC574A Keypad Assembly	8-20
Figure 8-16: LC574A Power Supply Assembly	8-22
Figure 8-17: LC574A Fan Assembly	8-23
Figure 8-18: LC574A Graphic Printer Assembly	8-25
Figure 8-19: LC574A Upper Cover Assembly	8-26
Figure 8-20: LC574A Hard Disk Assembly	8-28
Figure 8-21: LC574A Centronics&VGA Interface	8-29
Figure 8-22: LC574A Floppy Disk Assembly	8-30
Figure 8-23: LC574A Packaging Assembly	8-32

Schematics, Layouts, Parts List

F9601-1-X Processor Board Schematics	9-2
F9601-1-X Processor Board Layouts	9-11
F9601-1-X Processor Board Parts List	9-14
9384M-2 Acquisition Memory Schematics	9-19
9384M-2 Acquisition Memory Layouts	9-29
9384M-2 Acquisition Memory Parts List	9-35
9384MEM-2 Acquisition Memory Schematics	9-37
9384MEM-2 Acquisition Memory Layouts	9-47
9384MEM-2 Acquisition Memory Parts List	9-53
F9601-2 Centronics & VGA Interface Schematics	9-55
F9601-2 Centronics & VGA Interface Layouts	9-56
F9601-2 Centronics & VGA Interface Parts List	9-59
900022-01 Main Acquisition Board Schematics	9-60
900022-01 Main Acquisition Board Layouts	9-116
900022-01 Main Acquisition Board Parts List	9-152
F9300-4 GPIB & RS232 Interface Schematics	9-187
F9300-4 GPIB & RS232 Interface Layouts	9-188
F9300-4 GPIB & RS232 Interface Parts List	9-191
F9354-4 Time Base Board Schematics	9-192
F9354-4 Time Base Board Layouts	9-193

F9354-4 Time Base Board Parts List	9-199
F9602-5 Front Panel Keypad Schematics	9-200
F9602-5 Front Panel Keypad Layouts	9-201
F9604-5 Front Panel Schematics	9-202
F9604-5 Front Panel Layouts	9-203
F9602-5 Front Panel Keypad Parts List	9-206
F9604-5 Front Panel Parts List	9-206
F9601-6 Floppy Interface Schematics	9-207
F9601-6 Floppy Interface Layouts	9-208
F9300-7 Graphic Printer Controller Schematics	9-211
F9300-7 Graphic Printer Controller Layouts	9-213
F9300-7 Graphic Printer Controller Parts List	9-216
F9601-6 Floppy Interface Parts List	9-216
F9300-8 Hard Disk Interface Schematics	9-218
F9300-8 Hard Disk Interface Layouts	9-219
F9300-8 Hard Disk Interface Parts List	9-222
PSLC574-2 +3.3v Supply & Line Trigger Schematics	9-223
PSLC574-2 +3.3v Supply & Line Trigger Layouts	9-224
PSLC574-2 +3.3v Supply & Line Trigger List	9-227
PS1724 Power Supply Schematics	9-228
CD9600 Color Display Block Diagram	9-230
CD9600 Color Display Layouts	9-231
CD9600 Color Display Parts List	9-233

Connecting the LC574A to a Plotter or a Printer

10.1	Introduction	10-1
10.2	Plotters	10-3
10.2.1	HP 7470A Plotter	10-3
10.2.2	HP 7550A Plotter	10-3
10.2.3	Hitachi 672 Graph Plotter (or NSA 672)	10-4
10.3	Printers	10-4
10.3.1	Centronics Printers	10-4
10.3.2	RS 232 Printers	10-5
10.3.2.1	Epson FX80	10-5
10.3.2.2	Citizen 120D	10-5
10.3.2.3	HP LaserJet	10-5
10.3.2.4	HP ThinkJet	10-6
10.3.2.5	HP DeskJet 550C	10-6
10.3.2.6	Brother Printers	10-6
10.3.3	GPIB Printers	10-7
10.3.3.1	HP QuietJet	10-7
10.3.3.2	HP ThinkJet	10-7
10.3.3.3	HP PaintJet	10-7
10.4	Information on GPIB	10-8
10.4.1	Introduction	10-8





1. Product and Client Care

1.1 As Soon As Your Scope is Delivered

We recommend you thoroughly inspect the contents of the scope packaging at once. Check all the contents against the enclosed *packing list*. Unless LeCroy is notified promptly of a missing or damaged item, we cannot accept responsibility for its replacement. Contact your national LeCroy Customer Service Department or local office immediately.

1.2 Warranty

LeCroy warrants its oscilloscope products for normal use and operation within specifications for a period of three years from the date of shipment. Calibration each year is recommended to ensure in-spec performance. Spares, replacement parts and repairs are warranted for 90 days. The instrument's firmware has been thoroughly tested and is thought to be functional, but is supplied without warranty of any kind covering detailed performance. Products not made by LeCroy are covered solely by the warranty of the original equipment manufacturer.

In exercising its warranty, LeCroy will repair or, at its option, replace any product returned within the warranty period to the Customer Service Department or an authorized service center. However, this will be done only if the product is determined by LeCroy's examination to be defective due to workmanship or materials, and the defect has not been caused by misuse, neglect or accident, or by abnormal conditions or operation.

The client will be responsible for the transportation and insurance charges for the return of products to the service facility. LeCroy will return all products under warranty with transport prepaid.

This warranty replaces all other warranties, expressed or implied, including but not limited to any implied warranty of merchantability, fitness, or adequacy for any particular purpose or use. LeCroy shall not be liable for any special, incidental, or consequential damages, whether in contract or otherwise.

1.3 Maintenance Agreements

We provide a variety of customer support services. Maintenance agreements give extended warranty and allow our clients to budget maintenance costs after the initial three-year warranty has expired. Other services such as installation, training, enhancements and on-site repairs are available through special Supplemental Support Agreements



1.4 Keeping You Up to Date

LeCroy is dedicated to offering state-of-the-art instruments, continually refining and improving the performance of our products. Because of the speed with which physical modifications may be implemented, this manual and related documentation may not agree in every detail with the products they describe. For example, there might be small discrepancies in the values of components affecting pulse shape, timing or offset, and — infrequently — minor logic changes.

However, be assured the scope itself is in full order and incorporates the most up-to-date circuitry. We frequently update firmware or software during servicing to improve scope performance, free of charge during warranty. We will keep you up to date with such changes, through manuals such as this one and other publications.

1.5 Service and Repair

Please return products requiring maintenance to the Customer Service Department in your country or to an authorized service facility. LeCroy will repair or replace any product under warranty free of charge. The customer is responsible for transportation charges to the factory, whereas all in-warranty products will be returned to you with transportation prepaid.

Outside the warranty period, you will need to provide us with a *purchase order number* before we can repair your LeCroy product. You will be billed for parts and labor related to the repair work, and for shipping.

1.6 How to Return a Product

Contact your country's Customer Service Department or local field office to find out where to return the product. All returned products should be identified by model and serial number. You should describe the defect or failure, and provide your name and contact number. And in the case of products returned to the factory, a *Return Authorization Number* (RAN) should be used. The RAN can be obtained by contacting your nearest LeCroy office, or the New York Customer Care Center or European Manufacturing in Geneva (see *chapter 2* for contact numbers).

Return shipments should be made prepaid. We cannot accept COD (Cash On Delivery) or Collect Return shipments. We recommend air-freighting. It is important that the RAN be clearly shown on the outside of the shipping package for prompt redirection to the appropriate LeCroy department.

Wherever possible, use the original shipping carton. If a substitute carton is used, it should be rigid and packed so that the product is surrounded by a minimum of four inches or 10 cm of shock-absorbent material.



2. General Information

2.1 Product Assistance

Help on installation, calibration, and the use of LeCroy equipment is available from your local LeCroy office, or from LeCroy's

- Customer Care Center, 700 Chestnut Ridge Road, Chestnut Ridge, New York 10977-6499, U.S.A., tel. (914) 578-6020
- European Manufacturing, 2, rue du Pré-de-la-Fontaine, 1217 Meyrin 1, Geneva Switzerland, tel. (41) 22/719 21 11.

2.2 Addresses

LeCroy Corporate Headquarters

LeCroy Corporation
700 Chestnut Ridge Road
Chestnut Ridge, NY 10977-6499 USA

Tel : (914) 578-6020
Fax : (914) 578-5985
<http://www.lecroy.com>

LeCroy European Headquarters

LeCroy Europe GmbH
Mannheimer Strasse 175
D-69123 Heidelberg Germany

Tel : 49.6221.82700
Fax : 49.6221.834655

LeCroy European Manufacturing

LeCroy S.A.
2, Chemin Pre-de-la Fontaine
CH-1217 Meyrin 1 Geneva Switzerland

Tel : 41 (22) 719-21-11
Fax : 41 (22) 782-39-15



Europe

LeCroy S.a.r.l
1, Avenue de l' Atlantique
les Ulis 91976 Courtaboeuf
France

Tel : 33.1.69.18.83.20
Fax : 33.1.69.07.40.42

LeCroy S.r.l
Via E. Mattei 1/102
30020 Marcon (Venice)
Italy

Tel : 39.41.456.9700
Fax : 39.41.456.9542

Avantec
Rosenholmveien 20
N-1252 Oslo
Norway

Tel : 47.22. 611090
Fax : 47.22.610759

Mss AB
Foretagsallen 12, Hus 5 bv
184 24 Akersberga
Sweden

Tel : 46.8.544.107.00
Fax : 46.8.544.107.10

Dewetron Elektronische
Messgeraete Ges.M.b.h.
Riesstrasse 146
8010 Graz Austria

Tel : 43.316.3070
Fax : 43.316.3070.09

LeCroy Ltd
28 Blacklands Way
Abingdon, Oxon ox14 1dy
England

Tel : 44.1.235.533114
Fax : 44.1.235.528796

LeCroy S.a.
5702 Nierdenlenz
Lenzhardweg 43
Switzerland

Tel : 41.62.885.80.50
Fax : 41.62.885.80.55

Lutronic Aps
Naverland 2
2600 Glostrup
Denmark

Tel : 45.4342.9764
Fax : 45.4342.9765

Orbis OY
Vanha Kaarelantie 9
01610 Vantaa
Finland

Tel : 358.9.478.830
Fax : 358.9.531.604

Elsinco Gmbh
Breitenfurter Str 13
1120 Vienna
Austria

Tel : 43.1.815.04.00
Fax : 43.1.815.07.00

Ammo
9, Harugei Malkhut
Ramat Hachayal. p.o box 13132,
61131 Tel Aviv Israel

Tel : 972.3.6478740
Fax : 972.3.6478771

M.T. Brandao, SI
Ronda de Poniente 2
E-28760 Tres Cantos Madrid
Spain

Tel : 34.1.803.1767
Fax : 34.1.803.1536

Netes Lt Sti
Bankalar Ofkcu Musa cad
Menevse Han 54/131
Karakoy 80020 Istanbul Turkey

Tel : 90.212.237.32.26
Fax : 90.212.237.32.28

Asia

LeCroy Japan Corporation
Nakao Royal Bldg 6F
2-14-10 Miyahara
Yodogawa-Ku
Osaka 532 Japan

Tel : 816.396.0961
Fax : 816.396.0962

LeCroy Pty. Ltd.
17 Loddon St
Box Hill North 3129, Victoria
Australia

Tel : 61.3.9890.7358
Fax : 61.3.9890.8754

ABB Nera
Kokstadvegen 23
Kokstad Bergen
Norway

Tel : 351.2.815.680
Fax : 351.2.815.630

M.T. Brandao, Lda
Rua do Quanza, 150
4000 Porto
Portugal

Tel : 351.2.830.2709
Fax : 351.2.830.2710

IFIPCO John Fourniadis & co
213-215 Mesoglion Avenue
11510 Athens
Greece

Tel : 30.1.67.25.970
Fax : 30.1.64.76.331

LeCroy Japan Corporation
Zaiken Bldg 6th Floor
19-3, 2-Chome
Sasazuka, Shibuya-Ku
Tokyo 151 Japan

Tel : 813.3376-9400
Fax : 813.3376.9587

LeCroy Corp Hong Kong
15/f Radio City
505 Hannessy Road
Causeway Bay

Tel : 852.28367361
Fax : 852.28367007



Philips Scientific & Industrial Electronics
34 Waterloo Road
North Ryde NSW 2113
Australia

Tel : 61 2 98888222
Fax : 61 2 98880440

Abex Engineering Pte. Ltd.
37 Kallang Pudding Road 08-08
Tong Lee Building Block B
Singapore 1334

Tel : 65.8412818
Fax : 65.8415988

Lecoln Technology Co.,Ltd.
5f, No 649 Chung Jeng Road
Yung Ho City Taipei Hsien
Taiwan r.o.c.

Tel : 886.2.232.6368
Fax : 886.2.231.9731

Schmidt Electronics Ltd
18 f, Great Eagle Centre
23 Harbour Road Wanchai
Hong Kong

Tel : 852.2507.0222
Fax : 852.2827.5656

Electro Tech Corporation
M-23 Dada Terrace
Shaheed-Millat/Jamaludding
Karachi-74800 Pakistan

Tel : 92.21.493-9593
Fax : 92.21.493-7749

Tata-Honeywell
55-A/8 & 9 Hadapspar
Industrial Estate
Pune 411 013 India

Tel : 91.212.675.532
Fax : 91.212.672.205

Schmidt Electronics Ltd
18 F, Great Eagle Centre
23 Harbour Road Wanchai
Hong Kong

Tel : 852.2507.0222
Fax : 852.2827.5656

Measuretronix
2102/31 Ramkamhang Road
Bangkok 10240
Thailand

Tel : 66.2.375.2733-4
Fax : 66.2.374.9965

Woojoo Hi-Tech Corp.
Sinkwang Building 5f
160-8 Karak 2-Dong
Songpa-Ku Seoul 138-162
Korea

Tel : 82.2.449.5472
Fax : 82.2.449.5475

P.t. Dwi Tunggal Jaya Sakti
Multika Building 3rd Floor
JI Mampang Prapatan Raya
Jakarta 12790 Indonesia

Tel : 62.21797.5194
Fax : 62.21.797.5186

North America

Allan Crawford Ltd
5835 Coopers Av, Mississauga
Ontario L4z 1y2,
Canada

Tel : 416 890.2010
Fax : 416 890.1959

South America

Search Sa
Araoz 823
1414 Buenos Aires
Argentina

Tel : 54.1.777.4000
Fax : 54.1.777.4000

ATP-Hi-Tek
Alameda Amazonas
422 Alphaville 06454-030
Baruei, Sp Brazil

Tel : 55.11.725.5822
Fax : 55.11.421.5032

South Africa

Westplex Ltd
376 Oak Avenue
Randburg 2194
Republic of South Africa

Tel : 27.11.787.0473
Fax : 27.11.787.0237

Schmidt Vietnam co ltd
8/f Schmidt Tower
Hitc Cau Giay Ipo Box 89
Tu Liem Hanoi Vietnam


Tel : 84.4.346.186
Fax : 84.4.346.188

Sistemas De Instrumentation
Concha Toro No 65 Stgo
Casilla 51888 Stgo-1
Santiago Chile

Tel : 56.2.6951137
Fax : 56.2.6969665

Electroingenieria De Precision
Uxmal No 520
Col Vertiz Narvarte
03600 Mexico

Tel : 525.559-7677
Fax : 525.575-3381

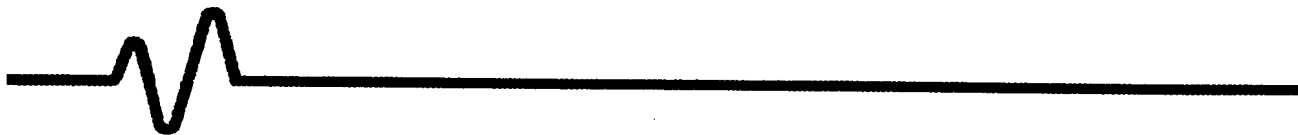

2.3 Installation for Safe and Efficient Operation

Operating Environment

The oscilloscope will operate to its specifications if the environment is maintained within the following parameters:

Temperature.....5 to 40 °C (41 to 104 °F) rated.

Humidity.....Maximum relative humidity 80 % RH (non-condensing) for temperatures up to 31 °C decreasing linearly to 50 % relative humidity at 40 °C

Altitude.....2000 m (6560 ft)

The oscilloscope has been qualified to the following EN61010-1 category:

Installation (Overvoltage) CategoryII

Pollution Degree.....2

Safety Symbols

Where these symbols or indications appear on the front or rear panels, and in this manual, they have the following meanings:



..... **CAUTION:** Refer to accompanying documents (for Safety-related information). *See elsewhere in this manual wherever the symbol is present, as indicated in the Table of Contents.*




..... **CAUTION:** Risk of electric shock



..... On (Supply)



..... Off (Supply)

 Earth (Ground) Terminal

 Protective Conductor Terminal

 Earth (Ground) Terminal on BNC Connectors

WARNING Denotes a hazard. If a **WARNING** is indicated on the instrument, do not proceed until its conditions are understood and met.



Any use of this instrument in a manner not specified by the manufacturer may impair the instrument's safety protection.

The oscilloscope has *not* been designed to make direct measurements on the human body. Users who connect a LeCroy oscilloscope directly to a person do so at their own risk.

Power Requirements

The oscilloscope operates from a 115 V (90 to 132 V) or 220 V (180 to 250 V) AC power source at 45 Hz to 66 Hz. No voltage selection is required, since the instrument automatically adapts to the line voltage present.

The power supply of the oscilloscope is protected against short-circuit and overload by means of two 6.3 A/250 V AC, "T" rated fuses (size: 5 X 20 mm), located above the mains plug. Disconnect the power cord before inspecting or replacing a fuse. Open the fuse box by inserting a small screwdriver under the plastic cover and prying it open.

For continued fire protection at all line voltages, replace only with fuses of the specified type and rating (T 6.3 A/250 V).

The oscilloscope has been designed to operate from a single-phase power source, with one of the current-carrying conductors (neutral conductor) at ground (earth) potential.

Maintain the ground line to avoid an electric shock.



None of the current-carrying conductors may exceed 250 V rms with respect to ground potential. The oscilloscope is provided with a three-wire electrical cord containing a three-terminal polarized plug for mains voltage and safety ground connection.

The plug's ground terminal is connected directly to the frame of the unit. For adequate protection against electrical hazard, this plug must be inserted into a mating outlet containing a safety ground contact.

Cleaning And Maintenance

Maintenance and repairs should be carried out exclusively by a LeCroy technician (see Chapter 2). Cleaning should be limited to the exterior of the instrument only, using a damp, soft cloth. Do not use chemicals or abrasive elements. Under no circumstances should moisture be allowed to penetrate the oscilloscope. To avoid electric shocks, disconnect the instrument from the power supply before cleaning.



CAUTION

**Risk of electrical shock:
No user serviceable parts
inside. Leave repair to
qualified personnel.**

Power On

Connect the oscilloscope to the power outlet and switch it on by pressing the power switch located on the rear panel. After the instrument is switched on, auto-calibration is performed and a test of the oscilloscope's ADCs and memories is carried out. The full testing procedure takes approximately 10 seconds, after which time a display will appear on the screen.

3.5 Triggering System

Modes: Normal, Auto, Single, and Stop.

Sources: CH1, CH2, CH3, CH4 Line, Ext, Ext/10. Slope, Level and Coupling are unique to each source.

Slope: Positive, Negative.

Coupling: AC, DC, HF, LFREJ, HFREJ.

Pre-trigger recording: 0 to 100% of full scale (adjustable in 1% increments).

Post-trigger delay: 0 to 10,000 divisions (adjustable in 0.1 div increments).

Holdoff by time: 10 ns to 20 s.

Holdoff by events: 0 to 99,999,999.

Internal Trigger Range: ± 5 div.

EXT Trigger Max Input: 10M Ω /15pF (system capacitance using PP005):

400V(DC+peakAC \leq 10kHz)

50 Ω $\pm 1\%$: ± 5 V DC (500 mW) or 5 V RMS.

EXT Trigger Range: ± 0.5 V (± 5 V with Ext/10).

Trigger Timing: Trigger Date and Time are listed in the Memory Status Menu.

Trigger Comparator: Optional ECL rear panel output. Alternatively, the calibrator output can provide a trigger output or a PASS/FAIL test output.

3.6 Smart Trigger Types

Pattern: Trigger on the logic combination of 5 inputs - CH1, CH2, CH3, CH4, and EXT Trigger, where each source can be de-fined as High, Low or Don't Care. The Trigger can be defined as the beginning or end of the specified pattern.

Signal or Pattern Width: Trigger on width between two limits selectable from \leq 2.5ns to 20s. Will typically trigger on glitches 1ns wide.

Signal or Pattern Interval: Trigger on interval between two limits selectable from 10ns to 20s.

Dropout: Trigger if the input signal drops out for longer than a time-out from 25ns to 20s.

State/Edge Qualified: Trigger on any source only if a given state (or transition) has occurred on another source. The delay between these events can be defined as a number of events on the trigger channel or as a time interval.

TV: Allows selection of both line (up to 1500) and field number (up to 8) for PAL, SECAM, NTSC or non-standard video.

Exclusion Trigger: Trigger on intermittent faults by specifying the normal width or period of a signal. The oscilloscope will trigger only on aberrations which are shorter or longer than normal.

3.7 Autosetup

Pressing Autosetup sets timebase, trigger and sensitivity to display a wide range of repetitive signals. (Frequency above 50Hz; Duty Cycle greater than 0.1%).

Autosetup Time: Approximately 2 seconds.

Vertical Find: Automatically sets sensitivity and offset for selected channel.



3.8 Probes

One PP005probe is supplied per channel. DC to 500 MHz typical at probe tip, 500 V max.

Probe calibration: Max 1 V into 1 M Ω , 500 mV into 50 Ω , frequency and amplitude programmable, pulse or square wave selectable, rise and fall time 1 ns typical.

3.9 9" Color Display

LeCroy provides a very large, sharp oscilloscope screen that is 50% larger in total viewing area than a 7" screen.

Its powerful features include Analog Persistence, Color Graded Persistence, Full Screen mode, Opaque or Transparent display, color association and personal color schemes. These provide the user with outstanding benefits that accelerate visual processing and effective communication of on-screen information.

3.10 High Speed Acquisition

The design and debug of fast digital systems and the need to capture fast transient signals require high speed signal capture. The LC574AA four channel 1 GS/s, 1 GHz bandwidth DSO operates at a 4 GS/s sample rate for single channel inputs. The high sample rate, bandwidth and the 1 GHz trigger bandwidth provide a flexible solution for capturing and viewing fast rise time signals.

3.11 Large Sample Rate Window

Having a high sample rate in a DSO is only the first step to preserving data integrity. The time window over which this sample rate is available is also of critical importance.

Long acquisition memory maintains the oscilloscope's highest sample rate for large time windows allowing the user to sample long signals with high horizontal resolution.

With up to 8 million points of acquisition memory the maximum sample rate of these oscilloscopes of 4 GS/s is maintained for a time window of 2ms. This sample rate window - 16 times greater than the maximum sample rate window of competing DSOs - enables the user to record long signals with high resolution.

3.12 Optimum Performance

SMARTMemory is a Total Memory Management system that dynamically allocates resources of microprocessor power, acquisition memory and processing RAM. The intelligent management provided by SMARTMemory guarantees optimal usage of oscilloscope resources.

The 96 MHz PowerPC microprocessor at the heart of these DSOs drives the system to produce results fast, providing rapid waveform update and super panel responsiveness.

3.13 Quick Diagnoses

Capturing and viewing waveforms is fundamental to an oscilloscope. Productivity improvements are accessible by using built-in math functions to assist troubleshooting and diagnoses of circuit problems.

The signal analysis capability of these DSOs is enhanced by advanced waveform math, spectrum analysis, and waveform parameter analysis. This analysis capability greatly increases the speed with which circuit problems are clearly identified and solved.

3.14 Analog Persistence

At a push of the green button the user can switch between an analog view and a digital view of signals on these oscilloscopes.

The depth of signal information can be explored along the third dimension of the waveform display to give the user a complete picture of waveform activity.

Unlike an analog oscilloscope, all signal data is captured and available in memory for analysis and measurements. Analog Persistence gives the user the best of both the analog and digital world of oscilloscopes.

3.15 Full Screen Grid

These LeCroy DSOs not only have a very large 9" screen but also provide a display mode with an extra-large grid, up to 150% larger than common grid areas. In Full Screen mode, all of the screen area is used to display signals. This provides a magnificent view of up to 8 waveforms: signal details are seen more clearly and with greater ease.

3.16 8 Trace display

8 trace display with any combination of math functions, zooms, reference memories or channels.

Octal grid display in normal and Full Screen display modes, with and without parameters displayed.



3.17 Easy Documentation

All waveform data and results of analysis can be quickly saved to floppy disk, memory card, ATA flash card, or a removable hard disk. This provides an efficient way to archive information and facilitates easy documentation of results.

An optional internal graphics printer outputs screen dumps in seconds providing the user with an immediate and clear record of signal activity.

3.18 Signal Viewing

Type: Color 10" Raster Scan CRT, 0.26mm dot pitch.

Resolution: 640 x 480 points.

Display Area: 170mm x 125mm - 50% greater than that of a 7" display.

Controls: Rear-Panel presets for position, brightness and contrast.

Menu controls for brightness and color selection.

Grid Styles: Single, Dual, Octal, Quad, XY, Single+XY, Dual+XY, and Full Screen
an enlarged view of each grid style.

Graticules: Internally generated; separate intensity control for grids and waveforms. Selectable blending of grid with displayed traces.

Waveform Style: Dot Join with optional sample point highlight or Dots only.

Persistence Modes: Color graded persistence and analog persistence, infinite or variable with decay over time. In color graded persistence a color spectrum from red through violet is used to map signal intensity. With Analog Persistence the brightness level of a single color denotes signal intensity. Each trace's persistence data is stored in 64k levels.

Trace Display: Opaque or transparent mode, with overlap management.

Number of Traces: 8 (any mix of channels, memories or Math functions).

Real-time Clock: Date, hours, minutes, seconds.

External Monitor: Rear-panel 15-pin socket for VGA compatible monitor.

Vertical Zoom: Up to 5x vertical expansion to a maximum of 5 mV/div (50x with averaging)

Horizontal Zoom: Waveforms can be expanded to give .4-.5 points/division.
Zoom factors up to 2,000,000x with all channels combined for the 'AL' model.

3.19 Signal Analysis

A comprehensive and easy-to-use set of diagnostic tools are available. Calculations are performed rapidly and results can be presented on-screen or stored to disk.

Rapid Processing System

Microprocessor: 96 MHz PowerPC™ 603e.

System RAM: 8 to 64 Mbytes.

Video Memory: 1 Mbyte.

Cache Memory: 32 kbyte.

Persistence Data Map Memory: 16 bits per displayed pixel (64k levels).

3.20 Waveform Processing

Up to four processing functions may be performed simultaneously. Standard functions available are: Add, Subtract, Multiply, Divide, Negate, Identity, Summation Averaging and Sine x/x. The source information for a math function trace can be data from an acquisition channel or from another math function trace. This allows display of traces which "daisy chain" math functions.

Average: Up to 10^6 averages are possible.

Extrema*: Roof, Floor, or Envelope values from 1 to 10^6 sweeps.

ERES*: Six Low-Pass digital filters provide up to 11-bit vertical resolution.

Sampled data is always available, even when a trace is turned off.

FFT*: Spectrum Analysis with five windowing functions and FFT averaging.

3.21 Statistical Diagnostics*

The Parameter Analysis package permits in-depth diagnostics on waveform parameters. Live histogramming of any waveform parameter measurement is possible and the histogram can be autoscaled to display the center and width of the distribution.

Any of the above processes can be invoked without losing the data.

*Extrema and ERES modes are provided in the Advanced Waveform Math Package. FFT is in Spectrum Analysis. Histogramming and trending is part of the Parameter Analysis Package.

3.22 Internal Memory

Waveform Memory: Up to four 16-bit Memories (M1, M2, M3, M4), whose length corresponds to the length of the channel acquisition memory.

Zoom & Math Memory: Up to four 16-bit Waveform Processing Memories (A, B, C, D), whose length corresponds to the length of the channel acquisition memory.

Setup Memory: Four non-volatile memories. Optional Memory Cards, Flash Disks or removable Hard Disks may also be used for high-capacity waveform and setup storage.

3.23 Cursor Measurements

Relative Time: Two cursors provide time measurements with resolution of $\pm 0.05\%$ full scale for unexpanded traces; up to 10% of the sampling interval for expanded traces. The corresponding frequency value is displayed.

Relative Voltage: Two horizontal bars measure voltage differences up to $\pm 0.2\%$ of full scale in single-grid mode.

Absolute Time: A cross-hair marker measures time relative to the trigger and voltage with respect to ground.

Absolute Voltage: A reference bar measures voltage with respect to ground.



Automated Measurements

A wide range of pulse parameter measurements are available. These are categorized for ease of use. The categories include Pulse, Horizontal, and Vertical parameters. Basic statistical measurements, included as standard, (average, highest, lowest, and standard deviation) can be made on these parameter measurements in order to understand their distribution. Pass/Fail Testing and Waveform Limit testing using masks can be performed. Test conditions can be expressed as either waveform parameter limits, waveform shape limits (mask) or a combination of both. Any failure can cause preprogrammed actions such as Hardcopy, Save, GPIB service request, logic pulse out, audible beep, or any combination of the above.

3.24 Additional Information

Interfacing

Remote Control: Possible by GPIB and RS-232-C for all front-panel controls, as well as all internal functions.

RS-232-C Port: Asynchronous up to 19.2 Kb/s for computer/terminal control or printer/plotter connection.

GPIB Port: (IEEE-488.1) Configurable as talker/listener for computer control and fast data transfer, up to 300 kbytes/sec. Command Language complies with requirements of IEEE-488.2.

Centronics Port: Hardcopy parallel interface is standard.

PC Card (PCMCIA I/II/III) Ports: For memory cards, ATA compatible flash cards and removable hard disks - optional.

Floppy Disk: High density 3.5" floppy disk drive (DOS format) is standard.

VGA Compatible Display: 15-pin D-type VGA compatible connector for external color display.

Hardcopy: Screen dumps are activated by a front-panel button or via remote control. TIFF and BMP formats are available for importing to Desktop Publishing programs. The following printers can be used to make hardcopies:

B/W: HP LaserJet, HP DeskJet 500, Epson FX.

Color: HP DeskJet 550C, Epson Stylus. An optional internal high resolution graphics printer is also available for screen dumps; a stripchart output format with 2 meters per division is also possible.

Output Formats: ASCII waveform out-put is available in seconds, compatible with spreadsheets, MATLAB™, MathCad™. Binary output is also available.

General

Auto-calibration ensures specified DC and timing accuracy.

Temperature: 5° to 40°C (41° to 104° F) rated 0° to 50°C (32° to 122° F) operating.

Humidity: 80% for temperatures up to 31°C decreasing linearly to 50% relative humidity at 40°C.

Altitude: Up to 2000m (operating), 40°C max.

Power: 90-132V AC, 180-250V AC, 45-66 Hz, 400 W.

Battery Backup: Front-panel settings maintained for two years.

Dimensions: (HWD) 10.4" x 15.65" x 17.85", 264 mm x 397 mm x 453 mm.

Weight: 20kg (44 lbs) net, 28 kg (61.6 lbs) shipping.

Warranty: Three years.

UL: Meets UL safety standards.

CE Approval

EMC: Conforms to EN50081-1, EN50082.

Safety: The oscilloscope has been designed to comply with EN61010-1 Installation Category (Over-voltage Category) II, 300V, Pollution Degree 2.





4. Theory of Operation

4.1 Processor Board : F9601-1-8 or F9601-1-64

MPC603e Processor

This processor board is based on to the Power MPC603e processor. It is a 64-bit RISC processor with 2x32kbyte cache. It features high speed processing and fast memory accesses. The processor is set to an internal clock of three times the external bus clock (3x32MHz = 96 MHz), and used in a 32-bit mode.

There are two "worlds" on the board:

- the 32-bit world, including the main PowerPC processor, the dynamic RAM modules and the VGA interface;
- the 8 or 16-bit world, including all other on-board peripherals, external small peripherals and acquisition board.

A MC68150 dynamic bus sizer is used as an interface between the two worlds.

Power Supplies

The board uses three power supplies from the main acquisition board: Vcc, +15V and -15V. Vee is wired on a connector for board test purposes. The +15V supply OP-amps on the 9601-1 board, and +15V and -15V supply small peripherals.

The current processor needs a 3.3V power supply, all the rest of the logic needs 5V. All signals are TTL compatible.

The PLL circuit (88916) generates a PLL_LOCK signal, which is used to clamp the 3.3V and 2.5V references as long as the 32MHz clock is not stable. The processor also needs to be protected against too big voltage differences between 2.5V and 3.3V (diodes on the reference).


An OP-amp and a MOSFET transistor for each power supply are used. The reference voltages are taken directly from the 5V power supply by a resistive divider.

Capacitors and a few diodes ensure that the supplies do not exceed dangerous levels at power-up, nor rise too fast.

32-bit Peripherals

There are only three devices hooked up on to the processors 32-bit data bus:

- the VGA video controller
- the DRAM system
- the bus sizer, bridge to the 68k-like world

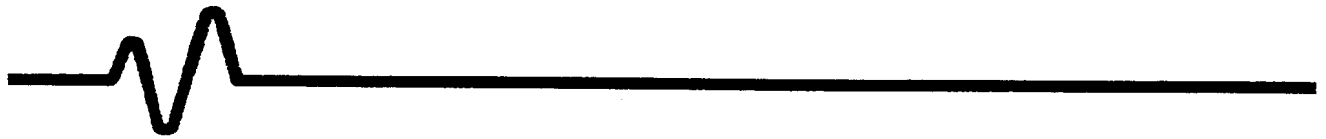

Processor Block Diagram

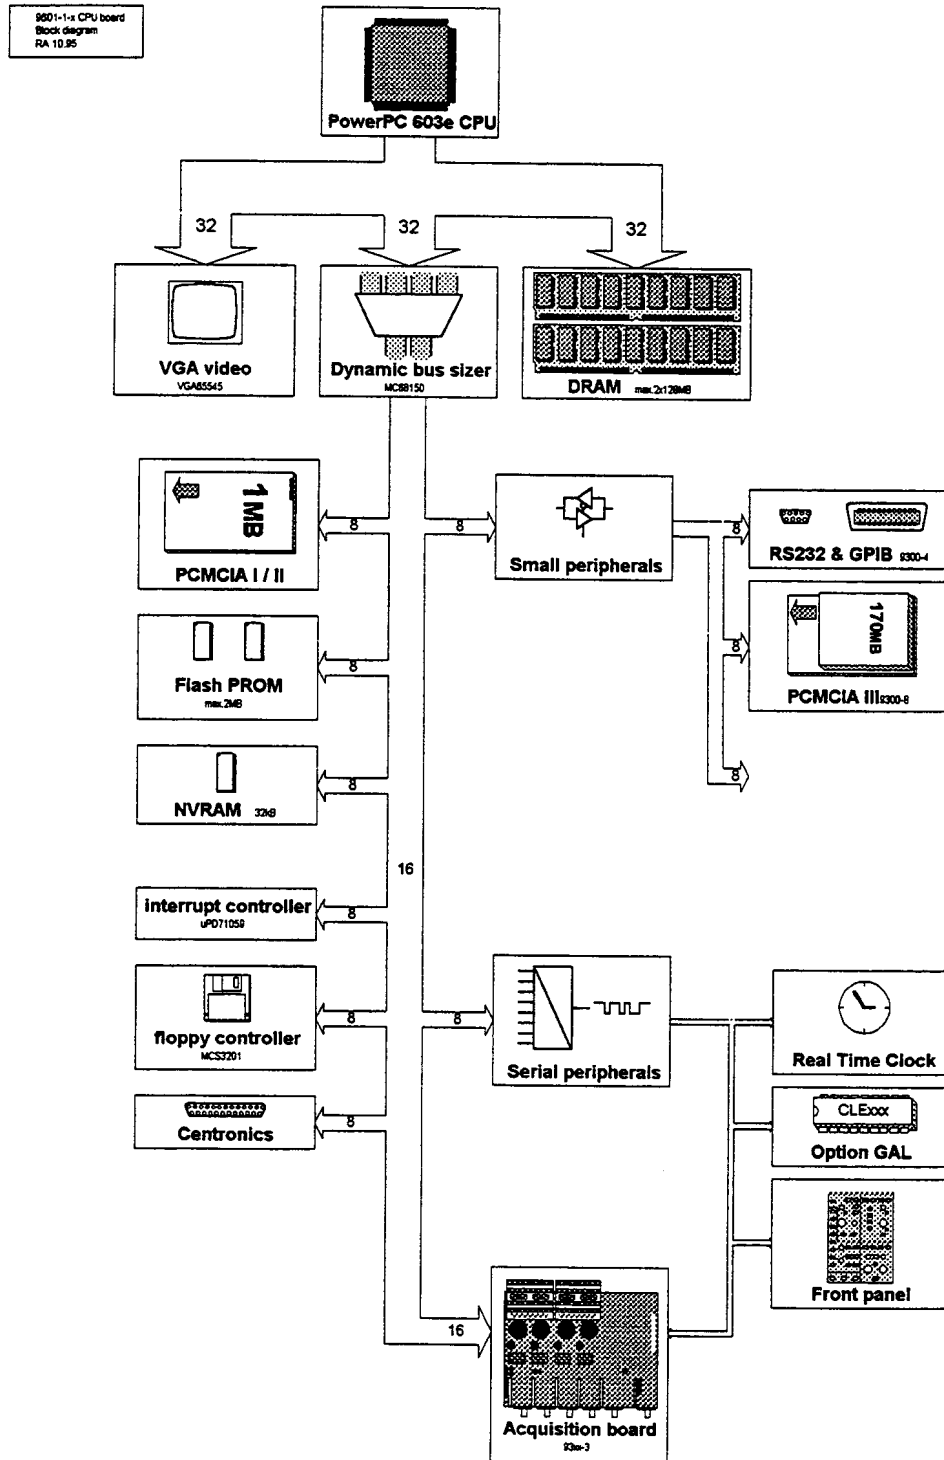


Fig 4-1 9601-1 Block diagram

DRAM

The DRAM consists of two SIMM modules from 4 MB up to 32 MB each. By interleaving two SIMMs, the access time is dramatically reduced (one beat every 30ns, while the other module "recovers" from the previous access). The DRAM control logic, including refresh control, is built around several GALs and a few gates.

RAMEUR (A44) is the main sequencer. It inserts refresh cycles whenever needed, and drives row and column addressing timing.

RASADE (A39) controls the row address select lines of the memory modules, and generates the addresses for double beat or burst accesses.

OCCASE (A37) generates the column address select lines of the SIMMs.

DRAME (A57) holds some glue logic, and a state machine that counts the number of beats, inserting pauses in the access if necessary (single SIMM support).

Four multiplexers (A40, 42, 46 and 47) switch between odd and even addresses to be sent to the address lines of the modules. One more multiplexer (A38) switches low order address bits, routing them either directly to the processor, or to the DRAM address generator in RASADE.

Normal Access Timing

This is the simplest access possible: the processor puts an address onto the address bus, and reads back or writes one long word (32-bit wide) to DRAM. Depending on the address (odd or even), bank A or bank B is selected in a dual SIMM configuration.

Burst Access Timing

A burst access on a 603e configured as a 32-bit device, consists of either two ("double beat") or eight ("burst") successive reads in DRAM. The idea is to put a start address onto the address bus, and read back or write several data's from or to DRAM every clock cycle, without the processor incrementing the address (this is done by the external logic). To increase system performance, the memory has been interleaved, allowing each module to access a memory location every 60ns, but with a delay of 30ns between the modules.

A burst access is signaled by an active low `_TBST` signal and a 32-bit access (`SIZ2..0= 011`), a double-beat access is indicated by a high `_TBST` but an access size of 64 bits (`SIZ2..0= 100`). The double-beat case is decoded by a GAL (VIADUC), and the signal is named `_DBEAT` (active low).

Refresh Timing

The 32 kHz clock from the real time clock chip is used to refresh periodically the DRAM.

The GAL RAMEUR generates the refresh cycles, as well as the sequencing of `_RAS` and `_CAS`. Depending on the operating mode, it chooses to access slot A or selects alternately slots A and B.



Memory Mapping

By default, the board is set to the biggest memory size possible. The software checks out for "holes" in the addressing space, and sets accordingly two configuration lines, MAP1 and MAP0.

MAP1..0	meaning
00	2x4, single sided SIMMs
01	2x8 MB SIMMs
10	2x32 MB SIMMs

VGA

The VGA 65545 controller chip (A27) includes its own address decoding logic. It generates all video signals (red, green and blue video, horizontal and vertical syncs, and all control lines to drive a flat panel) and controls its associated 1 MB video dynamic RAM (reads, write and refresh cycles).

All timings are extracted from the 16 MHz bus clock, so no external crystal or timebase is needed.

The horizontal and vertical sync. signals are sent to both the internal and the external video connector (high density DB15 on the 9601-2 board). The external syncs are direct, the internal syncs pass through the GAL VIADUC (A32), allowing to force these two lines to ground. This puts the internal display in power down mode (standby mode).

The chip can support several bus interfaces (PCI, ISA, VL.), it is configured as VL-bus.

The 65545 chip generates red, green and blue video signals. These are controlled-impedance lines (37.5 Ohm approximately, which corresponds to two 75 Ohm loads in parallel). A low-pass filter is implemented right at the outputs from the VGA controller, and another low-pass filter is located at each video connector on the 9601-2 board (just after the "active" load).

9601-2 Board: VGA proper termination (auto termination)

The 9601-2 board is a complement to the 9601-1 main processor board. It holds the external Centronics connector (female DB-25) with its EMI filters, both internal and external VGA connectors (female mini DB-15), and line termination for R, G and B signals.

The VGA controller is able to drive a load of 37.5 Ohms on its Red, Green and Blue outputs (two 75 Ohms loads in parallel). The line impedance of these signals on the processor board is therefore close to 37.5 Ohms. The 9601-2 board includes a special termination circuit that keeps the loads on the R, G and B lines at 37.5 Ohms, no matter if one or two 75 Ohms loads are connected. The circuit assumes that a 75 Ohms load is present on each output.

Bus Sizer

The MPC603e processor does not support dynamic bus sizing, as did the 68k family. Many parts of the software and the hardware rely on that feature. A Motorola MC68150 chip 'translates' the PowerPC 32-bit data bus to a 68030 8 or 16-bit bus. Except DRAM and VGA controller, all peripherals work on this 68k-type bus. Full compatibility is therefore ensured with current acquisition boards and small peripherals.

16 and 8-bit Peripherals

The only 16-bit peripheral hooked on the bus is the acquisition board. RETINE (A36) generates wait state timings and is used to switch between cold boot (return to default state) and warm boot (do a RESET, but keep current scope settings), and generates a bus error if max. access time is out and no peripheral has acknowledged the access.

ASSISE (A21) generates chip select signals for the bus sizer, BUDGET (A28) creates typical 68k signals (`_BAS`, `_BDS`, 16MHz clock).

The peripheral address decoding is done by a set of GALs (GRANDS (A20), PETITS (A29)) and a few multiplexers (A30, A22). GRANDS selects between main peripheral categories (VGA, DRAM, memory card, flash PROM, acquisition board or other peripherals), PETITS generates chip select signals for 8-bit peripherals (flash PROM, memory card, non-volatile RAM, Centronics and "others"). It also determines how many wait states are needed for peripherals not able to acknowledge a bus access. This is done by pulling low `_DSACK0` after having sensed the corresponding number of wait states through `_BWT1` and `_BWT3`, which ends the current access.

The multiplexer A30 does a finer decoding between "others" decoded in PETITS, namely interrupt controller, small peripherals, serial interface, flash PROM chip 1 or 2, and status registers.

PCMCIA type I / II interface

This interface consists mainly of buffers for both data and address busses. An OP amp (A10) and a MOS transistor (Q3) allow to switch off the memory card power supply while no card is plugged in, and turn it on slowly when plugged in. The GAL CARDAN (A11) handles the card format and generates several control signals accordingly.

A16 (an hex D-type flip-flop) holds control bits for 12Vpp (flash programming voltage), DRAM memory mapping and memory card type. All bits of this register reset to zero when the `_RESET` signal goes active low, which means that their state is also guaranteed at power-up.

A9 and A12 are the read registers for several status bits.

Several EXOR gates (A17 and A18) invert the most significant address bits of the memory card whenever the SWAP jumper is plugged in, so that the first bytes are always located at `0xFFFF0000`, regardless of the size of the memory card. This allows to boot directly from a PCMCIA memory card.



Flash PROM

Two Intel 28F008-compatible 1MB PROMs (A24 and A25), are used. From a hardware point of view, a flash PROM is the same as an EPROM in read mode. To write to it, however, a programming voltage (V_{pp}) needs to be applied to a pin. The 12V voltage is generated by a switching regulator (A26), controlled by a logic level ($_EPPP$).

NVRAM

This chip is powered through the lithium battery (VCT) when power is off. The chip select is held high through a pull-up resistor to VCT to avoid accidental overwriting while power is off.

Interrupt Controller

In order to keep compatibility with both 68k hardware and software, it is necessary to use a chip that prioritizes several interrupt sources. This is done by an NEC chip, a uPD71059. It scans eight interrupt pins and sends a unique interrupt to the processor when a (non-masked) interrupt appears.

Interrupt levels are assigned the following:

level 0	(lowest priority) acquisition board
level 1	small peripherals, unused
level 2	RS232
level 3	GPIB
level 4	small peripherals and acquisition board, unused
level 5	real time clock
level 6	time base (acquisition board)
level 7	(highest priority) only for test purposes. Linked to level 2 for debugging.

Floppy Controller

The floppy controller chip directly interfaces to a double or high-density disk drive. The floppy controller has a digital 8-bit input/output register, which is used to read several status lines from the drive (disk inserted, etc.). In principle, the controller is able to provide an interrupt when accesses are completed. As these accesses are performed in non-time critical paths of the program, The interrupt line has been wired to the input register, so that the program has to poll this register until the interrupt line goes active. The controller has it's own timebase, a 24MHz crystal.

Centronics

Both external and internal Centronics ports are write-only. The data get latched in a 74HCT374 register (A45 for internal Centronics, A55 for external).

Small Peripheral Interface

This 8-bit interface is intended to allow external expansion to the processor board. A56 and A53 (74HCT541 tri-state buffers) buffer the address and control lines, and A62 (74HCT245, bi-directional tri-state buffers) buffer the data lines.

The address decoding is done on each peripheral board. The acknowledge for each access is also done by the peripheral device, so that there is no restriction on wait-states. The bus clock runs at 16mhz, and a reset line reinitializes the boards at the same time as the CPU.

Four interrupt lines are also included in this interface, so that interrupt-driven boards can be used (a good example is the 9300-4 GPIB/RS232 board, which uses interrupts 2 and 3).

Serial Interface for on-board Peripherals

Two GALs (SEVERE and SAVEUR) are used to access serial on-board devices, like the real time clock, option GAL, front panel and some parts of the acquisition board. The principle of such a serial access is the following: every write or read to the serial interface allows to write or read one bit (the MSB of the byte). To write a byte to a serial device, you need eight accesses to the serial interface.

Many serial devices need the same protocol: you first send a command byte (read, write, clear, etc.), and then read or write one or several data (if required).

Depending on the address the serial interface is been accessed, the corresponding device gets selected (`_SSER`, `_SFPR`, `_SLED` or `SRTC` lines). A clock (`_SCKA`), a read data (`SDRA` or `SDRD`) and a write data (`SDWA` or `SDWD`) constitute the serial interface itself (the D suffix on read and write data lines means Digital, i.e. devices on the CPU board; an A suffix means devices on the Acquisition board).

RTC

The 68HC68T1 real time clock has several functions:

- keep a time-of-the-day and current-date information while the DSO is not powered on.
- generate a 32kHz clock for DRAM refreshment.
- generate a 128Hz periodic interrupt to force bus accesses from the processor (otherwise the watchdog timer would time out and reset the board) and allow periodic update of the time display ("scope alive").

The chip uses it's own 32.768kHz crystal to keep the time and derive all timings. A few discrete components around it leave the chip powered by the backup lithium battery while the rest of the board is not powered, and charge the battery when the power is on again.

Option GAL

The option GAL is a hardware key to unlock specific software functionality's. A pattern is sent to the GAL, which responds with another pattern. If the two fit, the feature is unlocked.



Front Panel

The front panel LED can be controlled by a serial write access. The LED (write only) shares the same address as the option GAL (read only). The LED is driven by the less significant bit (LSB) of the control register.

Watchdog and Reset Generation

The power supply is monitored by a TL7770-5 chip. Whenever the Vcc voltage goes below 4.8V (even for a short time !), a reset pulse is generated, whose width is determined by an RC time constant (33uF and internal resistor).

The second half of this chip serves as watchdog circuit. The processor needs to poll a sense line on that chip from time to time (typically a few ms). By doing this, a capacitor (33uF) is discharged. When not polled, it gets charged by a constant current, and when a given threshold is exceeded, a reset pulse is generated. The LED connected goes off whenever the _RESET line is low, so a blinking LED indicates either no bus access for longer than a few hundreds of ms, or a problem (glitch) on the Vcc power supply.

Bus Error Generation

A bus error exception is generated when the _TEA pin is pulled low on the processor. The 603e expects a _TA signal as an acknowledge to the current data transaction, and inserts wait states as long as _TA has not been pulled low at the correct timing (refer to the MPC603e documentation for exact timing information's). An external circuit is required to break the pending cycle if no device responds after a given time-out.

This is the job of the GAL RETINE (A36), which counts the number of wait states already passed (4 bit Gray counter). An external 4-bit counter (A59) extends the count to 160 (tbd) wait cycles before triggering a bus error.

An acknowledge (_DSACK1..0 lines) aborts the time-out count and finishes successfully the current cycle.

I/O Structure and GALs Involved

The following bloc diagram describes the peripheral decoding flow, and what GAL is involved in the decoding. The three frames group the peripherals into 8, 16 or 32-bit devices. The simple 3D-blocs represent an on-board device. The 3D-blocks with an arrow represent external devices (more generally: accessed through a connector).

GRANDS does the main decoding of peripherals and the 93xx-3 acquisition board.

PETITS does the sub-decoding for all 8-bit peripherals.

VIADUC handles the Motorola to Intel format decoding for the VGA controller.

CARDAN takes care of the PCMCIA interface timings.

PROFIL dispatches 8-bit data to the Centronics or the Floppy controller.

SAVEUR and SEVERE generate the serial clock and routes the data to the right serial device, including CLExxx, which is the option PAL.

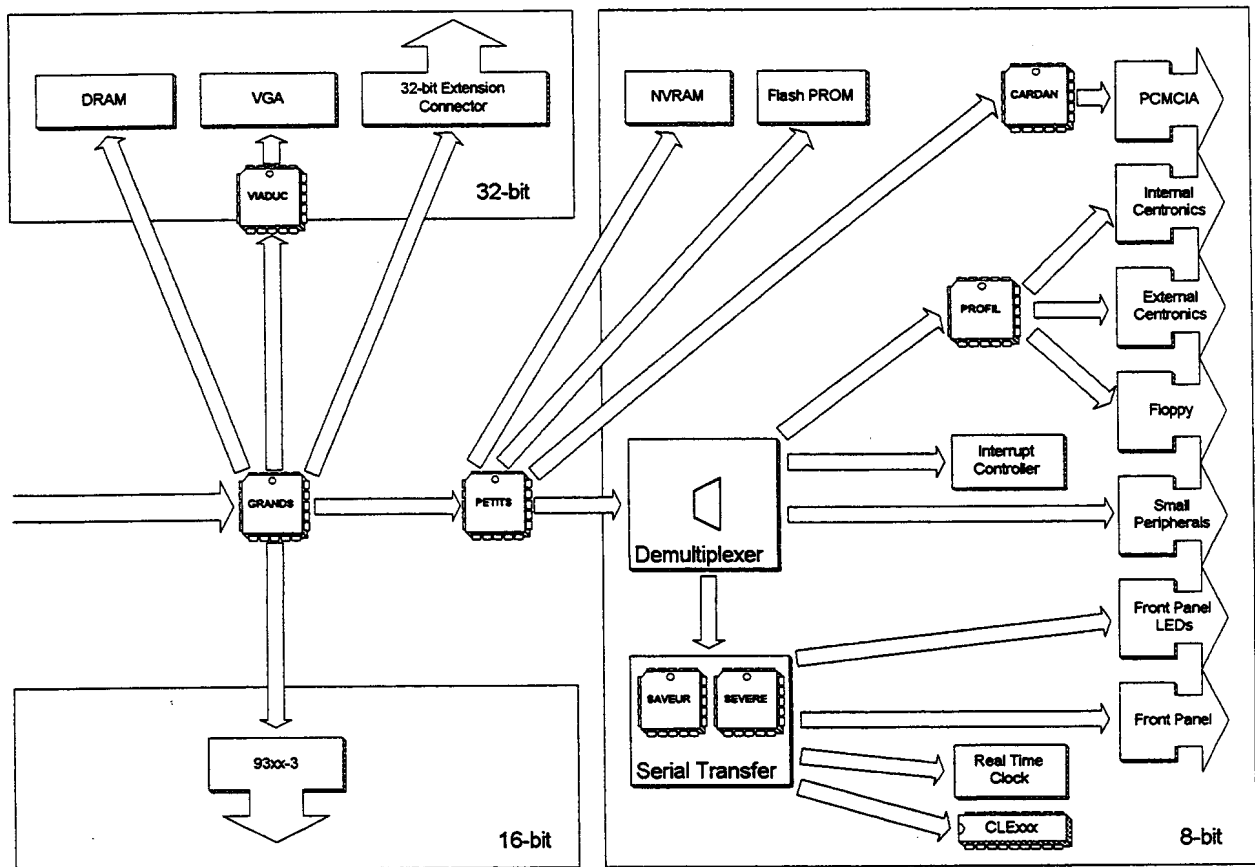


Fig 4-2 Peripheral Decoding and Data Bus Size

Not shown in Fig.4-2, are a few GALs for miscellaneous functions (like DRAM refreshing).

RASADE generates the RAS signals and the lower addresses for DRAM. It also supports the signals needed for interleaved burst mode.

OCCASE generates the CAS signals for DRAM.

RAMEUR is the main sequencer for the DRAM, and handles the access precharge and the refresh system.

BUDGET translates a 680x0 bus cycle into a PPC cycle, and handles fast cycles, like accesses to DRAM or VGA.

RETINE counts the wait states and generates a bus error if no response after too many (153) wait states. It also generates the system reset.

ASSISE decodes CPU space cycles and controls the bus sizer.



4.2 F9384-31 (900022) Main Board

4.2.1 Introduction

The board is divided into five sections :

- Microprocessor control.
- Front-end
- Trigger
- Analog to Digital Converter and memory
- Time base

4.2.2 Microprocessor Control

The microprocessor interface provides the address, data, and control interface for the microprocessor card plugged into connector J1. This is the only interface to the data acquired by the acquisition card. This interface is essentially identical to the 9354 and 9374 interface. The main power supplies provided on connector J2 are +/-15 volts, +/-6 volts, +/-5 volts, and +3.3 volts.

4.2.2.1 Data Bus Buffer


The data bus BD(0:15) from the microprocessor is buffered by A12 and A14 to unload the microprocessor bus from the extended bus DD(0:15) on the acquisition card. There is a one to one mapping of the two busses. All data flows through this bi-directional bus buffer. An additional eight bit buffer (A27) provides zero fill for the least significant eight bits of the bus when the processor reads data from the acquisition or buffer memory.

Bus	Bus name	Description
BD(0:15)	Data bus	Microprocessor data bus, bi-directional
DD(0:15)	Internal data bus	Internal buffered microprocessor data bus, bi-directional

4.2.2.2 ADC Address Shifter

Four GAL16V8's, ROUTE1-A, ROUTE2-A, ROUTE2-B, and ROUTE3-C shift and buffer the address bus BA(0:31) from the microprocessor. The shifted address bus DA(0:31) is used to read the data from the acquisition memory and the buffer memory.

Data from the four acquisition channels are not written into the acquisition memory in a linear sequential fashion. For example, when interleaving channel 1 and channel 2 for a sample rate of 2 Gs/S, channel 1 acquisition memory has the first sample point and channel 2 has the second sample point, these must be read in the correct time sequence to the microprocessor. The address bus shifter is programmed to read the first sample point from channel 1 and the second from channel 2, etc. Similarly, when 4 Gs/S is selected, one sample from each channel is read in the correct time sequence for the microprocessor

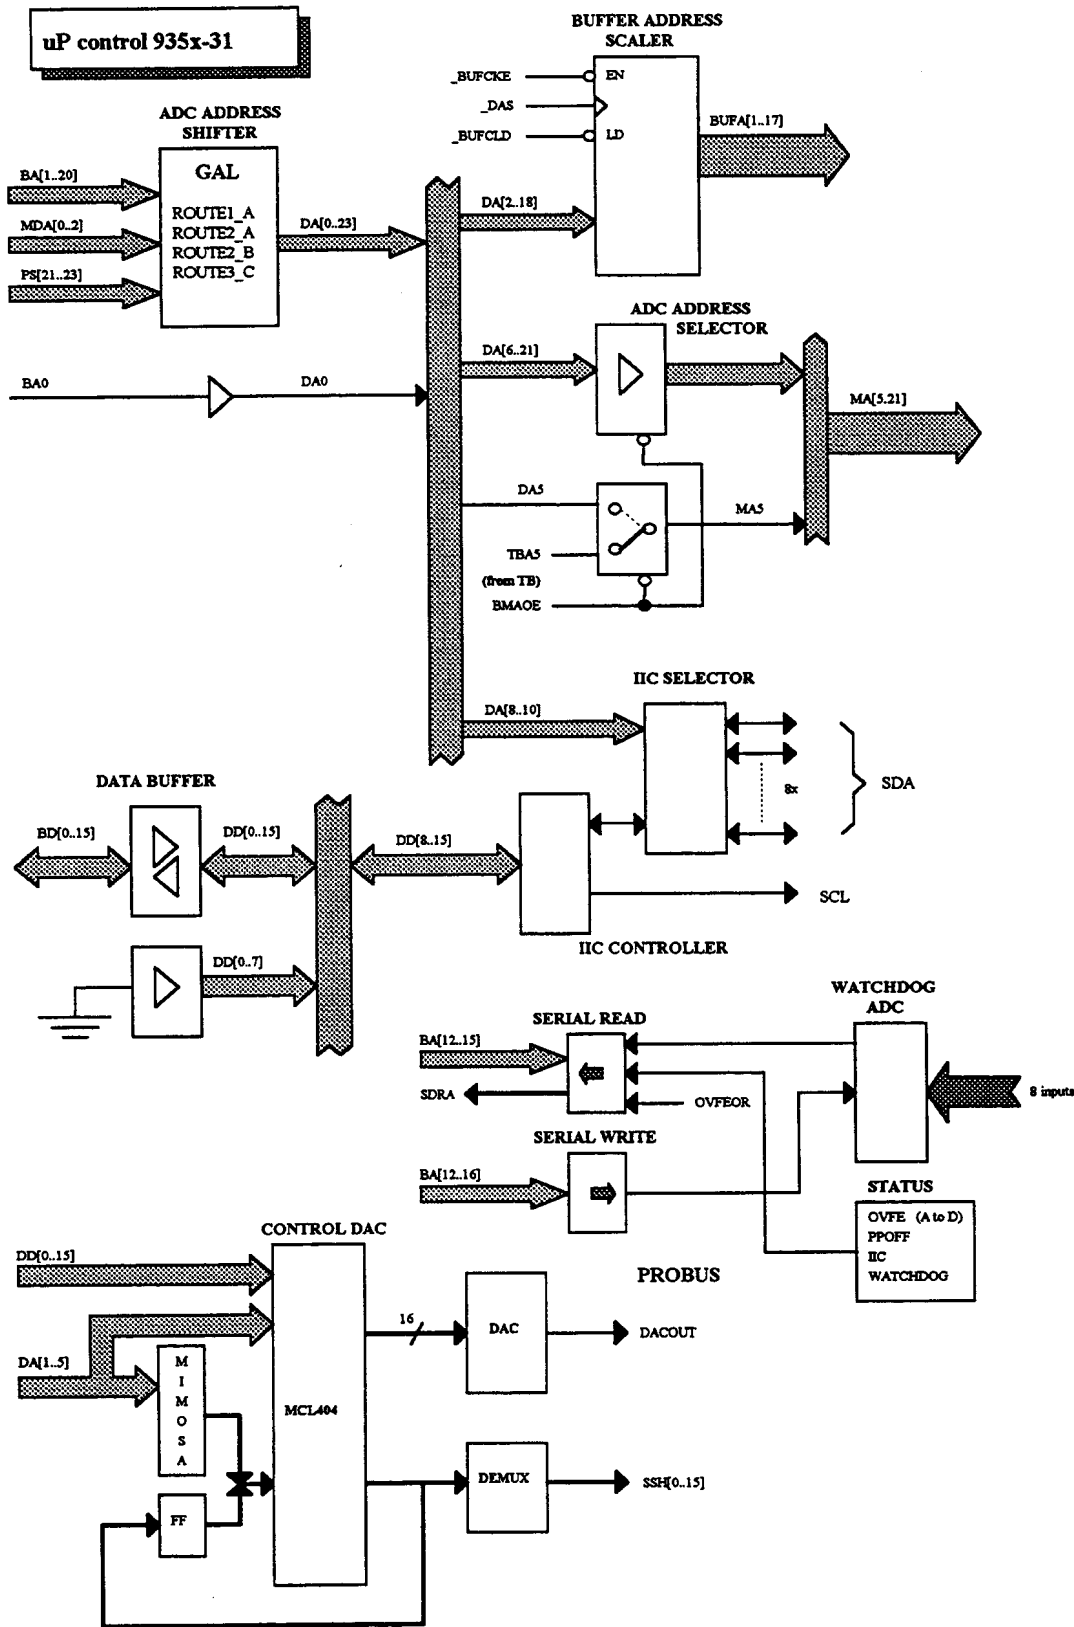

Each channel also interleaves two ADC's to sample at 1 Gs/S. At this sample rate two demultiplexers write sample points to memory in a non time ordered sequence. The



address shifter must shift the microprocessor address bus to read the sample points in the correct time sequence.

Bus	Bus name	Description
BA(0:31)	Address bus	Address bus from the microprocessor
DA(0:31)	Shifted address bus	Acquisition memory bus and when selected, the buffer memory address bus

4.2.2.3 Buffer Address Scalar

Acquisition memory is off-loaded to the buffer memory via the MDX622 demultiplexers for direct access by the microprocessor. The buffer memory is sequentially addressed via the address bus BUFA(1:17) by the buffer address scalar, a seventeen bit counter. The buffer address scalar can be loaded with an address pointing to the start of data, then sequential address strobes from the microprocessor increments the scalar, sequentially addressing the buffer memory and writing waveform data. Meanwhile the address shifter reads the waveform data from the acquisition memory in the correct time sequence.

Bus	Bus name	Description
BUFA(1:17)	Buffer address bus	Address bus for the buffer memory which stores a portion of the acquisition memory data.

4.2.2.4 ADC Address Selector

After the acquisition memory is filled by the waveform data, the buffer address scalar is loaded with the starting address for the buffer memory and the shifted address bus is connected to the acquisition memory address bus MA(5:22) with the ADC address selector. (NOTE: During acquisition, the monolithic timebase, MTB411, provides the memory addresses.) Sequential addresses from the microprocessor address the acquisition memory and increment the buffer address scalar, moving the waveform data from the acquisition memory to the microprocessor card. The buffer memory snoops the data and saves the waveform data from the acquisition memory in the local buffer memory. Subsequent accesses to the waveform data by the microprocessor can come from the buffer memory instead of the acquisition memory. The buffer memory stores only 128k samples, one eighth of the samples stored in the acquisition memory. At memory sizes above this value, double buffering in the buffer memory is of little use.

Notice that the buffered sample points are in the correct time sequence for single channel operation. However, when two or four channels are interleaved, the address shifter must be used to read the data from the buffer memory in the correct time sequence for the microprocessor.

Bus	Bus name	Description
MA(5:22)	Memory address	High speed acquisition memory address bus

4.2.2.5 Decode Logic

A programmable device, GAL16V8, called AVENUE-A decodes the upper address bits of the microprocessor address bus to generate the signals shown below.

AVENUE-A	
SPER0, SPER1	select peripheral group
PS21, PS22, PS23	pseudo address output for the address shifter
EBA	select card
SMDX	select MDX

Two more GAL16V8's (CHEMIN-A and ARTERE-A) use the output of AVENUE-A, part of the shifted address bus (DA(0:31)), and the microprocessor signals `_BAS` and `_BR_W` to write and read the acquisition memory and buffer memory.

The decoded signals of these two decoders are:

CHEMIN-A	
BUFCLD, BUFCKE	buffer scalar command output
WEBUFH, WEBUFL, BUWALL	buffer memory command output
EADR AB, EADR CD, DIOE	ADC command
ARTERE-A	
EZERO, EADCW	driver command
SADCM, ADCOE1, ADCOE2	ADC memory command output
WE AB, WE CD	ADC write output
REBUF	buffer READ output

Another GAL16V8 (MIMOSA-A) is the state machine for the scanning DAC.

The following table is the memory map for the F9384-31 card.

ADC memories (0200 0000 - 0200 FFFF) 16MB			
0200 0000	021F FFFF	ADC memory ch. A 1MP	2MB
	023F FFFF	ADC memory ch. A 2MP	4MB
0220 0000	0227 FFFF	BUF memory ch. A 256kP	512kB
0240 0000	025F FFFF	ADC memory ch. B 1MP	2MB
	027F FFFF	ADC memory ch. B 2MP	4MB
0260 0000	0267 FFFF	BUF memory ch. B 256kP	512kB
0280 0000	029F FFFF	ADC memory ch. C 1MP	2MB
	02BF FFFF	ADC memory ch. C 2MP	4MB
02A0 0000	02A7 FFFF	BUF memory ch. C 256kP	512kB



02C0 0000	02DF FFFF	ADC memory ch. D 1MP	2MB
	02FF FFFF	ADC memory ch. D 2MP	4MB
02E0 0000	02E7 FFFF	BUF memory ch. D 256kP	512kB
Small peripherals (0300 0000 - 033F FFFF) 4MB			
0300 0000	0300 0062	MCL404 Multiplexed DAC	2*36B
0308 0000	0308 0N02	Smart probe IIC controller	x8
0310 0000	0310 000E	MDX416 Data demux ch. A	4B
0314 0000	0314 000E	MDX416 Data demux ch. B	4B
0318 0000	0318 000E	MDX416 Data demux ch. C	4B
031C 0000	031C 000E	MDX416 Data demux ch. D	4B
	031F FFFF	spare	
0320 0000	0320 0005	MST412 Smart trigger	6B
0320 0006	0320 0007	Mode control / status	2B
	032F FFFF	spare	
0330 0000	0330 003F	MTB411 Timebase	64B
Extended buffer memories (0300 0000 - 033F FFFF) 4MB			
0340 0000	0347 FFFF	BUF memory ch. A 2x128kB	512kB
0350 0000	0357 FFFF	BUF memory ch. B 2x128kB	512kB
0360 0000	0367 FFFF	BUF memory ch. C 2x128kB	512kB
0370 0000	0377 FFFF	BUF memory ch. D 2x128kB	512kB
Spare (0380 0000 - 03FF FFFF) 8MB			
0380 0000	03FF FFFF	spare	12MB

4.2.2.6 Serial, Watchdog ADC, Overload, and IIC Control

The microprocessor card provides the serial clock SCKA, write data SDWA, and strobe STRA for the serial data stream that programs most of the DAC's and registers. It reads back the serial data via SDRA. Two decoders (A4 and A10) provide 13 write strobes, generated by STRA. The data is shifted in from the microprocessor to all of the serial DAC's and registers but only the intended DAC's or registers are strobed by the write strobe.

The LC574A has controls for the gain of each flash and delay and offset of each S/H for each channel, a total of six DAC's per channel. These DACs are provided by three octal 8-bit DACs.

The watchdog ADC monitors probe attenuation, calibration voltage, and VCCADC and generates an interrupt when any monitored voltage is outside of the valid range. Attaching a probe to the input of the scope changes the monitored voltage and alerts the microprocessor that a new probe is connected. The probe is interrogated by the microprocessor to determine the type of probe.

An overload condition at any of the 50 ohm inputs generates an interrupt to the microprocessor. The microprocessor reads the status register to determine which of the 8 possible overload conditions caused the interrupt.

The probus connectors are controlled by the IIC controller and IIC selector. IIC is a two wire serial bus used to control the probus probes. The controller controls the four input channels, external trigger input, probe cal, an EEPROM, and another input.

4.2.2.7 Scanning DAC

The scanning DAC is an 18 channel 16 bit DAC for use where precision and resolution are needed in the analog circuits. The DAC output range is +/-10 volts. It has its own reference and is not trimmed for gain or offset.

The MCL404 is a controller chip for the scanning DAC subsystem. Eighteen sample and hold circuits can be updated periodically with the MCL404. The MCL404 sequentially enables each of the sample and hold circuits. A precision 16 bit DAC provides the input to the sample and hold circuits through an analog multiplexer also controlled by the MCL404. The MCL404 has eighteen internal 16 bit registers for the eighteen sample and hold circuits.

Each frontend channel has a gain, offset, and trigger level sample and hold. External trigger level is connected to one sample and hold. Probe calibrate also uses one of the sample and hold outputs.

The scanning DAC is not used to calibrate the S/H and flash gain, offset, and delay. These are independent DAC's near each acquisition hybrid.

4.2.2.8 Power Supply Connector

The power supply provides +/-15 volts, +/-6 volts, +/-5 volts, +3.3 volts, -2 volts and line. All voltages except for line appear at connector J2. Line appears on connector J4. Line is a TTL compatible square wave synchronized to the ac power supplying the instrument.

4.2.3 Front End

The front end system provides the signal conditioning for the ADC system. The main functions are :


- four channel operation, calibration with software control
- input protection and coupling : AC, DC, 1 M Ω , 50 Ω
- amplitude normalisation for the ADC system : 320 mV full scale
- fine gain control
- offset control
- bandwidth limit filter : BWL 25 MHz or 200 MHz user selctable
- triggering with standard coupling and TV trigger on four channels and External



Six power supplies are generated from +/-15 volts and +/-6 volts for use in the frontend. These are: +/-12VFEP, +/-12VFE, and +/-5VFE. A reference supply VREF at 5 volts is generated by an SMLM336-5 from +12VFE.

4.2.3.1 Channel Description

The four channels are identical, thus only one channel will be described for brevity.

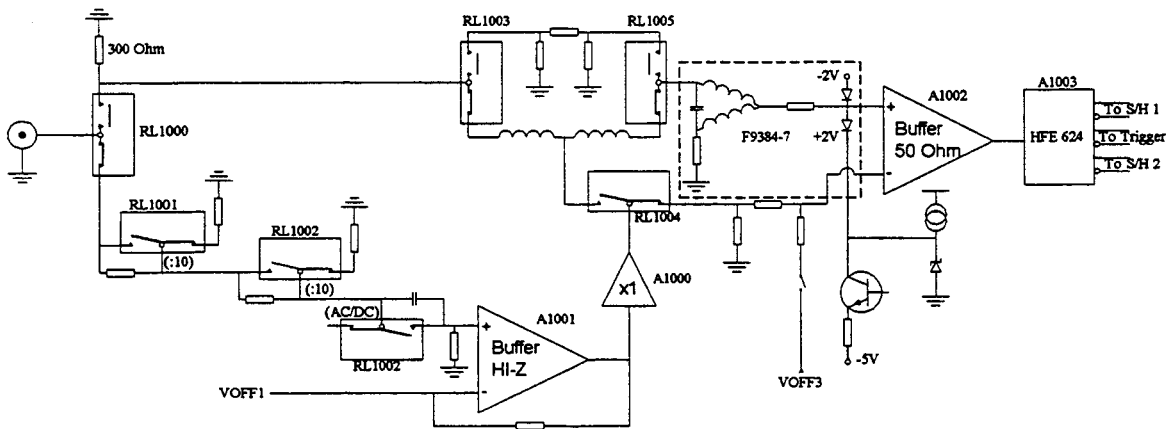

Attenuation/Coupling Stage

- Relay RL1000 selects the input between the HiZ (1 M Ω) and the 50 Ω path. A diode circuit senses the temperature of the 300 Ω termination and sets the `_OVL` bit low if overheating is detected. If overload is detected the 50 Ω path is then disconnected by the hardware and the 1 Mohm input is switched in.
- Relay RL1001 selects the input between divide-by-10 or direct for the signal in the HiZ path.
- Relay RL1002 selects another divide-by-10 or direct for the signal in the HiZ path
- Relay RL1003 selects the input between another divide-by-10 or direct for the signal in the 50 Ω path.
- Relay RL1004 enables the HiZ output (selection between 1M Ω output & offset for 50 Ω buffer).
- Relay RL1006 sets the AC/DC coupling in HiZ.
- Relay RL1007 selects the output between no attenuation in 50 Ω or HiZ (if RL5 is ON) to attenuate by 10 in 50 Ω .
- Switch SW1 (`_Voff3`) enable : This signal is only used for the calibration of the 50 Ω path when 1 M Ω coupling.

HFE624:

The HFE624 provides the following functions:

- Fine gain control to fill up the fixed vertical sensitivities with a 13:1 gain control range
- Bandwidth limit filter at 25 MHz and 200 MHz
- Three outputs, one for the trigger circuit and two for sample and hold input.
- Amplitude normalisation for the ADC system : at the BNC the dynamic range is 16 mV to 8V FS at 50 Ω and to 80V FS (full scale) at 1 MOhm in a 1-2-5 step sequence and the ADC system input is 500 mV differential,

4.2.3.2 Digital controls

The following controls are for the front end in the 9354. Note: Bits 16-23 are internal to the HFE624 and are written as a serial data stream.

0141 0z00 - 0141 0zff write channel A control register

0141 1z00 - 0141 1zff write channel B control register

0141 2z00 - 0141 2zff write channel C control register

0141 3z00 - 0141 3zff write channel D control register

23							16
--	ENc	ENb	ENa	G1	G0	BWL1	BWL0
15							8
RELSHA	:1 50	:10 50	:100 1M	:10 1M	AC/DC	1M	50
7							0
--	--	--	--	--	--	OF BUF50	--

ENc	:	Enable MFE output C
ENb	:	Enable MFE output B
ENa	:	Enable MFE output A
G1,G0	:	Gain range; 0 = range*1, 1 = range*2, 3 = range*5
BWL1,BWL0	:	Bandwidth limit; 0 = off, 1 = 200 MHz, 2 = 20 MHz
RELSHA	:	0 = direct, 1 = (A:BA, D:CD)
:1 50	:	RL7; 1 = x0.1 and 1M calibration, 2 = x1
:10 50	:	RL6; 1 = 50 Ohm calibration and 1mohm running
:100 1M	:	RL3; 1
:10 1M	:	RL2;
AC/DC	:	RL4; 0 = AC, 1 = DC
1M	:	RL5;
50	:	RL1
OF_BUF50	:	0 = user mode, 1 = 1mohm calibration mode

0140 4z00 - 0140 4zff read channels overload (and option package availability)

7							0	LSB-1
INTWD	INTIIC	OVL T	PPOFF	OVL D	OVL C	OVL B	OVL A	OPT

_INTWD watchdog ADC interrupt,
_INTIIC I2C protocol interrupt,
_PPOFF probe power overload interrupt,
_OVL_noverload indicator (Ch A, B, C, D, EXT).



OPT935XA-CKTRIG option package (9th bit of serial read).

A low state indicate that overload or interrupt is detected. Bit OPT is high when the options are available.

0140 5z00 - 0140 5zff read overload sum

OVLSUMbit 7, Sum of the eight above bits.

0 = OK, 1 = problem occurred (read channels overload)

4.2.3.3 Analog controls

- One precision DAC, with its associated control system, drives and refreshes a multiple sample-and-hold system. Each channel has three analog controls VOFF1_x, VOFF3_x and IVGAIN_x, where x refers to channel A, B, C, or D corresponding to channels 1, 2, 3, and 4. VOFF1_x is the offset control in 50 Ohm coupling,, VOFF3_x is used to control the offset of the 50 Ohm path when in 1 MOhm coupling and IVGAIN_x is used to calibrate the gain of the front end and perform the variable gain control.
- The DAC dynamic range ($\pm 10V$) is scaled to the proper range by means of resistor dividers.

The addresses are :

0300 0000	write channel A gain control
0300 0002	write channel A offset control
0300 0004	write channel B gain control
0300 0006	write channel B offset control
0300 0008	write channel C gain control
0300 000a	write channel C offset control
0300 000c	write channel D gain control
0300 000e	write channel D offset control

4.2.4 Trigger

The different trigger couplings are :

- DC
- AC : cut off frequency approximately 10 Hz.
- LF REJ: a single pole high pass filter with a cut off frequency at 50 kHz.
- HF REJ: a single pole low pass filter with a cut off frequency at 50 kHz.
- HF: divides the trigger frequency by two.

The amplitude at the input of the MTR408 is approximately 400 mV FS (identical to the ADC system),

4.2.4.1 Digital Controls

The 40 bit shift register, is allocated as follows :

0141 4z00 - 0141 4zff write trigger control register

39	---	TBWL A	HFR A	AC A	DC A	---	SNEG A	SPOS A	32
31	TEXT50	TBWL B	HFR B	AC B	DC B	---	SNEG B	SPOS B	24
23	---	TBWL C	HFR C	AC C	DC C	---	SNEG C	SPOS C	16
15	---	TBWL D	HFR D	AC D	DC D	---	SNEG D	SPOS D	8
7	EXT/10	TBWL EXT	HFR EXT	AC EXT	DC EXT	---	SNEG EXT	SPOS EXT	0

TEXT50 0 = 1 M Ω external input coupling, 1 = 50 Ω external input coupling.
 _EXT/10 0 = attenuation is ON, 1 = OFF.

4.2.4.2 Analog Controls

A sample and hold fed by the precision DAC provides the threshold level.

The addresses are :

0300 0010 write EXT threshold control
 0300 0018 write channel A threshold control
 0300 001a write channel B threshold control
 0300 001c write channel C threshold control
 0300 001e write channel D threshold control

4.2.4.3 TV Trigger

Each channel has an analog pick-off for the tv trigger after the HFE624. The external trigger has a pickoff after the high impedance buffer. The TV trigger source is selected via the three bits of TVS and drives an amplifier with complementary outputs. These outputs are selected by _TVINV.

The TV trigger uses a commercial chip (LM1881) and provides two outputs, TV1 & TV2. This circuit is able to trigger on several different TV line number standards.

▪ Digital Controls

The 16 bit shift register, written using the serial protocol, is allocated as follows :

0141 5z00 - 0141 5zff write trigger TV and MST412 oscillator control register

15	TVINV	TVS2	TVS1	TVS0	HDTV	875	MB	MA	8
7	STI	STW	SVS	STS	---	---	---	---	0




_TVINV
 MFE409).
 _SVS
 _STS
 _STI
 _STW

0 = inverting TV trigger (to compensate for inversion in
 0 = enable TV1 source.
 0 = enable TV2 source.
 0 = enable interval width mode for MST412 oscillator control.
 0 = enable pulse width mode for MST412 oscillator control.

TVS2	TVS1	TVS0	TV trigger source	HDTV	875	line setting
0	0	1	channel A	0	0	525-625 TVLO
0	1	0	channel B	0	1	875 (MED)
0	1	1	channel C	1	0	1225 (HIGH)
1	0	0	channel D	1	1	2500 (HDTV)
1	0	1	external trigger			

4.2.4.4 Trigger Block Diagram

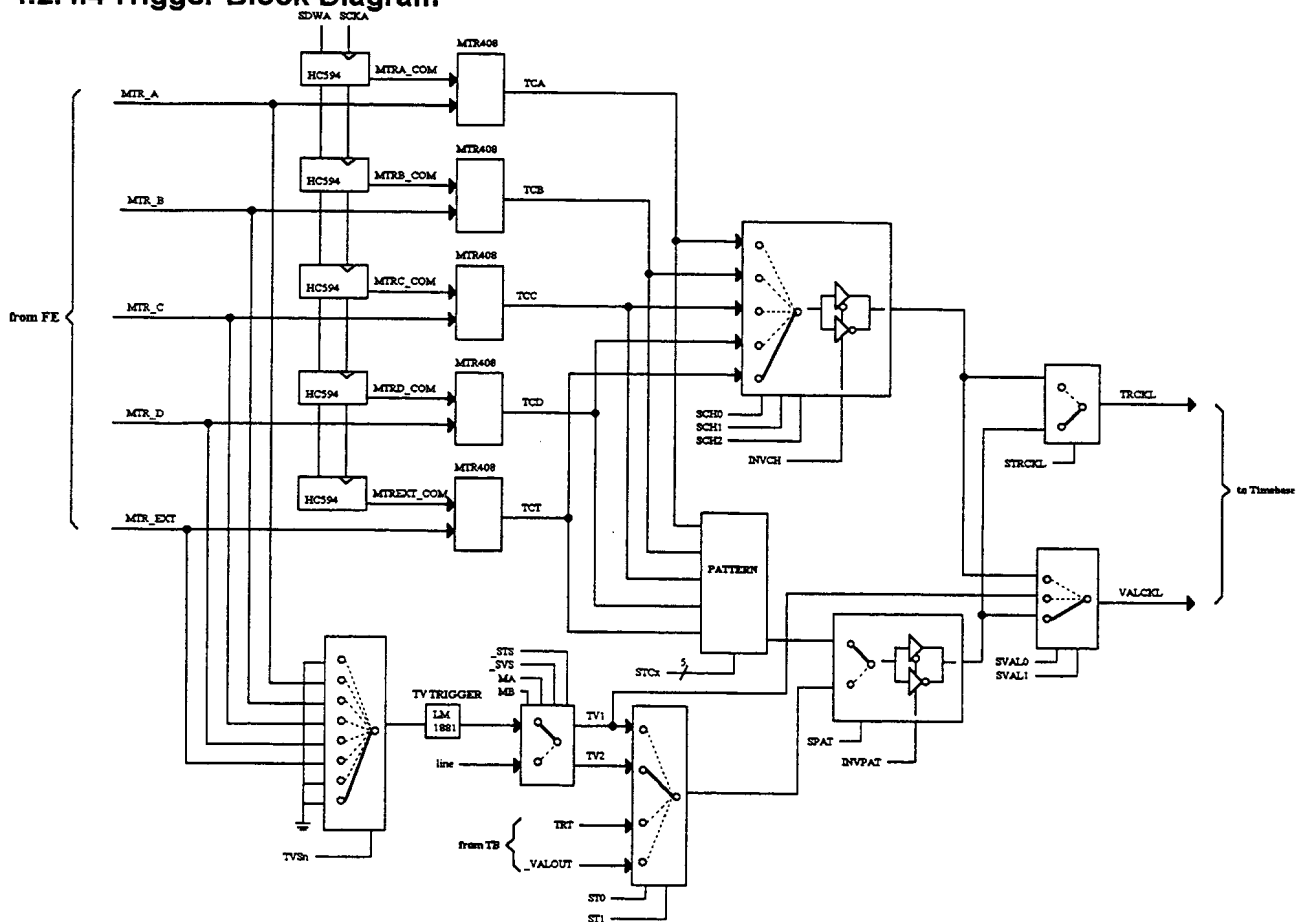

4.2.5 Analog to Digital Converter

4.2.5.1 Introduction


The analog to digital converter system does the signal conversion to 8 bits. Each channel has a custom hybrid, HAD621, that contains two identical channels A and B consisting of a sample and hold, MSH417, and an ADC, TDA8718. Each hybrid is followed by a data demultiplexer, MDX622 and memory.

- Sample and Hold : the MSH417 with an analog bandwidth of 1GHz, performs the track and hold before the ADC. It is clocked at three different frequencies : 500 MHz, 400 MHz, and 200 MHz. The offset difference between the two channels in the HAD621 is adjusted by an 8 bit DAC.
- Flash ADC : the TDA8718 is a folding ADC working at a maximum clock speed of 500 MS/s. The gain difference between channels in the HAD621 is calibrated by adjusting the internal resistor ladder using an 8 bit DAC. The ADC input level is nominally 2 volts peak to peak.
- Demultiplexer : the MDX622 monolithic is used to demultiplex the ADC output for the slower memories and to peak detect the data on the fly.
- Buffer Memory : 128K bytes
- ADC Memory : 100 K for the LC574A, 500 K for the LC574AM and 2 M for the LC574AL. Memory length may be extended by combining the acquisition memories of multiple channels to a maximum of 8 Mpoints for one channel.

Any time two channels are interleaved to produce a higher sample rate, the timing between the S/H's must be precise. A square wave oscillator at a frequency of 15.5029 MHz provides the edge required to calibrate the timing. The square wave is injected into the 50 ohm signal path at the buffer driving the HFE624 and is used by the software to calibrate out this internal delay.



4.2.5.2 ADC/Memories Block Diagram

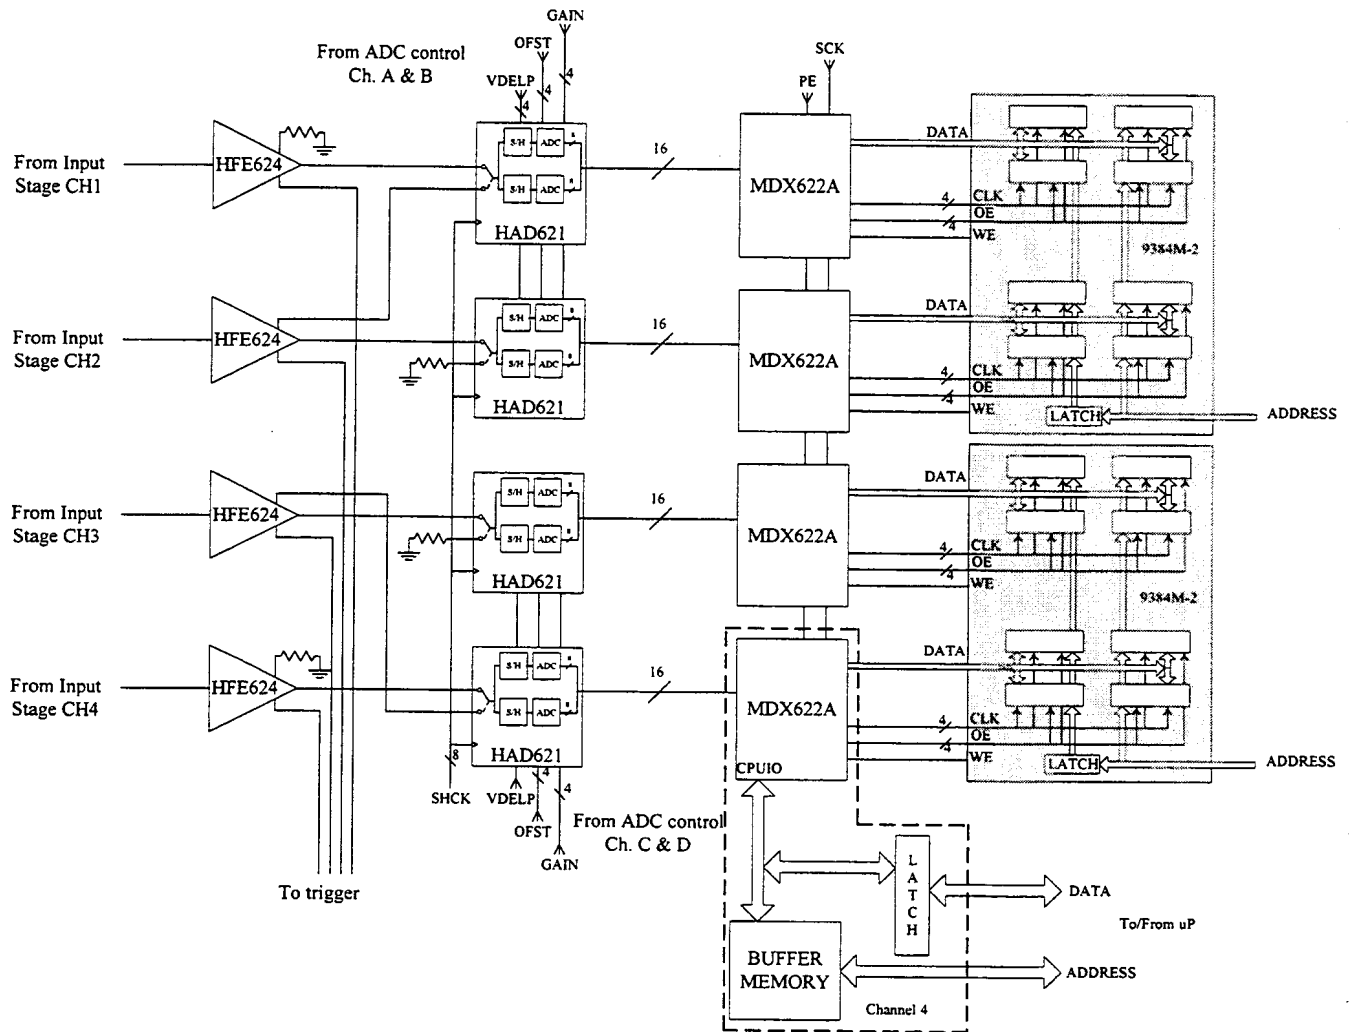

4.2.6 Time Base

4.2.6.1 Introduction

The main clock comes from a PLL oscillator that uses a precision 10 MHz reference. There is a control bit, SEXTREF, to select an optional external reference providing a 0 dbm signal level.

The PLL output frequency is controlled by three bits, SF500, SF400, and _SF200. One branch of the main clock, SHCK, is directly used by the sample-and-hold, the analog-to-digital converter and the time-to-digital converter for data acquisition. A differential ECL clock from each channel, called MCK, synchronizes the MDX622 data demultiplexer with the data from the ADC.

Another branch of the main clock, MDXCK, is routed to the time where the basic timing of the oscilloscope is generated. A programmable divider using a fast ECL first stage and a slower TTL second stage generate a signal called SAMPLE CLOCK. A second programmable ECL divider uses SAMPLE CLOCK to generate the timing signals for the MDX622 data demultiplexers, the time to digital converter, the trigger recognizer, and the MTB411 timebase.

The main clock can also be driven from the external trigger BNC, this path is selected by a control bit (SEXTCK). The external clock threshold can be modified by two bits from the time base mode control (EXTCTH1 and EXTCTH2). This external clock frequency range is 0 to 100 MHz. An optional rear panel input can drive the external clock to 500 MS/s.

The PLL oscillator has in fact only two values, 500 and 400 MHz, the 200 MHz is a secondary path coming from a divide by two.

- 500 MHz is used for the fast timebase settings, 250 MS/s, 500 MS/s, 1 GS/s, 2 GS/s, 4 GS/s and RIS mode.
- 400 MHz is used for all other timebase settings including Roll mode.

The time to digital converter is a variation on the classic Wilkinson charge to time converter. The capacitor is charged by the time difference between the trigger and the main clock, while the discharge is controlled by a fixed current source approximately 0.001 times the charging current. The MTB411 counts a clock called ICK, which is 1/8 th. of the main clock, during the discharge part of the TDC. The value of the counter after the discharge cycle is proportional to the time difference.

Another clock called TRT, derived from the main clock is used by the processor to calibrate the smart trigger.

4.2.6.3 Digital Control

0141 8z00 - 0141 8zffwrite Time Base divider register

15							8
MDX_CNT7	MDX_CNT6	MDX_CNT5	MDX_CNT4	MDX_CNT3	MDX_CNT2	MDX_CNT1	SEXTREF
7							0
DISFD	SF200	SF500	SF400	DIV3	DIV2	DIV1	DIV0

where :

- SEXTREF select optional external PLL clock reference (10 MHz \pm 5 %).
- DISFD disable FD clock to MTB411.
- _SF200 select oscillator frequency 200 MHz.
- SF500 select oscillator frequency 500 MHz.
- SF400 select oscillator frequency 400 MHz.
- DIVn frequency pre-divider (4 bits).
- MDX_CNT1:7 master MDX622 divider.

4.2.6.4 Trigger Selection

Each differential output of the five MTR408's from the Front-End (TCx) are selected (bit SCHn) and then inverted (bit INVCH) to drive the TRCKL signal and the VALCKL signal (bit SVAL1).

A logical function of the TCx signals can be selected (bit STCx) for the pattern generator. A few single ended signals can also be selected one at a time (bit STn). These signals are TV1 and TV2 for television trigger, TRT for test and calibration of MST412, _VALOUT for drop-out trigger.

Then there is a selection between the pattern and the single ended sources (bit SPAT). The signal obtained is inverted (bit INV PAT) and used to drive TRCKL (bit STRCKL). There is also a choice between this signal and TV1 to drive VALCKL (bit SVAL0). The pattern trigger logic function is any "AND" combination of TCx input signals, inverted or not. All the controls are done through a 16 bit serial register.

4.2.6.5 Smart Trigger

The VALCKL source drives the MST412. The TRCKL source goes through a buffer to drive the MST412, the fast trigger latch, and control the smart trigger 400 MHz start/stop oscillator. The DC trigger coupling mode uses the fast trigger latch path for triggering to approximately 700 MHz. Selecting HF trigger coupling extends the trigger sensitivity to beyond 1 GHz.

The MST412 oscillator is usually free running, but when using glitch trigger mode, the oscillator is enabled only during the pulse duration (bit _STW), and when using interval width trigger mode the oscillator is restarted at each edge (bit _STI). There is also a time base mode control register with roll mode interrupt enable (RMIE), external clock control (SEXTCK, EXTCTH1 and EXTCTH2), buzzer (BUZZ) and calibration front panel output signal selection (PCSn).



4.3 F9300-4 GPIB and RS 232 Interface

This board is connected to the processor through a flat cable.
Data bus is 8 bits, address bus: 12 bits.
Address 0180 000 to 0180 00FF.

4.3.1 RS 232 Serial Interface

Based on the 2661A IC from Signetics or Philips.

- Clock frequency 4.9152 MHz.
- RTC/CTS signals are connected
- DCD input is biased and the DTR output is not wired
- 4 internal registers of 8 bits.
- Interrupt level 2.
- Connector compatible with a DB9-P (9 pin male).

4.3.2 GPIB Interface

Based on the circuit 7210 IC from NEC.

- Clock frequency 4.9152 MHz.
- 8 internal registers of 8 bits.
- Tri-state external GPIB drivers. - Low level output.
- Interrupt level 3.

The GPIB address is set by software and stored in non-volatile memory.

4.4 FP9604 Front Panel

The front panel is connected to the processor board with a flat cable. Power supply and control signals are supplied from the processor. The front panel is divided in two sections:

- F9604-5 board with Motorola 68HC05C4 processor, encoders, and serial data interface.
- F9602-5 matrix keypad with push buttons.

4.5 F9300-7 Printer Controller Option

- Based on the Internal graphic printer LPT5446, and LPT5000 series control chip set from Seiko instrument Inc (Technical reference 39019-2234-01)
- PT501P01 CPU
- PT500GA1 Gate array
- Address 0130 0100
- Interrupt level 2

4.6 PSLC574 Power Supply

Line Voltage Autoranging

The LC574A oscilloscope operates from a 115 V (90 to 130 V) or 220 V (180 to 260 V) normal power source at 47 Hz to 63Hz. No voltage selection is required since the instrument automatically adapts to the line voltage which is present. The instrument operates at line frequencies up to 440 Hz.

4.6.1 Power Supply Specifications


Input voltage	: 90 to 130 V or 180 to 260 V. Auto ranging line voltage.
Input frequency	: 47 Hz to 63 Hz.
Input rush current	: Max. 40 A peak at start up.
Environmental	: Operating temperature range 0 °C to + 50 °C Storage temperature range - 55 °C to + 80 °C Relative humidity from 5% to 95%.
Output voltages	: - 5.2 VDC, 13 amp Max. + 5.2 VDC, 6 amp Max. - 15.1 VDC, 3 amp Max + 15.1 VDC, 3 amp Max. - 2.1 VDC, 10 amp Max. + 3.3 VDC, 3 amp Max.
Output adjustment	: +/- 5%.
Regulation	: +/- 1%.
Transient response	: recover to 1% of its final value within 500 µsec.
Ripple and noise	: Peak to peak value < 50 mV
Hold up time	: 16 msec at full load
Output short circuit protection	: Yes.
Output over voltage protection	: Yes.
Input protection	: 6 amp fuses.
Thermal protection	: Yes.
Safety	: VDE 0806, IEC 380, 435, 950 & UL1012, 478, CSAC22.2#1402C
EMI	: VDE 0871 class A, FCC 20780 class A.



4.6.2 Power Supply Configurations

There are two different power supplies which may be present in the LC574A. They are the PSLC574 and the 900024. The 900024 has a fan on the front of the power supply while the PSLC574 does not. The presence of a fan is based on the type of fan used in the rear of the unit.

4.6.3 Power Supply Block Diagram

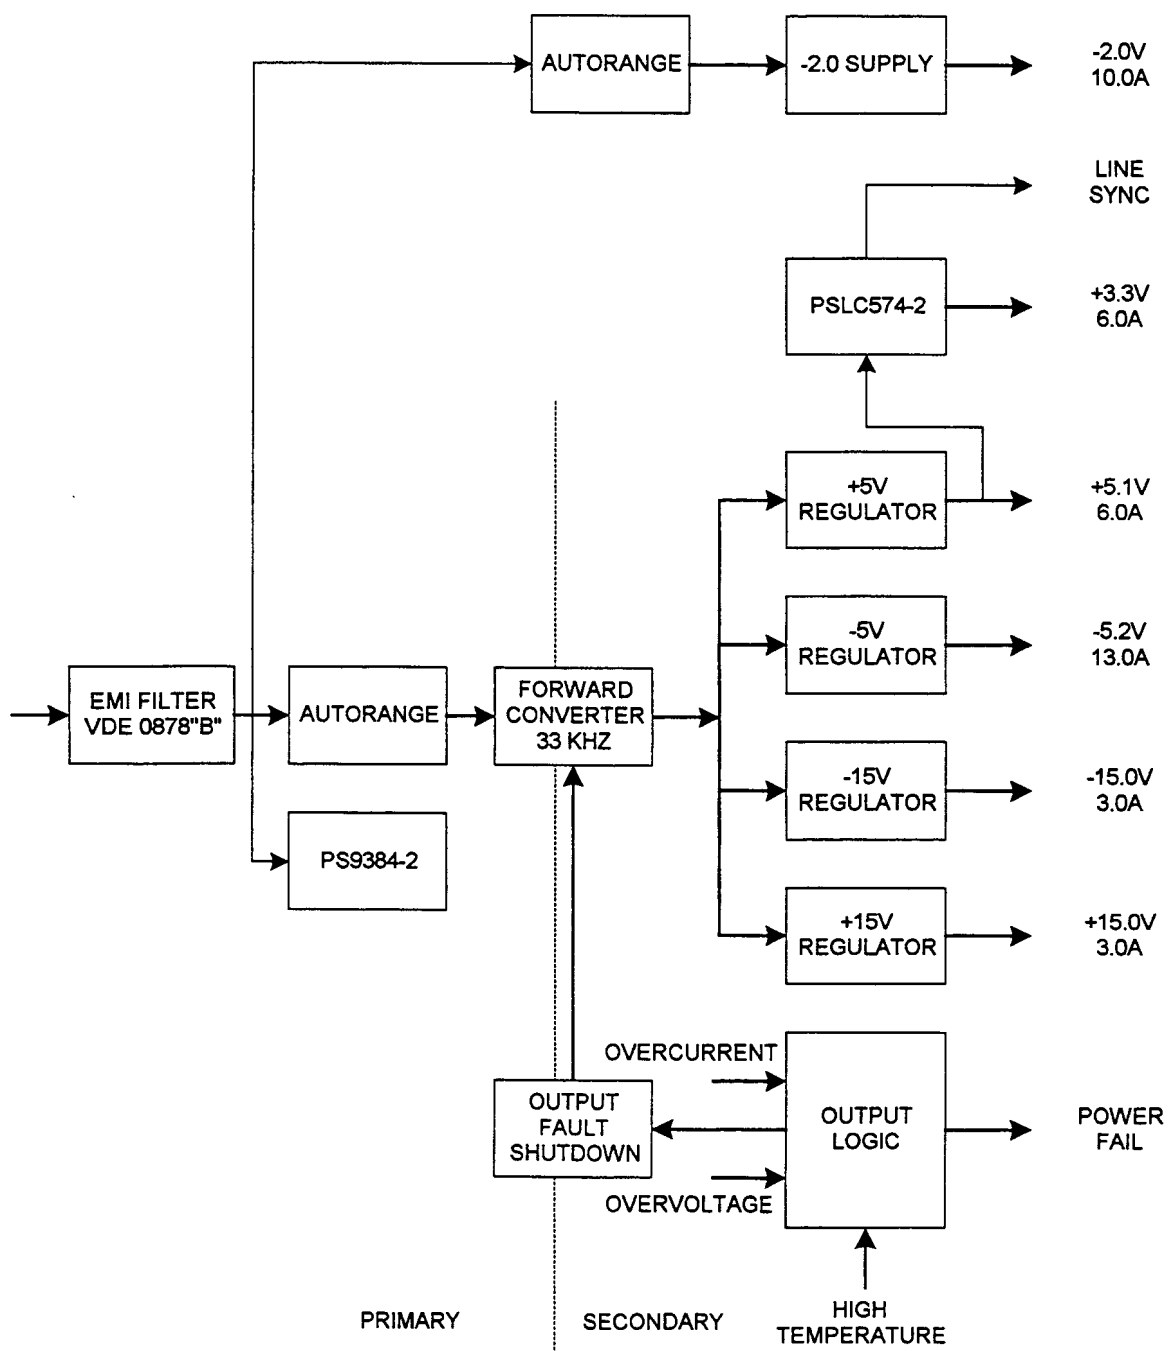



5. Performance Verification Procedures

5.1 Introduction

This chapter contains procedures suitable for determining if the LC574A Digital Storage Oscilloscope performs as warranted. They check all the characteristics that are designated as specifications in subsection 5.1.1.

Because they require time and suitable test equipment, you may not need to perform all of these procedures, depending on what you want to accomplish.

In the absence of the computer automated calibration system based on LeCroy Calibration Software (LeCalsoft), this manual performance verification procedure can be followed to establish a traceable calibration.

It is the calibrating entities' responsibility to ensure that all laboratory standards used to perform this procedure are operating within their specifications and traceable to required standards if a traceable calibration certificate is to be issued for the LC574A Digital Storage Oscilloscope.

5.1.1 List of Specifications

The electrical specifications described in terms of quantifiable performance limits are listed in this subsection.

- Input Impedance
- Leakage Current
- Peak to Peak and RMS Average noise level
- Positive and Negative DC linearity
- Positive and Negative Offset
- Bandwidth
- Trigger Level
- Smart Trigger
- Time Base Accuracy
- Overshoot and Rise Time
- Overload

5.1.2 Calibration Cycle

The LC574A Digital Storage Oscilloscope requires periodic verification of performance. Under normal use (2,000 hours of use per year) and environmental conditions, this instrument should be calibrated once a year.



5.2 Test Equipment Required

These procedures use external, traceable signal generators, DC precision power supply, step generator and digital multimeter, to directly check specifications.

Instrument	Specifications	Recommended
Signal Generator Radio Frequency	Frequency : .5 MHz to 2 GHz Frequency Accuracy : 1 PPM	HP8648B or equivalent
Signal Generator Audio Frequency	Frequency : 0 to 5 KHz Amplitude : 8 V peak to peak	LeCroy LW420 or HP33120A or equivalent
Voltage Generator DC Power Supply	Range of 0 to 20 V, in steps of no more than 15 mV	HP6633A or equivalent
Step Generator Fast Pulser	Rise time 350ps \pm 100 ps Overshoot 3.5 % \pm 1 %	LeCroy 4969A + PB049 or equivalent
Power Meter + Sensor	Accuracy \pm 1 %	HP436A + 8482A or equivalent
Digital Multimeter Volt & Ohm	Voltmeter Accuracy : 0.1 % Ohmmeter Accuracy : 0.1 %	Keithley 2000 or equivalent
Adapter	50 Ω to 1M Ω	LeCroy 4962-9
Adapter	4 GS/s, Single channel mode	LeCroy PP094
Coaxial Cable, 1 ns	50 Ω , BNC, length 20 cm,	LeCroy 480232001
Coaxial Cable, 5 ns	50 Ω , BNC, length 100 cm,	LeCroy 480020101
Attenuators, 20 dB	50 Ω , BNC, 1 % accuracy, 2GHz	LeCroy 402200402
Terminator, 2 W	50 Ω , BNC, Feed-Through	LeCroy 402323001
T adapter	50 Ω , BNC T adapter	LeCroy 402222002

Table 5-1 : Test Equipment

5.2.1 Test Records

The last pages of this chapter contain LC574A test records in the format tables. Keep them as masters and use a photocopy for each calibration.

5.3 Turn On

If you are not familiar with operating the LC574A, read the operator's manual.

- Switch on the power using the power switch.
- Wait for about 10 minutes for the scope to reach a stable operating temperature, and verify :
 - * the display turns on after about 10 seconds and is stable.
 - * the range of intensity and grid intensity is reasonable.

5.4 Input Impedance

Specifications

DC $1.00\text{ M}\Omega \pm 1\%$

DC $50\Omega \pm 1\%$

The impedance values for 50Ω , $1\text{M}\Omega$ and Gnd couplings are measured with a high precision digital multimeter. The DMM is connected to the DSO in 4 wire configuration (input and sense), allowing for accurate measurements.


5.4.1 Channel Input Impedance

a. DC $1\text{M}\Omega$

- Recall 574p001.PNL or configure the DSO :

Panel Setups : Recall FROM DEFAULT SETUP
Channels Trace OFF Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling : DC $1\text{M}\Omega$ on all 4 Channels
Input gain : 50 mV/div. on all 4 Channels
Time base : $50\text{ }\mu\text{sec/div.}$
Trigger mode : Auto

5-Feb-97
14:13:41

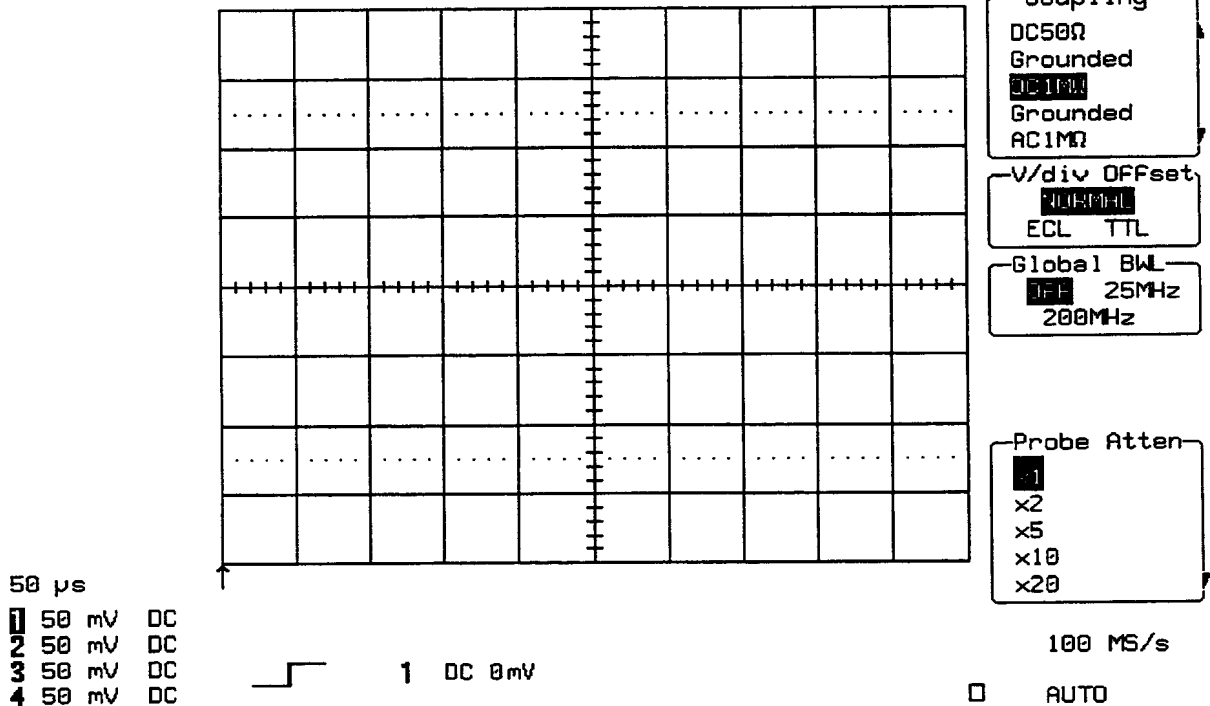




- Set the DMM with Ohms and Ohms sense to provide a 4 wire measurement.
- Connect it to Channel 1.
- Measure the input impedance. Record it in Table 2, and compare it to the limits.
- Repeat the above test for all input channels.
- Recall 574p002.PNL or Set Input gain to 200 mV/div. on all 4 Channels
- Repeat the test for all input channels.
- Record the measurements in Table 2, and compare the test results to the limits in the test record.

b. AC 1MΩ

- Recall 574p003.PNL or configure the DSO as shown in 5.4.1.a, and for each Channel make the following change :

Input Coupling : AC 1MΩ

5-Feb-97
14:55:43

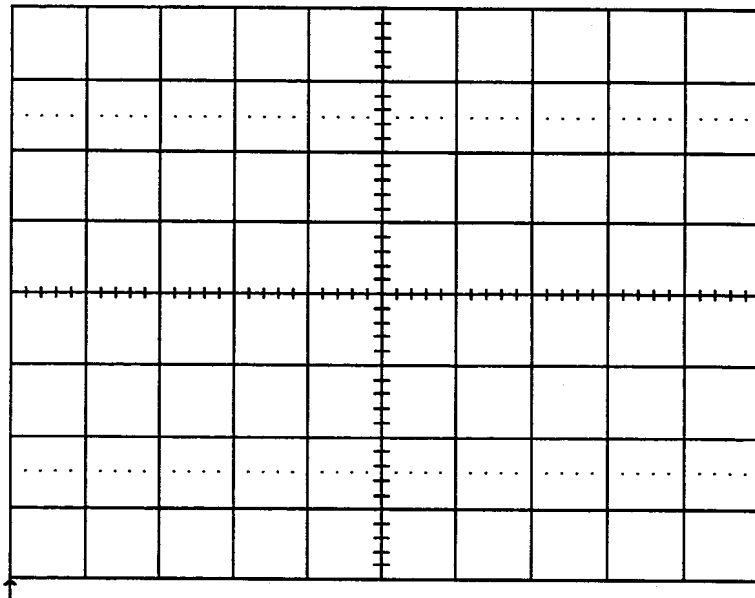

CHANNEL 1

Coupling
 DC50Ω
 Grounded
 DC1MΩ
 Grounded
 1MΩ

V/div Offset
 NORMAL
 ECL TTL

Global BWL
 OFF 25MHz
 200MHz

Probe Atten
 1
 x2
 x5
 x10
 x20

50 μs

- 1 50 mV AC
- 2 50 mV AC
- 3 50 mV AC
- 4 50 mV AC

1 DC 0mV

100 MS/s

AUTO

- For all input channels measure the input impedance.


- Record the input impedance in Table 2, and compare it to the limits.
- Recall 574p004.PNL or Set Input gain to 200 mV/div on all 4 Channels.
- Repeat the test for all input channels.
- Record the measurements in Table 2, and compare the results to the limits in the test record.

c. DC 50Ω

- Recall 574p005.PNL or configure the DSO as shown in 5.4.1.a, and for each Channel make the following change:

Input Coupling : DC 50Ω

5-Feb-97
15:00:22

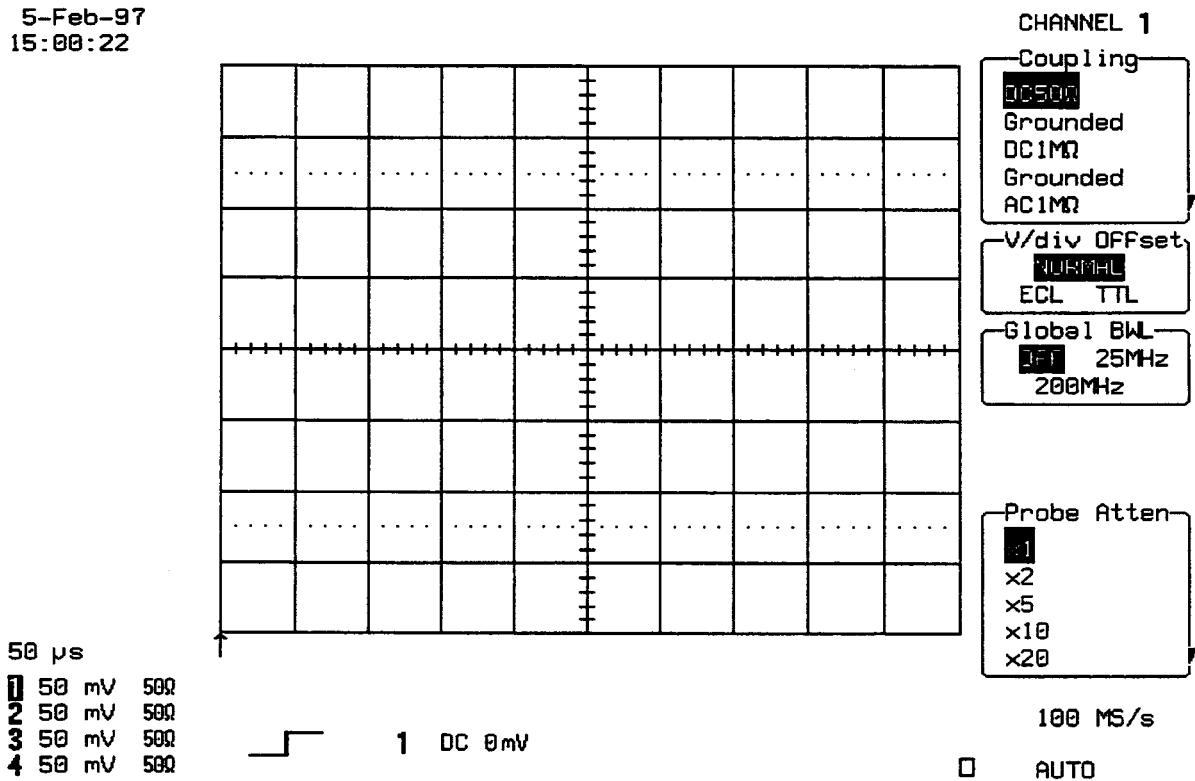

- For all input Channels, measure the input impedance.
- Record the input impedance in Table 2, and compare it to the limits.
- Recall 574p006.PNL or set Input gain to 200 mV/div. on all 4 Channels
- Repeat the test for all input channels. Record the measurements in Table 2, and compare the results to the limits in the test record.




5.4.2 External Trigger Input Impedance

a. DC 1MΩ

- Recall 574p007.PNL or configure the DSO :

Set Trigger on : EXT
 Trigger mode : Auto
 Cplg Ext : DC
 External : DC 1MΩ
 Time base : 50 μsec/div.

3-Feb-97
 13:31:09

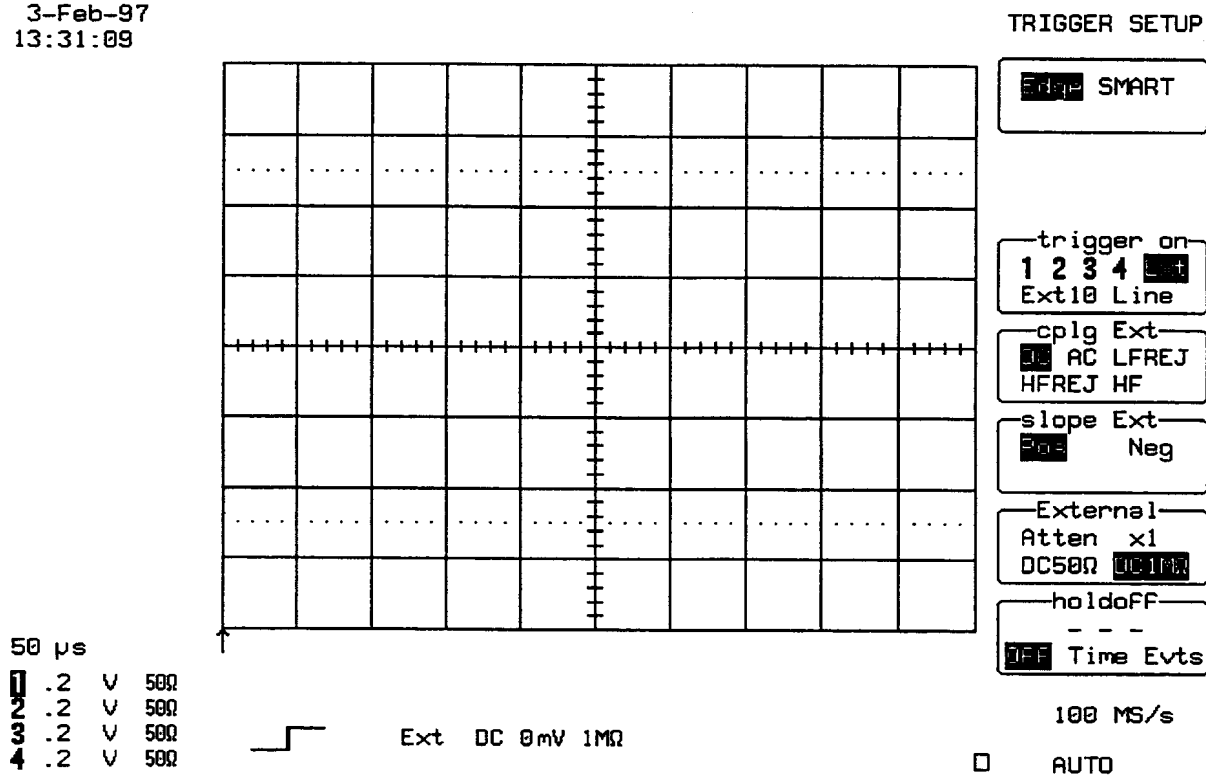

- Connect the DMM to External, and measure the input impedance.
- Record the input impedance in Table 2, and compare it to the limits.
- Recall 574p008.PNL or set trigger to Ext/10
- Measure the input impedance.
- Record the test result in Table 2, and compare the result to the limits in the test record.


b. DC 50Ω

- Recall 574p009.PNL or configure the DSO :

Trigger on : EXT

External : DC 50Ω

3-Feb-97
13:34:08

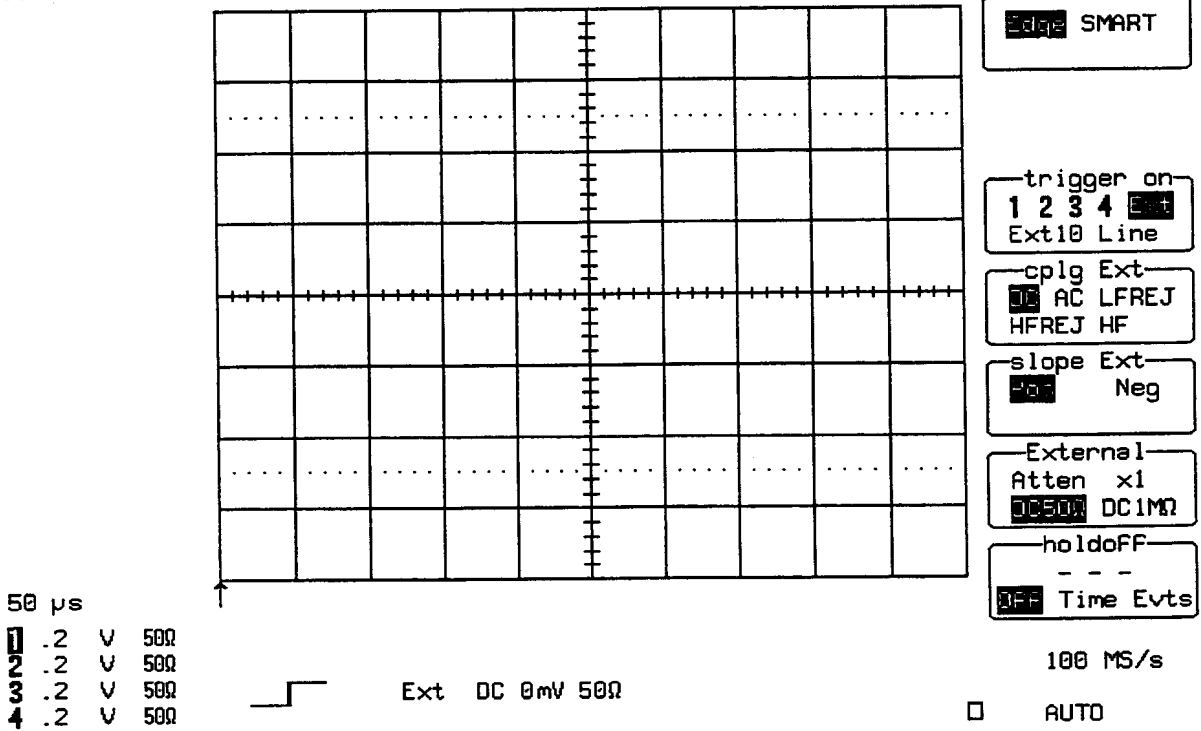

- Connect the DMM to External, and measure the input impedance.
- Record the input impedance in Table 2, and compare the result to the limit in the test record.




5.4.3 Ground

- Recall 574p010.PNL or configure the DSO as shown in 5.4.1.a, and for each Channel make the following changes :

Input Coupling : Grounded

5-Feb-97
15:11:20

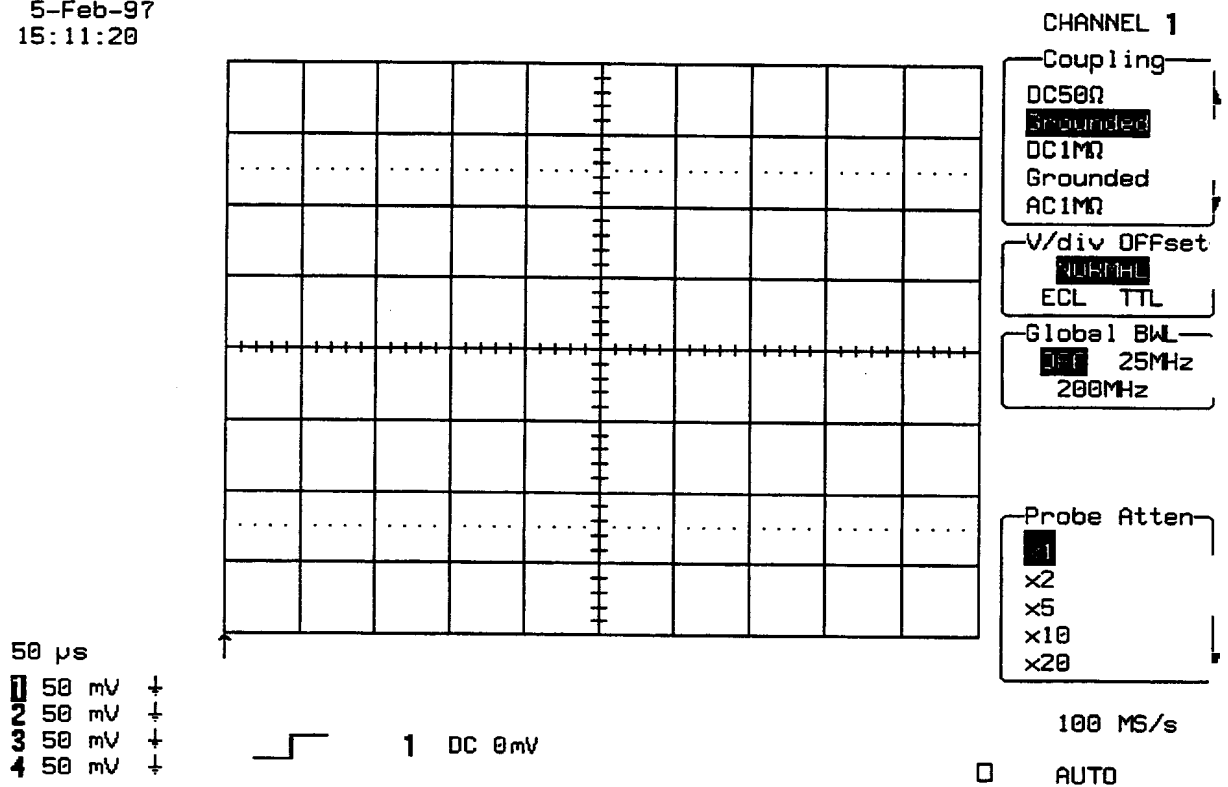

- Connect the DMM to Channel 1, and measure the input impedance.
- Record the input impedance in Table 2, and compare the result to the limit in the test record.
- Repeat the test for all input channels.
- Record the measurements in Table 2, and compare the results to the limits in the test record.

5.5 Leakage Current

Specifications

DC 1M Ω , AC 1M Ω , DC 50 Ω : ± 1 mV


The leakage current is tested by measuring the voltage across the input channel.

5.5.1 Channel Leakage Current

a. DC 1M Ω

- Recall 574p011.PNL or configure the DSO :

Panel Setups : Recall FROM DEFAULT SETUP
 Channels Trace ON : Channel 1, Channel 2, Channel 3 & Channel 4
 Input Coupling : DC 1M Ω on all 4 Channels
 Input gain : 50 mV/div. on all 4 Channels
 Trigger mode : Auto
 Time base : 10 μ sec/div.

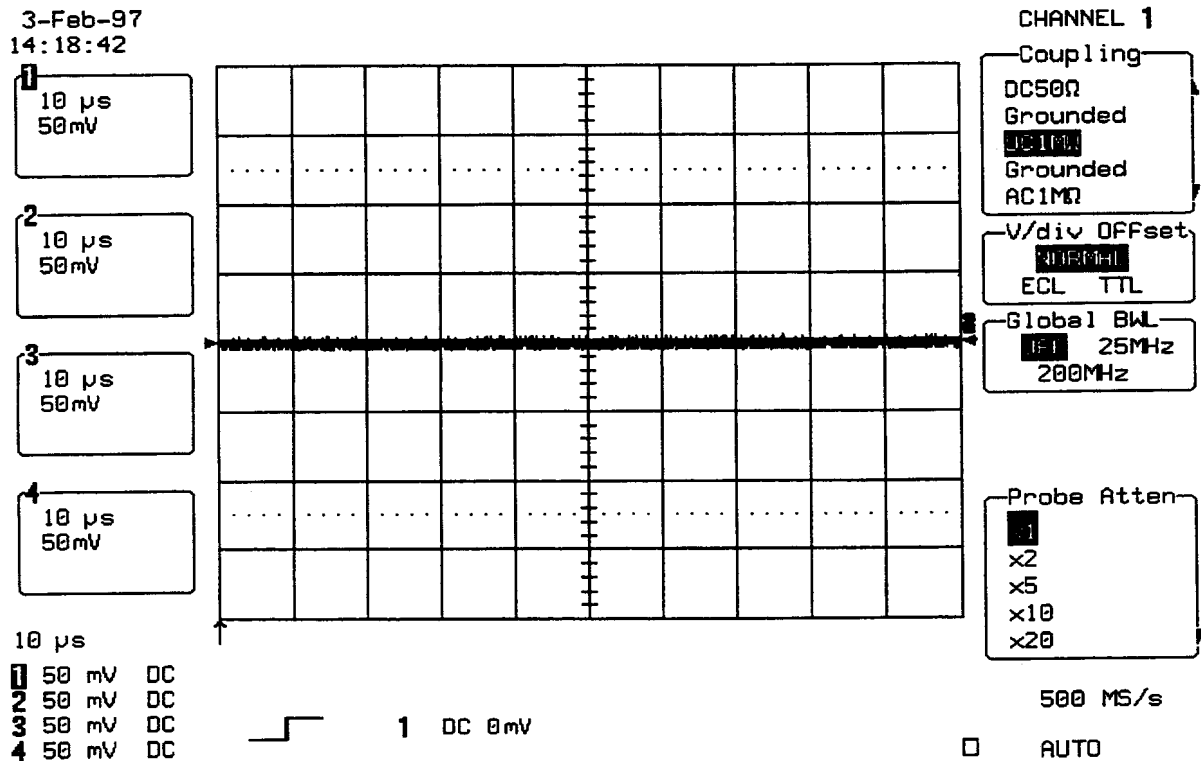

- Set the DMM to measure Volts, and connect it to Channel 1.
- Measure the voltage and enter it in Table 3. Compare it to the limits.



- Repeat the test for all input channels.
- Recall 574p012.PNL or set Input gain to 200 mV/div. on all 4 Channels
- Repeat the test for all input channels. Record the measurements in Table 3, and compare the results to the limits in the test record.

b. DC 50Ω

- Recall 574p013.PNL or configure the DSO as shown in 5.5.1.a and for each Channel make the following changes :

Set Input Coupling: DC 50Ω

- Connect the DMM to Channel 1.
- Measure the voltage and enter it in Table 3. Compare it to the limits.
- Recall 574p014.PNL or set Input gain to 200 mV/div. on all 4 Channels
- Repeat the test for all input channels.
- Record the measurements in Table 3, and compare the results to the limits in the test record.

5.5.2 External Trigger Leakage Current

a. DC 50Ω

- Recall 574p015.PNL or configure the DSO as shown in 5.5.1.a and make the following changes :

Set Trigger on : EXT

External : DC 50Ω

- Connect the DMM to External.
- Measure the voltage and enter it in Table 3. Compare it to the limits.

5.6 Average Noise Level

Description

Noise tests with open inputs are executed on all channels for both 1M Ω and 50 Ω input impedance, with AC and DC input coupling, 0 mV offset, at a gain setting of 10 mV/div., and different timebase settings.

The scope parameters functions are used to measure the Peak and RMS amplitude of the noise.

5.6.1 Peak to Peak Noise

Specifications

9 % of full scale or 7.2 mV Peak Peak at 10 mV/div.

a. DC 1M Ω

With no signal connected to the inputs

- Recall 574p016.PNL or configure the DSO :

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels Trace ON	:	Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling	:	DC 1M Ω on all 4 Channels
Input gain	:	10 mV/div. on all 4 Channels
Input offset	:	0.0 mV on all 4 Channels
Trigger setup	:	Edge
Trigger on	:	1
Coupling 1	:	DC
Trigger Mode	:	Auto
Timebase	:	20 msec/div.
Channel use	:	4
Record up to	:	50 k Samples
Press	:	Cursors/Measure
Measure	:	Parameters
Mode	:	Custom
Statistics	:	On
Change parameters	:	
Category	:	All
On line 1	:	Measure pkpk of Ch1
On line 2	:	Measure pkpk of Ch2
On line 3	:	Measure pkpk of Ch3
On line 4	:	Measure pkpk of Ch4
On line 5	:	no parameter selected for line 5

Performance Verification



17-Jan-97
9:44:22

1 20 ms
10.0mV


2 20 ms
10.0mV

3 20 ms
10.0mV

4 20 ms
10.0mV

20 ms

1 10 mV DC
2 10 mV DC
3 10 mV DC
4 10 mV DC

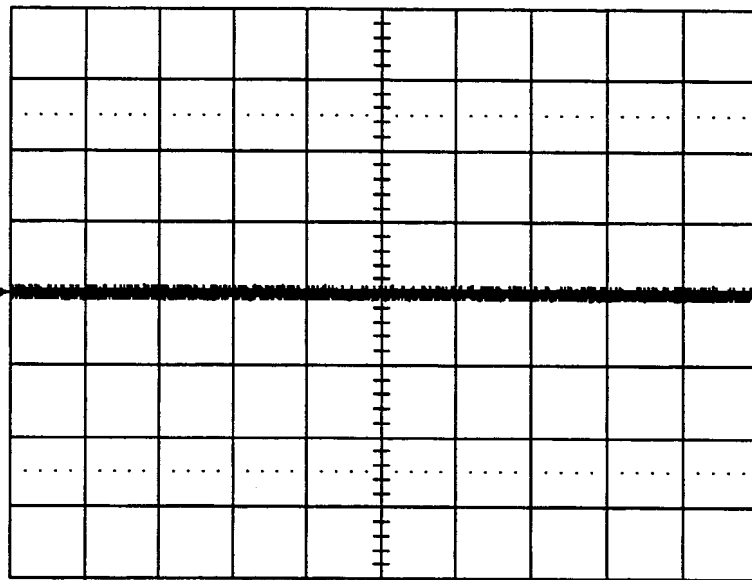

1 DC 0.0mV

CHANNEL 1

Coupling

DC50Ω
Grounded
DC1MΩ
Grounded
AC1MΩ

V/div Offset:
NORMAL
ECL TTL

Global BWL
OFF 25MHz
200MHz

Probe Atten:
x1
x2
x5
x10
x20

250 kS/s

AUTO

17-Jan-97
9:48:47

1 20 ms
10.0mV


2 20 ms
10.0mV

3 20 ms
10.0mV

4 20 ms
10.0mV

20 ms

1 10 mV DC
2 10 mV DC
3 10 mV DC
4 10 mV DC

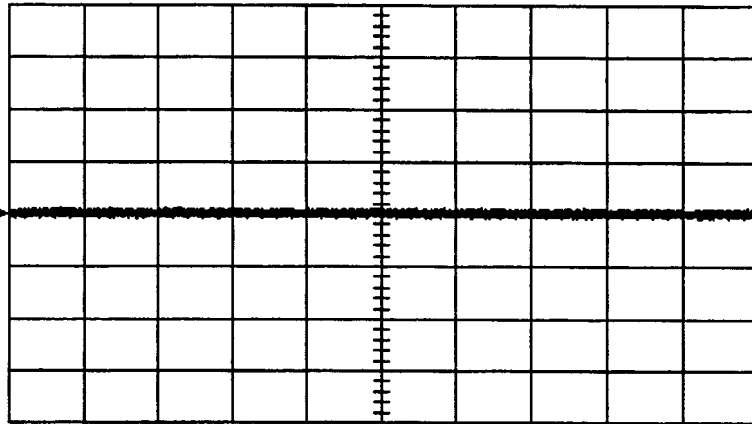

52 sweeps:

	average	low	high	sigma
pkpk (1)	2.4mV	2.2	2.5	0.1
pkpk (2)	2.3mV	1.9	2.5	0.2
pkpk (3)	2.3mV	1.9	2.8	0.2
pkpk (4)	2.5mV	2.2	2.8	0.1

1 DC 0.0mV

MEASURE

OFF Cursors
Parameters

mode
Std Voltage
Std Time
Custom
List by nT
Pass

statistics
OFF

CHANGE
PARAMETERS

from
0.00 div
Track OFF On
to
10.00 div

250 kS/s

STOPPED

17-Jan-97
9:49:49


1
20 ms
10.0mV

2
20 ms
10.0mV

3
20 ms
10.0mV

4
20 ms
10.0mV

20 ms
1 10 mV DC
2 10 mV DC
3 10 mV DC
4 10 mV DC

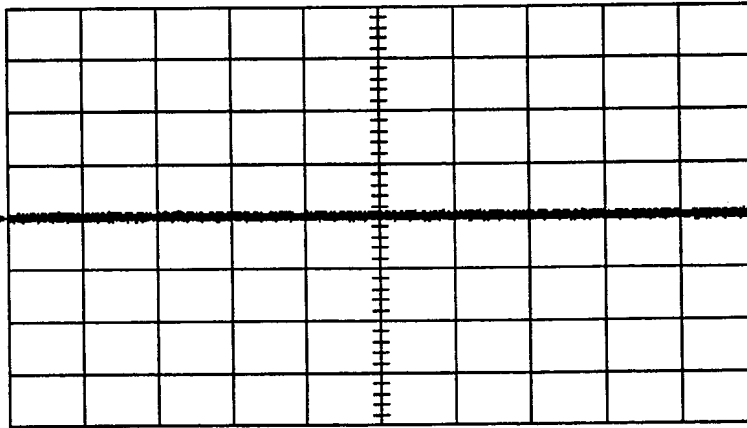

	52 sweeps:	average	low	high	sigma
pkpk(1)		2.4mV	2.2	2.5	0.1
pkpk(2)		2.3mV	1.9	2.5	0.2
pkpk(3)		2.3mV	1.9	2.8	0.2
pkpk(4)		2.5mV	2.2	2.8	0.1

peak to peak
difference between maximum and
minimum data values

CHANGE PARAM

On line
1 2 3 4 5

Category
-11
DISK-Std
DISK-Local
DISK-PRML
OPTICAL-Data

DELETE ALL
PARAMETERS

measure
pct1
period
pkpk
pmax

of
1 2 3 4
A B C D

250 kS/s

STOPPED

- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the four high pkpk parameter values in Table 4, and compare the test results to the limits in the test record.
- Repeat the test for Timebase : 1 msec/div., 50 μsec/div., and 10 μsec/div.
- Record the measurements (high pkpk of 1,2,3,4) in Table 4, and compare the results to the limits in the test record.


b. AC 1MΩ

- Recall 574p017.PNL or configure the DSO as shown in 5.6.1.a, and for each Channel make the following changes :

Input Coupling : AC 1MΩ



- Press **Clear Sweeps**.
- Measure for at least **50 sweeps**, then press **Stop** to halt the acquisition.
- Record the four **high pkpk** parameter values in Table 4, and compare the test results to the limits in the test record.

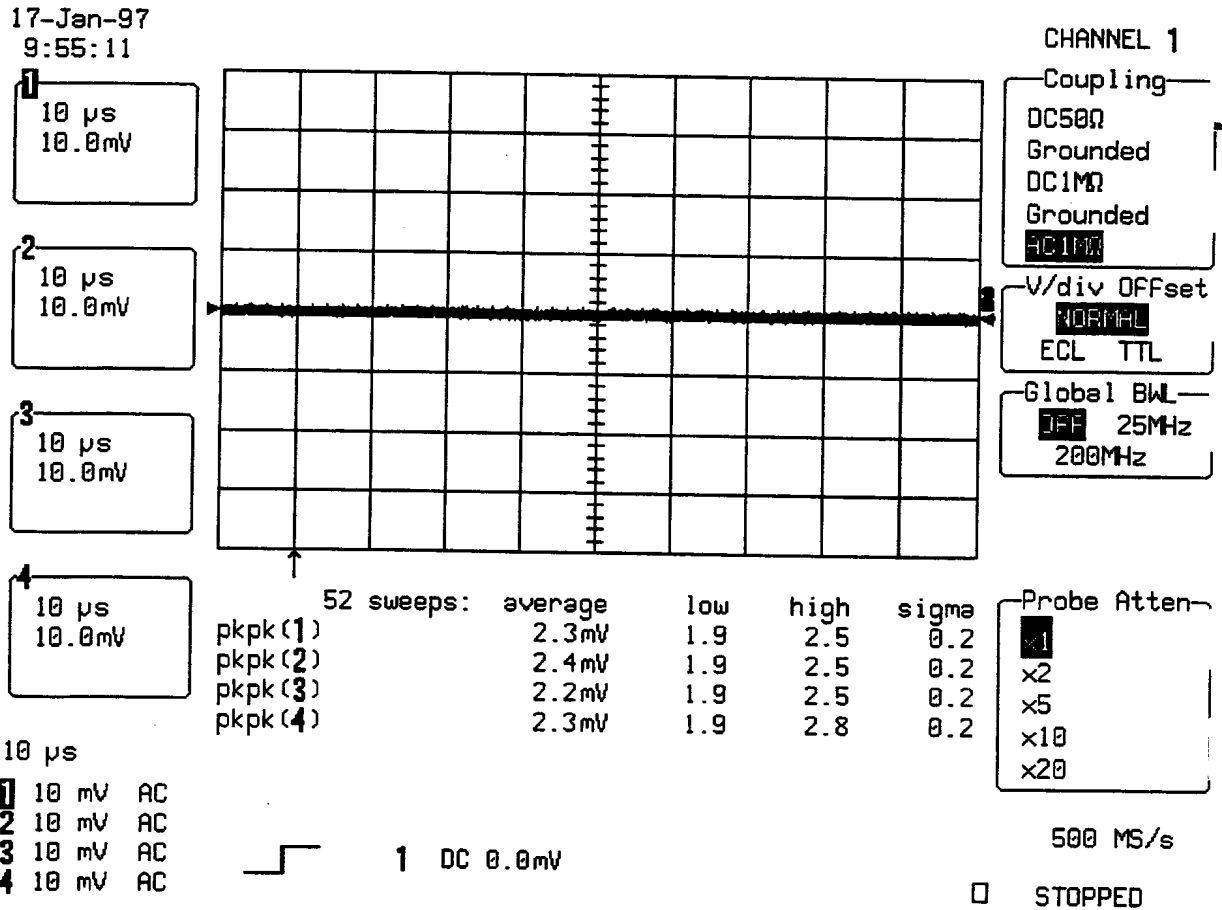

c. DC 50Ω

- Recall **574p018.PNL** or configure the DSO as shown in 5.6.1.a, and for each Channel make the following changes :

Input Coupling : DC 50Ω

- Press **Clear Sweeps**.
- Measure for at least **50 sweeps**, then press **Stop** to halt the acquisition.
- Record the four **high pkpk** parameter values in Table 4, and compare the test results to the limits in the test record.

- Repeat the test for Timebase : 50 μ sec/div.
- Record the measurements (high pkpk of 1,2,3,4) in Table 4, and compare the results to the limits in the test record.


17-Jan-97
10:05:18

1 50 μ s
10.0mV

2 50 μ s
10.0mV

3 50 μ s
10.0mV

4 50 μ s
10.0mV

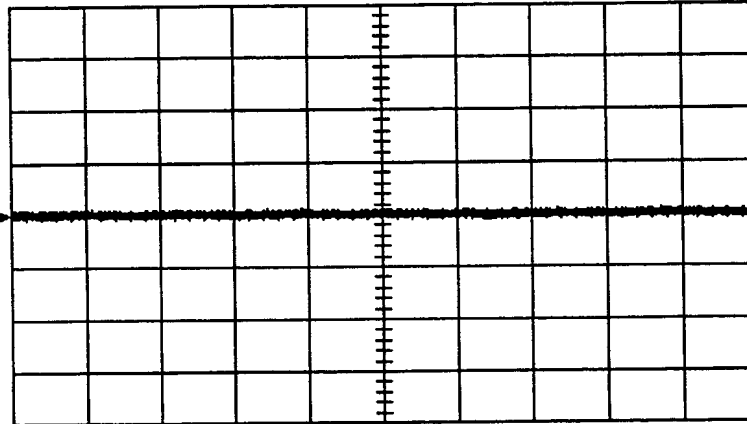

	52 sweeps:	average	low	high	sigma
pkpk (1)		2.1mV	1.9	2.5	0.2
pkpk (2)		2.1mV	1.9	2.5	0.2
pkpk (3)		2.1mV	1.9	2.5	0.2
pkpk (4)		2.3mV	2.2	2.5	0.2

CHANNEL 1

Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω

V/div Offset
NORMAL
ECL TTL

Global BWL
OFF 25MHz
200MHz

Probe Atten
1
x2
x5
x10
x20

50 μ s
1 10 mV 50 Ω
2 10 mV 50 Ω
3 10 mV 50 Ω
4 10 mV 50 Ω



1 DC 0.0mV

100 MS/s

STOPPED

d. DC 50 Ω , 2 Channel Mode *GM/R 31 MAR 2004*


- Recall 574p019.PNL or configure the DSO as shown in 5.6.1.a. and make the following changes :

Input Coupling : DC 50 Ω on all 4 Channels
Input gain : 10 mV/div. on all 4 Channels
Timebase : 5 μ sec/div.

Select Setup Timebase

Channel use : 2
Change parameters

On line 1 : Measure pkpk of Ch2
On line 2 : Measure pkpk of Ch3

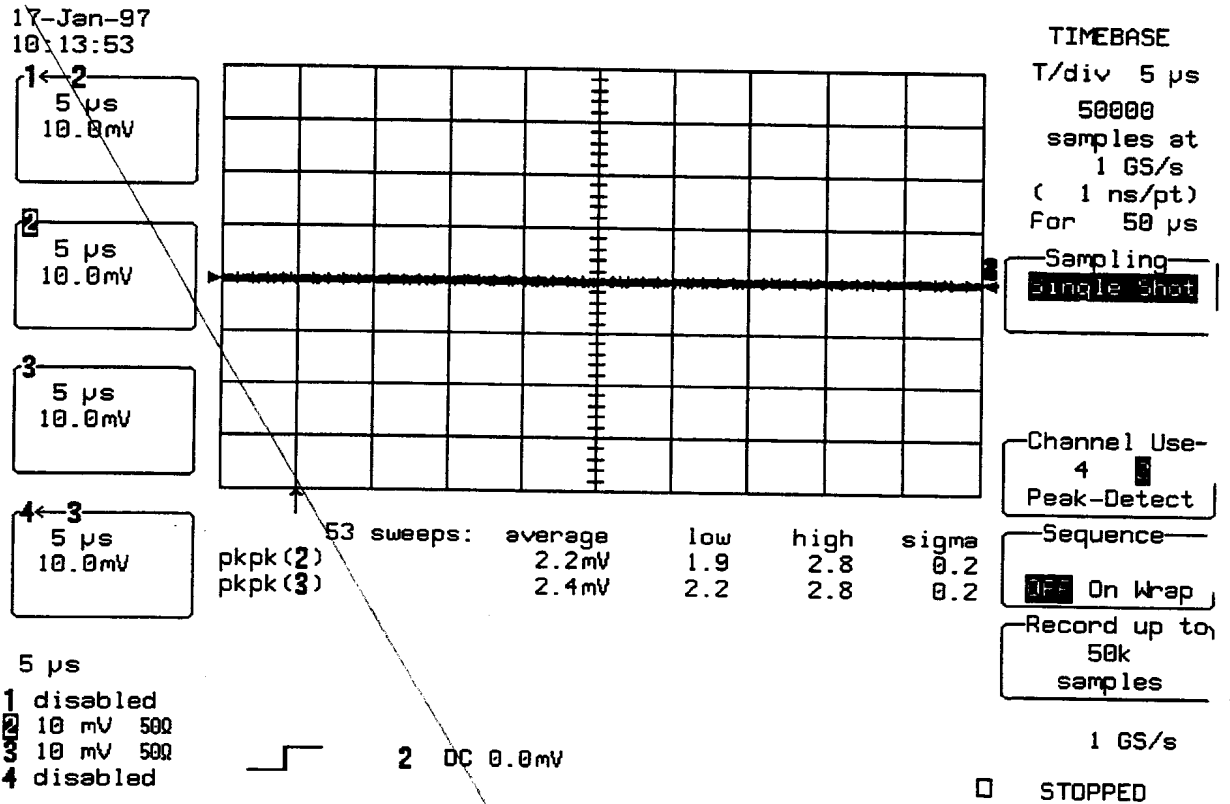

- Press **Clear Sweeps**.
- Measure for at least **50 sweeps**, then press **Stop** to halt the acquisition.
- Record the two **high pkpk** parameter values in Table 4, and compare the test results to the limits in the test record.

e. DC 50 Ω , All Channels Combined

- Recall **574p020.PNL** or configure the DSO as shown in 5.6.1.a. and make the following changes :

Input Coupling : DC 50 Ω on all 4 Channels


Timebase : 2 μ sec/div.

Change parameters
On line 1 : Measure pkpk of Ch2

- Connect a **PP094** adapter to Channel 2 and Channel 3

BMC 31MAR01

- Check :
- PP094 is identified on Channel 2.
- Channel 1, Channel 3 and Channel 4 are disabled
- Sampling rate is 4 GS/s

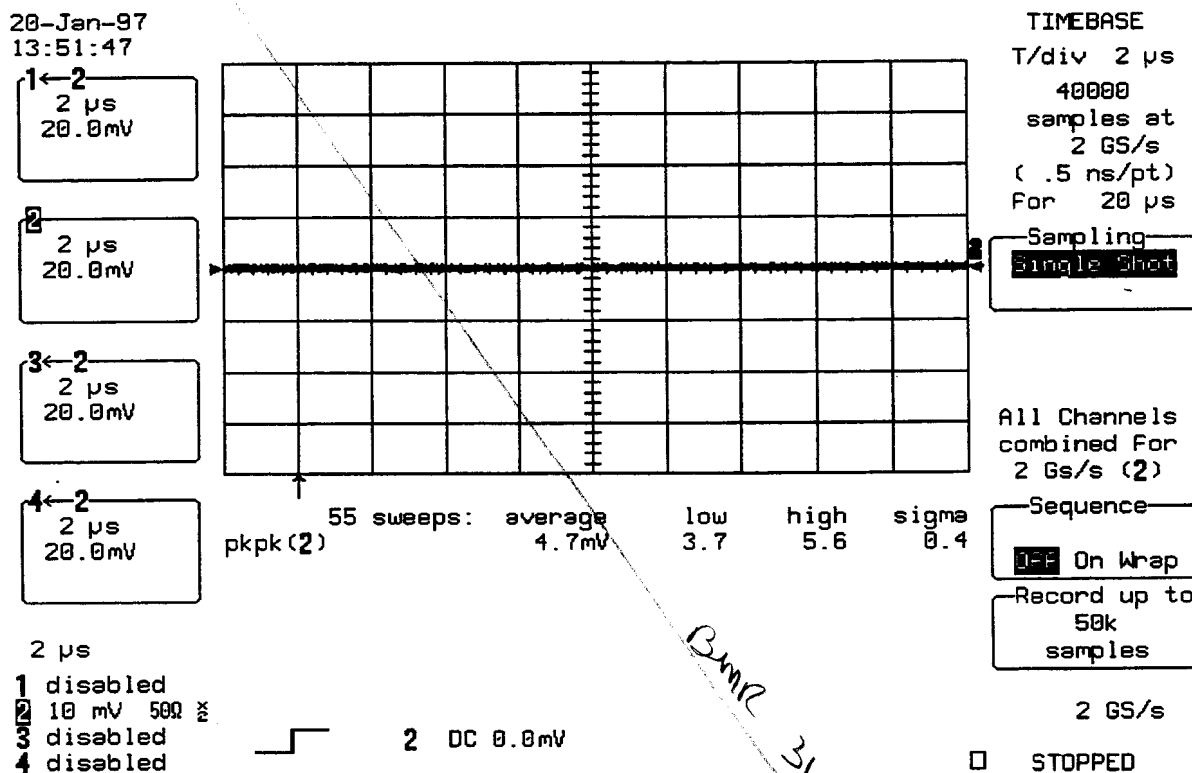

- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the high pkpk parameter value in Table 4, and compare the test result to the limits in the test record.
- Disconnect the PP094 adapter.



5.6.2 Rms Noise

Specifications

0.9 % of full scale or 0.72 mV at 10 mV/div.

a. DC 1M Ω

Procedure

With no signal connected to the inputs

- Recall 574p021.PNL or configure the DSO :

Panel Setups : Recall FROM DEFAULT SETUP
Channels Trace ON : Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling : DC 1M Ω on all 4 Channels
Input gain : 10 mV/div. on all 4 Channels

Trigger setup : Edge
Trigger on : 1
Coupling 1 : DC
Trigger Mode : Auto

Timebase : 20 msec/div.
Channel use : 4
Record up to : 50 k Samples
Press : Cursors/Measure
Measure : Parameters
Mode : Custom
Statistics : On

Change parameters

Category : All

On line 1 : Measure sdev of Ch1
On line 2 : Measure sdev of Ch2
On line 3 : Measure sdev of Ch3
On line 4 : Measure sdev of Ch4

On line 5 : no parameter selected for line 5

20-Jan-97
10:25:28


1
20 ms
10.0mV

2
20 ms
10.0mV

3
20 ms
10.0mV

4
20 ms
10.0mV

20 ms
1 10 mV DC
2 10 mV DC
3 10 mV DC
4 10 mV DC

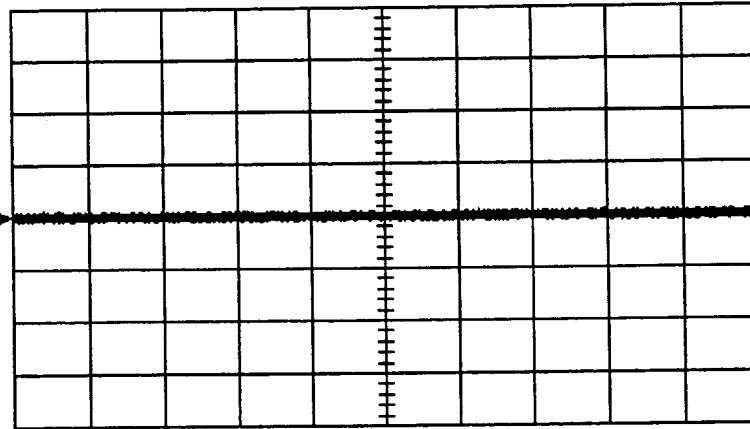

	52 sweeps:	average	low	high	sigma
sdev(1)		0.31mV	0.31	0.32	0.00
sdev(2)		0.31mV	0.31	0.31	0.00
sdev(3)		0.31mV	0.30	0.31	0.00
sdev(4)		0.29mV	0.29	0.30	0.00



1 DC 0.0mV

CHANGE PARAM

On line
1 2 3 4 5

Category
All
DISK-Std
DISK-Local
DISK-PRML
OPTICAL-Data

DELETE ALL
PARAMETERS

measure
r@level
rms
sdev
sigma
taa

of
1 2 3 4
A B C D

250 kS/s

STOPPED

- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the four high sdev parameter values in Table 5, and compare the test results to the limits in the test record.
- Repeat the test for Timebase : 1 msec/div., 50 μ sec/div., and 10 μ sec/div.
- Record the measurements (high sdev of 1,2,3,4) in Table 5, and compare the results to the limits in the test record.


b. AC 1M Ω

- Recall 574p022.PNL or configure the DSO as shown in 5.6.2.a. and for each Channel make the following change :

Input Coupling : AC 1M Ω




- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the four high sdev parameter values in Table 5, and compare the test results to the limits in the test record.

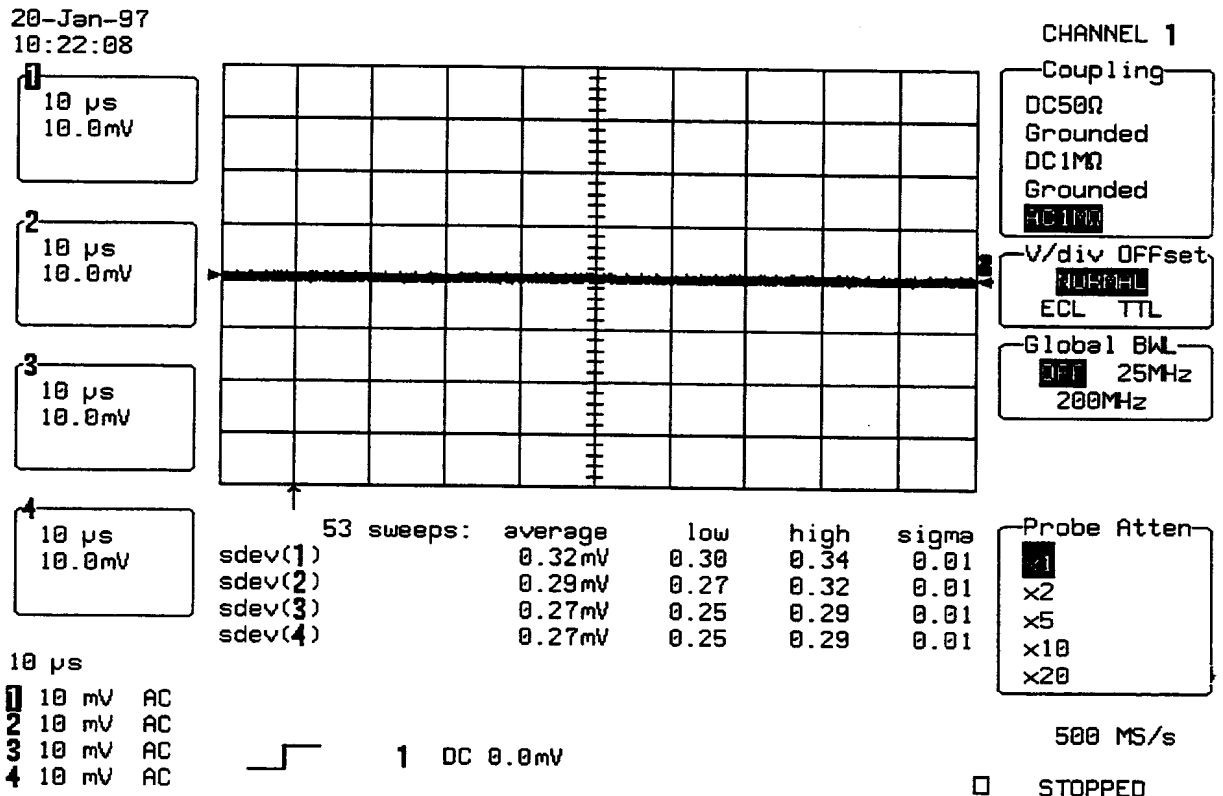

c. DC 50Ω

- Recall 574p023.PNL or configure the DSO as shown in 5.6.2.a and make the following changes :
 - Input Coupling : DC 50Ω on all 4 Channels
 - Timebase : 10 μsec/div.
- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the four high sdev parameter values in Table 5, and compare the test results to the limits in the test record.

- Repeat the test for Timebase : 50 μ sec/div.
- Record the measurements (high sdev of 1,2,3,4) in Table 5, and compare the results to the limits in the test record.

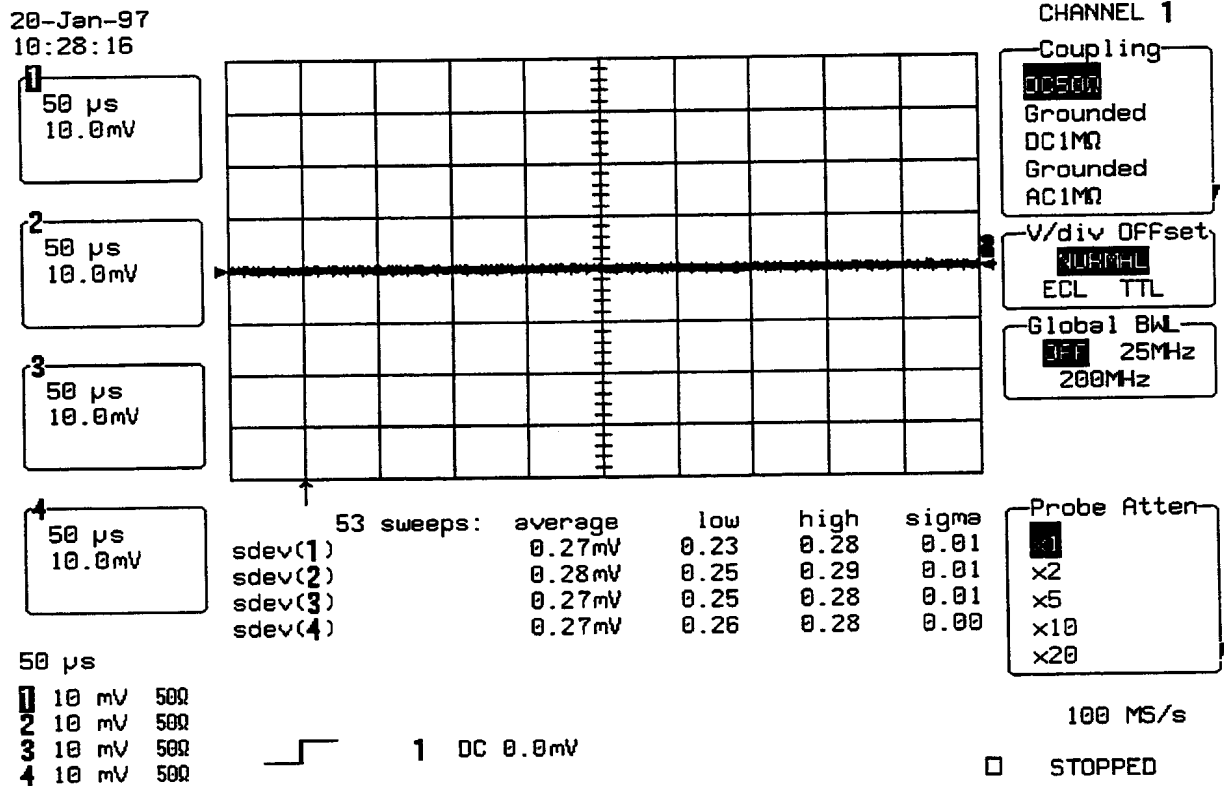

d. DC 50 Ω , 2 Channel Mode

- Recall 574p024.PNL or configure the DSO as shown in 5.6.2.a and make the following changes :

Input Coupling : DC 50 Ω on all 4 Channels

Timebase : 5 μ sec/div.

Select Setup Timebase

Channel use : 2

Change parameters


On line 1 : Measure sdev of Ch2

BMR 31 MAR 04



On line 2 : Measure sdev of Ch3

- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the two high sdev parameter values in Table 5, and compare the test results to the limits in the test record.

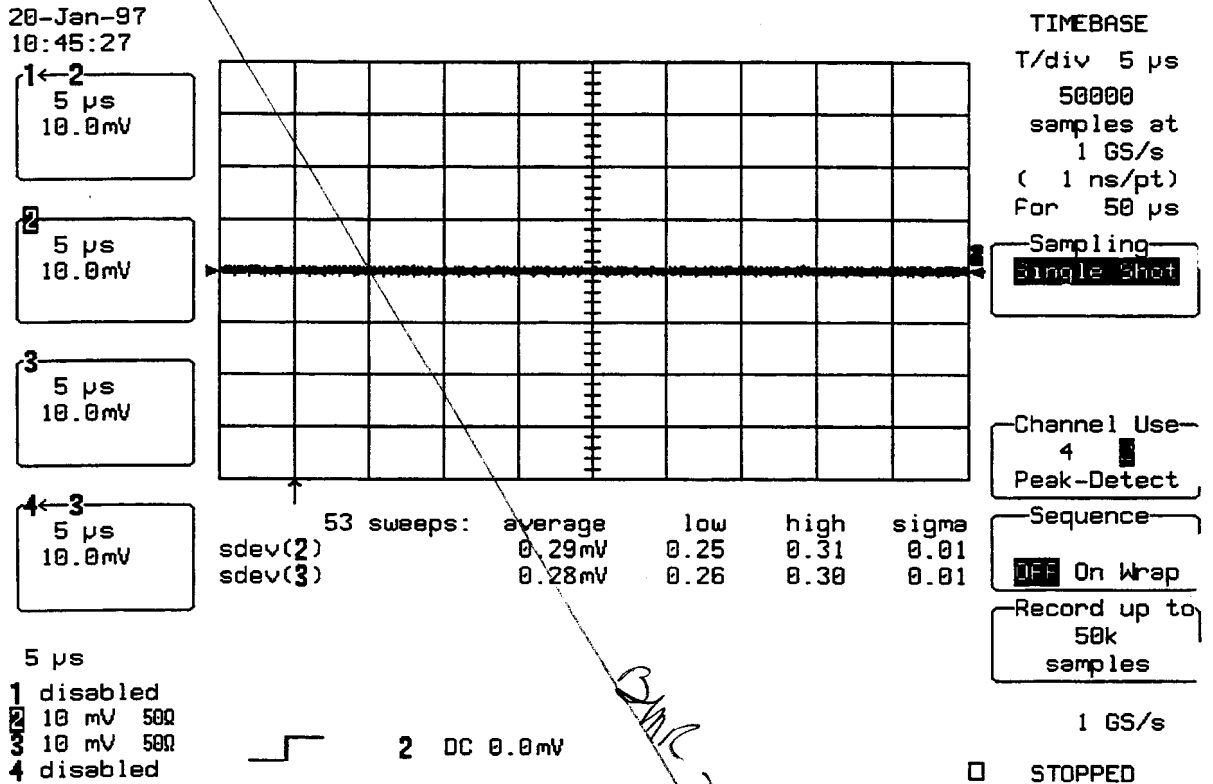

e. DC 50 Ω , All Channels Combined

- Recall 574p025.PNL or configure the DSO as shown in 5.6.2.a and make the following changes :

Input Coupling : DC 50 Ω on all 4 Channels

Timebase : 2 μ sec/div.

Change parameters

On line 1 : Measure sdev of Ch2

- Connect a PP094 adapter to Channel 2 and Channel 3
- Check :
- PP094 is identified on Channel 2
- Channel 1, Channel 3 and Channel 4 are disabled
- Sampling rate is 4 GS/s

20-Jan-97
13:49:48


1 ← 2
2 μ s
20.0mV

2
2 μ s
20.0mV

3 ← 2
2 μ s
20.0mV

4 ← 2
2 μ s
20.0mV

2 μ s
1 disabled
2 10 mV 50 Ω \times
3 disabled
4 disabled

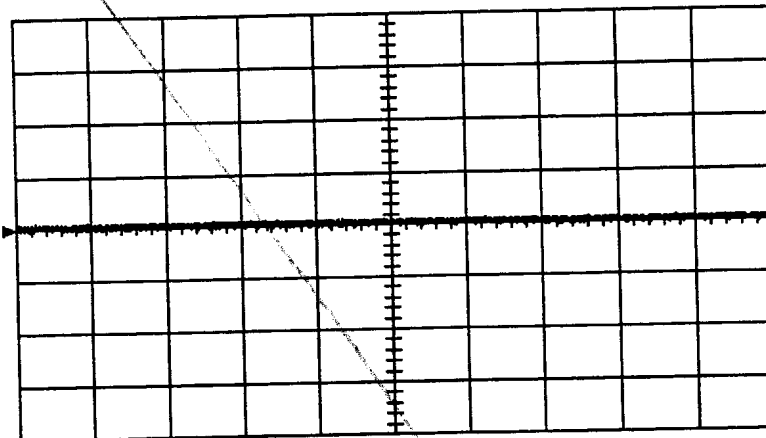

53 sweeps: average 0.56mV low 0.50 high 0.71 sigma 0.04
sdev(2)

2 DC 0.0mV

TIMEBASE
T/div 2 μ s
40000
samples at
2 GS/s
(.5 ns/pt)
For 20 μ s

Sampling
Single Shot

All Channels
combined For
2 Gs/s (2)

Sequence
 On Wrap

Record up to
50k
samples

2 GS/s

STOPPED

BMC 31 MAR 97

- Press Clear Sweeps.
- Measure for at least 50 sweeps, then press Stop to halt the acquisition.
- Record the high sdev parameter value in Table 5, and compare the test result to the limits in the test record.
- Disconnect the PP094 adapter.



5.6.3 Ground Line Test

Specifications

- ±5 % of full scale at 5 mV/div.
- ±2 % of full scale at 10 mV/div. and above.

Procedure

The stability of the ground line is verified for each channel at each fixed gain. The measured average values are checked against the desired limits.

a. DC 1MΩ

With no signal connected to the inputs

- Recall 574p026.PNL or configure the DSO :

Channels Trace ON **Channel 1, Channel 2, Channel 3 & Channel 4**
Input Coupling : **DC 1MΩ on all 4 Channels**
Input gain : **5 mV/div. on all 4 Channels**
Offset : **Zero on all 4 Channels**

Trigger on : **Channel 1, DC**
Trigger mode : **Auto**
Timebase : **10 μsec/div.**

Channel use : **4**
Record up : **50 k**
Channels Trace OFF **Channel 1, Channel 2, Channel 3 & Channel 4**

Zoom+Math Trace ON **A, B, C & D**

Select Math Setup
For Math : **Use at most 5000 points**
Redefine A, B, C, D **Channel 1, Channel 2, Channel 3 & Channel 4**
Use Math ? : **Yes**
Math Type : **Average**
Avg. Type : **Summed**
For : **100 sweeps**


Press Cursors/Measure

Select : **Parameters**
Mode : **Custom**
Statistics : **off**

27-Jan-97
18:25:14

- A: Average (1)
10 μ s
5.0mV
— 100 swps
- B: Average (2)
10 μ s
5.0mV
— 100 swps
- C: Average (3)
10 μ s
5.0mV
— 100 swps
- D: Average (4)
10 μ s
5.0mV
— 100 swps

- 10 μ s
- 1 5 mV DC
- 2 5 mV DC
- 3 5 mV DC
- 4 5 mV DC

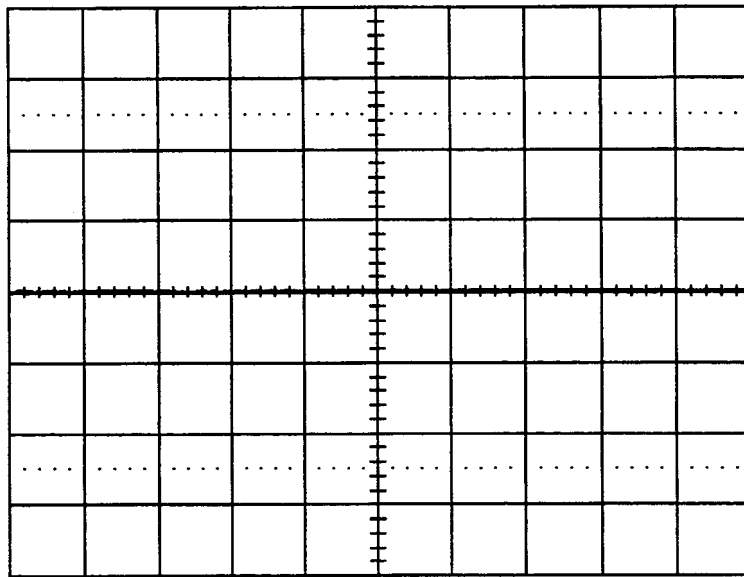

1 DC 0.0mV

ZOOM + MATH

- REDEFINE A
A=Average(1)
- REDEFINE B
B=Average(2)
- REDEFINE C
C=Average(3)
- REDEFINE D
D=Average(4)
- Multi-Zoom
 On

For Math use
max points
5000


500 MS/s

AUTO

27-Jan-97
18:26:02

- A: Average (1)
10 μ s
5.0mV
— 100 swps
- B: Average (2)
10 μ s
5.0mV
— 100 swps
- C: Average (3)
10 μ s
5.0mV
— 100 swps
- D: Average (4)
10 μ s
5.0mV
— 100 swps

- 10 μ s
- 1 5 mV DC
- 2 5 mV DC
- 3 5 mV DC
- 4 5 mV DC

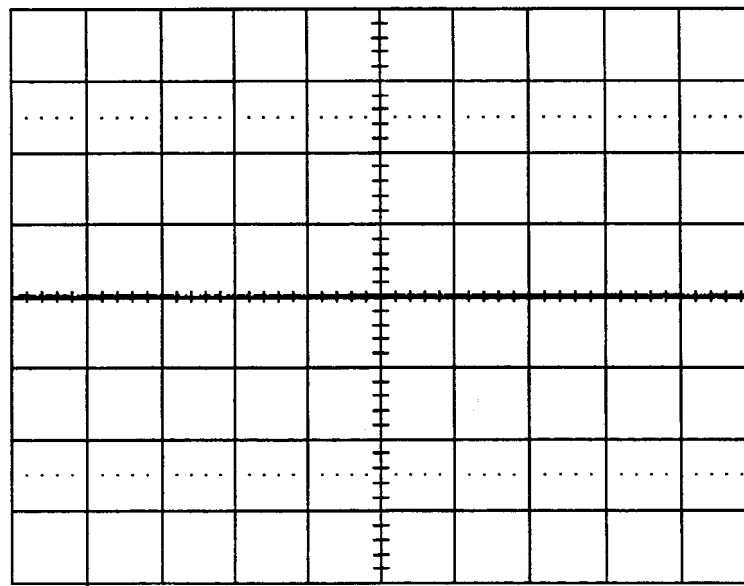

A: Average (1) 50000 -> 5000 pts

SETUP OF A

- use Math? No Yes
- Math Type
Arithmetic
Average
Correlate
Enh.Res
Extrema
- Avg Type
Summed
Continuous
- For 100 (sweeps)
- of 2 3 4 B C D
M1 M2 M3 M4


500 MS/s

AUTO

Change parameters



- On line 1 : Measure mean of A
- On line 2 : Measure mean of B
- On line 3 : Measure mean of C
- On line 4 : Measure mean of D

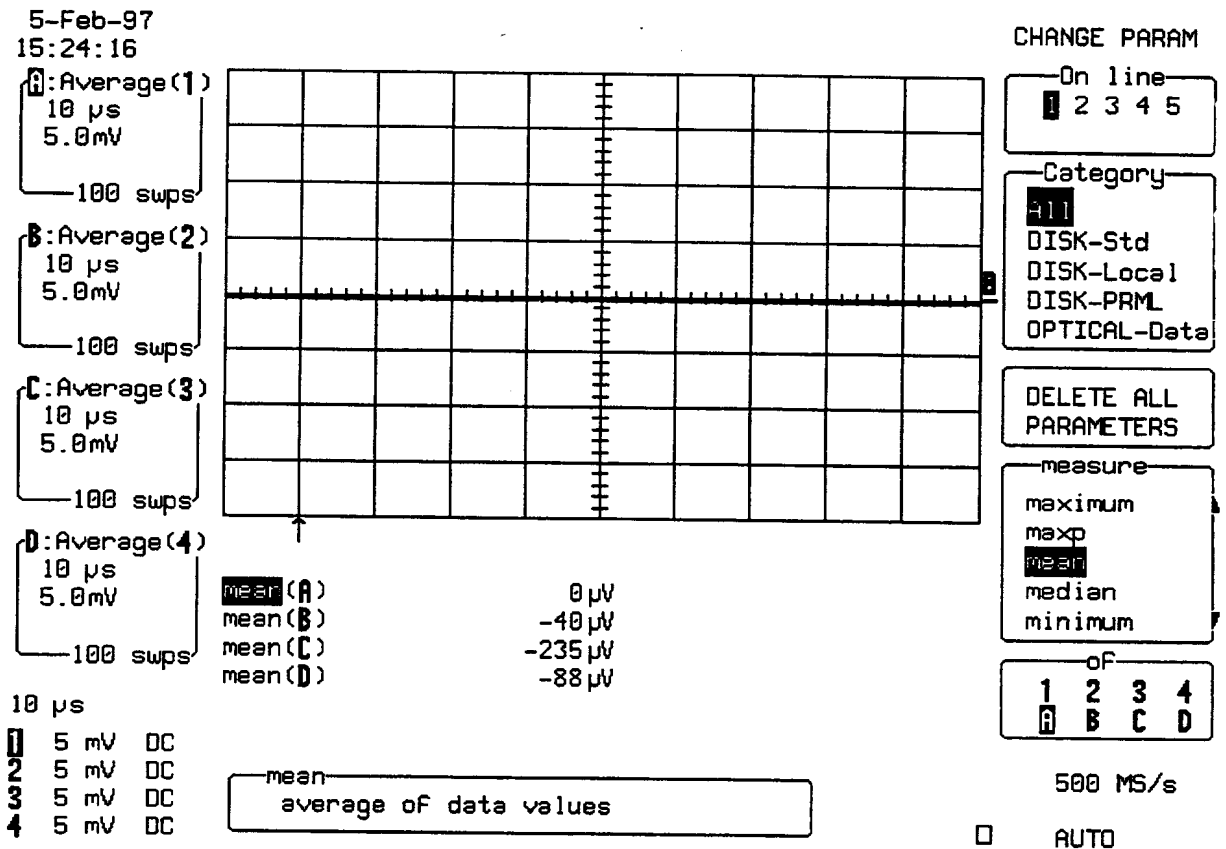


- Press Clear Sweeps.
- After 100 sweeps record the mean value of A, B, C & D in Table 6, and compare the test results to the limits in the test record.
- Repeat step 5.6.3.a. for all vertical scale settings listed in Table 6, and check that the test results (mean value of A, B, C, D) are within the limits specified.
- Record the measurements in Table 6.


b. DC 50Ω

- Recall 574p027.PNL or configure the DSO as shown in 5.6.3.a. and for each Channel make the following change :

Input Coupling : DC 50Ω

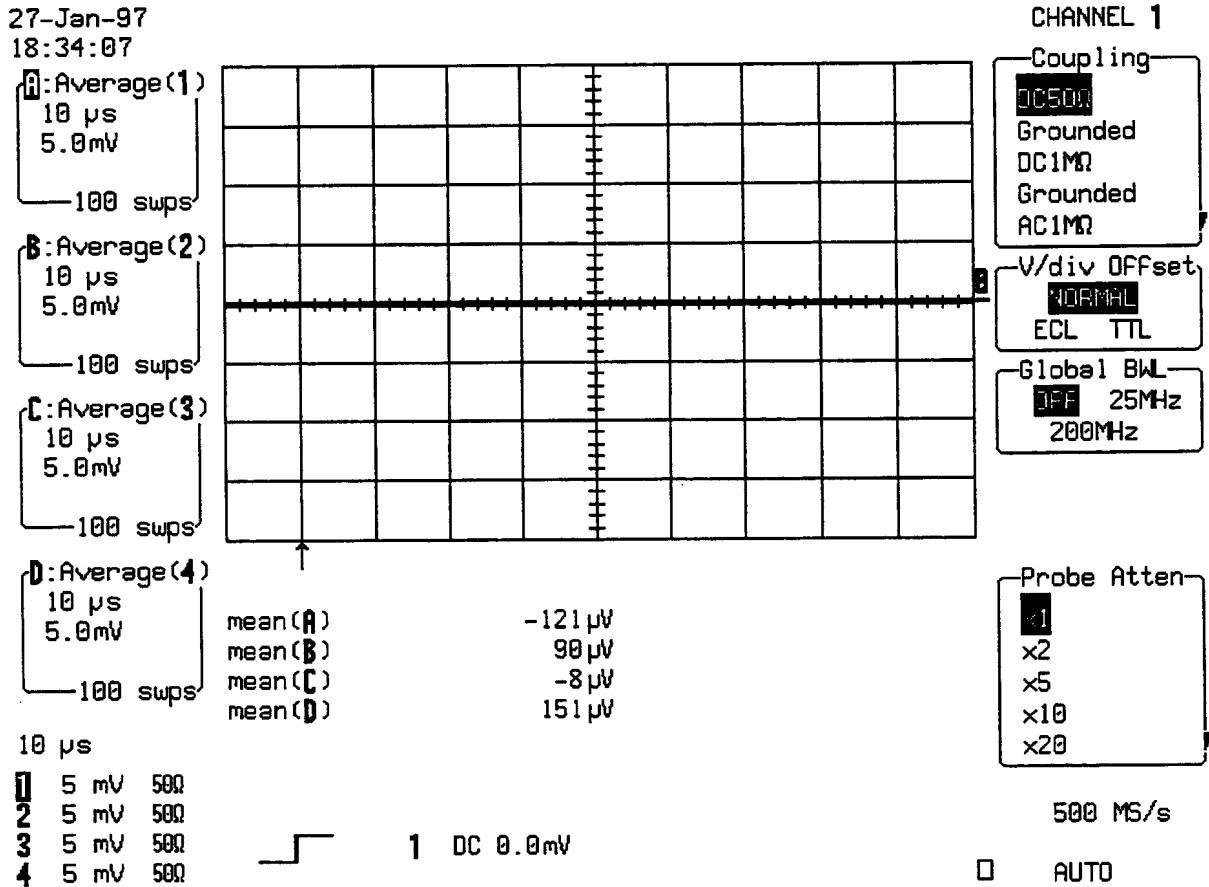

- Press Clear Sweeps.
- After 100 sweeps record the mean value of A, B, C & D in Table 7, and compare the test results to the limits in the test record.
- Repeat step 5.6.3.b. for all vertical scale settings listed in Table 7, and check that the test results (mean value of A, B, C, D) are within the limits specified.
- Record the measurements in Table 7.



c. DC 50Ω, 2 Channel Mode

- Recall 574p028.PNL or configure the DSO as shown in 5.6.3.a. and make the following change :

Input Coupling : DC 50Ω on all 4 Channels
 Input gain : 0.2 V/div. on all 4 Channels
 Timebase : 5 μsec/div.

Select Setup Timebase


Channel use : 2

Change parameters

On line 1 : Mean of B
 On line 2 : Mean of C

- Press Clear Sweeps.
- After 100 sweeps record the mean value of B & C in Table 7, and compare the test results to the limits in the test record.

5-Feb-97
 15:28:41

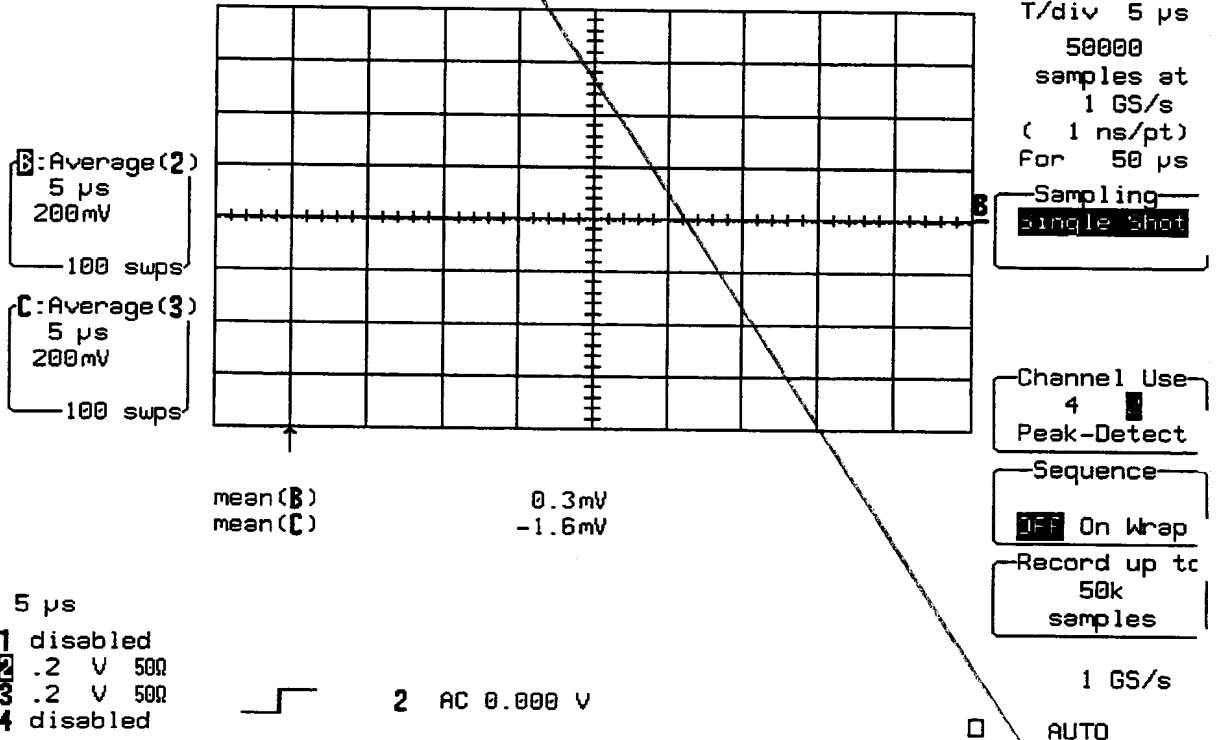

d. DC 50Ω, All Channel Combined


- Recall 574p029.PNL or configure the DSO as shown in 5.6.3.a. and make the following changes :

Input Coupling : DC 50Ω on all 4 Channels
 Input gain : 0.2 V/div. on all 4 Channels
 Timebase : 2 μsec/div.
 Change parameters
 On line 1 : Measure Mean of B

- Connect a PP094 adapter to Channel 2 and Channel 3.
- Check :
 - PP094 is identified on Channel 2
 - Channel 1, Channel 3 and Channel 4 are disabled
 - Sampling rate is 4 GS/s
- Press Clear Sweeps.
- After 100 sweeps record the mean value of B in Table 7, and compare the test result to the limits in the test record.

5-Feb-97
15:32:05

B: Average (2)
 2 μs
 400mV
 100 swps

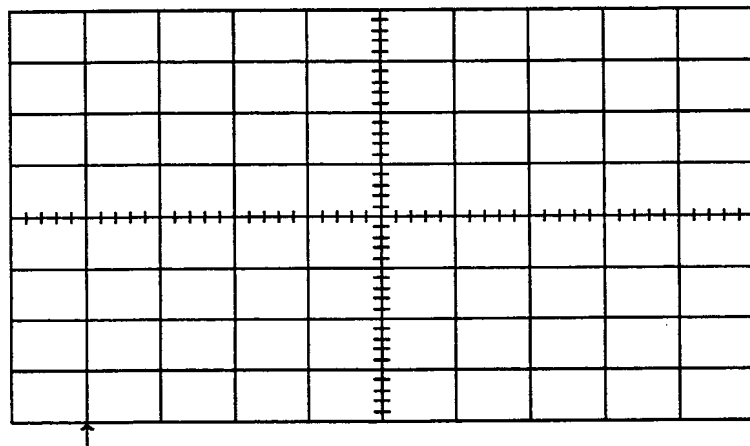

mean(B)

3.5mV

TIMEBASE
 T/div 2 μs
 40000
 samples at
 2 GS/s
 (.5 ns/pt)
 For 20 μs

Sampling
 Single Shot

All Channels
 combined For
 2 Gs/s (2)

Sequence

On Wrap

Record up to
 50k
 samples

2 GS/s

AUTO

2 μs
 1 disabled
 2 .2 V 50Ω
 3 disabled
 4 disabled



2 AC 0.000 V

- Disconnect the PP094 adapter.

5.7 DC Accuracy

Specification

- ≤ ±3 % of full scale at 5mV/div, with 0 mV offset.
- ≤ ±2 % of full scale at 10mV/div and above, with 0 mV offset.

Description

This test measures the DC Accuracy within the gain range specified. It requires a DC source with a voltage range of 0 V to 20 V adjustable in steps of no more than 15 mV, and a calibrated DMM that can measure voltage to 0.1 %. Measurements are made using voltage values applied by the external voltage reference source, measured by the DMM, and in the oscilloscope using the parameters Std voltage. For each known input voltage, the deviation is checked against the tolerance.

5.7.1 Positive DC Accuracy

a. DC 50Ω

Procedure

- Recall 574p030.PNL or configure the DSO :

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels Trace ON	:	Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling	:	DC 50Ω on all 4 Channels
Input offset	:	0.0 mV on all 4 Channels
Input gain	:	from 5mV/div to 1 V/div. (see Table 8) on all 4 Ch
Coupling 1	:	DC
Slope 1	:	Pos.
Mode	:	Auto
Holdoff	:	Off
Timebase	:	2 msec/div.
Channel use	:	4
Record up	:	50 k
Channels Trace OFF	:	Channel 1, Channel 2, Channel 3 & Channel 4
Zoom+Math Trace ON	:	A, B, C & D
Select Math Setup	:	
For Math	:	Use at most 5000 points
Redefine A, B, C, D	:	Channel 1, Channel 2, Channel 3 & Channel 4
Use Math ?	:	Yes
Math Type	:	Average
Avg. Type	:	Summed
For	:	100 sweeps

Cursors/Measure : Parameters
Mode : Custom
Statistics : off

Change parameters

On line 1 : Measure mean of A
On line 2 : Measure mean of B
On line 3 : Measure mean of C
On line 4 : Measure mean of D

- For the low sensitivities : 5 mV, 10 mV and 20 mV/div., connect the test equipment as shown in Figure 5-1.

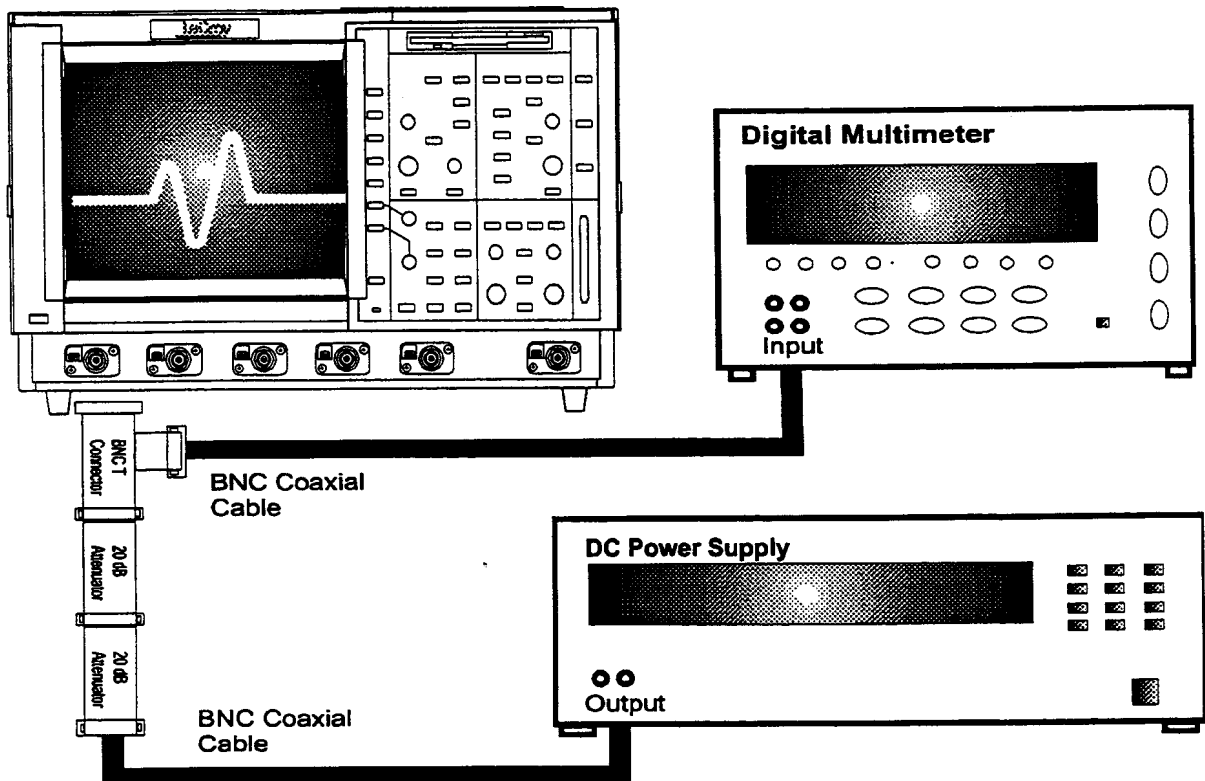


Figure 5-1 : DC 50Ω Accuracy Equipment Setup for 5, 10 and 20 mV/div

- For the sensitivities : 50 mV and 100 mV/div, connect the test equipment as shown in Figure 5-2.
- For the range 1 V/div no attenuator is required, connect the test equipment as shown in Figure 5-3.

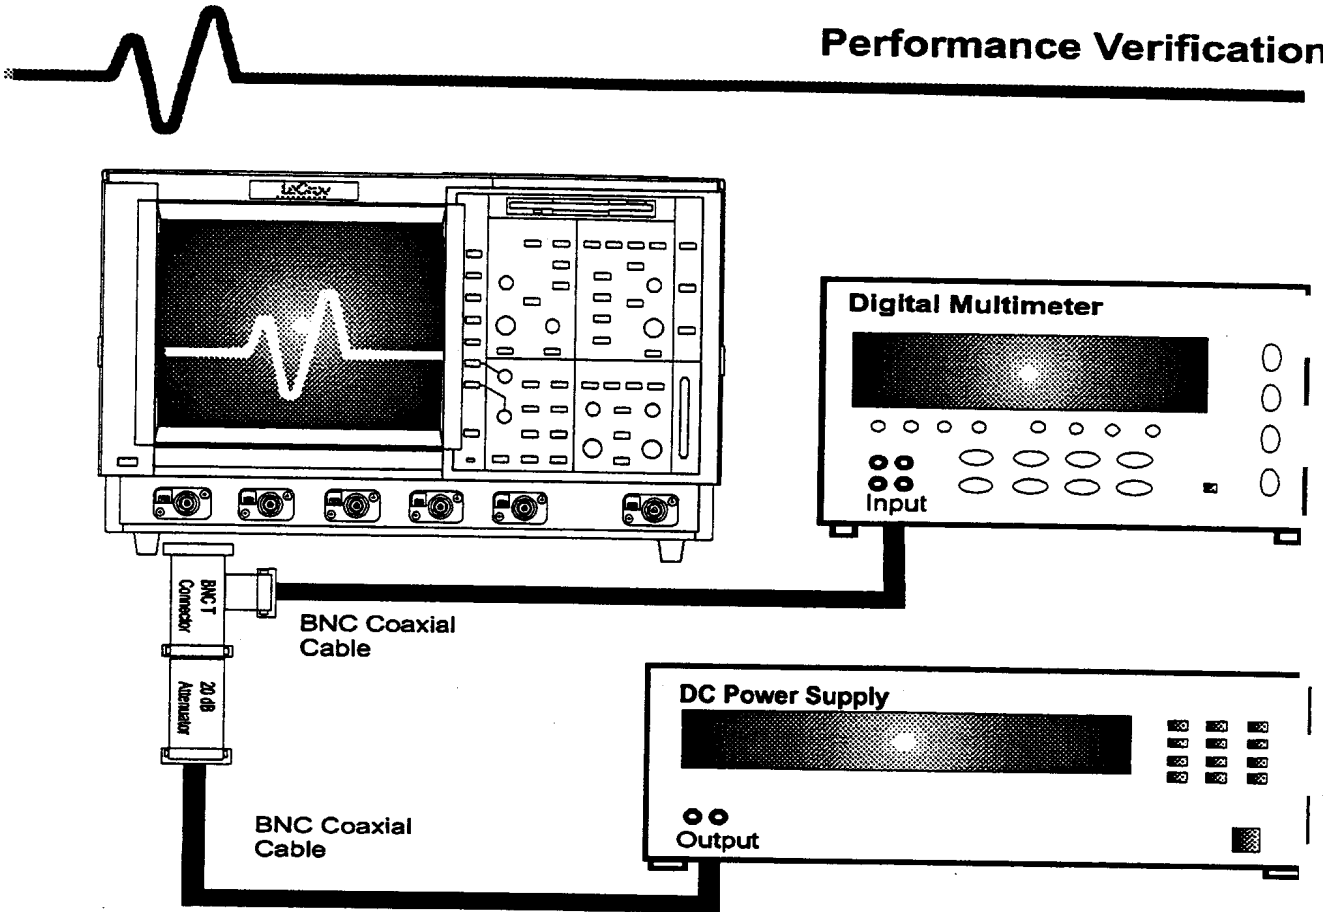


Figure 5-2 : DC 50Ω Accuracy Equipment Setup for 50 and 100 mV/div


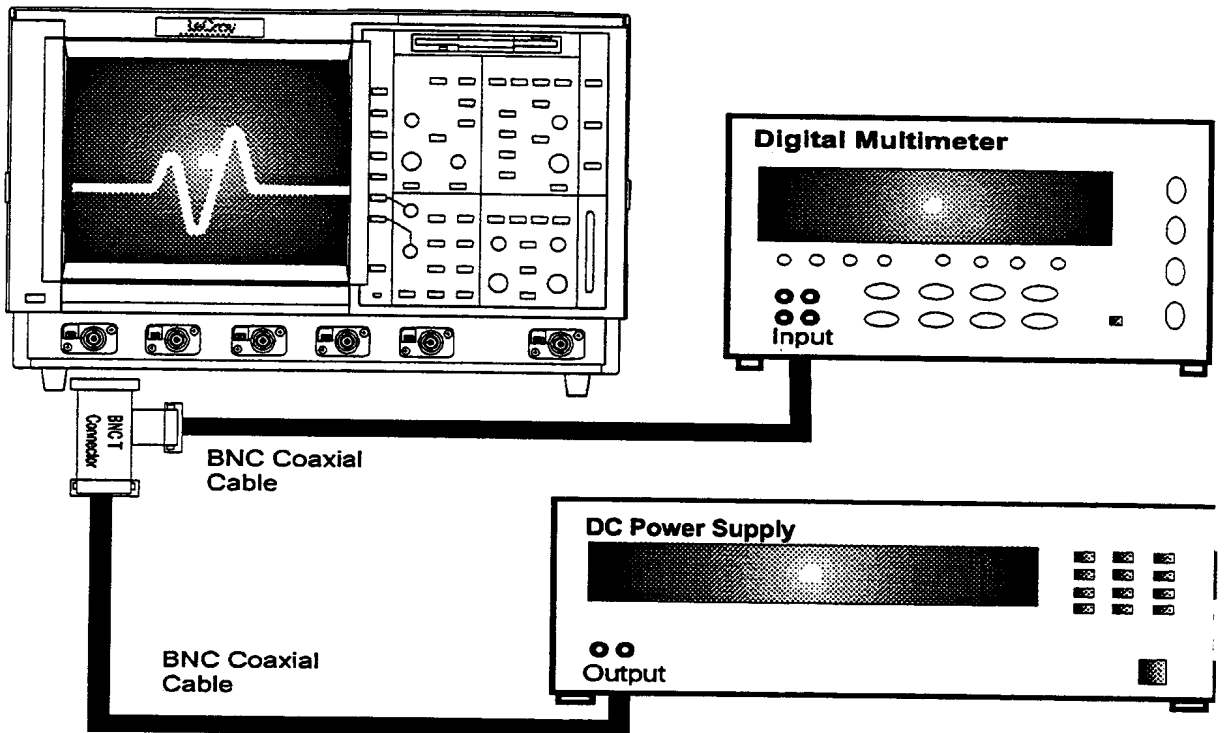


Figure 5-3 : DC 50Ω Accuracy Equipment Setup for 1 V/div.

- For each DSO Volts/div, set the output of the external DC voltage reference source as shown in Table 8, column PS output.
 - 1) Connect the DMM and record the voltage reading in Table 8, column DMM.
 - 2) Disconnect the DMM from the BNC T connector.
 - 3) Press Clear Sweeps
 - 4) After 100 sweeps, read off the DSO mean parameter, and record the measurement in Table 8, column Mean.
- For each DC voltage applied to the DSO input, repeat parts 1), 2), 3) and 4).
- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 8, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat step 5.7.1.a. for the other channels, substituting channel controls and input connector.



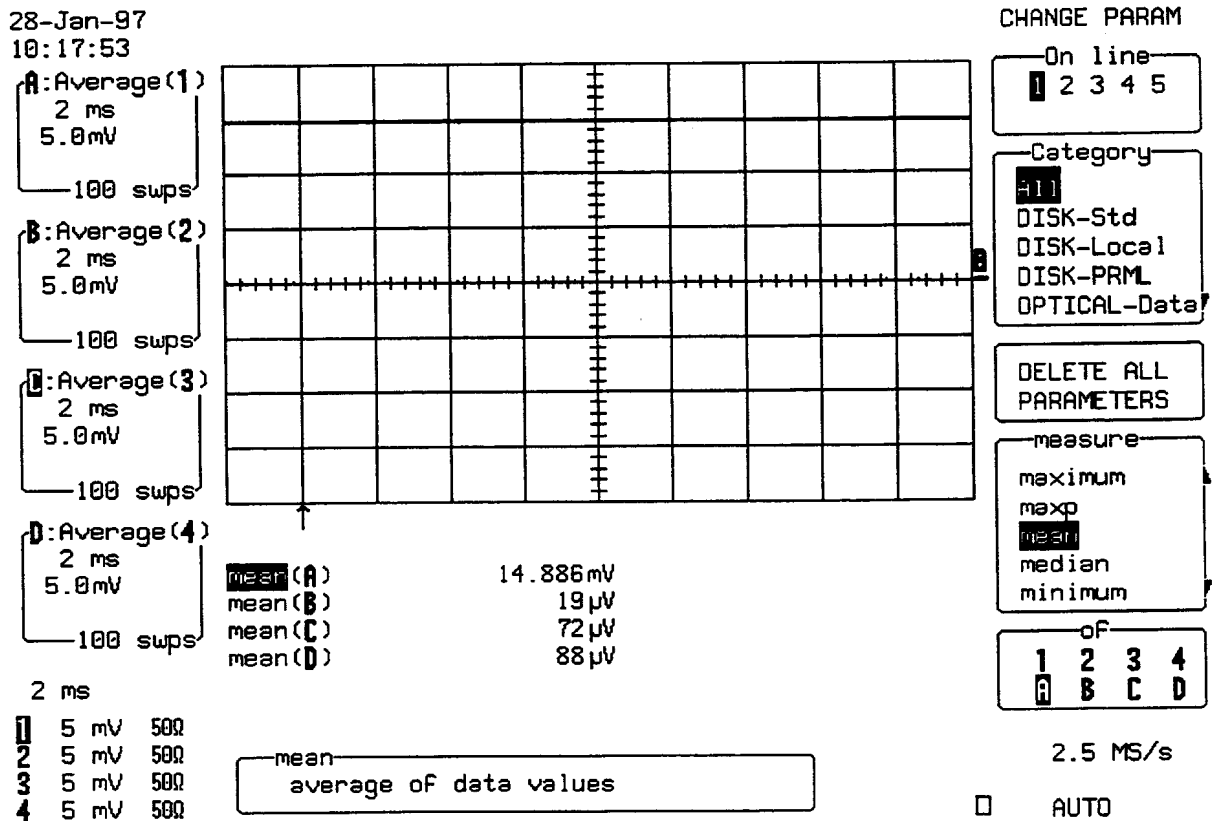

b. DC 1MΩ

Procedure

- Recall 574p031.PNL or configure the DSO as shown in 5.7.1.a. and make the following change :

Input Coupling : DC 1MΩ on all 4 Channels

- For 5 mV/div., connect the test equipment as shown in Figure 5-4.

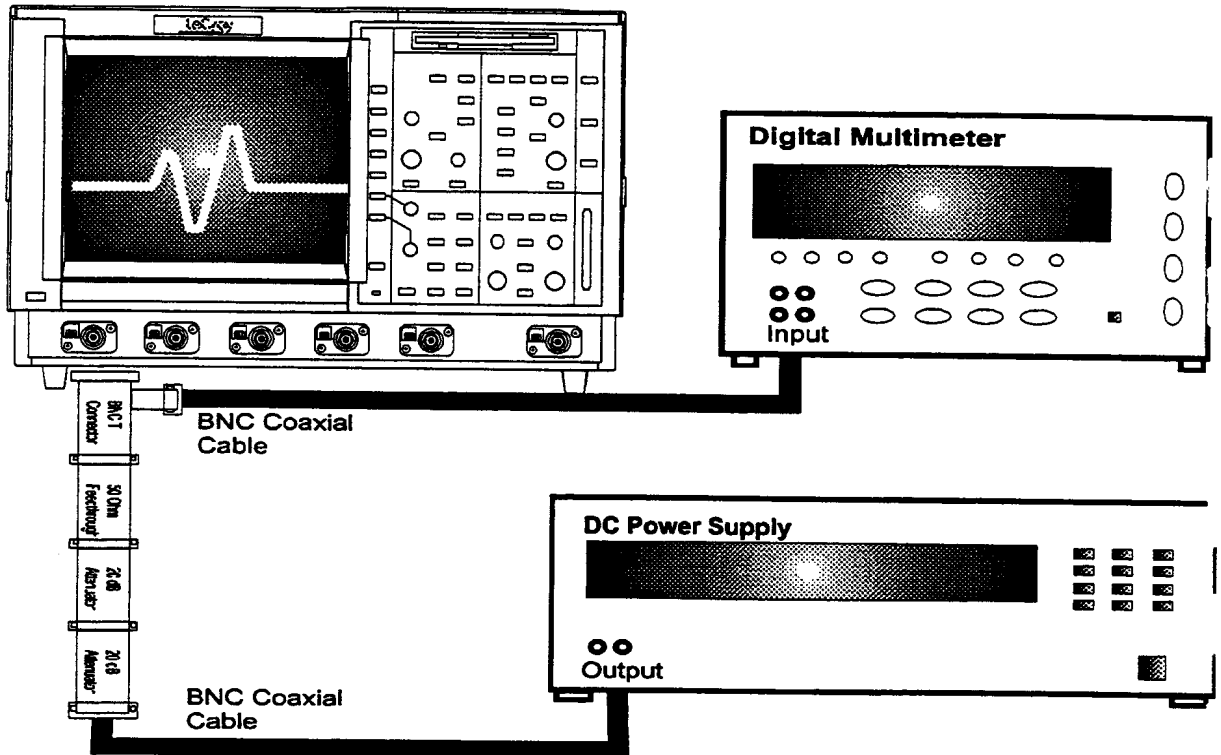


Figure 5-4: DC 1MΩ Accuracy Equipment Setup for 5 mV/div.

- For 100 mV/div, connect the test equipment as shown in Figure 5-5.
- For 5V/div no attenuator is required, connect the test equipment as shown in Figure 5-6.

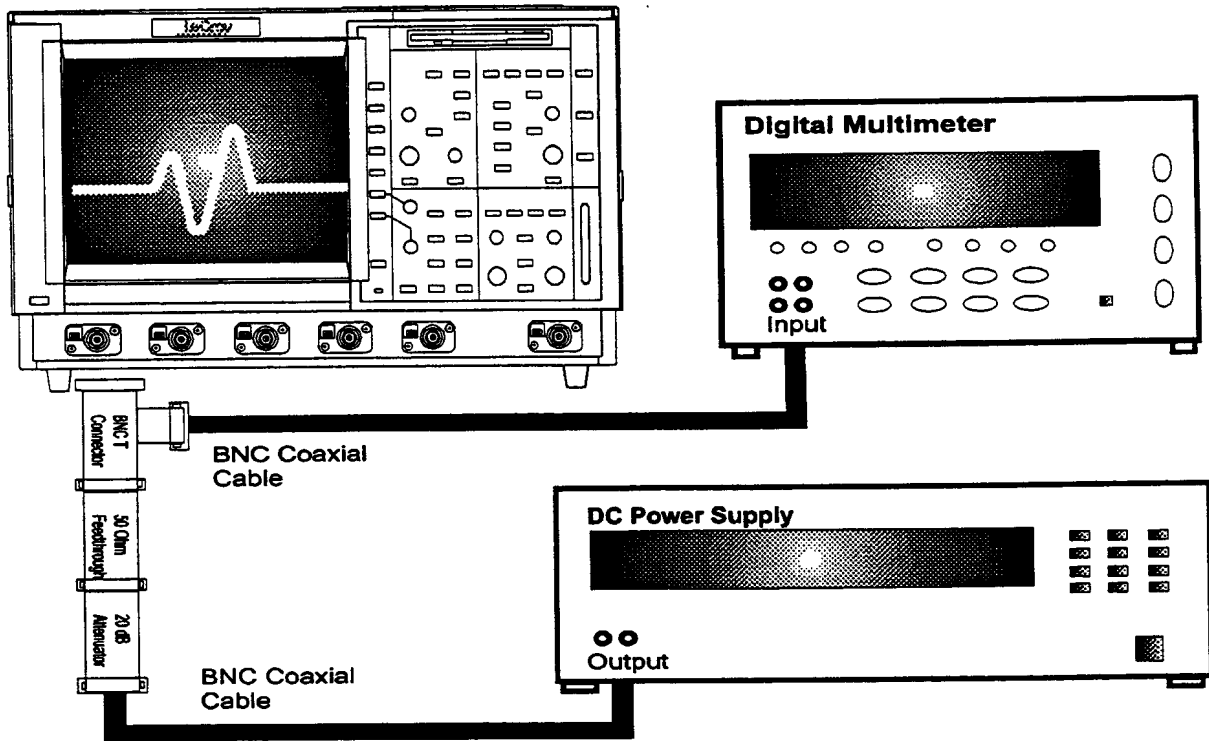


Figure 5-5 : DC 1MΩ Accuracy Equipment Setup for 100 mV/div


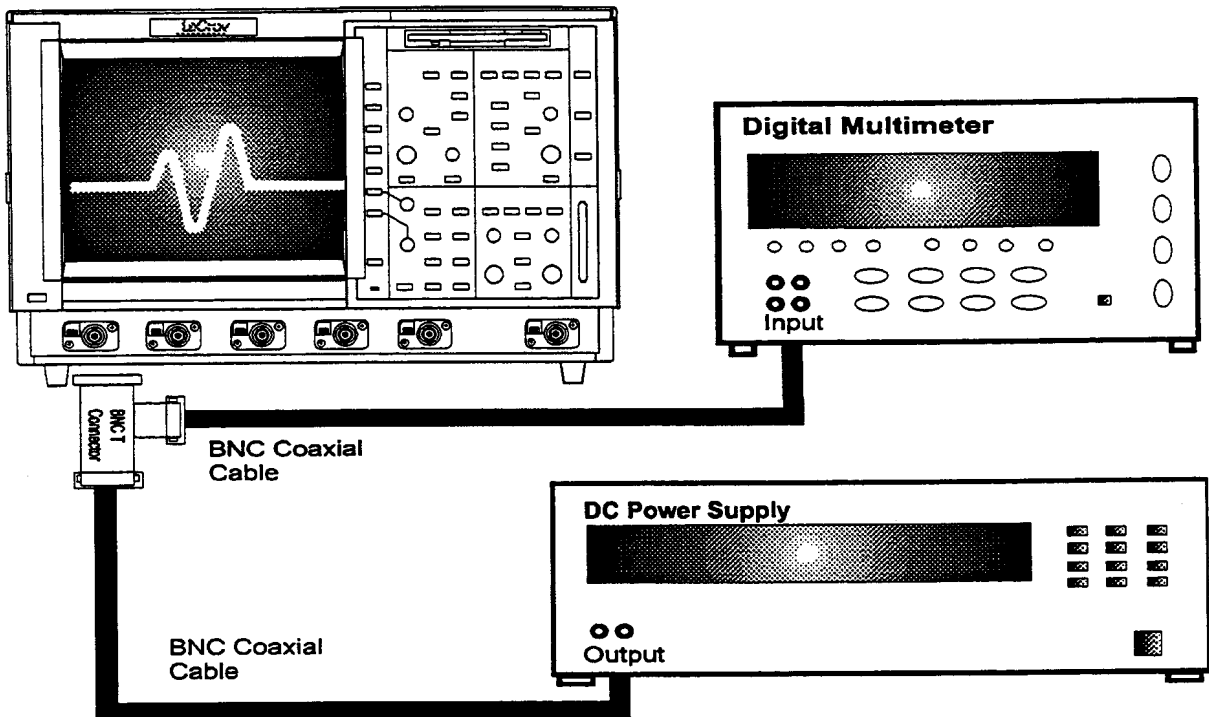


Figure 5-6 : DC 1MΩ Accuracy Equipment Setup for 5V/div.




- For each DSO Volts/div, set the output of the external DC voltage reference source as shown in Table 9, column PS output.
 - 1) Connect the DMM and record the voltage reading in Table 9, column DMM.
 - 2) Disconnect the DMM from the BNC T connector.
 - 3) Press Clear Sweeps
 - 4) After 100 sweeps, read off the DSO mean parameter, and record the measurement in Table 9, column Mean.
- For each DC voltage applied to the DSO input, repeat parts 1), 2), 3) and 4).
- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 9, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat step 5.7.1.b. for the other channels, substituting channel controls and input connector.

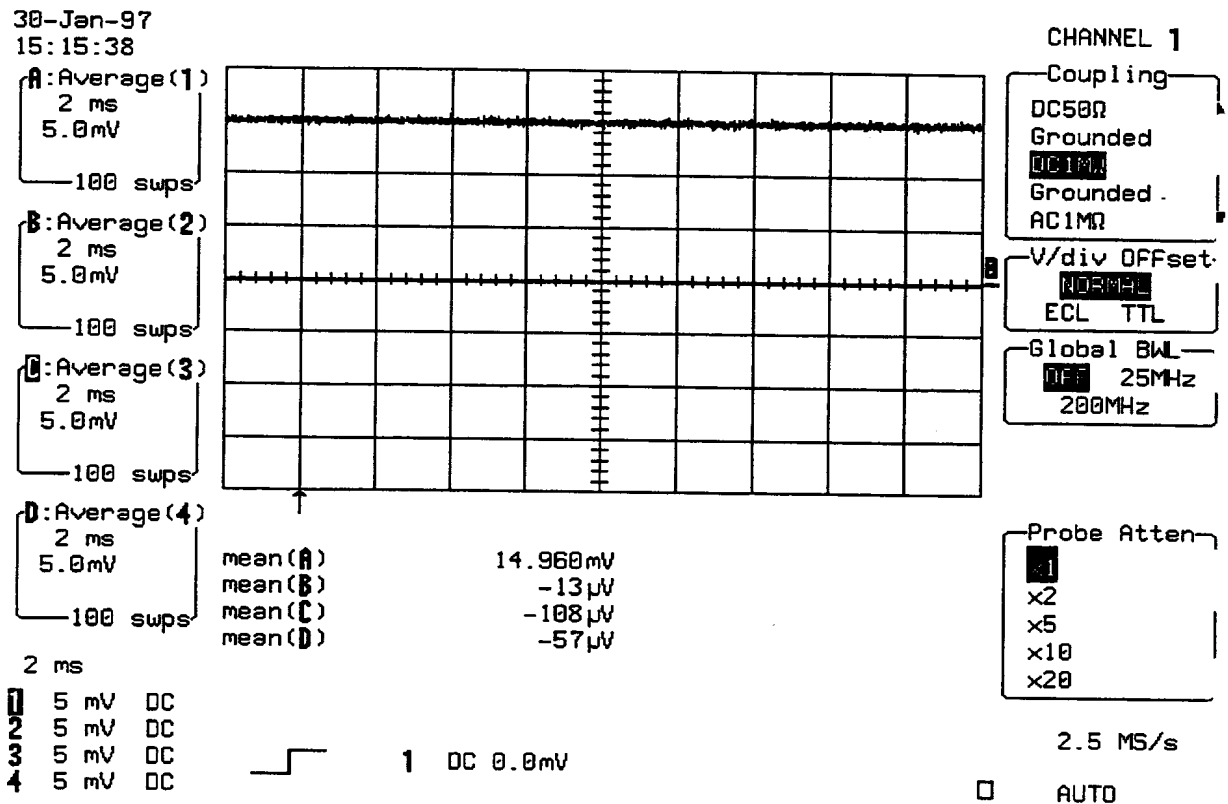

5.7.2 Negative DC Accuracy

a. DC 50Ω

- Recall 574p030.PNL or configure the DSO as shown in 5.7.1.a.
- Connect the test equipment as shown in either Figure 5-1 or 5-2 or 5-3.
- For each DSO Volts/div, set the output of the external DC voltage reference source as shown in Table 10, column PS output. (if a banana-BNC adapter is being used it can simply be turned to get the opposite polarity)
 - 1) Connect the DMM and record the voltage reading in Table 10, column DMM.
 - 2) Disconnect the DMM from the BNC T connector.
 - 3) Press Clear Sweeps
 - 4) After 100 sweeps, read off the DSO mean parameter, and record the measurement in Table 10, column Mean.
- For each DC voltage applied to the DSO input, repeat parts 1), 2), 3) and 4).
- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 10, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat step 5.7.2.a. for the other channels, substituting channel controls and input connector.

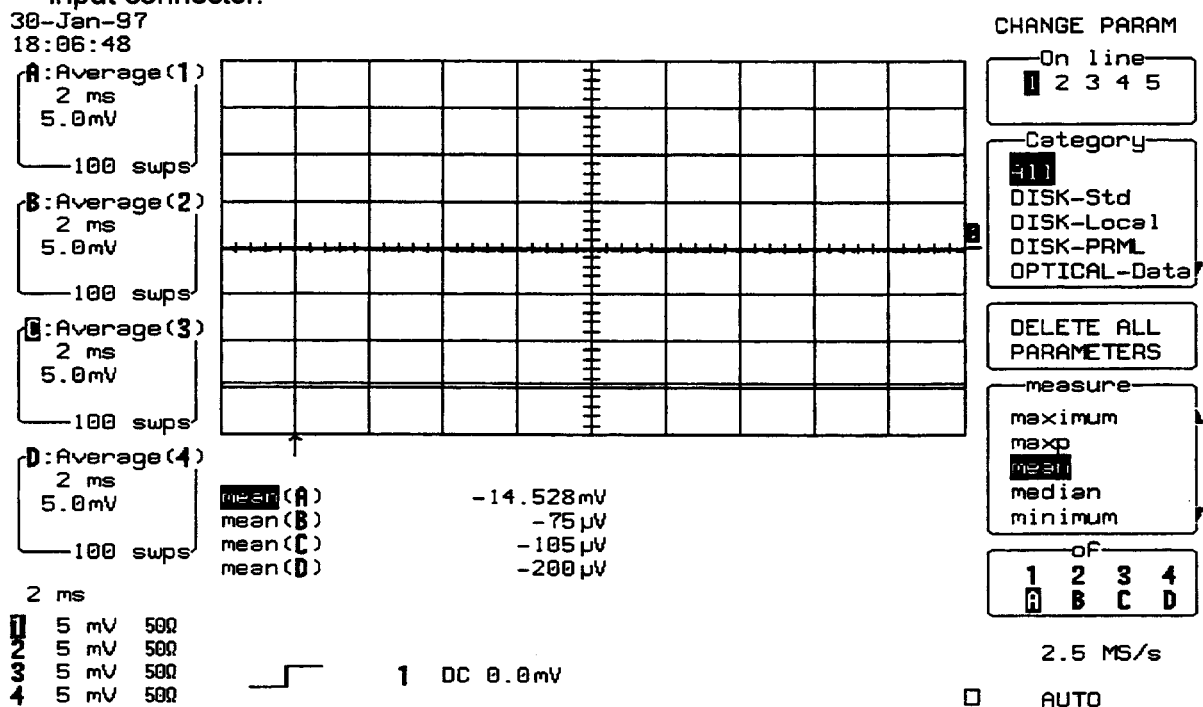




b. DC 1 MΩ

- Recall 574p031.PNL or configure the DSO as shown in 5.7.1.a. and make the following change :

Input Coupling : DC 1 MΩ on all 4 Channels

- Connect the test equipment as shown in either Figure 5-4 or 5-5 or 5-6.
- For each DSO Volts/div, set the output of the external DC voltage reference source as shown in Table 11, column PS output.
 - Connect the DMM and record the voltage reading in Table 11, column DMM.
 - Disconnect the DMM from the BNC T connector.
 - Press Clear Sweeps
 - After 100 sweeps, read off the DSO mean parameter, and record the measurement in Table 11, column Mean.
- For each DC voltage applied to the DSO input, repeat parts 1), 2), 3) and 4).
- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 11, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat step 5.7.2.b. for the other channels, substituting channel controls and input connector.

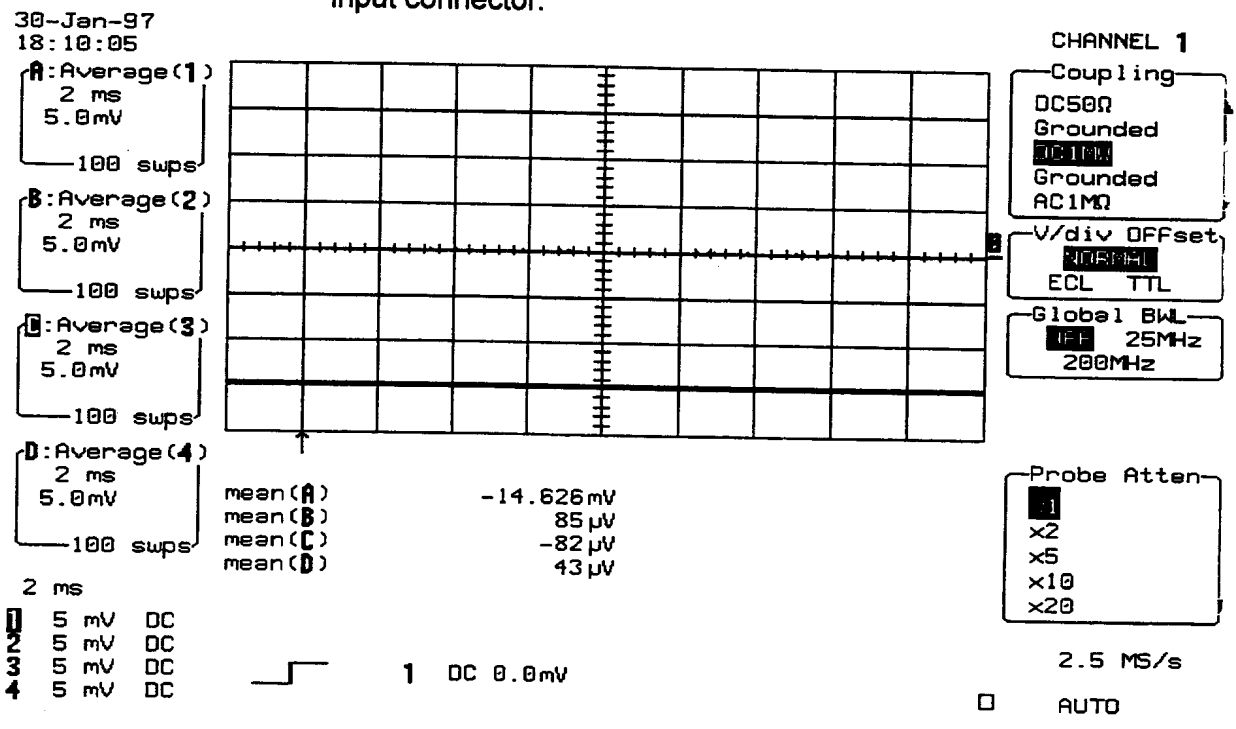

5.8 Offset Accuracy

Specifications

Offset range ± 1 Volt at 5 mV/div

Accuracy $\leq \pm 11.2$ mV (3 % of full scale +1 % of offset).

Description

The offset test is done at 5 mV/div, for 50 Ω and 1M Ω couplings, with a signal of ± 1 Volt cancelled by an offset of the other polarity.

5.8.1 Positive Offset Accuracy

a. DC 50 Ω

Procedure

- Recall **574p032.PNL** or configure the DSO :

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels Trace ON	:	Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling	:	DC 50Ω on all 4 Channels
Input gain	:	5mV/div on all 4 Channels
Input offset	:	+1 Volt on all 4 Channels
Trigger setup	:	Edge
Trigger on	:	1
Coupling 1	:	DC
Slope 1	:	Pos.
Mode	:	Auto
Timebase	:	2 msec/div.
Channel use	:	4
Record up	:	50 k
Channels Trace OFF	:	Channel 1, Channel 2, Channel 3 & Channel 4
Zoom+Math Trace ON	:	A, B, C & D
Select Math Setup	:	
For Math	:	Use at most 5000 points
Redefine A, B, C, D	:	Channel 1, Channel 2, Channel 3 & Channel 4
Use Math ?	:	Yes
Math Type	:	Average
Avg. Type	:	Summed
For	:	100 sweeps
Cursors/Measure	:	Parameters
Mode	:	Custom

Statistics : off
 Change parameters
 On line 1 : Measure mean of A
 On line 2 : Measure mean of B
 On line 3 : Measure mean of C
 On line 4 : Measure mean of D

- Connect the test equipment as shown in Figure 5-7.

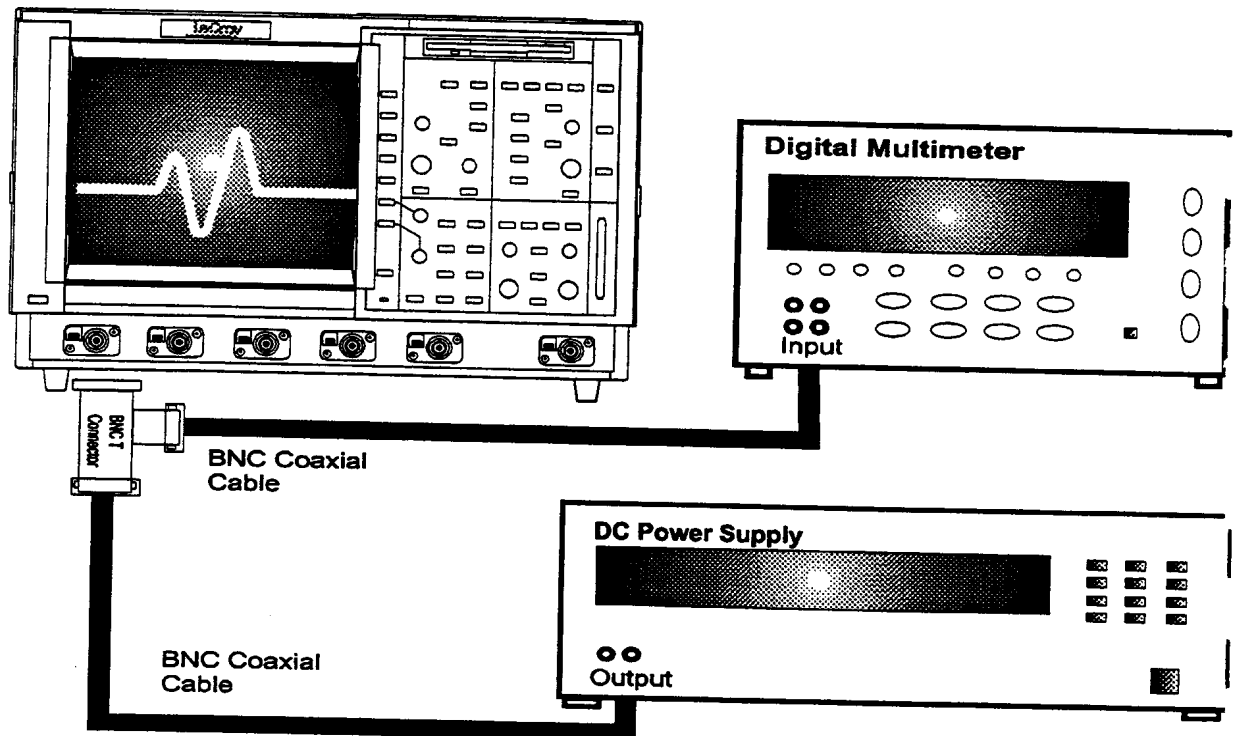


Figure 5-7 : Offset Accuracy Equipment Setup

- Set the output of the external DC voltage reference source to -1 Volt.
- Verify that the displayed trace A : Average (1) is in the screen, near to the center horizontal graticule line.
- Connect the DMM and record the voltage reading in Table 12, column DMM.
- Disconnect the DMM from the BNC T connector.
- Press Clear Sweeps
- After 100 sweeps, Read off the DSO Mean parameter voltage, and record the measurement in Table 12, column Mean.


31-Jan-97
14:33:30

A: Average (1)
2 ms
5.0mV
100 supps

B: Average (2)
2 ms
5.0mV
100 supps

C: Average (3)
2 ms
5.0mV
100 supps

D: Average (4)
2 ms
5.0mV
100 supps

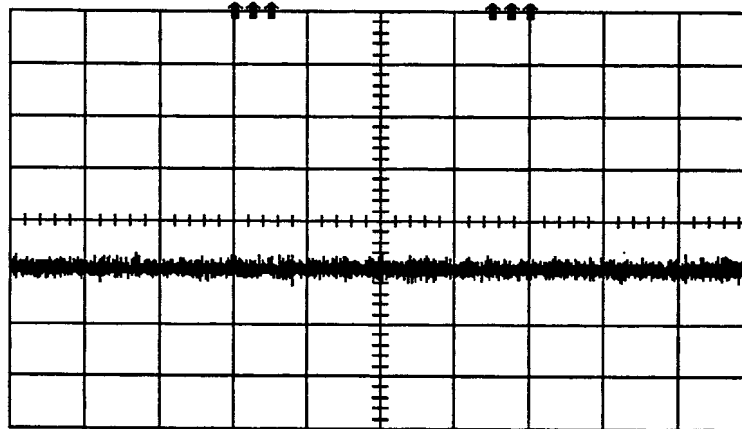

mean(A) -1.00456 V
mean(B) -980.156mV
mean(C) -980.156mV
mean(D) -980.156mV

2 ms
1 5 mV 50Ω
2 5 mV 50Ω
3 5 mV 50Ω
4 5 mV 50Ω

mean
average of data values

CHANGE PARAM

On line
1 2 3 4 5

Category
DISK-Std
DISK-Local
DISK-PRML
OPTICAL-Data

DELETE ALL
PARAMETERS

measure
maximum
maxp
mean
median
minimum

of
1 2 3 4
A B C D

2.5 MS/s

AUTO

- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 12, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat the test for the other channels, substituting channel controls and input connector. Record the measurements in Table 12.

b. DC 1MΩ

Procedure

- Recall 574p033.PNL or configure the DSO as shown in 5.8.1.a. and for each Channel make the following change :

Input Coupling : DC 1MΩ

- Connect the test equipment as shown in Figure 5-7.
- Set the output of the external DC voltage reference source to -1 Volt.



- Verify that the displayed trace A : Average (1) is in the screen, near to the center horizontal graticule line.
- Connect the DMM and record the **voltage reading** in Table 12, column **DMM**.
- Disconnect the DMM from the BNC T connector.
- **Press Clear Sweeps**
- After 100 sweeps, Read off the **DSO Mean parameter voltage**, and record the measurement in Table 12, column **Mean**.
- Calculate the **Difference (Δ)** by subtracting the **DMM voltage** reading from the **DSO mean voltage** reading. Record the test result in Table 12, and compare the **Difference (Δ)** to the corresponding limit in the test record.
- Repeat the test for the other channels, substituting channel controls and input connector. Record the measurements in Table 12.

5.8.2 Negative Offset Accuracy


a. DC 50 Ω

Procedure

- Recall **574p034.PNL** or configure the DSO as shown in 5.8.1.a. and for each Channel make the following change :

Input offset : -1 Volt
- Connect the test equipment as shown in Figure 5-7.
- Set the output of the external **DC voltage reference source** to **+1 Volt**.
- Verify that the displayed trace A : Average (1) is in the screen, near to the center horizontal graticule line.
- Connect the DMM and record the **voltage reading** in Table 13, column **DMM**.
- Disconnect the DMM from the BNC T connector.
- **Press Clear Sweeps**
- After 100 sweeps, Read off the **DSO Mean parameter voltage**, and record the measurement in Table 13, column **Mean**.

- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 13, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat the test for the other channels, substituting channel controls and input connector. Record the measurements in Table 13.

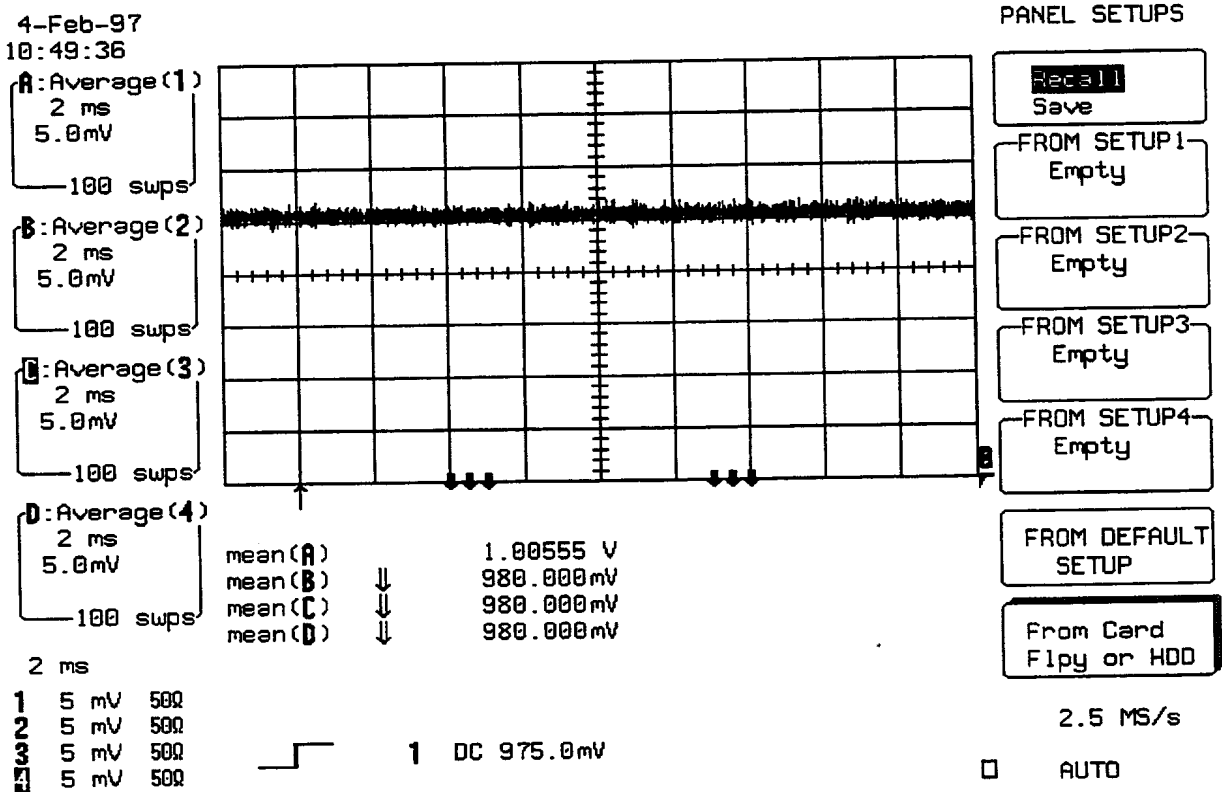


b. DC 1MΩ

- Recall 574p035.PNL or configure the DSO as shown in 5.8.1.a. and for each Channel make the following changes :
 - Input Coupling : DC 1MΩ
 - Input offset : -1 Volt
- Connect the test equipment as shown in Figure 5-7.
- Set the output of the external DC voltage reference source to +1 Volt.
- Verify that the displayed trace A : Average (1) is in the screen, near to the center horizontal graticule line.



- Connect the DMM and record the voltage reading in Table 13, column DMM.
- Disconnect the DMM from the BNC T connector.
- Press Clear Sweeps
- After 100 sweeps, Read off the DSO Mean parameter voltage, and record the measurement in Table 13, column Mean.
- Calculate the Difference (Δ) by subtracting the DMM voltage reading from the DSO mean voltage reading. Record the test result in Table 13, and compare the Difference (Δ) to the corresponding limit in the test record.
- Repeat the test for the other channels, substituting channel controls and input connector. Record the measurements in Table 13.

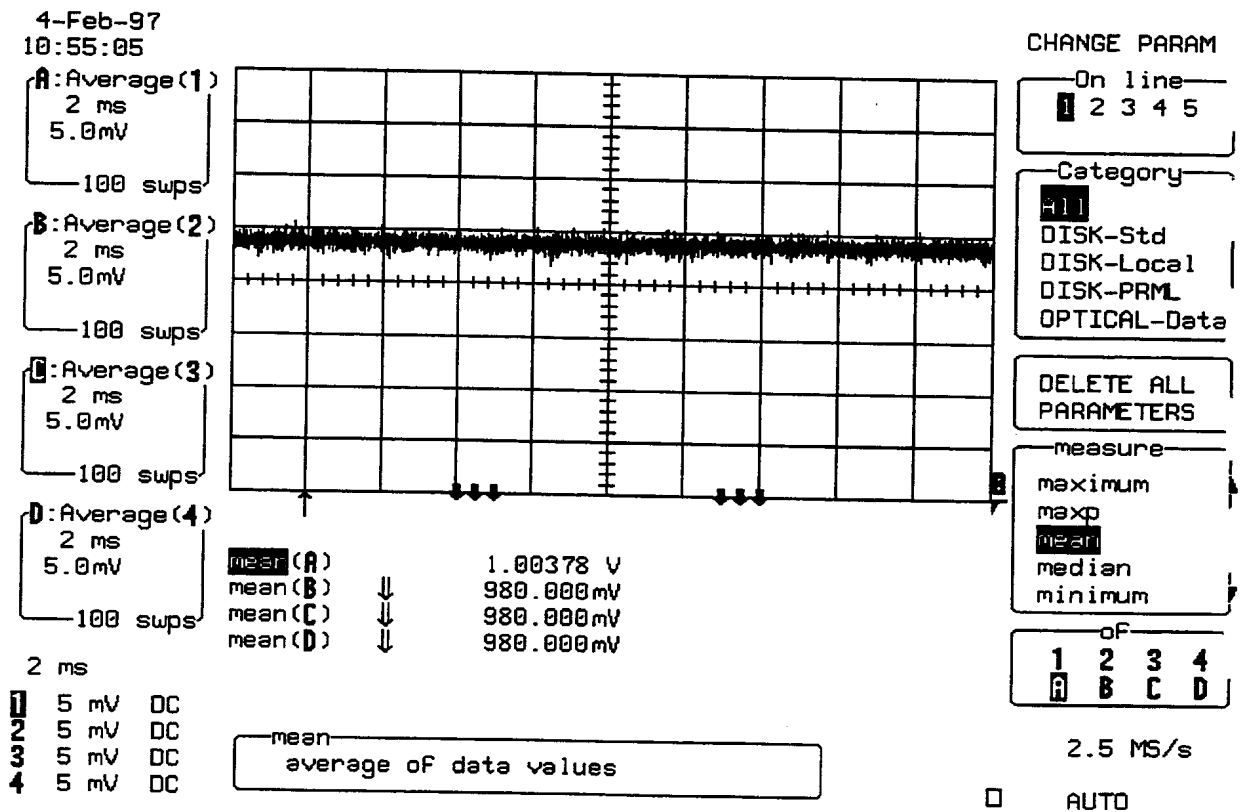

5.9 Bandwidth

5.9.1 Description

The purpose of this test is to ensure that the entire system has a bandwidth of at least 1 GHz. An external source is used as the reference to provide a signal where amplitude and frequency are well controlled.

The amplitude of the generator as a function of frequency and power is calibrated using an HP8482A sensor on an HP436A power meter or equivalent.

Specifications

50Ω : DC to at least 1 GHz (−3 dB) at 10 mV/div. and above.

1MΩ : DC to 400 MHz typical at 100 mV/div

a. DC 50Ω

- Recall **574p036.PNL** or configure the DSO :

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels Trace ON	:	Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling	:	DC 50Ω on all 4 Channels
Input gain	:	50mV/div on all 4 Channels
Input offset	:	0 mV on all 4 Channels
Trigger setup	:	Edge
Trigger on	:	Line
Slope line	:	Pos
Mode	:	Auto
Timebase	:	10 μsec/div.
Channel use	:	4
Record up	:	50 k
Cursors/Measure	:	Parameters
Mode	:	Custom
Statistics	:	On
Change parameters	:	
On line 1	:	Sdev of 1
On line 2	:	Sdev of 2
On line 3	:	Sdev of 3
On line 4	:	Sdev of 4

- Connect the HP8482A power sensor to the power meter.
- Zero and calibrate the HP8482A power sensor using the power meter **Power Ref output**.

- Connect a BNC adapter to the HP8482A power sensor.
- Connect a 5ns 50 BNC cable to the RF output of the HP8648B generator and then through the necessary adapters to the power sensor.

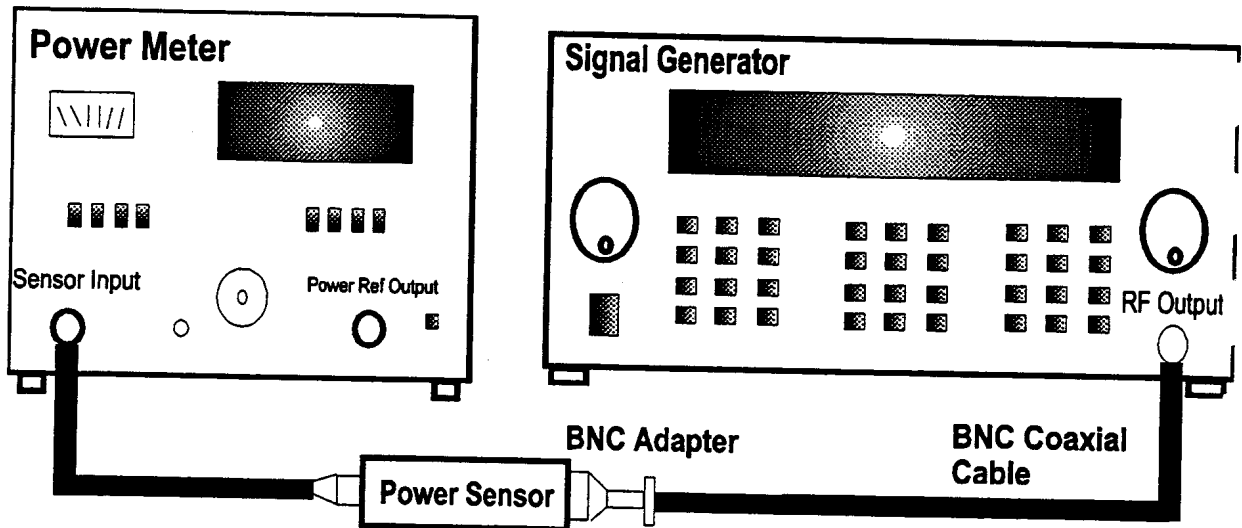


Figure 5-8 : Power Meter Equipment Setup

- Set the generator frequency to 300 KHz
- Set the generator amplitude to measure 0.200 mW on the power meter.
- Read the displayed **generator output amplitude**, and record it in the third column of Table 14.
- Repeat the above measurement for 1.1 MHz, 30.1 MHz, 250.1 MHz, 750.1 MHz & 1000.1 MHz. Record the generator output amplitude readout in the third column of Table 14.
- Disconnect the **RF output** of the HP8648B generator from the HP8482A power sensor.
- Connect the **RF output** of the HP8648B generator through the 5ns 50 Ohm BNC cable into Channel 1.
- Set the generator frequency to 300 KHz.
- From the generator, apply the recorded **generator signal amplitude** to Channel 1.
- Press **Clear Sweeps**.

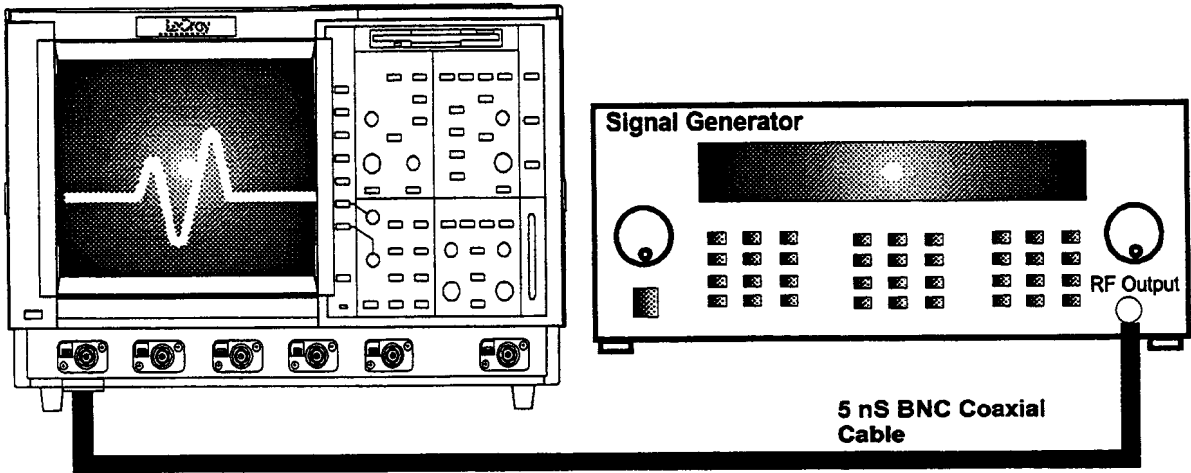


Figure 5-9 : 50Ω Bandwidth Equipment Setup

- Measure for at least 100 sweeps, record the average value of `sdev(1)` in Table 14
- Repeat the above 3 steps for Channel 2, Channel 3 & Channel 4 substituting channel controls and input connector. Record the measurements in Table 14.
- Repeat the above measurement for all channels for 1.1 MHz, 30.1 MHz, 250.1 MHz, 750.1 MHz and 1000.1 MHz and record the values in Table 14.
- Calculate the ratio to .3 MHz for each frequency, $sdev_{1.1}/sdev_{0.3}$, $sdev_{30.1}/sdev_{0.3}$, $sdev_{250.1}/sdev_{0.3}$, and $sdev_{750.1}/sdev_{0.3}$, and compare the results to the limits in the test record.


11-Feb-97
9:03:49

1 10 μ s
50mV

2 10 μ s
50mV

3 10 μ s
50mV

4 10 μ s
50mV

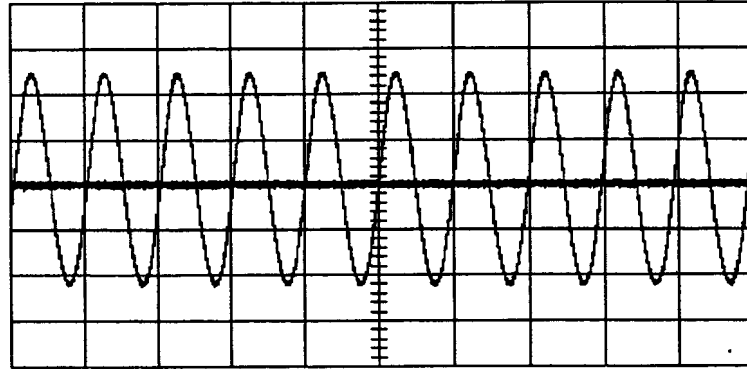

331 sweeps:

	average	low	high	sigma
<code>sdev(1)</code>	82.06mV	81.60	82.58	0.20
<code>sdev(2)</code>	1.71mV	1.69	1.73	0.01
<code>sdev(3)</code>	1.41mV	1.38	1.43	0.01
<code>sdev(4)</code>	1.42mV	1.39	1.44	0.01

10 μ s

1 50 mV 50 Ω

2 50 mV 50 Ω

3 50 mV 50 Ω

4 50 mV 50 Ω

standard deviation
of the data values
from the mean value

CHANGE PARAM

On line
1 2 3 4 5

Category
H11
DISK-Std
DISK-Local
DISK-PRML
OPTICAL-Data

DELETE ALL
PARAMETERS

measure
r@level
rms
`sdev`
sigma
taa

of
1 2 3 4
A B C D

500 MS/s

AUTO



- Recall 574p037.PNL or configure the DSO as shown in 5.9.1.a. and for each Channel make the following change :
 - Input gain : 100mV/div
- Connect the test equipment as shown in Figure 5-8.
- Set the generator frequency to 300 kHz
- Set the generator amplitude to measure 0.800 mW on the power meter.
- Read the displayed generator output amplitude, and record it in the third column of Table 15.
- Repeat the above measurement for 1.1 MHz, 30.1 MHz, 250.1 MHz, 750.1 MHz & 1000.1 MHz. Record the generator output amplitude readout in the third column of Table 15.
- Disconnect the RF output of the HP8648B generator from the HP8482A power sensor.
- Connect the test equipment as shown in Figure 5-9.
- Set the generator frequency to 300 kHz.
- From the generator, apply the recorded generator signal amplitude to Channel 1.
- Press Clear Sweeps.
- Measure for at least 100 sweeps, record the average value of $sdev(1)$ in Table 15
- Repeat the above 3 steps for Channel 2, Channel 3 & Channel 4 substituting channel controls and input connector. Record the measurements in Table 15.
- Repeat the above measurement for all channels for 1.1 MHz, 30.1 MHz, 250.1 MHz, 750.1 MHz and 1000.1 MHz and record the values in Table 15.
- Calculate the ratio to .3 MHz for each frequency, $sdev_{1.1}/sdev_{0.3}$, $sdev_{30.1}/sdev_{0.3}$... $sdev_{1000.1}/sdev_{0.3}$, and compare the results to the limits in the test record.

b. DC 50Ω with Bandwidth Limiter On

- Recall **574p038.PNL** or configure the DSO


Panel Setups	:	Recall FROM DEFAULT SETUP
Channels Trace ON	:	Channel 1
Input Coupling	:	DC 50Ω
Global BWL	:	25 MHz
Input gain	:	100 mV/div.
Input offset	:	0 mV
Trigger setup	:	Edge
Trigger on	:	1
Slope line	:	Pos
Mode	:	Auto
Timebase	:	5 μsec/div.
Channel use	:	4
Record up	:	50 k
Cursors/Measure	:	Parameters
Mode	:	Custom
Statistics	:	On
Change parameters	:	
On line 1	:	Sdev of 1
On line 2	:	Freq of 1

- Connect the test equipment as shown in Figure 5-9.
- Set the generator frequency to **300 kHz**.
- Adjust the generator signal amplitude to measure **sdev(1) = 200 mV**.
- Set Timebase : **50 nsec/div.**
- Increase the generator frequency until **sdev(1) = 140 mV**. (typically 25 MHz)
- Press **Clear Sweeps**
- When **sdev(1) = 140 mV**, record **Freq(1)** in Table 16.
- Check that the frequency is within the limits specified in Table 16.

Performance Verification

11-Feb-97
15:12:14

5 μ s
100mV

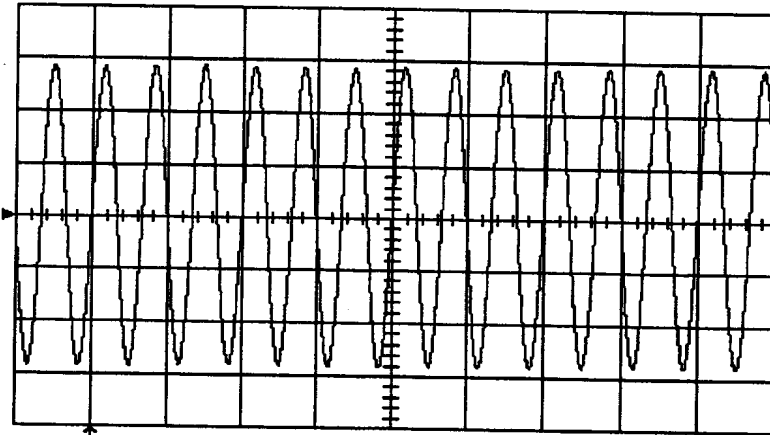

CHANNEL 1

Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω

V/div OFFset
NORMAL
ECL TTL

Global BWL
OFF 25MHz
200MHz

393 sweeps: average low high sigma
sdev(1) 201.0mV 200.8 201.2 0.1
Freq(1) μ s 299.999 kHz 298.890 301.176 0.299

Probe Atten
1
x2
x5
x10
x20

	5 μ s	BWL
1	.1 V	50 Ω
2	.1 V	50 Ω
3	.1 V	50 Ω
4	.1 V	50 Ω


1 DC 0mV

500 MS/s

AUTO

11-Feb-97
10:58:31

50 ns
100mV

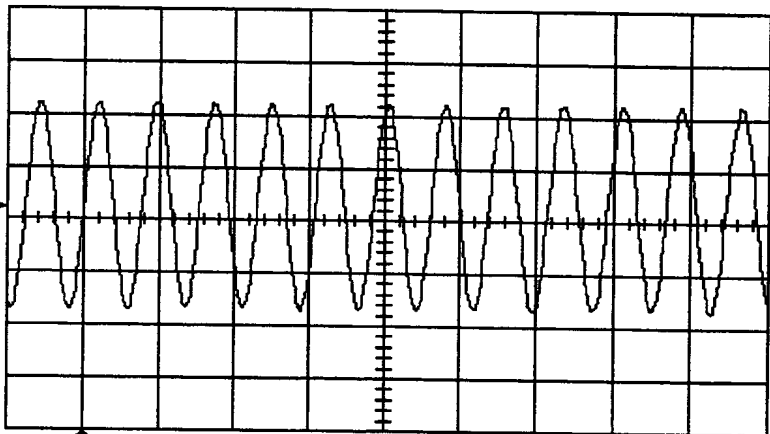

CHANNEL 1

Coupling
DC50 Ω
Grounded
DC1M Ω
Grounded
AC1M Ω

V/div OFFset
NORMAL
ECL TTL

Global BWL
OFF 25MHz
200MHz

916 sweeps: average low high sigma
sdev(1) 139.8mV 139.2 140.3 0.1
Freq(1) μ s 25.9990 MHz 25.8117 26.1759 0.0499

Probe Atten
<1
x2
x5
x10
x20

	50 ns	BWL
1	.1 V	50 Ω
2	.1 V	50 Ω
3	.1 V	50 Ω
4	.1 V	50 Ω

1 DC 0mV

500 MS/s


AUTO

▪ Set Global BWL : 200 MHz

- Set Timebase : 5 nsec/div.
- Increase the generator frequency until $sdev(1) = 140$ mV. (typically 200 MHz)

11-Feb-97
11:04:48

5 ns
100mV

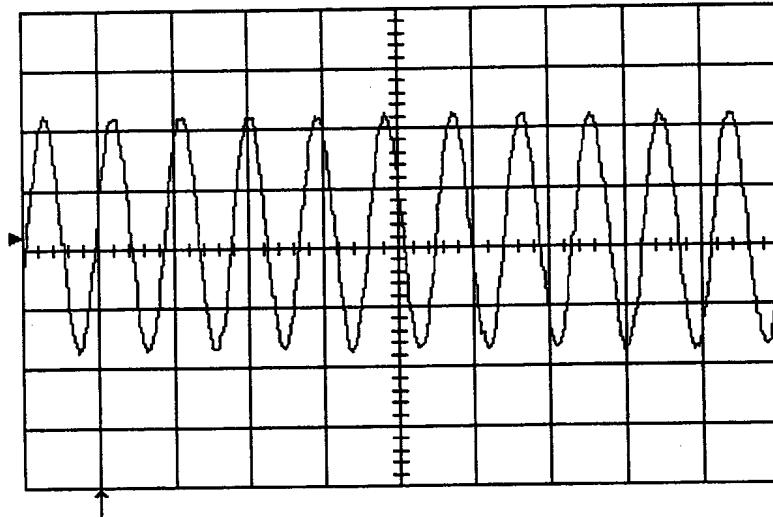

CHANNEL 1
Coupling
DC500
Grounded
DC1MΩ
Grounded
AC1MΩ
V/div OFFSET
NORMAL
ECL TTL
Global BWL
OFF 25MHz
200MHz

	113 sweeps:	average	low	high	sigma
sdev(1)		140.0mV	139.7	140.3	0.1
Freq(1)	ΠΠ	220.048 MHz	212.713	228.164	1.167

Probe Atten
x1
x2
x5
x10
x20

5 ns RIS BWL

1 .1 V 50Ω
2 .1 V 50Ω
3 .1 V 50Ω
4 .1 V 50Ω



1 DC 0mV

10 GS/s

AUTO

- Press Clear Sweeps
- When $sdev(1) = 140$ mV, record Freq(1) in Table 16.
- Repeat the 25 MHz and 200 MHz Bandwidth limiter tests for the other channels, substituting channel controls and input connector.
- Recall 574p039.PNL for Channel 2, 574p040.PNL for Channel3 574p041.PNL for Channel 4, or configure the DSO as shown in 5.9.1.b. and make the necessary changes.
- Record the test results in Table 16, and compare the results to the limits.



5.9.2 DC 1MΩ

- Recall 574p042.PNL or configure the DSO :

Panel Setups : Recall FROM DEFAULT SETUP
Channels Trace ON : Channel 1, Channel 2, Channel 3 & Channel 4
Input Coupling : DC 1MΩ on all 4 Channels
Input gain : 100 mV/div. on all 4 Channels
Input offset : 0 mV on all 4 Channels

Trigger setup : Edge
Trigger on : Line
Slope line : Pos
Mode : Auto
Timebase : 10 μsec/div.
Channel use : 4
Record up : 50 k

Cursors/Measure : Parameters
Mode : Custom
Statistics : On
Change parameters
On line 1 : Sdev of 1
On line 2 : Sdev of 2
On line 3 : Sdev of 3
On line 4 : Sdev of 4

- Connect the test equipment as shown in Figure 5-10.


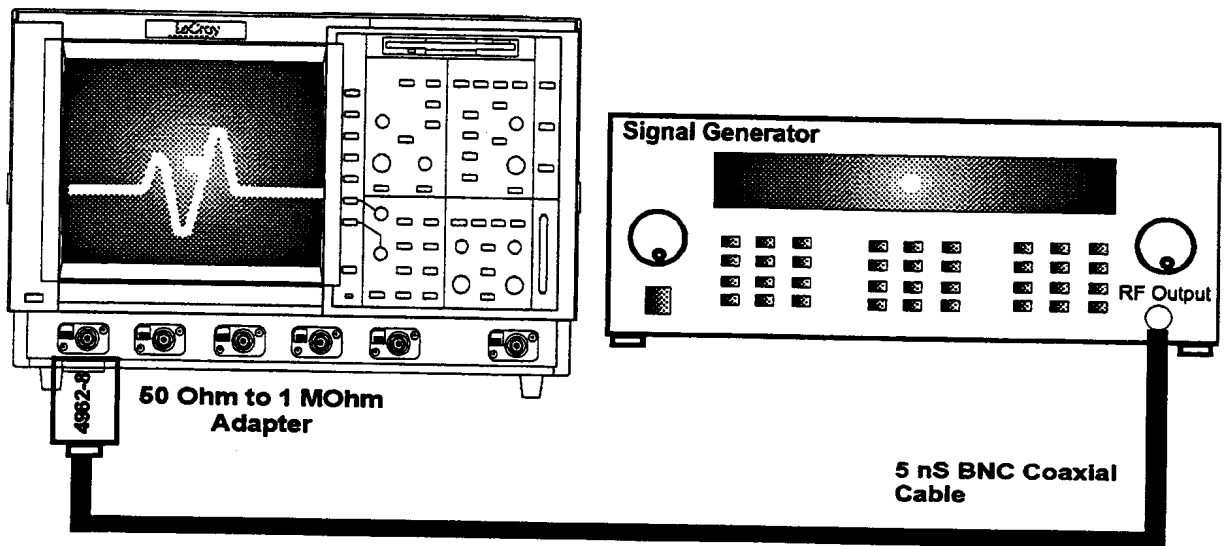


Figure 5-10 : 1MΩ Bandwidth Equipment Setup

- Set the generator frequency to 300 kHz.
- Adjust the generator signal amplitude to measure $sdev(1) = 200 \text{ mV}$.

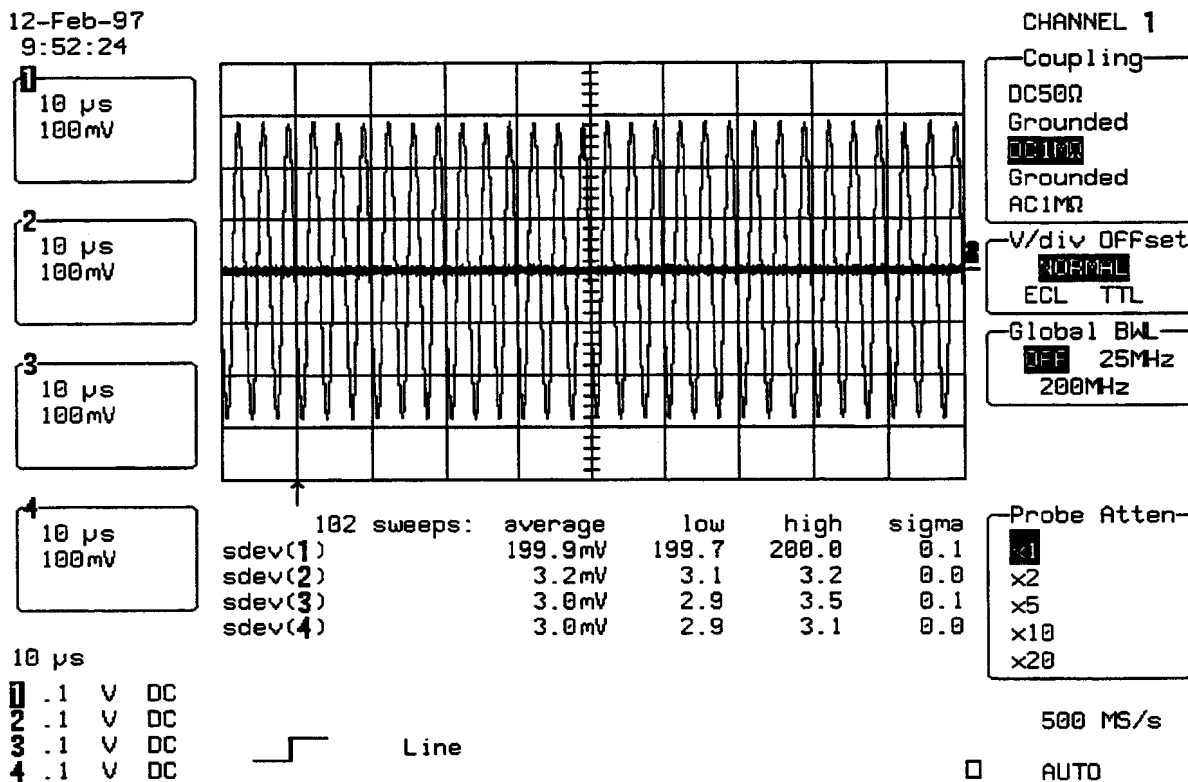

- Disconnect the coaxial cable from the 4962-9 adapter. Connect the test equipment as shown in Figure 5-11.

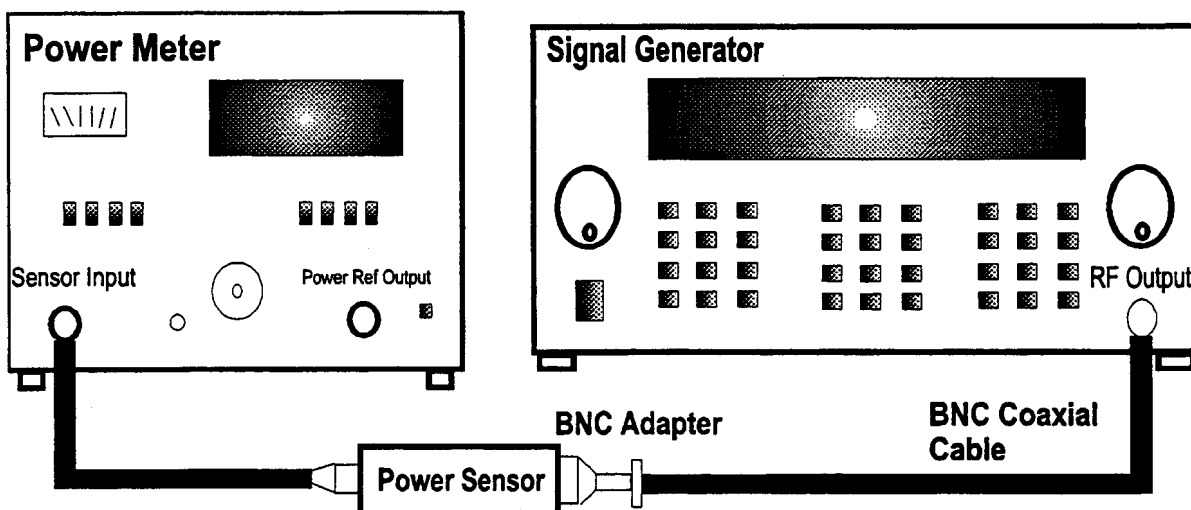



Figure 5-11 : Power Meter Equipment Setup

- Record the displayed power meter value in mW.



360 BMR 31 MAR 94

- Set the generator frequency to 400.1 MHz.
- Now fine adjust the generator amplitude output until the power meter readout indicates the value measured just above at 300 kHz.
- Reconnect the signal generator to DSO Channel 1, as shown in Figure 5-10.
- Press Clear Sweeps.
- Measure for at least 100 sweeps, record the average value of sdev(1) in Table 17.
- Repeat the above steps for Channel 2, Channel 3 & Channel 4, substituting channel controls and input connector.
- Record the sdev measurements in Table 17.
- Calculate the ratio $sdev_{400.1}/sdev_{0.3}$ for each Channel, and test each value against the limits shown in the test record.

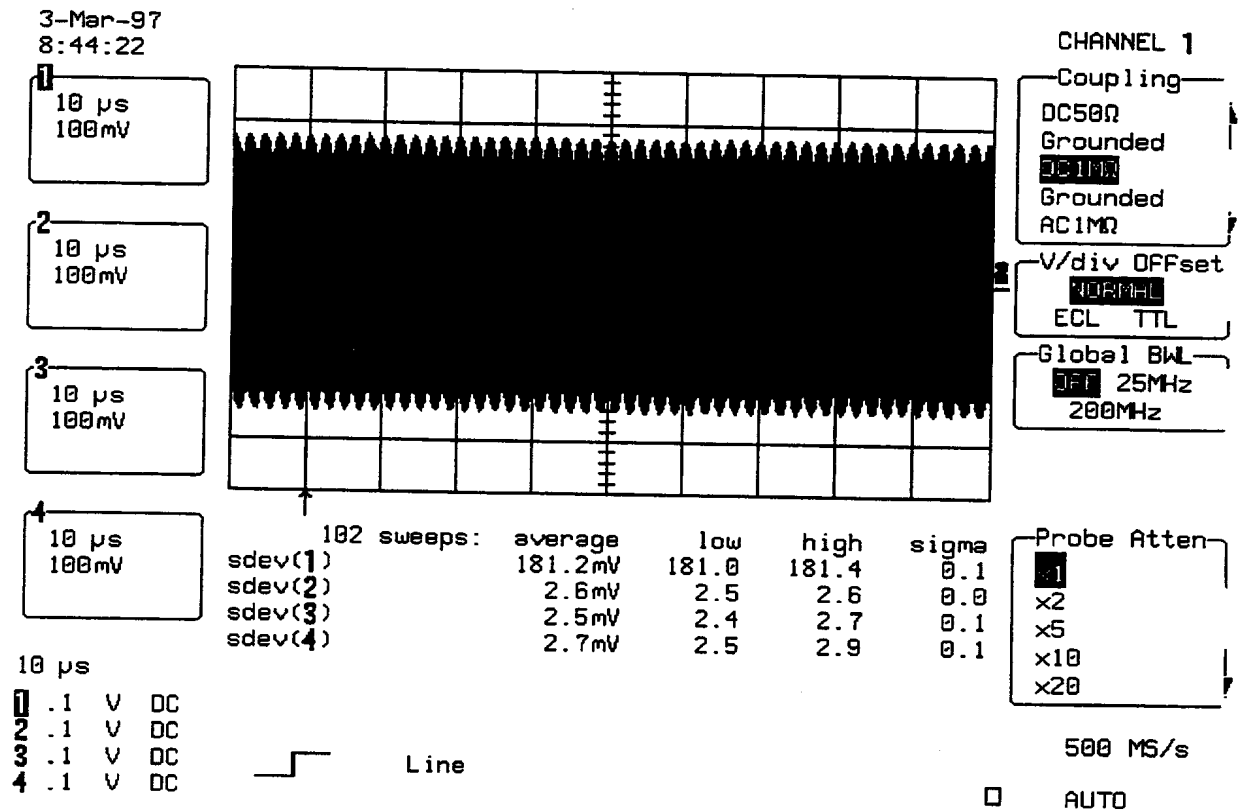

5.10 Trigger Level

5.10.1 Description

The trigger capabilities are tested for several cases of the standard edge trigger :

- Channel (internal), and External Trigger sources
- Three DC levels : -3, 0, +3 major screen divisions
- DC, HFREJ coupling
- Positive and negative slopes

5.10.2 Channel Trigger at 0 Division Threshold

a. DC Coupling

Recall **574p043.PNL** or configure the DSO :

Panel Setups : **Recall FROM DEFAULT SETUP**
Channels Trace ON **Channel 1, Channel 2, Channel 3 & Channel 4**
Input Coupling : **DC 50Ω on all 4 Channels**
Input gain : **100 mV/div. on all 4 Channels**
Input offset : **0 mV on all 4 Channels (use show status to verify)**

Trigger setup : **Edge**
Trigger on : **1**
Slope 1 : **Pos**
Coupling : **DC**
Mode : **Auto**
Set Trigger level : **DC 0.0 mV**
Pre-Trigger Delay : **50 %**


Timebase : **0.1 msec/div.**
Record up to : **50 k samples**

Channels Trace OFF **Channel 1, Channel 2, Channel 3 & Channel 4**


Zoom+Math Trace ON **A, B, C & D**

Select Math Setup

For Math : **Use at most 5000 points**
Redefine A, B, C, D **Channel 1, Channel 2, Channel 3 & Channel 4**
Use Math ? : **Yes**
Math Type : **Average**
Avg. Type : **Summed**
For : **10 sweeps**




- Set the output of the LeCroy LW420 or equivalent audio frequency signal generator to 1 kHz.
- Connect the output of the generator to Channel 1 through a 50 Ohm coaxial cable and adjust the sine wave output amplitude to get 8 divisions peak to peak .
- Select Cursors/Measure : **Cursors, Time, Absolute**
- Use the "cursor position" knob, to move the Time marker at 0.0 μ s

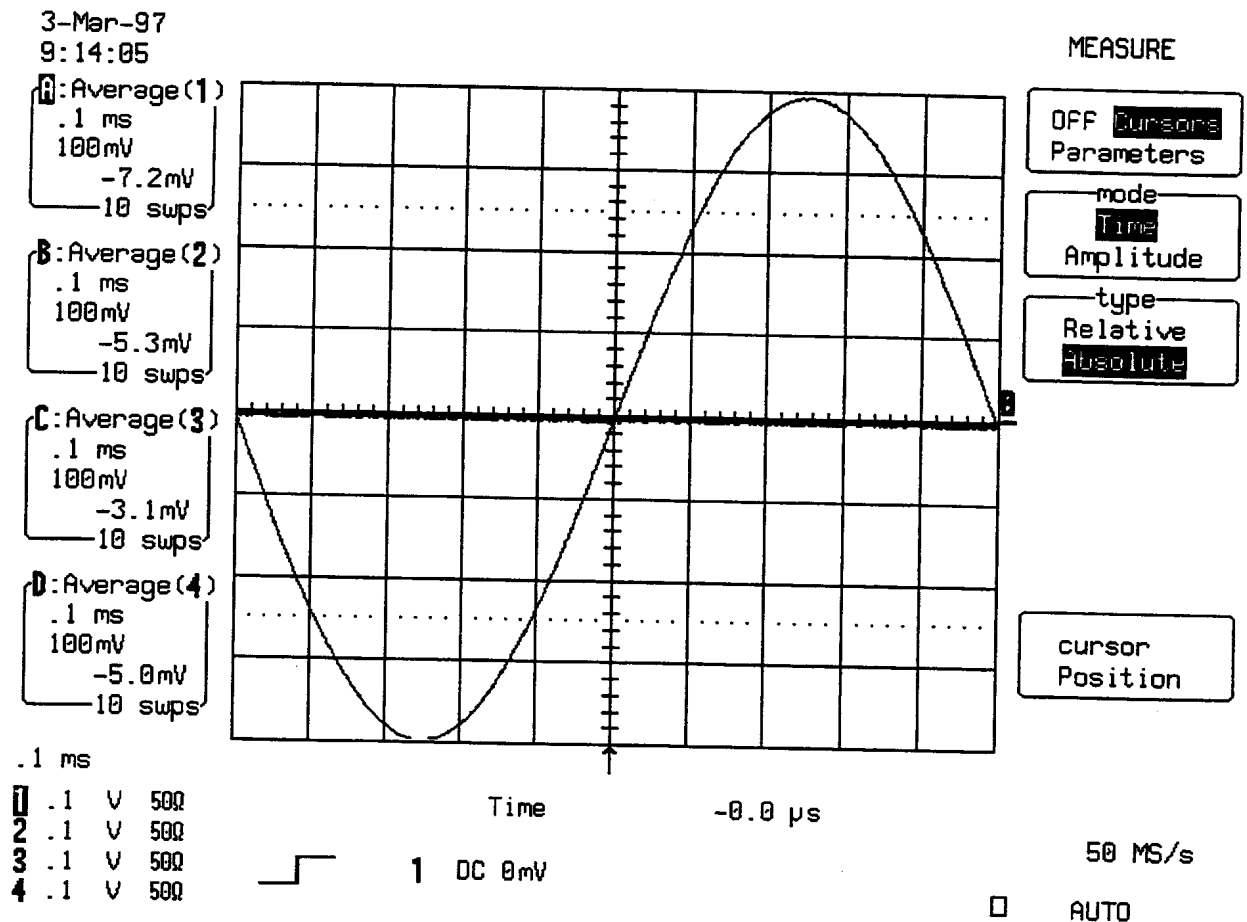

- Press **Clear Sweeps**,
- Acquire 10 sweeps and record in Table 18 the level readout displayed below 100 mV in the icon 1, at top left.
- Compare the test results to the corresponding limit in the test record.
- Set Trigger Slope 1 : **Neg**

- Acquire 10 sweeps and record in Table 18 the level readout displayed below 100 mV in the icon 1, at top left.

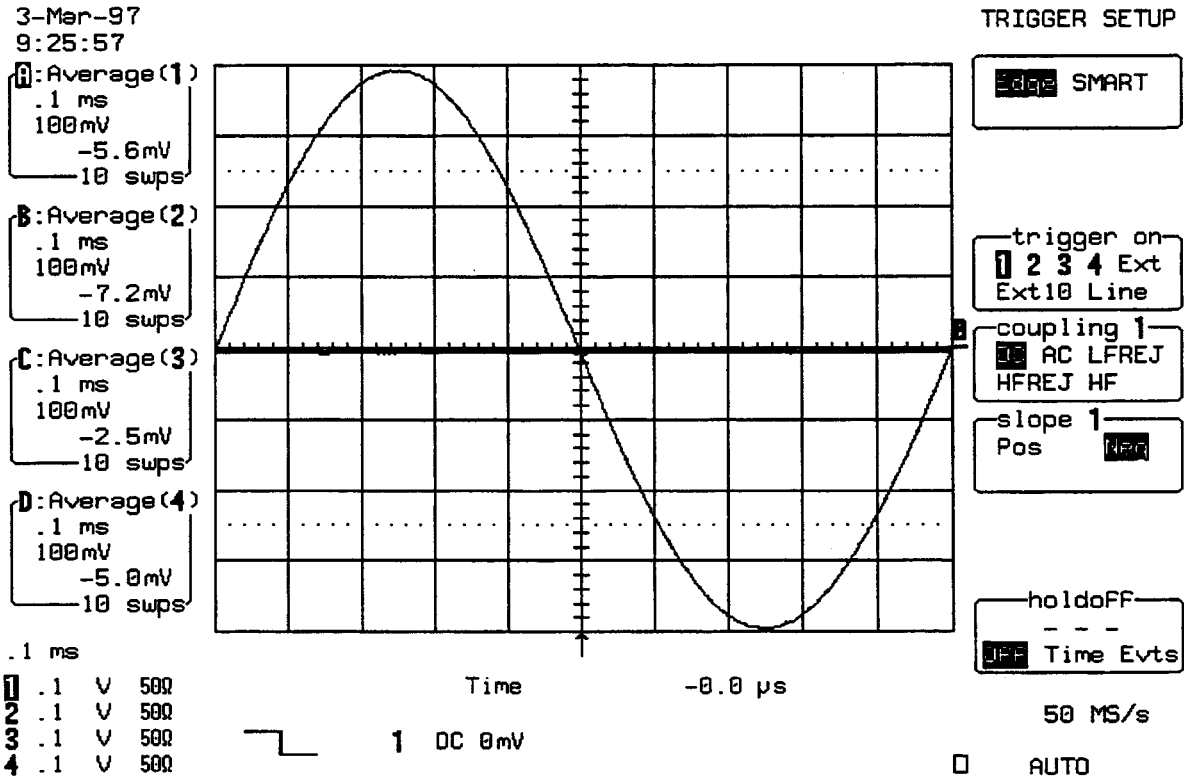

b. HFREJ Coupling

- Set Coupling : HFREJ
- Acquire 10 sweeps and record in Table 19 the level readout displayed below 100 mV in the icon 1, at top left.
- Set Trigger Slope 1 : Pos *BMR 31MARCH*
- Acquire 10 sweeps and record in Table 19 the level readout displayed below 100 mV in the icon 1, at top left.
- Repeat steps 5.10.2.a. and 5.10.2.b. for all input channels, substituting channel controls (DC, HFREJ, Pos, Neg) and input connector.
Recall 574p044.PNL for Channel 2, 574p045.PNL for Channel 3, 574p046.PNL for Channel 4, or select Trigger on the Channel under test.
The Trigger level is displayed in either the icon 2, 3 or 4
- Record the measurements in Table 18 & 19 and compare the test results to the corresponding limits in the test record.


5.10.3 Channel Trigger at +3 Divisions Threshold

a. DC Coupling

- Recall 574p047.PNL or configure the DSO as shown in 5.10.2.a and for each Channel make the following change :

Set Trigger level : DC +300 mV


- Connect the output of the generator to Channel 1 through a 50 Ohm coaxial cable.
- Press Clear Sweeps,
- Acquire 10 sweeps and record in Table 18 the level readout displayed below 100 mV in the icon 1, at top left.
- Compare the test results to the corresponding limit in the test record.

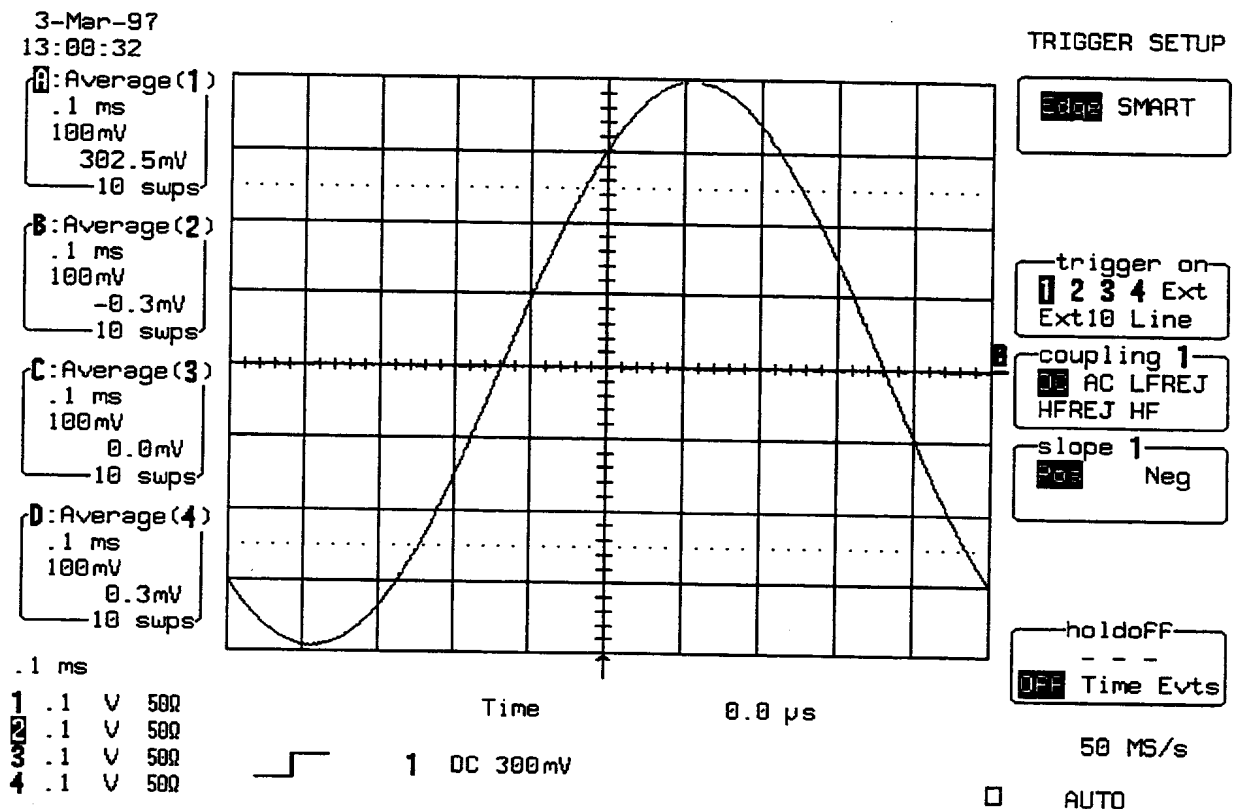

- Set Trigger Slope 1 : Neg
- Acquire 10 sweeps and record in Table 18 the level readout displayed below 100 mV in the icon 1, at top left.

b. HFREJ Coupling

- Set Coupling : HFREJ
- Acquire 10 sweeps and record in Table 19 the level readout displayed below 100 mV in the icon 1, at top left.

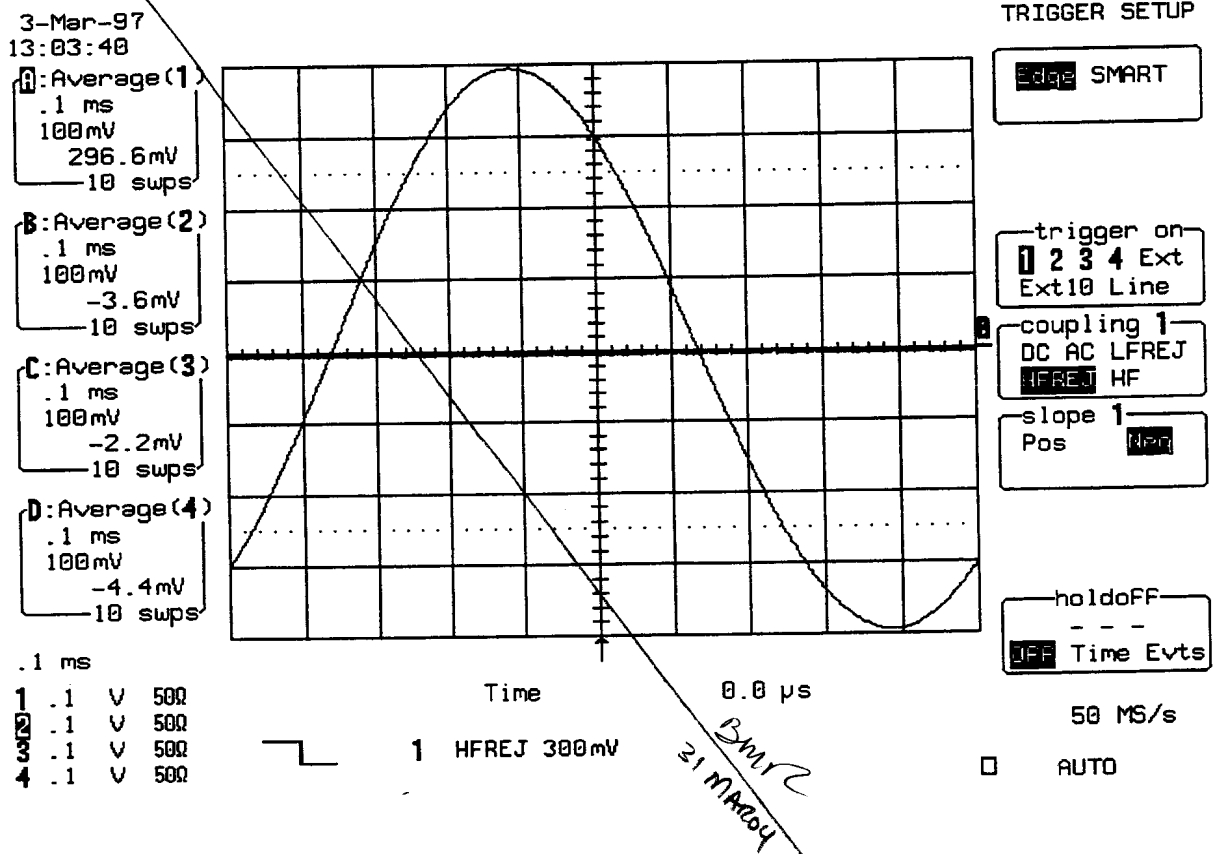

- Set Trigger Slope 1 : Pos
- Acquire 10 sweeps and record in Table 19 the level readout displayed below 100 mV in the icon 1, at top left.
- Repeat steps 5.10.3.a. and 5.10.3.b. for all input channels, substituting channel controls (DC, HFREJ, Pos, Neg) and input connector. Recall **574p048.PNL** for Channel 2, **574p049.PNL** for Channel 3, **574p050.PNL** for Channel 4, or select Trigger on the Channel under test. The Trigger level is displayed in either the icon 2, 3 or 4
- Record the measurements in Table 18 & 19 and compare the test results to the corresponding limits in the test record.




5.10.4 Channel Trigger at -3 Divisions Threshold

a. DC Coupling

- Recall 574p051.PNL or configure the DSO as shown in 5.10.2.a and for each channel make the following change :

Set Trigger level : DC -300 mV


- Connect the output of the generator to Channel 1 through a 50 Ohm coaxial cable.
- Press Clear Sweeps,
- Acquire 10 sweeps and record in Table 18 the level readout displayed below 100 mV in the icon 1, at top left.
- Compare the test results to the corresponding limit in the test record.

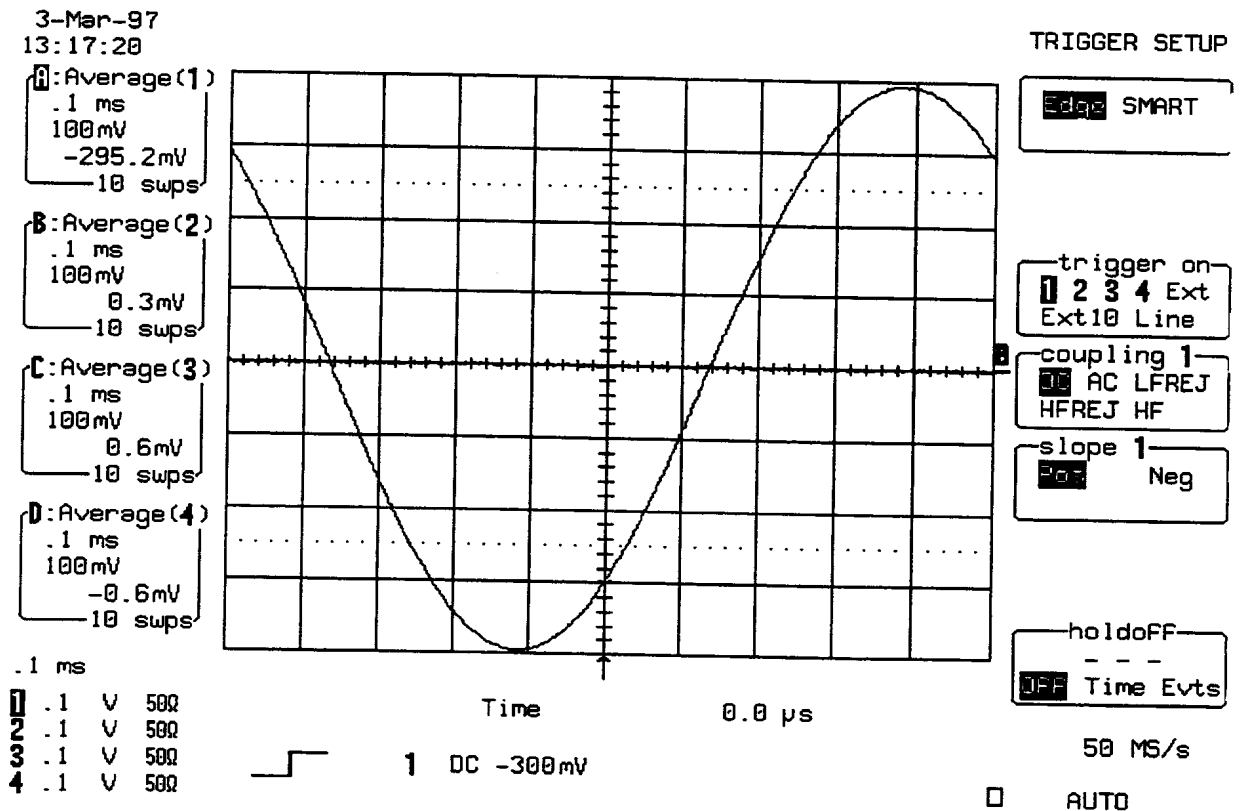

- Set Trigger Slope 1 : Neg
- Acquire 10 sweeps and record in Table 18 the level readout displayed below 100 mV in the icon 1, at top left.

b. HFREJ Coupling

- Set Coupling : HFREJ
- Acquire 10 sweeps and record in Table 19 the level readout displayed below 100 mV in the icon 1, at top left.

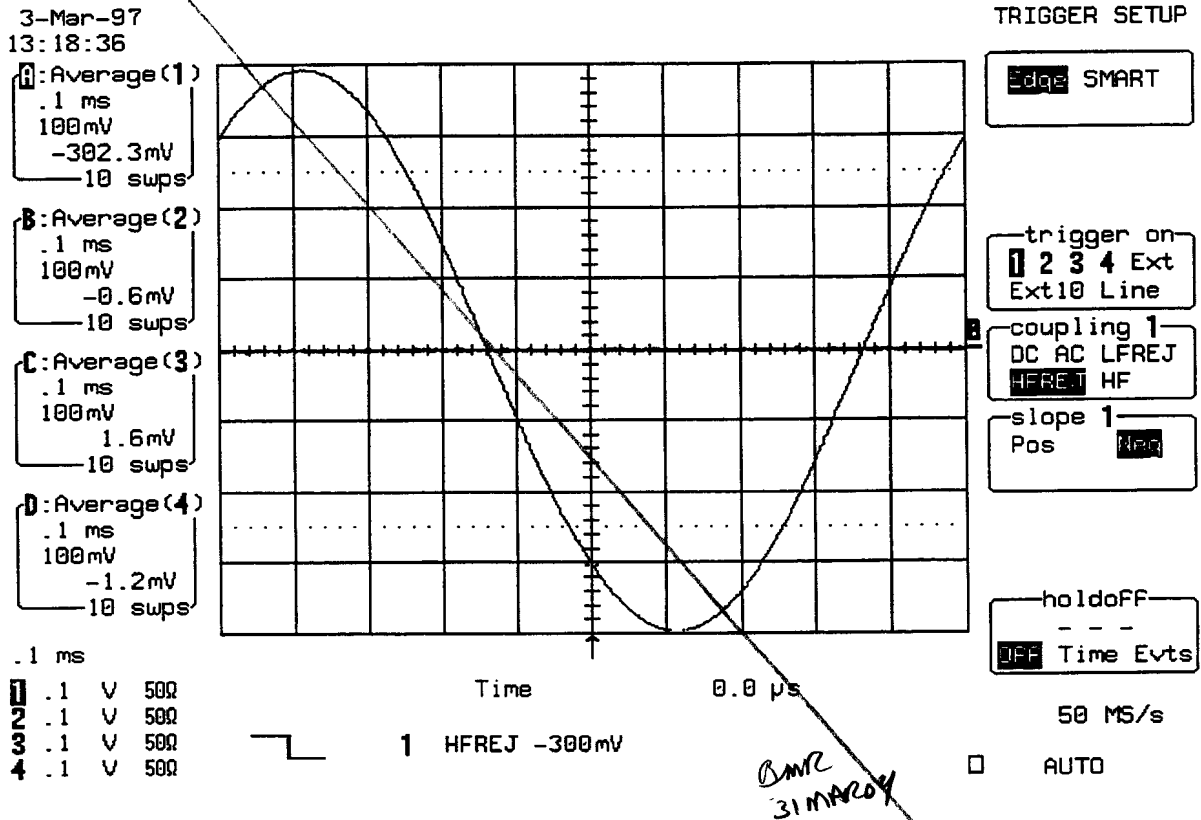

- Set Trigger Slope 1 : Pos
- Acquire 10 sweeps and record in Table 19 the level readout displayed below 100 mV in the icon 1, at top left.
- Repeat steps 5.10.4.a. and 5.10.4.b. for all input channels, substituting channel controls (DC, HFREJ, Pos, Neg) and input connector. Recall 574p052.PNL for Channel 2, 574p053.PNL for Channel 3, 574p054.PNL for Channel 4, or select Trigger on the Channel under test. The Trigger level is displayed in either the icon 2, 3 or 4
- Record the measurements in Table 18 & 19 and compare the test results to the corresponding limits in the test record.



5.10.5 External Trigger at 0 Division Threshold

a. DC Coupling

- Recall 574p055.PNL or configure the DSO :

Panel Setups : Recall FROM DEFAULT SETUP
Channel Trace ON Channel 2
Input Coupling : DC 50 Ω
Input gain : 100 mV/div.
Input offset : 0 mV

Trigger setup : Edge
Trigger on : Ext
Slope Ext : Pos
Coupling Ext : DC
Set Trigger level : 0.0 mV
External : DC 1M Ω
Mode : Auto
Pre-Trigger Delay : 50 %
Timebase : 0.1 msec/div.
Record up to : 50 k samples

Channel Trace OFF Channel 2
Zoom+Math Trace ON B
Select Math Setup
For Math : Use at most 5000 points
Redefine B : Channel 2
Use Math ? : Yes
Math Type : Average
Avg. Type : Summed
For : 10 sweeps

- Connect the test equipment as shown in Figure 5-12.
- Set the output of the LeCroy LW420 or equivalent audio frequency signal generator to 1 kHz.
- Adjust the sine wave output amplitude to get 8 divisions peak to peak .
- Select Cursors/Measure : Cursors, Time, Absolute
- Use the "cursor position" knob, to move the Time marker at 0.0 μ s


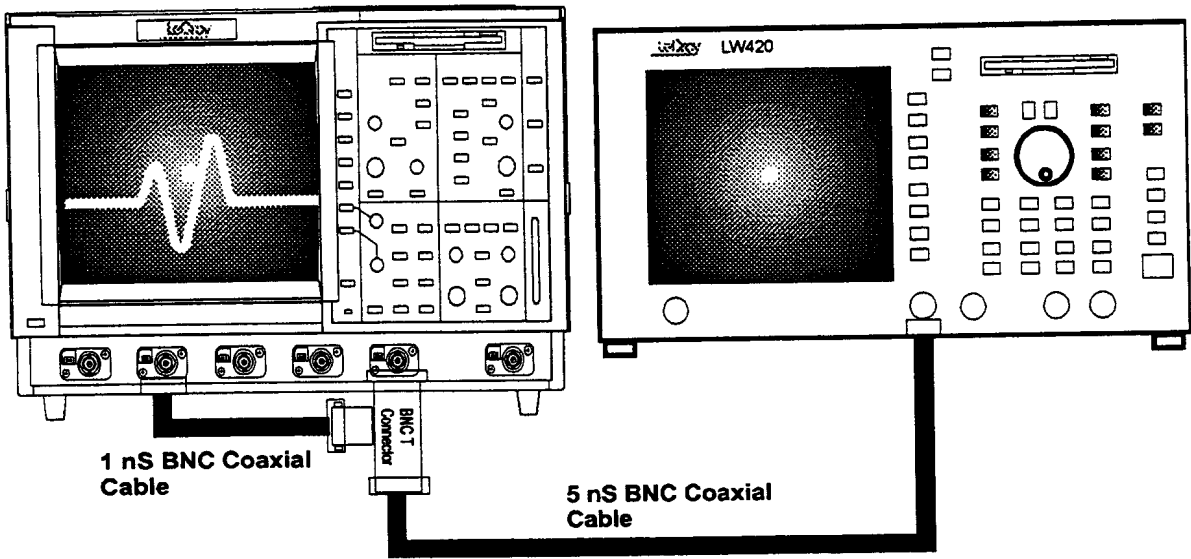


Figure 5-12 : External Trigger Equipment Setup

- Press Clear Sweeps,
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.




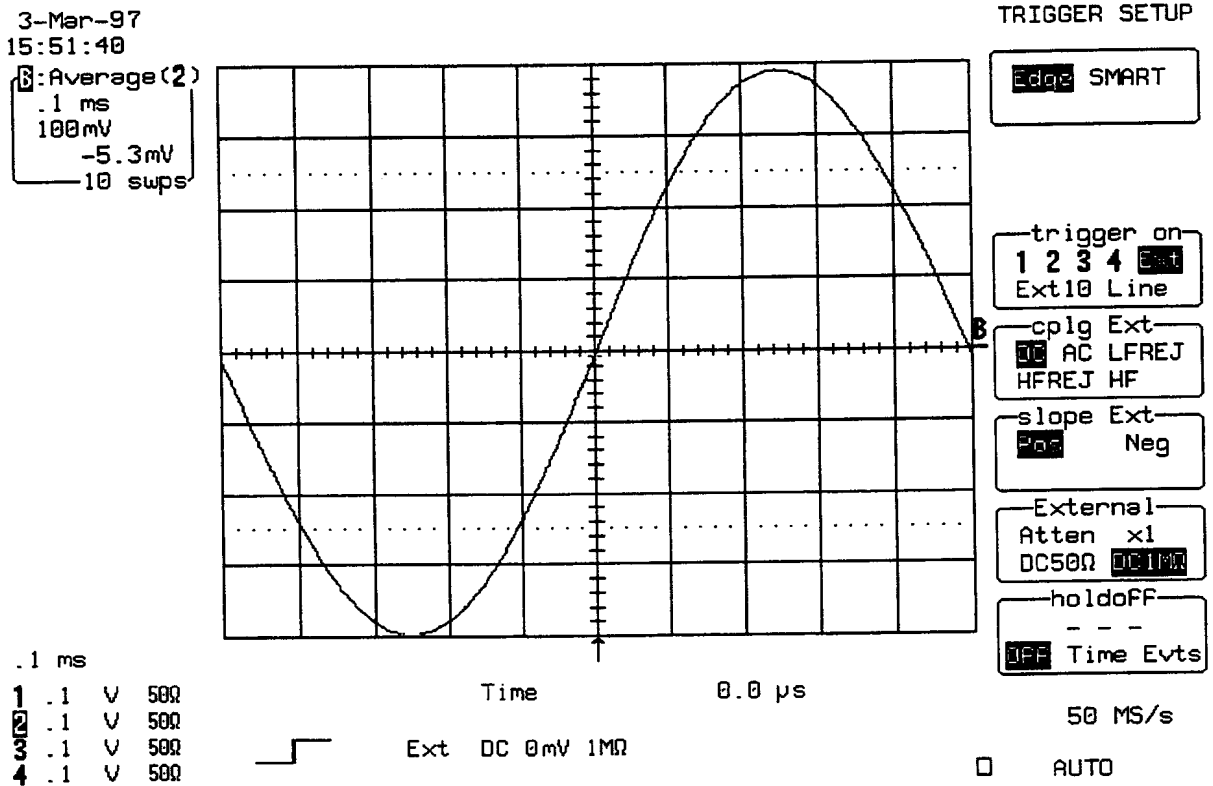

- Set Trigger Slope Ext : Neg
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

b. HFREJ Coupling

- Set Coupling Ext : HFREJ
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

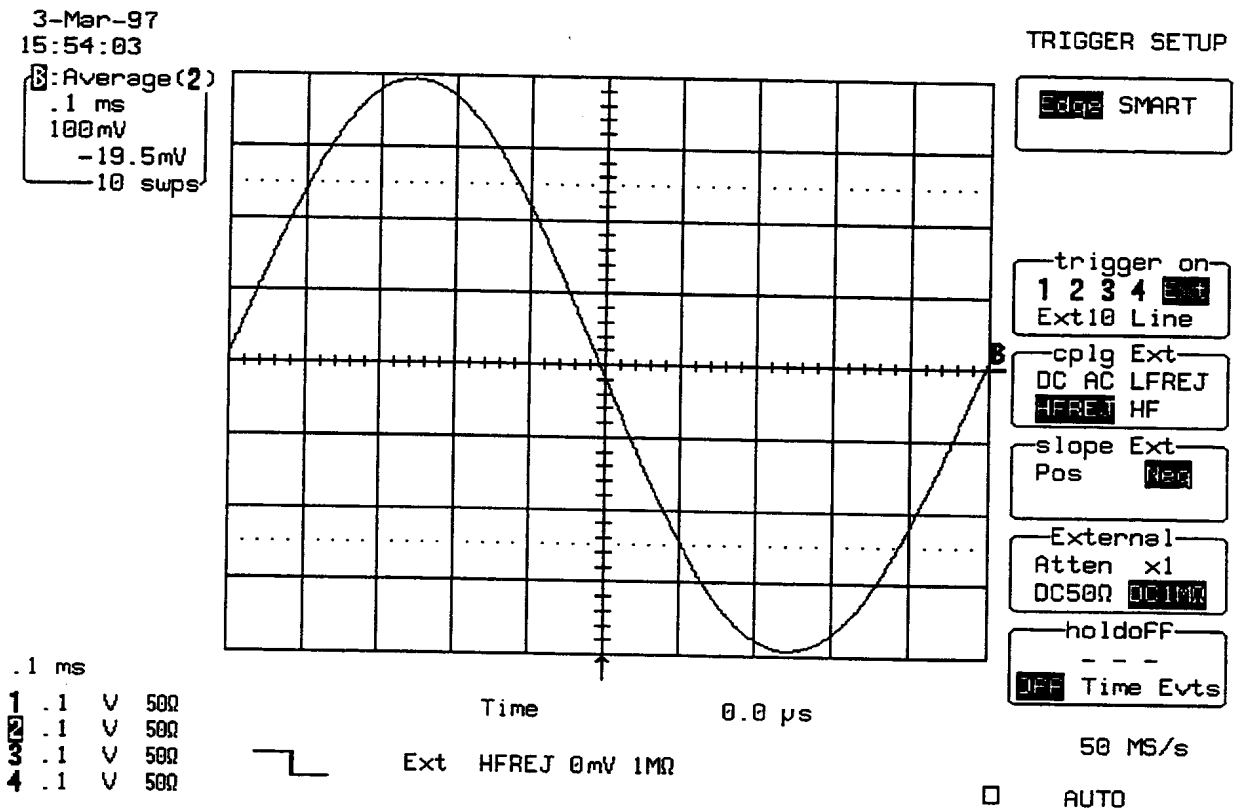

- Set Trigger Slope Ext : Pos
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.


5.10.6 External Trigger at +3 Divisions Threshold

a. DC Coupling

- Recall 574p056.PNL or configure the DSO as shown in 5.10.5.a and make the following change :

Set Ext Trigger level : DC +300 mV

- Connect the test equipment as shown in Figure 5-12.
- Press Clear Sweeps,
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

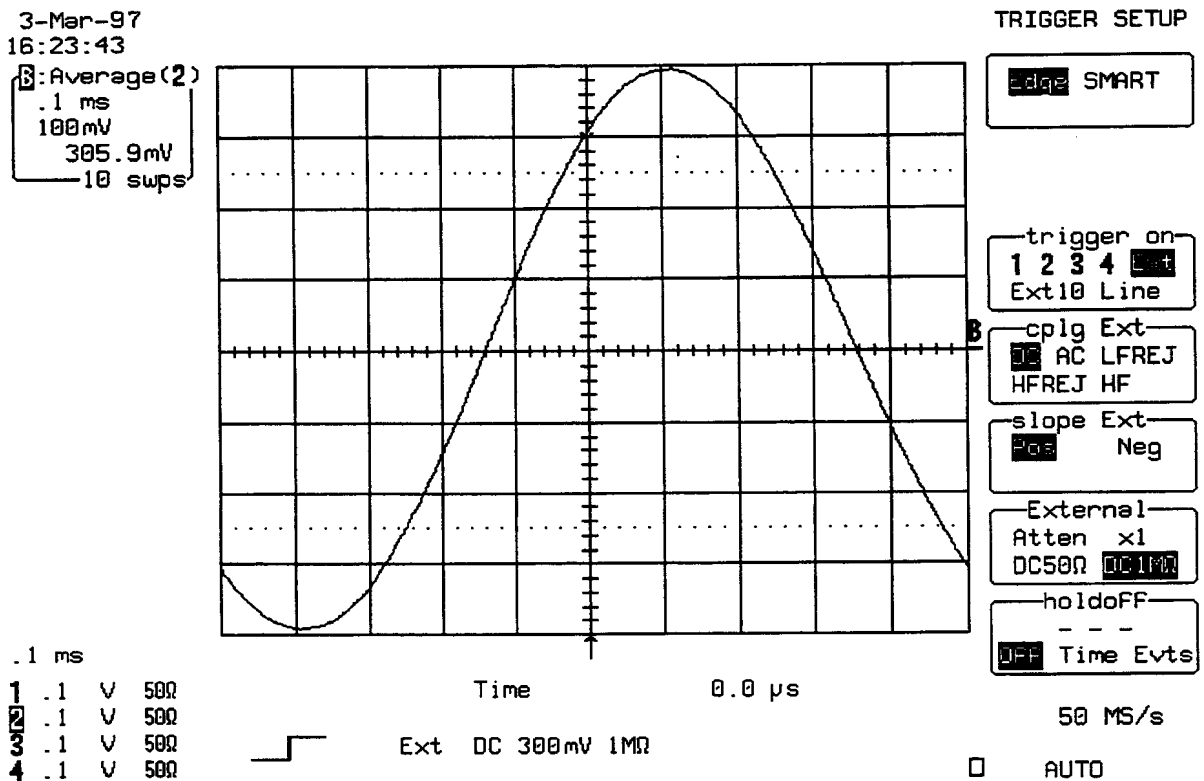


- Set Trigger Slope Ext : Neg
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.



b. HFREJ Coupling

- Set Ext Coupling : HFREJ
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

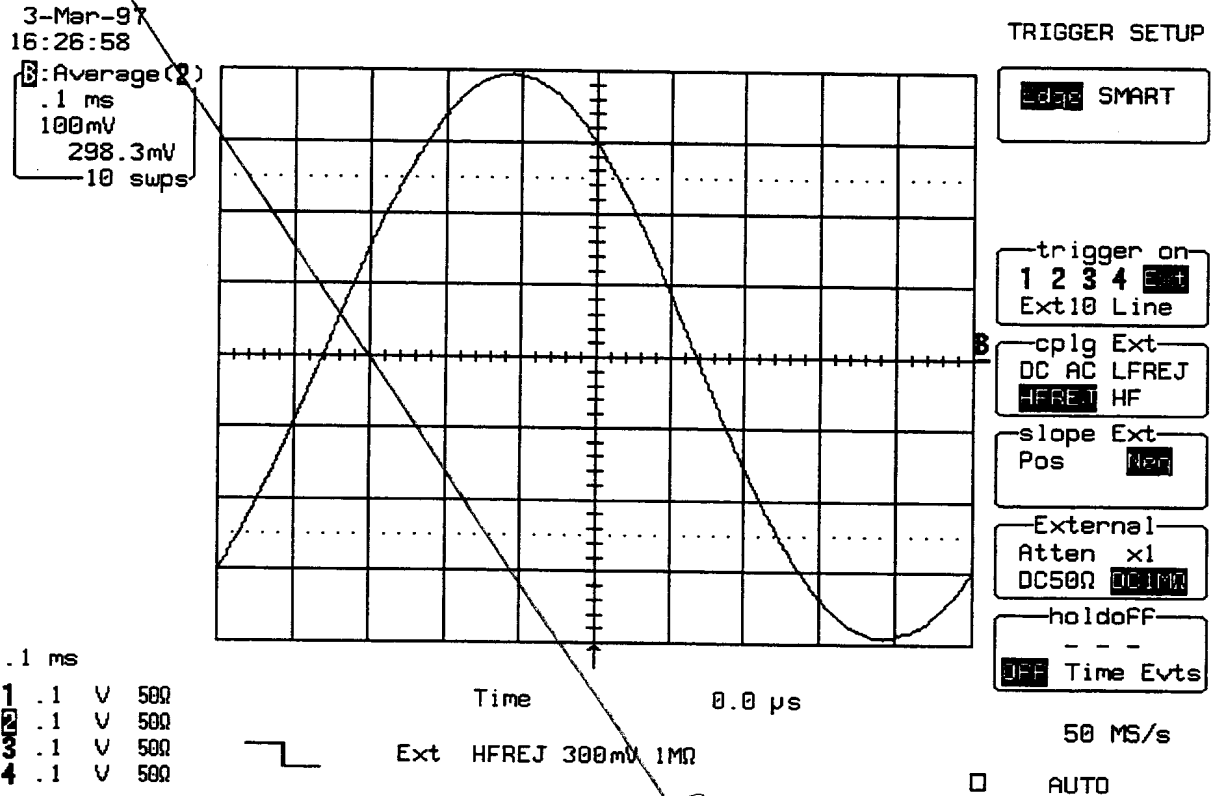

- Set Trigger Slope Ext : Pos
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.


5.10.7 External Trigger at -3 Divisions Threshold

a. DC Coupling

- Recall 574p057.PNL or configure the DSO as shown in 5.10.5.a and make the following change :

Set Ext Trigger level : DC -300 mV

- Connect the test equipment as shown in Figure 5-12.
- Press Clear Sweeps.
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

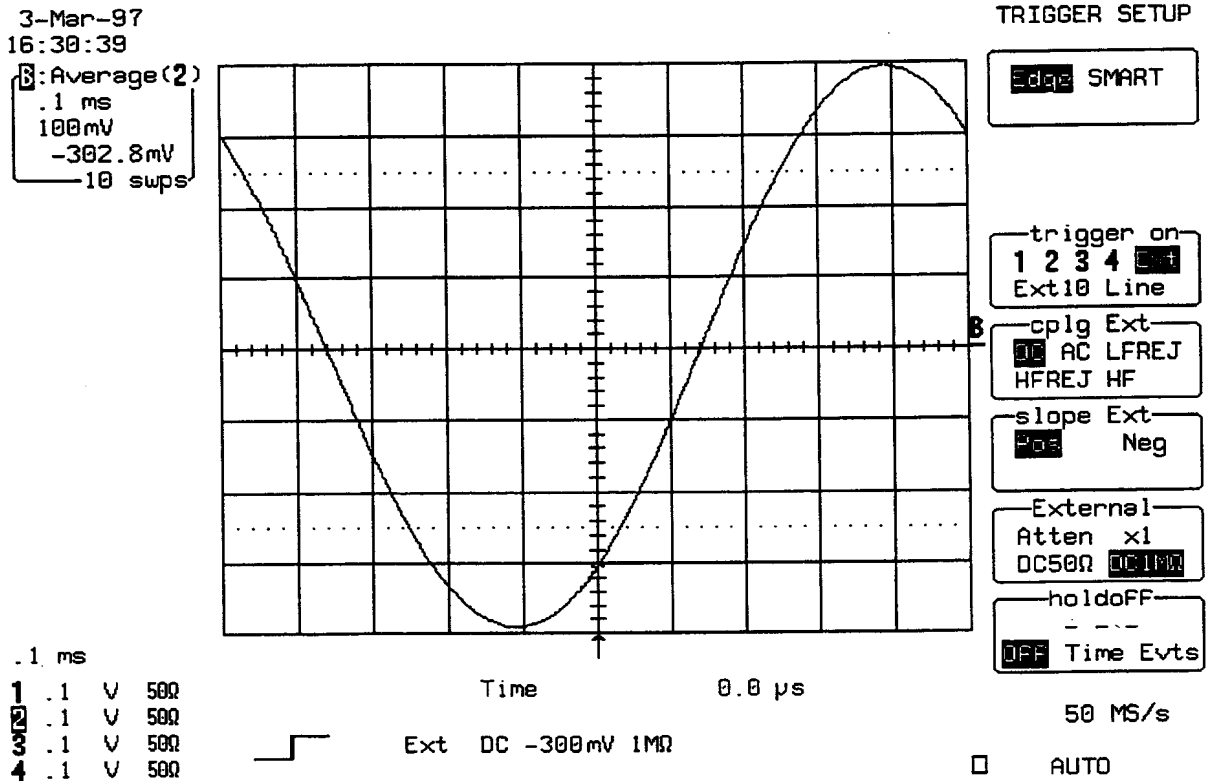


- Set Trigger Slope Ext : Neg
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.



b. HFREJ Coupling

- Set Ext Coupling : HFREJ
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

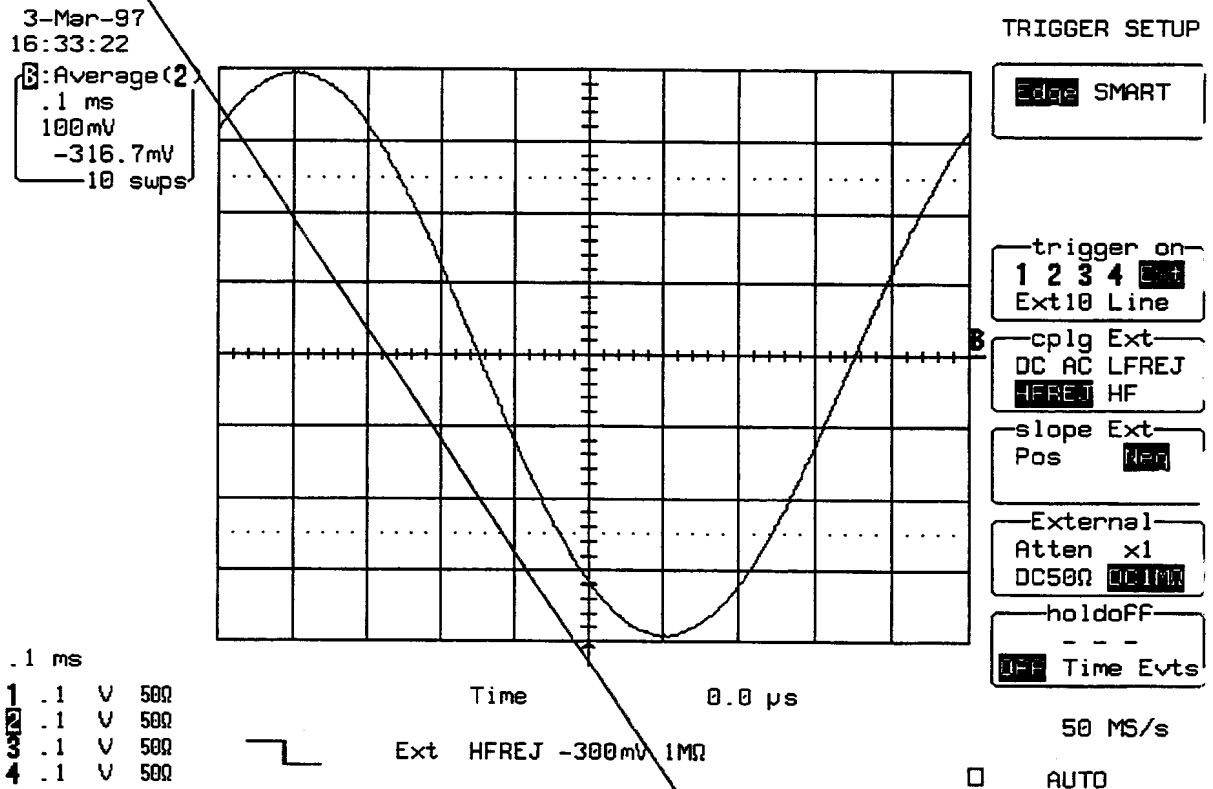

- Set Trigger Slope Ext : Pos
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

5.10.8 External/10 Trigger at 0 Division Threshold

a. DC Coupling

- Recall 574p058.PNL or configure the DSO :

Panel Setups : Recall FROM DEFAULT SETUP
Channel Trace ON Channel 2
Input Coupling : DC 50 Ω
Input gain : 1V/div
Input offset : 0 mV

Trigger setup : Edge
Trigger on : Ext/10
Slope Ext/10 : Pos
Mode : Auto
Coupling : DC
Set Trigger level : 0.0 mV
External : DC 1M Ω
Pre-Trigger Delay : 50 %
Timebase : 0.1 msec/div.
Record up to : 50 k samples

Channel Trace OFF Channel 2


Zoom+Math Trace ON B

Select Math Setup


For Math : Use at most 5000 points
Redefine B : Channel 2
Use Math ? : Yes
Math Type : Average
Avg. Type : Summed
For : 10 sweeps

BMR
31
mar 09

- Connect the test equipment as shown in Figure 5-12.
- Set the output of the LeCroy LW420 or equivalent audio frequency signal generator to 1 kHz.
- Adjust the sine wave output amplitude to get 8 divisions peak to peak .
- Select Cursors/Measure : Cursors, Time, Absolute
- Use the "cursor position" knob, to move the Time marker at 0.0 μ s



- Press Clear Sweeps,
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

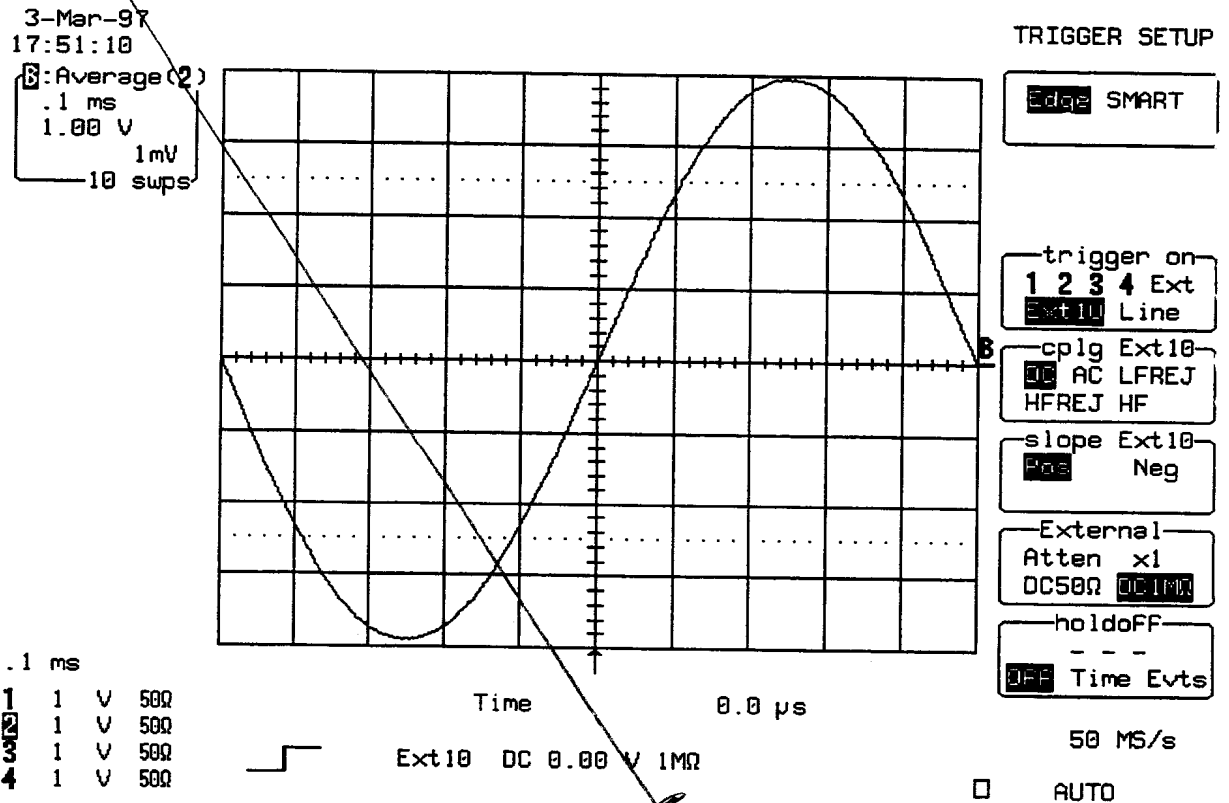


- Set Trigger Slope Ext/10 : Neg
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

*Blank
31 MAR 04*

b. HFREJ Coupling

- Set Coupling Ext/10 : HFREJ
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

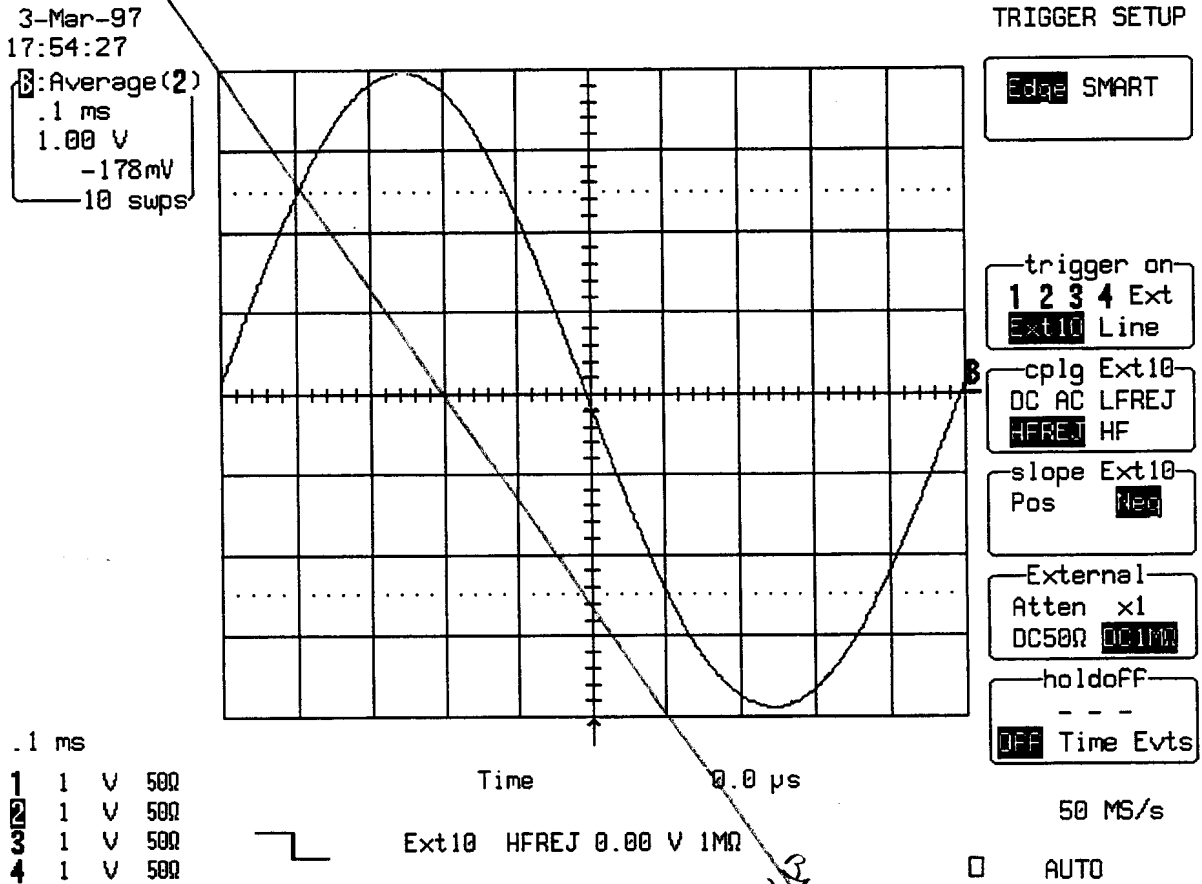

- Set Trigger Slope Ext/10 : Pos
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.



5.10.9 External/10 Trigger at +3 Divisions Threshold

a. DC Coupling


- Recall 574p059.PNL or configure the DSO as shown in 5.10.8.a and make the following change :

Set Ext/10 Trigger level : DC +3 V

- Connect the test equipment as shown in Figure 5-12.
- Press Clear Sweeps,
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

3-Mar-97
18:02:42
Average(2)
.1 ms
1.00 V
3.077 V
10 sups

*BmC
31MAR04*

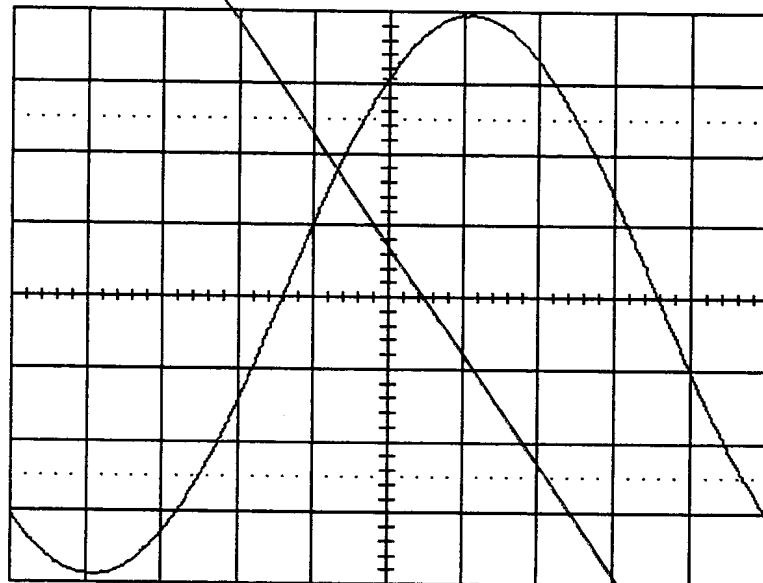

.1 ms
1 1 V 50Ω
2 1 V 50Ω
3 1 V 50Ω
4 1 V 50Ω

Time 0.0 μs
Ext10 DC 3.00 V 1MΩ

TRIGGER SETUP

Edge SMART

trigger on
1 2 3 4 Ext
Ext10 Line

cp1g Ext10
AC LFREJ
HFREJ HF

slope Ext10
Neg

External
Atten x1
DC50Ω 0.1MΩ

holdOFF
Time Evts


50 MS/s

AUTO

- Set Trigger Slope Ext/10 : Neg
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

b. HFREJ Coupling

- Set Ext/10 Coupling: HFREJ
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

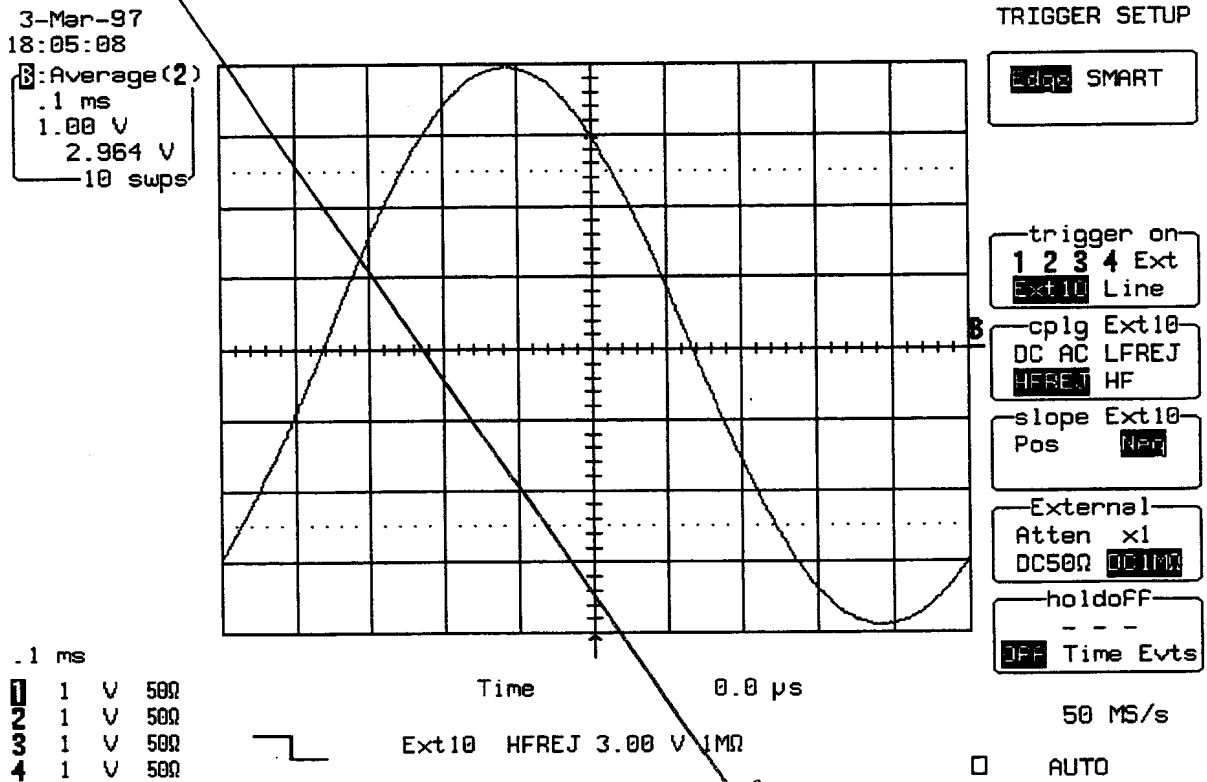

- Set Trigger Slope Ext/10 : Pos
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.



5.10.10 External/10 Trigger at -3 Divisions Threshold

a. DC Coupling


- Recall 574p060.PNL or configure the DSO as shown in 5.10.5.a and make the following change :

Set Ext/10 Trigger level : DC -3 V

- Connect the test equipment as shown in Figure 5-12.
- Press Clear Sweeps.
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

3-Mar-97
18:09:13
 Average (2)
 .1 ms
 1.00 V
 -3.037 V
 10 swps

*BMR
31 MAR 04*

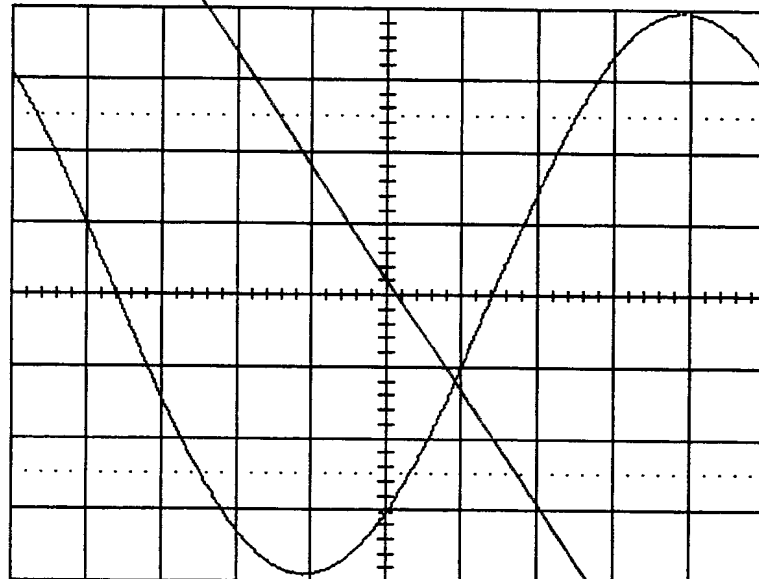

.1 ms
 1 V 50Ω
 2 1 V 50Ω
 3 1 V 50Ω
 4 1 V 50Ω

Time 0.0 μs
 Ext10 DC -3.00 V 1MΩ

TRIGGER SETUP

SMART

trigger on
 1 2 3 4 Ext
 Line

cp1g Ext10-
 AC LFREJ
 HFREJ HF

slope Ext10-
 Pos Neg

External
 Atten x1
 DC50Ω DC1MΩ

holdoff
 OFF Time Evts

50 MS/s

AUTO


- Set Trigger Slope Ext/10 : Neg
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.

b. HFREJ Coupling

- Set Ext/10 Coupling: **HFREJ**
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.

6-Mar-97
9:40:41

3: Average (2)
.1 ms
1.00 V
-3.087 V
10 swps

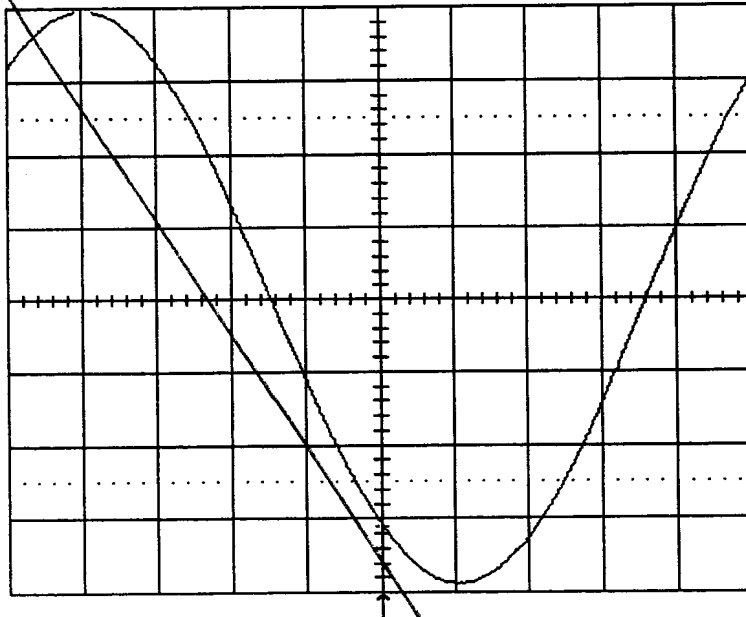

TRIGGER SETUP

Edge SMART

trigger on
1 2 3 4 Ext
Ext10 Line

cplg Ext10
DC AC LFREJ
HFREJ HF

slope Ext10
Pos Neg

External
Atten x1
DC500 DC1M

holdoff
Time Evts

.1 ms

1	1	V	500
2	1	V	500
3	1	V	500
4	1	V	500

Time 0.0 μ s

Ext10 HFREJ -3.00 V 1M Ω

50 MS/s

AUTO

BMR
31 MAR 04

- Set Trigger Slope Ext/10 : **Pos**
- Acquire 10 sweeps and record in Table 20 the level readout displayed below 100 mV in the icon 2, at top left.
- Compare the test results to the corresponding limit in the test record.



5.11 Smart Trigger

5.11.1 Trigger on Pulse Width 10 nsec

a. Pulse Width < 10 nsec

- Recall 574p061.PNL or configure the DSO
 - Panel Setups : Recall FROM DEFAULT SETUP
 - Channels trace ON Channel 1
 - Input coupling : DC 50Ω
 - Input gain : .5 V/div.
 - Input offset : 0 mV
 - Trigger setup : Smart
 - Setup Smart Trigger Glitch
 - Trigger on : 1
 - At the end of : Neg.
 - Width < 10 nsec : On
 - Width > 10 nsec : Off
 - Trigger mode : Norm
 - Timebase : 5 nsec/div.

- Connect the RF output of the HP8648B generator through a 5ns 50 Ohm BNC coaxial cable into Channel 1.

- Set the generator frequency to 100 MHz. Adjust the generator output amplitude to get 5 divisions peak to peak .

- Check that the scope Triggers. Record the test result in Table 21.

- Set Width < 10 nsec Off and Width > 10 nsec ON

- Check that the scope **doesn't trigger** : slow trigger and no flashes in box next to normal. Record the test result in Table 21.

b. Pulse Width > 10 nsec

- Set the generator frequency to 40 MHz.

- Set Width < 10 nsec Off and Width > 10 nsec ON


- Check that the scope Triggers. Record the test result in Table 21.

- Set Width < 10 nsec On and Width > 10 nsec Off

- Check that the scope **doesn't trigger** : slow trigger and no flashes in box . Record the test result in Table 21.

13-Feb-97
10:37:55

5 ns
0.50 V
-5mV

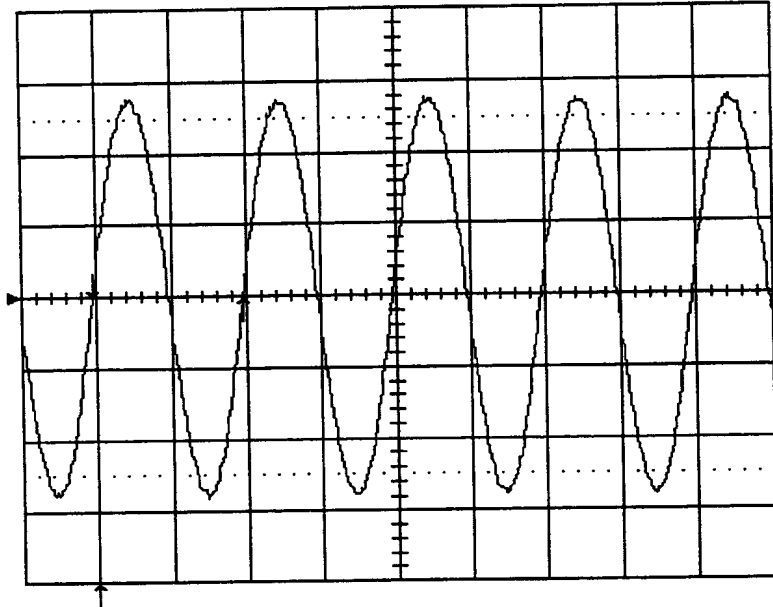

5 ns RIS
1 .5 V 500
2 50 mV AC
3 50 mV AC
4 50 mV AC

Δt 10.000 ns $\frac{1}{\Delta t}$ 100.00 MHz



1 DC 0.00 V
pulse < 10.0 ns

TRIGGER SETUP

Edge **SMART**
(Glitch)

SETUP SMART
TRIGGER

trigger on
1 2 3 4 Ext
Ext10 Pattern

coupling 1
AC AC
LFREJ HFREJ

at end of
NEG Pos
pulse

width <
10.0 ns
OFF **On**


width >
- - -
OFF On

10 GS/s

NORMAL


13-Feb-97
11:35:15

5 ns
0.50 V
-18mV

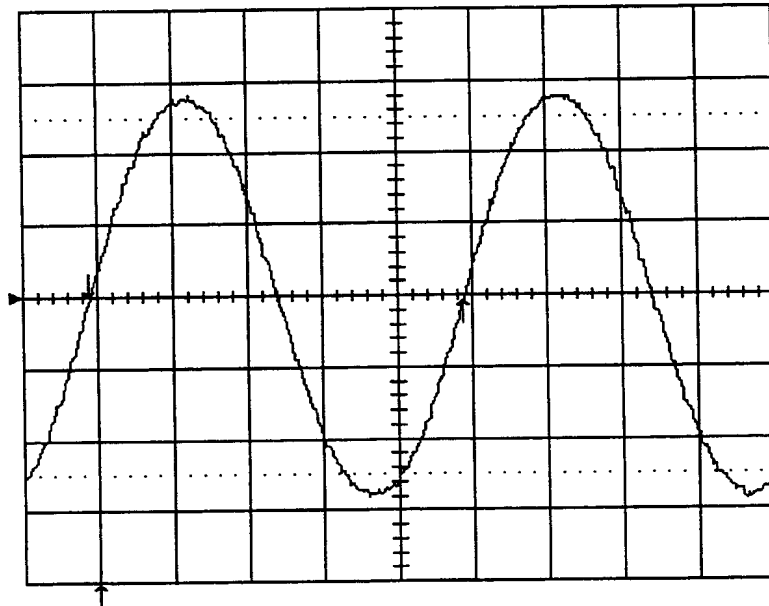

5 ns RIS
1 .5 V 500
2 50 mV AC
3 50 mV AC
4 50 mV AC

Δt 25.000 ns $\frac{1}{\Delta t}$ 40.000 MHz



1 DC 0.00 V
10.0 ns < pulse

TRIGGER SETUP

Edge **SMART**
(Glitch)

SETUP SMART
TRIGGER

trigger on
1 2 3 4 Ext
Ext10 Pattern

coupling 1
AC AC
LFREJ HFREJ

at end of
NEG Pos
pulse

width <
- - -
OFF On

width >
10.0 ns
OFF **On**

10 GS/s

NORMAL



5.11.2 Trigger on Pulse Width 100 nsec

a. Pulse Width < 100 nsec

- Recall 574p062.PNL or configure the DSO as shown in 5.11.1.a and make the following changes :

Width < 100 nsec : On

Width > 100 nsec : Off

Timebase : 20 nsec/div.


- Set the generator frequency to 10 MHz.
- Check that the scope Triggers. Record the test result in Table 21.
- Set Width < 100 nsec Off and Width > 100 nsec ON
- Check that the scope **doesn't trigger** : slow trigger and no flashes in box next to normal. Record the test result in Table 21.

b. Pulse Width > 100 nsec

- Set the generator frequency to 4 MHz.
- Timebase : 50 nsec/div.
- Set Width < 100 nsec Off and Width > 100 nsec ON
- Check that the scope Triggers. Record the test result in Table 21.
- Set Width < 100 nsec On and Width > 100 nsec Off
- Check that the scope **doesn't trigger** : slow trigger and no flashes in box. Record the test result in Table 21.

13-Feb-97
11:44:01

20 ns
0.50 V
-31mV

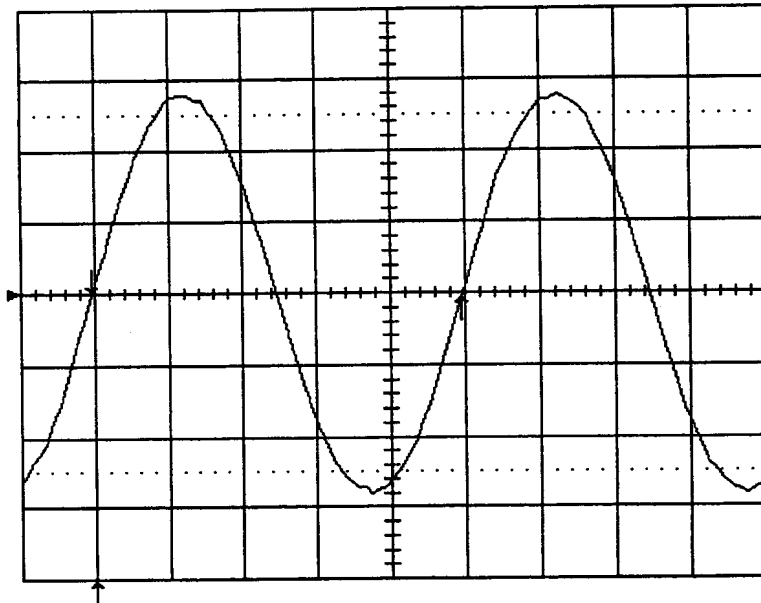

20 ns
1 .5 V 500
2 50 mV AC
3 50 mV AC
4 50 mV AC



Δt 100.0 ns $\frac{1}{\Delta t}$ 10.00 MHz

1 DC 0.00 V
pulse < 100.0 ns

TRIGGER SETUP

Edge SMART (Glitch)

SETUP SMART TRIGGER

trigger on 1 2 3 4 Ext Ext10 Pattern

coupling 1 AC LFREJ HFREJ

at end of Neg Pos pulse

width < 100.0 ns OFF On


width > OFF On

500 MS/s

NORMAL

13-Feb-97
11:46:09

50 ns
0.50 V
20mV

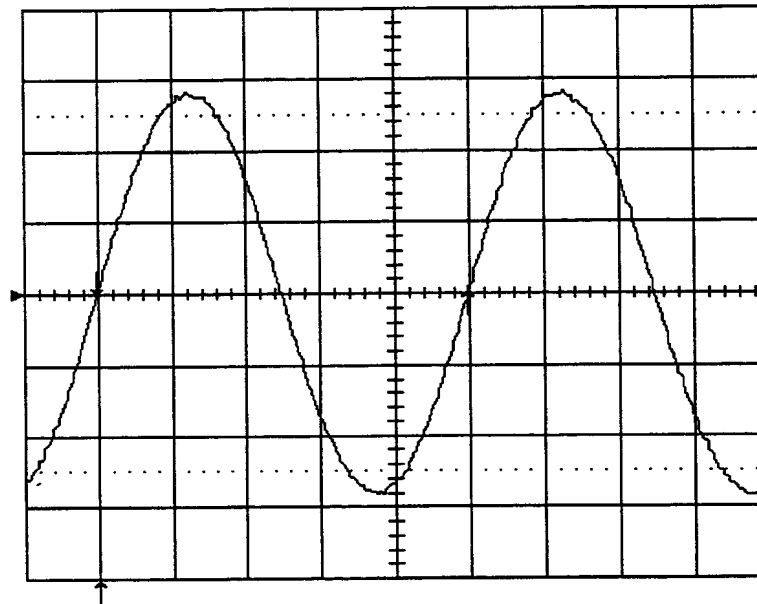

50 ns
1 .5 V 500
2 50 mV AC
3 50 mV AC
4 50 mV AC



Δt 250.00 ns $\frac{1}{\Delta t}$ 4.0000 MHz

1 DC 0.00 V
100.0 ns < pulse

TRIGGER SETUP

Edge SMART (Glitch)

SETUP SMART TRIGGER

trigger on 1 2 3 4 Ext Ext10 Pattern

coupling 1 AC LFREJ HFREJ

at end of Neg Pos pulse

width < OFF On

width > 100.0 ns OFF On

500 MS/s

NORMAL

5.12 Time Base Accuracy

5.12.1 Description

An external sine wave generator of 1 MHz with a frequency accuracy better than 1 PPM is used.

Specifications

500 MHz clock : accuracy : $\leq \pm 0.001\%$ or $\leq \pm 10$ PPM

5.12.2 500 MHz Clock Verification Procedure

- Recall 574p063.PNL or configure the DSO

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels trace ON	:	Channel 1
Input coupling	:	DC 50 Ω
Input gain	:	.5 V/div.
Input offset	:	0 mV
Trigger setup	:	Edge
Trigger on	:	1
Coupling 1	:	DC
Slope 1	:	Pos
Level 1	:	0.5 V
Trigger mode	:	Norm
Delay	:	0 %
Timebase	:	.5 μ sec/div.
Channel use	:	4
Record up to	:	50 k

- Connect the **RF output** of the HP8648B generator through a 5ns 50 Ohm BNC coaxial cable into Channel 1.
- Set the generator frequency to 1 MHz.
- Adjust the generator output amplitude to get **5 divisions peak to peak** .
- Store Channel 1 in Memory 1
- Recall 574p064.PNL or make the following change :
- Set Post-trigger delay to **5.00 msec**
- Recall Memory 1 to A


- Press : Cursors/Measure
- Measure : Parameters
- Mode : Custom
- Statistics : Off

▪ Change parameters

- On line 1 : Delay of 1
- On line 2 : Delay of A

- Check that the displayed Channel 1 trace is aligned with the sine wave from memory 1.

- This allows the accuracy of the time base clock to be checked 5000 periods after the trigger point. A difference of $\pm 0.05 \mu\text{sec}$ corresponds to $\pm 10 \text{ PPM}$.

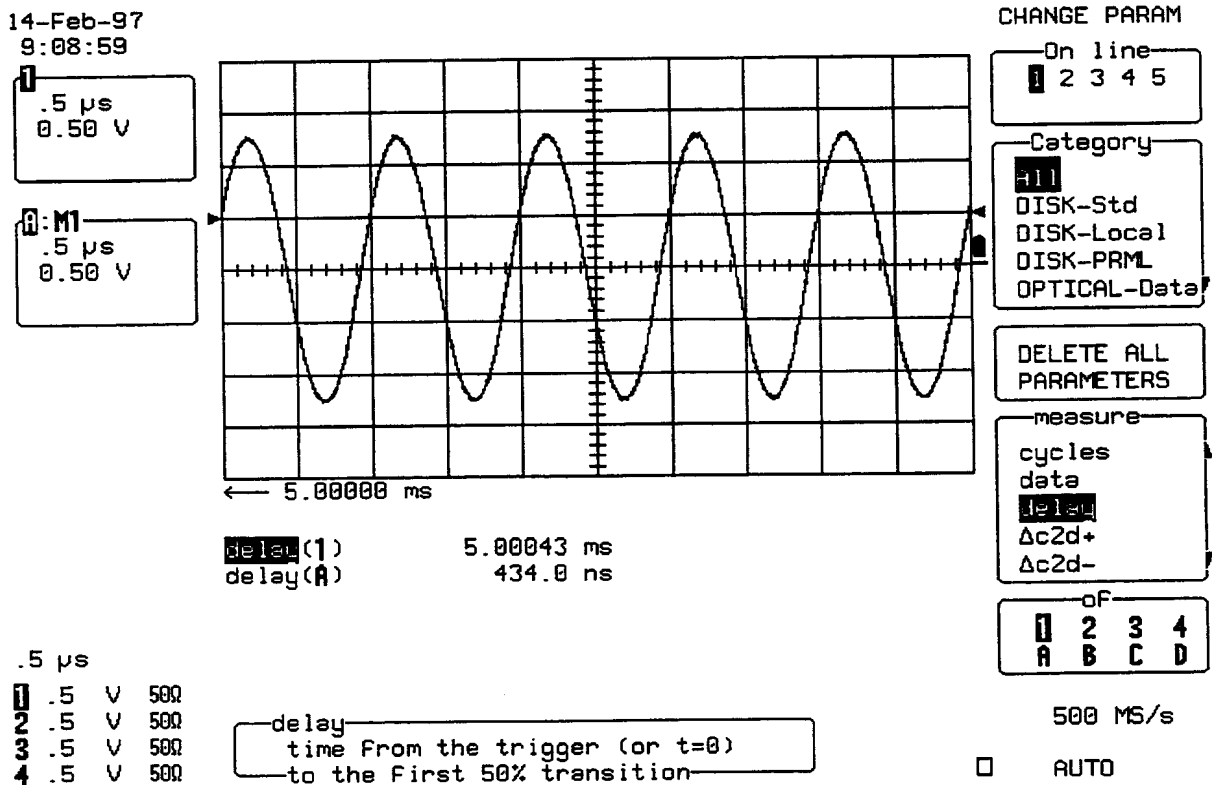

- Calculate the Difference $\{[\text{delay}(A) - \text{delay}(1)] + 5 \text{ msec}\}$.
- Record the test result in Table 22, and compare it to the limit in the test record.



5.13 Overshoot and Rise time (10 % - 90 %)

Specifications

DC 50 Ω , 50 mV/div., : overshoot < 20 %, rise time < 0.5 ns
DC 1M Ω , 100 mV/div., : rise time < 1.5 ns

a. DC 50 Ω

- Recall 574p065.PNL or configure the DSO

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels trace ON	:	Channel 1
Input coupling	:	DC 50 Ω on all 4 Channels
Input gain	:	0.1 V/div. on all 4 Channels
Input offset	:	-250 mV on all 4 Channels
Trigger setup	:	Edge
Trigger on	:	1
Coupling 1	:	DC
Slope 1	:	Pos
Level 1	:	250 mV
Trigger mode	:	Norm
Delay	:	30 % Pre-Trigger
Timebase	:	1 nsec/div.
Channel use	:	4
Record up to	:	50 k
Turn on trace	:	A
Select Math Setup	:	
For Math	:	Use at most 1000 points
Use Math ?	:	Yes
Math Type	:	Average
Avg Type	:	Summed
Of	:	Channel 1
Sweeps	:	100
Turn off trace	:	Channel 1
Cursors/Measure	:	Parameters
Mode	:	Custom
Statistics	:	Off
Change Parameters	:	
On displayed trace	:	A
On line 1	:	
Measure	:	Over + of A
On line 2	:	
Measure	:	Rise of A

- Connect the fast pulse generator 4969A and PB049 power adapter, or equivalent as shown in Figure 5-13.
- Set the 4969A frequency to 1 kHz


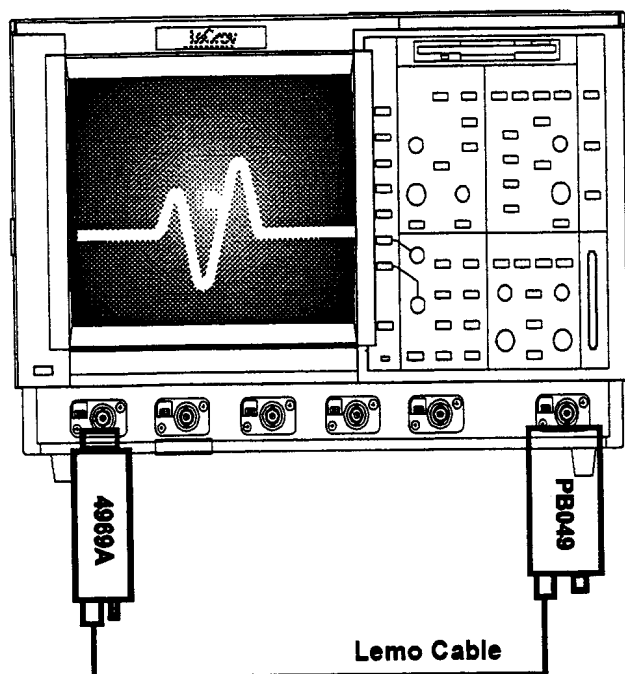


Figure 5-13 : 50 Ω Overshoot & Rise time Equipment Setup

- Press Clear Sweep
- After 100 sweeps record **over+(A)** and **rise(A)** measurements in Table 23.
- Repeat the DC 50 Ω Overshoot and Rise time test for the other channels, substituting channel controls and input connector.
- Recall **574p066.PNL** for Channel 2, **574p067.PNL** for Channel3 **574p068.PNL** for Channel 4, or configure the DSO as shown in 5.13.a. and make the necessary changes.
- Record the test results in Table 23, and compare the results to the limits.

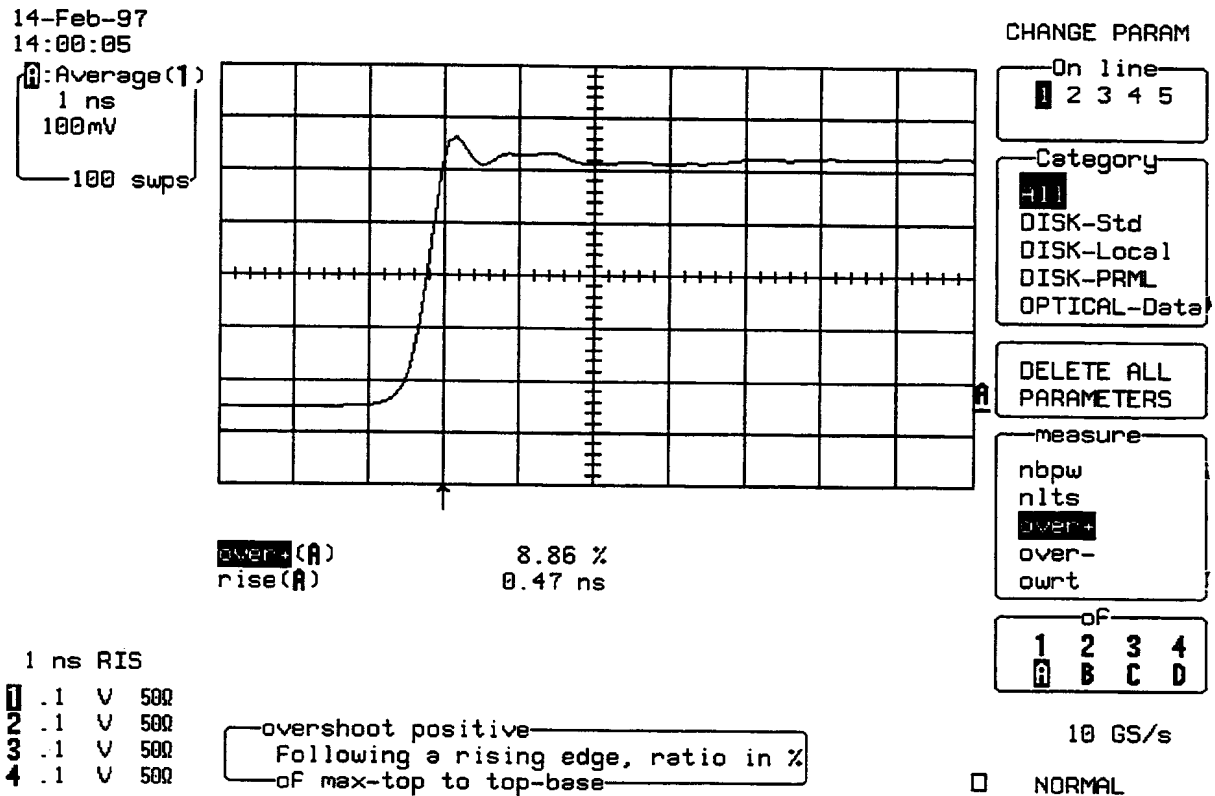

b. DC 1MΩ

- Recall 574p069.PNL or configure the DSO as shown in 5.13.a. and make the following change :
 - Set Input Coupling: DC 1MΩ on all 4 Channels
 - Input gain : 50 mV/div. on all 4 Channels
 - Input offset : -150 mV on all 4 Channels
 - Trigger Level : 75 mV
 - Timebase : 1 nsec/div.
- Terminate the output of the 4969A Pulser with the 4962-9 adapter (50Ω to 1MΩ) as shown in Figure 5-14.
- Press Clear Sweep. After 100 sweeps record over+(A) and rise(A) in Table23.
- Repeat the DC 1MΩ Overshoot and Rise time test for the other channels, substituting channel controls and input connector.
- Recall 574p070.PNL for Channel 2, 574p071.PNL for Channel3
574p072.PNL for Channel 4, or configure the DSO as shown in 5.13.a. and make the necessary changes.
- Record the test results in Table 23, and compare the results to the limits.


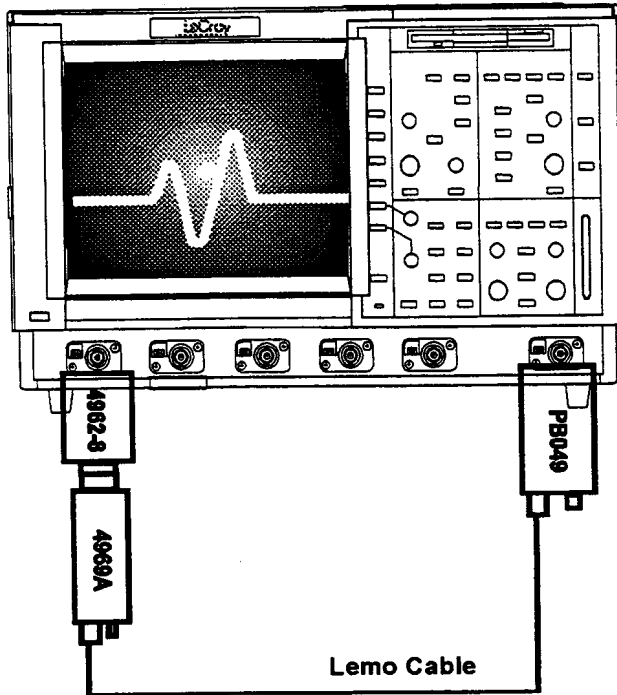


Figure 5-14 : 1MΩ Overshoot & Rise time Equipment Setup



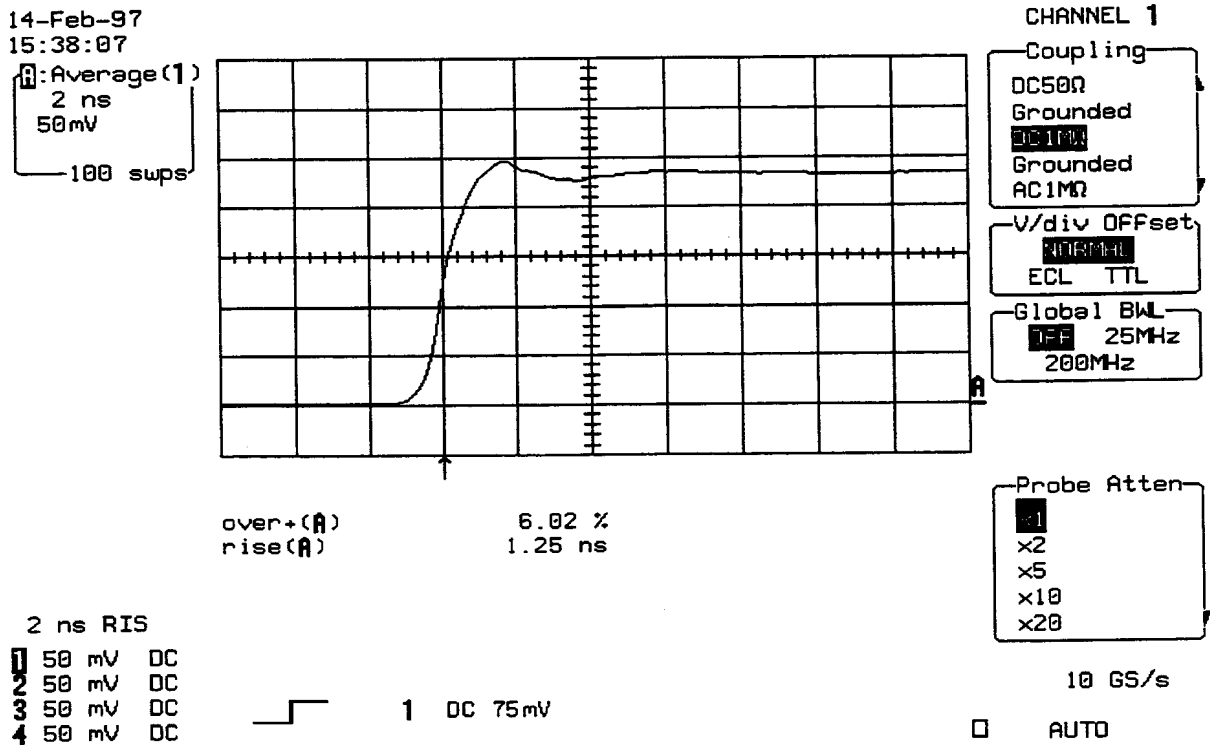

5.14 Overload

Specifications

1 Watt into 50Ω : Overload Trip < 17 seconds

a. Channel Overload Trip

- Recall 574p073.PNL or configure the DSO

Panel Setups	:	Recall FROM DEFAULT SETUP
Channels Trace ON	:	Channel 1, Channel 2, Channel 3 & Channel 4
Input coupling	:	DC 50Ω on all 4 Channels
Input gain	:	1 V/div. on all 4 Channels
Input offset	:	-3.5 V on all 4 Channels
Trigger setup	:	Edge
Trigger on	:	1
Coupling 1	:	DC
Slope 1	:	Pos
Level 1	:	0 V
Trigger mode	:	Norm
Delay	:	zero
Timebase	:	2 sec/div.
Channel use	:	4
Record up to	:	1000 samples

- Set the output of the external DC voltage source to +7.07 Volt corresponding to 1 Watt into 50Ω.
- Connect the DC voltage reference source through a BNC cable into Channel1.
- When the channel overload trips press Stop to halt the acquisition.
- Measure on the screen the overload trip time and record it in Table 24.
- Repeat the above tests for Channel 2, Channel 3 and Channel 4 substituting the input connector.
- Record the test results in Table 24, and compare the results to the limits.
- For all Channel clear the overload by selecting DC 50Ω in the Coupling menu.
- Set Timebase : 5 sec/div.

27-Feb-97
13:52:24

1
2 s
1.00 V


2
2 s
1.00 V

3
2 s
1.00 V

4
2 s
1.00 V

2 s

1 1 V +5
2 1 V 50Ω
3 1 V 50Ω
4 1 V 50Ω

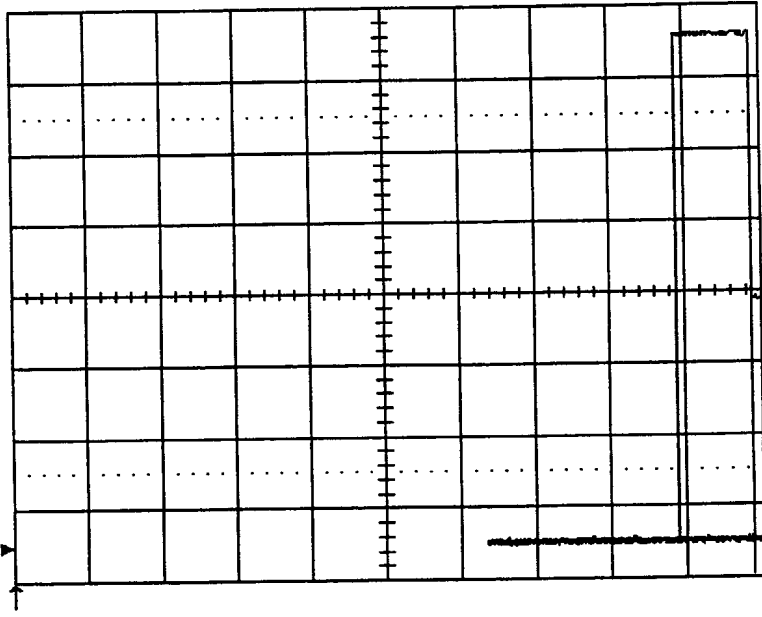

1 DC 0.00 V

CHANNEL 1

Coupling
DC50Ω
Grounded
DC1MΩ
Grounded
AC1MΩ

V/div OFFSET
NORMAL
ECL TTL

Global BWL
OFF 25MHz
200MHz

Probe Atten
x1
x2
x5
x10
x20

50 S/s

STOPPED

- Set the output of the external DC voltage source to **+5.00 Volt** corresponding to 0.5 Watt into 50Ω.
- For all channels check that the overload doesn't trip for at least **35 seconds**. Record the test result in Table 24.

b. External Overload Trip

- Recall **574p074.PNL**, or configure the DSO as shown in 5.14. and make the following changes.

Channel Trace ON : Channel 2
Input coupling : DC 1MΩ
Trigger on : Ext
Slope Ext : Pos.
External : DC 50Ω
Mode : Norm
Set Trigger level : DC 0.0 mV

- Connect the test equipment as shown in Figure 5-15.
- Set the output of the external DC voltage source to **+7.07 Volt**

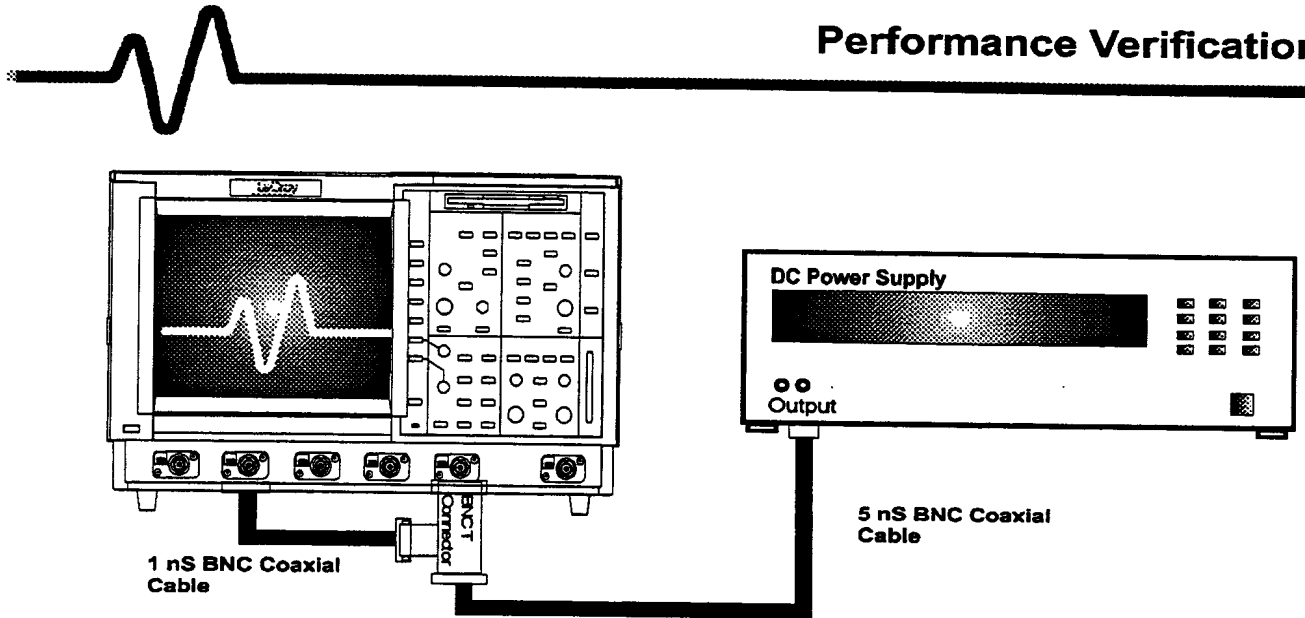



Figure 5-15 : External Overload Equipment Setup

- When the External overload trips press **Stop** to halt the acquisition.
- Measure on the screen the **overload trip time** and record it in Table 24. Compare the result to the limit in the test record.
- Press **clear overload** in the trigger setup menu.

27-Feb-97
14:01:49

2
2 s
1.00 V

2 s
1 1 V 500
2 1 V DC
3 1 V 500
4 1 V 500

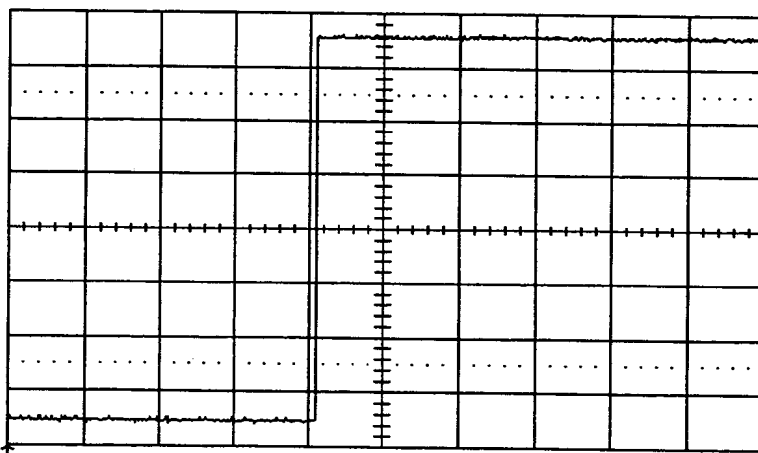

Ext DC 0mV OVL

TRIGGER SETUP

Edge SMART

trigger on
1 2 3 4 1
Ext10 Line

cplg Ext
AC LFREJ
HFREJ HF

slope Ext
Neg

CLEAR OVERLOAD

holdoff
Time Evts

50 S/s

STOPPED

- Set Timebase : **5 sec/div.**
- Set the output of the external DC voltage source to **+5.00 Volt**
- Check that the External overload doesn't trip for at least **35 seconds**. Record the test result in Table 24.

LeCroy Digital Storage Oscilloscope

Performance Certificate

LC574A Manual Performance Test Procedure Version A - July 1997

Model _____ Serial Number _____ Customer _____

Software Version _____

Inspection Date _____ Next Due _____

Temperature _____ Humidity _____%

Tested By _____ Report Number _____

Place of Inspection _____

Condition found _____ Condition Left _____

Approved By _____

Test Equipment Used

Instrument	Model	S/N	Cal Due Date
Signal Generator Radio Frequency	_____	_____	_____
Signal Generator Audio Frequency	_____	_____	_____
Voltage Generator DC Power Supply	_____	_____	_____
Step Generator Fast Pulser	_____	_____	_____
Digital Multimeter Voltmeter, Ohmmeter	_____	_____	_____

Traceable to _____

Table 1 : LC574A Test Report


LC574A Test Record

Coupling	Volts/div.	Measured Channel 1 Impedance $\Omega, M\Omega$	Measured Channel 2 Impedance $\Omega, M\Omega$	Measured Channel 3 Impedance $\Omega, M\Omega$	Measured Channel 4 Impedance $\Omega, M\Omega$	Measured External Impedance $\Omega, M\Omega$	Measured External/10 Impedance $\Omega, M\Omega$	Lower Limit $\Omega, M\Omega$	Upper Limit $\Omega, M\Omega$
DC 1M Ω	50 mV/div							0.99 M Ω	1.01 M Ω
DC 1M Ω	200 mV/div					N/A	N/A	0.99 M Ω	1.01 M Ω
AC 1M Ω	50 mV/div					N/A	N/A	1.08 M Ω	1.14 M Ω
AC 1M Ω	200 mV/div					N/A	N/A	0.98 M Ω	1.02 M Ω
DC 50 Ω	50 mV/div							49.5 Ω	50.5 Ω
DC 50 Ω	200 mV/div					N/A	N/A	49.5 Ω	50.5 Ω
DC 1M Ω Grounded	50 mV/div					N/A	N/A	0.98 M Ω	1.02 M Ω

Table 2 : Impedance Test Record

Coupling	Volts/div.	Measured Channel 1 Leakage mV	Measured Channel 2 Leakage mV	Measured Channel 3 Leakage mV	Measured Channel 4 Leakage mV	Measured External Leakage mV	Lower Limit mV	Upper Limit mV
DC 1M Ω	50 mV/div					N/A	-1	+1
DC 1M Ω	200 mV/div					N/A	-1	+1
DC 50 Ω	50 mV/div						-1	+1
DC 50 Ω	200 mV/div					N/A	-1	+1

Table 3 : Leakage Voltage Test Record



Coupling	Time/Div.	Measured Channel 1 pkpk mV	Measured Channel 2 pkpk mV	Measured Channel 3 pkpk mV	Measured Channel 4 pkpk mV	Limits mV
DC 1MΩ	20 ms					7.2
DC 1MΩ	1 ms					7.2
DC 1MΩ	50 μs					7.2
DC 1MΩ	10 μs					7.2
AC 1MΩ	10 μs					7.2
DC 50Ω	10 μs					7.2
DC 50Ω	50 μs					7.2
DC 50Ω 2 Ch Combined	5 μs	disabled			disabled	7.2
DC 50Ω 4 Ch Combined	2 μs	disabled		disabled	disabled	7.2

BMC
31MAR04


Table 4 : Peak to Peak Noise Test Record

Coupling	Time/Div.	Measured Channel 1 sdev mV	Measured Channel 2 sdev mV	Measured Channel 3 sdev mV	Measured Channel 4 sdev mV	Limits mV
DC 1MΩ	20 ms					0.72
DC 1MΩ	1 ms					0.72
DC 1MΩ	50 μs					0.72
DC 1MΩ	10 μs					0.72
AC 1MΩ	10 μs					0.72
DC 50Ω	10 μs					0.72
DC 50Ω	50 μs					0.72
DC 50Ω 2 Ch Combined	5 μs	disabled			disabled	1.08
DC 50Ω 4 Ch Combined	2 μs	disabled		disabled	disabled	1.08

BMC
31MAR04

Table 5 : RMS Noise Test Record

LC574A Test Record




Coupling	Volts/div.	Measured Channel 1 Mean (A) mV	Measured Channel 2 Mean (B) mV	Measured Channel 3 Mean (C) mV	Measured Channel 4 Mean (D) mV	Lower Limit mV	Upper Limit mV
DC 1MΩ	5 mV					-2	+2
DC 1MΩ	10 mV					-1.6	+1.6
DC 1MΩ	20 mV					-3.2	+3.2
DC 1MΩ	50 mV					-8	+8
DC 1MΩ	.1 V					-16	+16
DC 1MΩ	1 V					-160	+160

Table 6 : DC 1MΩ Ground Line Test Record

Coupling	Volts/div.	Measured Channel 1 Mean (A) mV	Measured Channel 2 Mean (B) mV	Measured Channel 3 Mean (C) mV	Measured Channel 4 Mean (D) mV	Lower Limit mV	Upper Limit mV
DC 50Ω	5 mV					-2	+2
DC 50Ω	10 mV					-1.6	+1.6
DC 50Ω	20 mV					-3.2	+3.2
DC 50Ω	50 mV					-8	+8
DC 50Ω	.1 V					-16	+16
DC 50Ω	1 V					-160	+160
DC 50Ω 2 Ch Combined	.2 V	disabled			disabled	-48	+48
DC 50Ω 4 Ch Combined	.2 V	disabled		disabled	disabled	-64	+64

B.M.E. B. MARCOY

Table 7 : DC 50Ω Ground Line Test Record



Volts /div.	Attenuator	P S Output	Measured Channel 1 V & mV			Measured Channel 2 V & mV			Measured Channel 3 V & mV			Measured Channel 4 V & mV			Limits
			DMM 1	Mean (A)	$\Delta 1$ Mean-DMM	DMM 2	Mean (B)	$\Delta 2$ Mean-DMM	DMM 3	Mean (C)	$\Delta 3$ Mean-DMM	DMM 4	Mean (D)	$\Delta 4$ Mean-DMM	
5 mV	X 100	+1.5 V													mV
10 mV	X 100	+3.0 V													± 1.2
20 mV	X 100	+6.0 V													± 1.6
50 mV	X 10	+1.5V													± 3.2
.1 V	X 10	+3.0 V													± 8
1 V	X 1	+3.0 V													± 16
															± 160

Table 8 : DC 50 Ω , Positive DC Accuracy Test Record

Volts /div.	Attenuator	P S Output	Measured Channel 1 V & mV			Measured Channel 2 V & mV			Measured Channel 3 V & mV			Measured Channel 4 V & mV			Limits
			DMM 1	Mean (A)	$\Delta 1$ Mean-DMM	DMM 2	Mean (B)	$\Delta 2$ Mean-DMM	DMM 3	Mean (C)	$\Delta 3$ Mean-DMM	DMM 4	Mean (D)	$\Delta 4$ Mean-DMM	
5 mV	X 100	+1.5 V													mV
.1 V	X 10	+3.0 V													± 1.2
5 V	X 1	+15.0 V													± 16
															± 800

Table 9 : DC 1M Ω , Positive DC Accuracy Test Record




Coupling	DSO Offset	P S Output	Measured Channel 1 V & mV		Measured Channel 2 V & mV		Measured Channel 3 V & mV		Measured Channel 4 V & mV		Limits								
			DMM 1	Mean (A)	Δ 1 Mean-DMM	DMM 2	Mean (B)	Δ 2 Mean-DMM	DMM 3	Mean (C)		Δ 3 Mean-DMM	DMM 4	Mean (D)	Δ 4 Mean-DMM				
DC																			
50 Ω	+1 V	-1 V																	±11.2
1 MΩ	+1 V	-1 V																	±11.2

Table 12 : Positive Offset Test Record

Coupling	DSO Offset	P S Output	Measured Channel 1 V & mV		Measured Channel 2 V & mV		Measured Channel 3 V & mV		Measured Channel 4 V & mV		Limits									
			DMM 1	Mean (A)	Δ 1 Mean-DMM	DMM 2	Mean (B)	Δ 2 Mean-DMM	DMM 3	Mean (C)		Δ 3 Mean-DMM	DMM 4	Mean (D)	Δ 4 Mean-DMM					
DC																				
50 Ω	-1 V	+1 V																		±11.2
1 MΩ	-1 V	+1 V																		±11.2

Table 13 : Negative Offset Test Record



LC574A Test Record

Frequency	Measured Power	Generator Amplitude	Measured Channel 1		Measured Channel 2		Measured Channel 3		Measured Channel 4		Lower Limit	Upper Limit
			Sdev(1) mV	Ratio(1) to 0.3	Sdev(2) mV	Ratio(2) to 0.3	Sdev(3) mV	Ratio(3) to 0.3	Sdev(4) mV	Ratio(4) to 0.3		
MHz	mW	mV		N/A		N/A		N/A		N/A		
0.300	0.200										N/A	N/A
1.1	0.200										0.94	1.06
30.1	0.200										0.94	1.06
250.1	0.200										0.88	1.13
750.1	0.200										0.84	1.18
1000.1	0.200										0.70	N/A

Table 14 : DC 50Ω, 50 mV/div. Bandwidth Test Record

Frequency	Measured Power	Generator Amplitude	Measured Channel 1		Measured Channel 2		Measured Channel 3		Measured Channel 4		Lower Limit	Upper Limit
			Sdev(1) mV	Ratio(1) to 0.3	Sdev(2) mV	Ratio(2) to 0.3	Sdev(3) mV	Ratio(3) to 0.3	Sdev(4) mV	Ratio(4) to 0.3		
MHz	mW	mV		N/A		N/A		N/A		N/A		
0.300	0.800										N/A	N/A
1.1	0.800										0.94	1.06
30.1	0.800										0.94	1.06
250.1	0.800										0.88	1.13
750.1	0.800										0.84	1.18
1000.1	0.800										0.70	N/A


Table 15 : DC 50Ω, 100 mV/div. Bandwidth Test Record

DSO Global BWL	Amplitude at 300 kHz	Measured Channel 1		Measured Channel 2		Measured Channel 3		Measured Channel 4		Lower Limit	Upper Limit
		Sdev mV	Freq(1) MHz	Sdev(2) mV	Freq(2) MHz	Sdev(3) mV	Freq(3) MHz	Sdev(4) mV	Freq(4) MHz		
25	200	140		140		140		140		10	37
200	200	140		140		140		140		110	290

Table 16 : DC 50Ω, Bandwidth Limiter Test Record

Frequency	Measured Channel 1		Measured Channel 2		Measured Channel 3		Measured Channel 4		Lower Limit
	Sdev(1) mV	Ratio(1) to 0.3	Sdev(2) mV	Ratio(2) to 0.3	Sdev(3) mV	Ratio(3) to 0.3	Sdev(4) mV	Ratio(4) to 0.3	
0.300	200	N/A	200	N/A	200	N/A	200	N/A	N/A
300 - 500.1 GHz 31MAF04									0.7

Table 17 : DC 1MΩ, 100 mV/div. Bandwidth Test Record



LC574A Test Record


Trigger Level	Trigger Slope	Channel 1 Measured DC Trigger Level (1) mV	Channel 2 Measured DC Trigger Level (2) mV	Channel 3 Measured DC Trigger Level (3) mV	Channel 4 Measured DC Trigger Level (4) mV	Lower Limit	Upper Limit
mV						mV	mV
0	Pos					-30	+30
0	Neg					-30	+30
+300	Pos					+270	+330
+300	Neg					+270	+330
-300	Pos					-270	-330
-300	Neg					-270	-330

Table 18 : Channel DC Trigger Test Record

Trigger Level	Trigger Slope	Channel 1 Measured HFREJ Trigger Level (1) mV	Channel 2 Measured HFREJ Trigger Level (2) mV	Channel 3 Measured HFREJ Trigger Level (3) mV	Channel 4 Measured HFREJ Trigger Level (4) mV	Lower Limit	Upper Limit
mV						mV	mV
0	Pos					-50	+50
0	Neg					-50	+50
+300	Pos					+250	+350
+300	Neg					+250	+350
-300	Pos					-250	-350
-300	Neg					-250	-350

*BM 2004
51MAY04*

Table 19 : Channel HFREJ Trigger Test Record

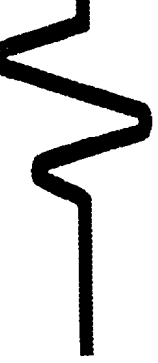

Trigger Slope	External Trigger Level	External DC	External HFREJ	External Limits		External/10 Trigger Level	External/10 DC	External/10 HFREJ	External/10 Limits			
				Measured DC Trigger Level (Ext)	Measured HFREJ Trigger Level (Ext)				Lower	Upper	Measured DC Trigger Level (Ext/10)	Measured HFREJ Trigger Level (Ext/10)
	mV	mV	mV	mV	mV	V	V	V	V	V	V	V
Pos	0			-50	+50	0			-0.5	+0.5		
Neg	0			-50	+50	0			-0.5	+0.5		
Pos	+300			+250	+350	+3			+2.5	+3.5		
Neg	+300			+250	+350	+3			+2.5	+3.5		
Pos	-300			-250	-350	-3			-2.5	-3.5		
Neg	-300			-250	-350	-3			-2.5	-3.5		

Table 20 : External & Ext/10 DC and HFREJ Trigger Test Record

Smart Trigger Pulse Width ns	Generator Frequency MHz	Width <	Width >	Triggered	Pass
< 10	100	On	Off	Yes	
< 10	100	Off	On	No	
> 10	40	Off	On	Yes	
> 10	40	On	Off	No	
< 100	10	On	Off	Yes	
< 100	10	Off	On	No	
> 100	4	Off	On	Yes	
> 100	4	On	Off	No	

Table 21 : Smart Trigger Test Record

LC574A Test Record



Generator Frequency MHz	Post Trigger Delay msec	Delay (A) ns	Delay (1) msec	Difference delay(A) -delay(1)+5msec	Lower Limit μ sec	Upper Limit μ sec
1.00000	5.00000	ns	msec		-0.05	+0.05

Table 22 : Time Base Test Record

Coupling	Measured Channel 1 Over+(A) %	Measured Channel 2 Over+(B) %	Measured Channel 3 Over+(C) %	Measured Channel 4 Over+(D) %	Overshoot Limit %	Measured Channel 1 Rise(A) ns	Measured Channel 2 Rise(B) ns	Measured Channel 3 Rise(C) ns	Measured Channel 4 Rise(D) ns	Rise time Limit ns
DC 50 Ω					0 to 20	ns	ns	ns	ns	ns
DC 1M Ω					-7 to 20					0.5
										1.6

Table 23 : Rise time and Overshoot Test Record

DC Reference Source	Measured Channel 1 Overload Trip sec	Measured Channel 2 Overload Trip sec	Measured Channel 3 Overload Trip sec	Measured Channel 4 Overload Trip sec	Measured External Overload Trip sec	Overload Trip Limit sec
Volt 7.07						< 17
5.00						> 35

Table 24 : Overload Trip Test Record




6. Maintenance


6.1 Introduction


This section contains information necessary to disassemble, assemble, maintain, calibrate and troubleshoot the LeCroy LC574A, LC574AM & LC574AL digital oscilloscopes.

6.1.1 Safety Precautions


The  symbol used in this manual indicates dangers that could result in personal injury.

The  symbol used in this manual identify conditions or practices that could damage the instrument.

 The following servicing instructions are for use by qualified personnel only. Do not perform any servicing other than contained in service instructions. Refer to procedures prior to performing any service.

 Exercise extreme safety when testing high energy power circuits. Always turn the power OFF, disconnect the power cord, discharge the cathode ray tube and all capacitors before disassembling the instrument.

6.1.2 Antistatic Precautions

 Any static charge that builds on your person or clothing may be sufficient to destroy CMOS components, integrated circuits, Gate array's.....etc.

In order to avoid possible damage, the usual precautions against static electricity are required.

- Handle the boards in antistatic boxes or containers with foam specially designed to prevent static build-up.
- Ground yourself with a suitable wrist strap.
- Disassemble the instrument at a properly grounded work station equipped with antistatic mat.
- When handling the boards, do not touch the pins.
- Stock the boards in antistatic bags.



6.2 Disassembly and Assembly Procedure

The disassembly and assembly procedures detailed below refer to the views of figures shown in section 8.

6.2.1 Disassembly Procedure

Please study the figures in section 8 before attempting disassembly. Before removing any parts from the LeCroy LC574A, be sure to read carefully the instructions referring to those parts, noting any precautions needed to avoid problems.

Extreme caution should be taken in protecting the glass CRT face-plate from damage (e.g. scratch marks etc.) when handling, in particular when inserting or removing from the instrument.

a. Removal of the Upper Cover Assembly

The upper cover disassembly procedure refers to the view of figure 8-1.

- Remove three M3X6 screws underneath the plastic bezel.
- Pivot up the plastic bezel and remove it from the front frame by disengaging the hooks on the top of the bezel from the corresponding front frame lugs.

The top cover is secured by seven M3x6 screws on the front panel assembly and by two M5 screws on the rear panel.

- Remove the seven M3X6 screws (three M3X6 on top, two M3X6 on left and two M3X6 on right).
- Remove the two M5 screws that secure the two upper feet on the upper cover and rear panel.
- Carefully slide the upper cover off the unit (disconnect optional Internal printer cables from power supply and processor board).

b. Removal of the Front Frame Assembly with Color Monitor

The front frame disassembly procedure refers to the view of figure 8-2 and 8-10.

- Remove the upper cover assembly (6.2.1.a)
- Remove two M3X6 screws that secure the front frame on both side of the lower cover.
- With a long hex screwdriver unlock two M4X5 screws that secure the monitor on rear of the main board upper shield, and two M3X6 screws that secure the front frame on the main board upper shield.
- Disconnect the monitor VGA cable from the F9601-2 card connector J1
- Disconnect the monitor power cable from the F9601-8 board connector J3

-
- Disconnect the monitor cable from the external adjustment board.
 - Disconnect the floppy cable from the processor board connector J1
 - Disconnect the front panel cable from the processor board connector J2

The front frame assembly with monitor, front panel and floppy disk drive can with care be removed forward from the unit.

c. Removal of the Processor Board

The processor board disassembly procedure refers to the view of figure 8-1 & 8-20.

- Remove the upper cover assembly (6.2.1.a)
- Remove the front frame assembly (6.2.1.b)
- Disconnect the processor cable J10 from the F9601-2 card connector J4
- Disconnect the processor cable J9 from the F9300-4 RS232 & GPIB interface and optional F9300-8 hard disk interface.

The processor can now be removed vertically from the main board connector J1.

d. Removal of the Power Supply Assembly

The power supply disassembly procedure refers to the view of figure 8-3 & 8-20.

- Remove the upper cover assembly (6.2.1.a)
- Remove the front frame assembly (6.2.1.b)
- Remove the processor board (6.2.1.c)

If the instrument is equipped with hard disk option, remove the F9300-8 interface from the rear panel, by removing two M3X6 screws that secure it to the rear panel.

- Remove two M3X6 screws that secure the power supply on the main board upper shield.
- Remove two M3X6 screws that secure the power supply on the rear panel.
- Disconnect the power supply cable from the F9601-8 board connector J2
- Disconnect the fan power cable from the power supply connector J5
- Disconnect the power supply cable from the F9654-32 main board connector J2

The power supply can now be removed from the oscilloscope.

e. Removal of the Upper Shield Assembly

The upper shield disassembly procedure refers to the view of figure 8-4.

- Remove the upper cover assembly (6.2.1.a)



- Remove the front frame assembly (6.2.1.b)
- Remove the processor board (6.2.1.c)
- Remove the power supply (6.2.1.d)

- Remove twelve M3x20 screws that secure the shield to the lower cover.
- Remove six M3X5 screws on both side of the lower cover.
- Remove six M2.5x6 screws that secure the upper shield to the main board front panel.
- Remove three M3X6 screws that secure the upper shield to the rear panel.
- Disconnect the power cable from the F9601-8 board connector J1.

The upper shield can now be removed from the oscilloscope.

f. Removal of the Rear Panel Assembly

The rear panel disassembly procedure refers to the view of figure 8-5.

- Remove the upper cover assembly (6.2.1.a)
- Remove the front frame assembly (6.2.1.b)
- Remove the processor board (6.2.1.c)
- Remove the power supply (6.2.1.d)
- Remove the upper shield (6.2.1.e)

- Remove two M5 screws that secure the two lower feet to the rear panel and lower cover.

The rear panel assembly can now be removed from the oscilloscope.

g. Removal of the Main Board Assembly

The main board disassembly procedure refers to the view of figure 8-7 & 8-8.

- Remove the upper cover assembly (6.2.1.a)
- Remove the front frame assembly (6.2.1.b)
- Remove the processor board (6.2.1.c)
- Remove the power supply (6.2.1.d)
- Remove the upper shield (6.2.1.e)
- Remove the rear panel (6.2.1.f)

- Remove the two acquisition memories
- Remove twelve M3x6 screws that secure the main board to the lower cover.
- Remove three M3X6 standoffs that secure the main board to the lower cover.

The main board can now be removed from the oscilloscope.

6.2.2 Assembly Procedure

Reassemble the unit in the reverse order, check that all screws shown on the drawings in section 8 are used and properly torqued.
Verify that all cables are correctly connected.

Assembly Note :

- **Bezel** : The plastic bezel should be in contact with the CRT all around the screen area. The bezel should not be deformed.
Adjust to 1.5 mm wide the joint between the bezel and the upper cover.
- **Color Monitor** : Being careful not to damage the protective ground braid.
- **Fan** : Check the fan cable direction. Note the air flow, the fan extracts air from the unit and expels it.
- **Feet** : Check that the lower feet and rear feet are aligned and properly tightened before re-assembly.
- **Filter** : Check that the earth wire is correctly installed and tightened.
- **Floppy** : Adjust the floppy position to obtain the front face tangential to face of the front panel. Check that the door is moving freely and shuts correctly.
Insert a floppy and eject it to check the mechanism.
- **Front Panel** : Check that knobs rotate freely, are the right size and in the right place.
- **Main Board** : The main card must be parallel and tacked against the bend of the lower cover. Being careful not to bend the board or damage components underneath. The main board must be programmed for the correct memory size. This can only be performed at a factory authorized service center.
- **Rear Panel** : Check the CD9610 trimming adjustments are aligned with the holes in the rear panel.
- **Processor** : Check that the memory card insertion guide is correctly inserted in the front panel.
- **Power supply** : Extend the power supply cable to connect it to the main board.
- **Printer** : If the graphic printer is used, before closing don't forget to plug the input cable to the option and the driver cable to the processor card.



6.3 Software Update Procedure

6.3.1 Upgrading Firmware

LeCroy Corporation has a policy of continually improving and upgrading its products.

The LC574A instrument is equipped with flash Prom on processor board. The software is updated to the latest version using either the floppy disk drive or the memory card interface.

After any software change, reboot the scope or perform a general reset of the instrument by simultaneously depressing the autsetup button, the top menu button and the return button.

To update an LC574A scope from software version earlier than 7.1.0, first update to 7.1.0, then proceed to update as described below.

6.3.1.1 Firmware Update Procedure from Floppy

a. Creating the Disk

- Format a single high density 1.44Mb floppy in the scope (not in the PC)
- Create a directory LECROY_P in the root of the card
- Copy the file LCXXX7XX.FLA, into the directory created above.
- Label this disk " Firmware Update Disk "

b. Performing the Update from Floppy

- Cycle power to the scope with no floppy or card inserted.
- When the scope boots enter the "Show Status" , "System" menu to verify that version 7.1.0 or later is running.
- Insert the Firmware Update Disk into the scope's floppy drive.
- Select "Utilities", "Special Modes", "Firmware Update", "Update from Floppy" .
- Press twice "Update Flash".
- When the operation is complete remove the floppy and reboot the scope.
- When the scope boots enter the "Show Status", "System " menu to verify that version 7.X.X is currently running.

6.3.1.2 Firmware Update Procedure from Memory Card

a. Creating the Update Card

- Follow the above procedure to update FLASH to 7.X.X from a Floppy Disk.
- Enter the "Internal Diagnostics Menu" by simultaneously pressing the Third and Fourth menu push buttons on the right hand side of the CRT, then release them, and then press the Fifth.
- Select "Flash Update" and use "Xfer Flash to Card" option to create the card. This card will not be readable in a PC since it will not contain a standard DOS file system.

b. Performing the Update from Card

- Cycle power to the scope with no floppy or card inserted.
- When the scope boots enter the "Show Status", "System" menu to verify that version 7.1.0 or later is running.
- Insert the Card created above into the PCMCIA Slot.
- Select "Utilities", "Special Modes", "Firmware Update", "Update from Card".
- Press twice "Update Flash".
- When the operation is complete remove the card and reboot the scope.
- When the scope boots enter the "Show Status", "System" menu to verify that version 7.X.X is currently running.

6.3.2 Changing Software Options

The Software option's selection GAL is located on the processor board at location A48. Insert or replace the GAL to select new options. Make sure that the orientation notch is correctly aligned with the PCB.

6.3.2.1 Software Option Selection GAL

The following software options are available:

- WP01 Advanced Math Firmware
- WP02 Basic FFT Firmware
- WP03 Parameter Distribution Analysis Firmware

- DDM Disk Drive Measurements
- PRML Partial Response Maximum Likelihood
- ORM Optical Recording Measurement
- DDFA Disk Drive Failure Analysis
- MC01 PCMCIA Memory Card
- MT01/02 Automatic Mask Tester



MC01	DDFA	ORM	PRML	DDM	WP03	WP02	WP01	KEY XXX-R XXX = Software option,
200	080	040	020	008	004	002	001	GAL Not Necessary
no	no	no	no	no	no	no	no	
no	no	no	no	no	no	no	yes	KEY 001-A
no	no	no	no	no	no	yes	no	KEY 002-A
no	no	no	no	no	no	yes	yes	KEY 003-A
no	no	no	no	no	yes	no	no	KEY 004-A
no	no	no	no	no	yes	no	yes	KEY 005-A
no	no	no	no	no	yes	yes	no	KEY 006-A
no	no	no	no	no	yes	yes	yes	KEY 007-A
no	no	no	no	yes	no	no	no	KEY 008-A
no	no	no	no	yes	no	no	yes	KEY 009-A
no	no	no	no	yes	no	yes	no	KEY 00A-A
no	no	no	no	yes	no	yes	yes	KEY 00B-A
no	no	no	no	yes	yes	no	no	KEY 00C-A
no	no	no	no	yes	yes	no	yes	KEY 00D-A
no	no	no	no	yes	yes	yes	no	KEY 00E-A
no	no	no	no	yes	yes	yes	yes	KEY 00F-A
no	no	no	yes	no	no	no	no	KEY 020-A
no	no	no	yes	no	no	no	yes	KEY 021-A
no	no	no	yes	no	no	yes	no	KEY 022-A
no	no	no	yes	no	no	yes	yes	KEY 023-A
no	no	no	yes	no	yes	no	no	KEY 024-A
no	no	no	yes	no	yes	no	yes	KEY 025-A
no	no	no	yes	no	yes	yes	no	KEY 026-A
no	no	no	yes	no	yes	yes	yes	KEY 027-A
no	no	no	yes	yes	no	no	no	KEY 028-A
no	no	no	yes	yes	no	no	yes	KEY 029-A
no	no	no	yes	yes	no	yes	no	KEY 02A-A
no	no	no	yes	yes	no	yes	yes	KEY 02B-A
no	no	yes	no	no	no	no	no	KEY 040-A
no	no	yes	no	no	no	no	yes	KEY 041-A
no	no	yes	no	no	no	yes	no	KEY 042-A
no	no	yes	no	no	no	yes	yes	KEY 043-A
no	yes	no	no	no	no	no	no	KEY 080-A
no	yes	no	no	no	no	no	yes	KEY 081-A
no	yes	no	no	no	no	yes	yes	KEY 083-A
...X...	...X...	...X...	...X...	...X...	...X...	...X...	...X...X.....
yes	no	no	no	no	no	no	no	KEY 200-A
yes	no	no	no	no	no	no	yes	KEY 201-A
yes	no	no	no	no	no	yes	no	KEY 202-A
yes	no	no	no	no	no	yes	yes	KEY 203-A
yes	no	no	no	no	yes	no	no	KEY 204-A
yes	no	no	no	no	yes	no	yes	KEY 205-A
yes	no	no	no	no	yes	yes	no	KEY 206-A
yes	no	no	no	no	yes	yes	yes	KEY 207-A
yes	no	no	no	yes	no	no	no	KEY 208-A
...X...	...X...	...X...	...X...	...X...	...X...	...X...	...X...X.....
yes	yes	yes	yes	yes	yes	yes	yes	KEY 2EF-A

6.3.3 Processor Board Exchange Procedure

The replacement board is supplied without any options. Therefore the existing GAL (Loc. A48) must be transferred from the faulty board to the new board. After upgrading firmware or changing the software option, check that the scope boots correctly. Then check in the system summary, by using the show status button on the front panel, the software version, software options and serial number.

The serial number of the LC574A oscilloscope is loaded in the real time clock memory which is battery backed up. If it becomes necessary to replace the processor board, the serial number must be loaded in the memory of the new board by using LeCroy program " LeCalsoft " under GPIB remote control.

To run " LeCalsoft " type SKP.exe, in the main menu type S, and follow the instructions, use five digits to enter the serial number (i.e. 02365).

27-May-97
16:31:03

STATUS

Serial Number LC33402365

Soft Version LC334AM 07.4.0
Wednesday, May 14, 1997 2:38 PM
(build 20)

Soft Options
WP01 WP02 CK10

Hard Options
CPUP VGAC GPIB R232 CLB2 FD01 CENT I2C

Acquisition
System
Text & Times
WaveForm
Memory Used

MORE VERSION INFORMATION

Main Processor RAM size: 8M bytes
Acquisition Memory size: 500k data points per channel



6.4 Equipment and Spare Parts Recommended for Service

6.4.1 Test Equipment Required

See Table 5-1 in section 5.2.

6.4.2 LC574A, LC574AM and LC574AL Spare Parts

LeCroy P/N	Assembly	Adjustments	Performance Tests
F9601-1-8	Power PC, 2X4MB DRAM for LC574A & LC574AM	None	None
F9601-1-64	Power PC, 2X32MB DRAM for LC574AL	None	None
F9601-2	Internal + External VGA Centronics Interface	None	None
9384M-2	Acquisition Memory 2X500k for LC574A & AM	None	None
9384MEM-2	Acquisition Memory 2 x 2M for LC574AL	None	None
F9384-31	Acquisition Card	6.5.2	Chapter 5
F9354-4	Timebase Board	None	Chapter 5
F9300-4	GPIB Interface RS232 Interface	None	None
FP9604	Front Panel Assy 4 Channel	None	None
F9602-5	Keypad	None	None
F9604-5	Front Panel	None	None
F9601-6	Floppy Disk Drive Assy	None	None
F9300-7	Printer Interface	None	None
F9300-8	Hard Disk Interface	None	None
F9601-8	Main Switch Board	None	None
CD9610	CD9600 10"Color Display, VGA 640 x 480 points with Magnetic Cancellation Coil.	6.5.3	None
PSLC574	Power Supply LC574	6.5.1	None
900024	Power Supply LC574 w/Fan	6.5.1	None

The other parts are not on the above list because the probability of failure is very low.

See chapter 7, 8 & 9 for mechanical and electrical replaceable parts.


6.5 Calibration Procedures

The following section includes the manual adjustments of the power supply, front end acquisition board and color monitor, but does not contain any calibration instructions about the Analog to Digital Converter. The ADC adjustments require complex test set-up and calibration Software.

6.5.1 Power Supply Calibration Procedure

- Remove the upper cover assembly (see 6.2.1.a)
- To ensure adequate main board cooling, it is necessary to control the air flow by installing a **temporary closure plate** which fully encloses the air space behind the monitor.
- Turn on the power, set the scope to **Auto Trigger**, and perform the adjustments to get on processor board connector J11:


Vcc Vcc +15 -15 GND



Vcc Vee +15 -15 GND

Vcc	: - 5.2 VDC	(Min - -5.30 V, Max = -5.10 V)
Vee	: + 5.2 VDC	(Min - +5.10 V, Max = +5.30 V)
+15	: - 15.1 VDC	(Min - +5.05 V, Max = +15.15 V)
-15	: + 15.1 VDC	(Min - -15.15 V, Max = -15.05 V)
-2	: - 2.1 VDC	(Min - -2.15 V, Max = -2.05 V)
+3.3	: + 3.3 VDC	(Min - +3.25 V, Max = +3.35 V) not adjustable

The five potentiometers are accessible from the top through holes in the 900024 power supply chassis.

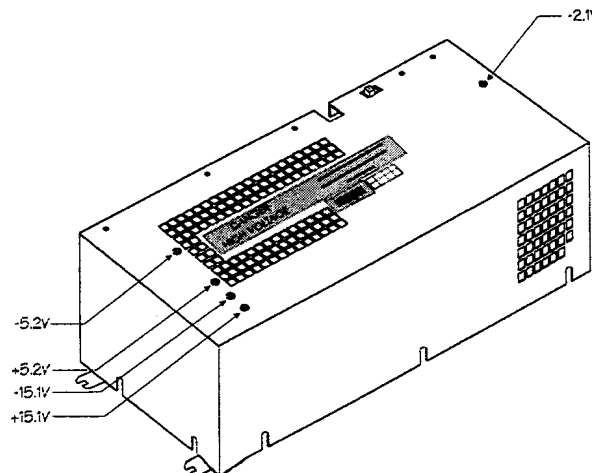



- Turn the potentiometer clockwise to increase the voltage or counterclockwise to decrease it. When the adjustment is done, stop the acquisition by depressing the stop trigger push button, and verify that there is no large difference on the + 5.00 V, typically less than 80 mV.

6.5.2 Color Monitor Calibration Procedure

This procedure describes the adjustments for the CD9610 display used in the LC574A series digital storage oscilloscopes.



For reasons of operator safety, no internal part of the display should be touched directly or accessed with any metallic object. All internal safety warning labels should be observed closely.

Any internal display adjustment should be performed using non-magnetic, insulated adjustment tools.


The display system should be oriented on the test bench so the CRT neck is facing magnetic west.

The tests should be performed well away from sources of magnetic radiation. If in doubt, the screen image should be observed for any change whilst the source of potential magnetic radiation is switched on/off (e.g. PC Monitor). If any change is visible on geometry or other effects, the setup environment is unsuitable.


a. Adjustment of Screen Image Position and Size

- Enter the internal menus by pressing menu soft-keys 3 & 4, then release them, then press soft-key 5.
- Select "Maintenance", "Screen Test", "Test Images"
- Select screen test image CD3 by rotating the Time/Div front panel control.

CD96xx Test Grate 3

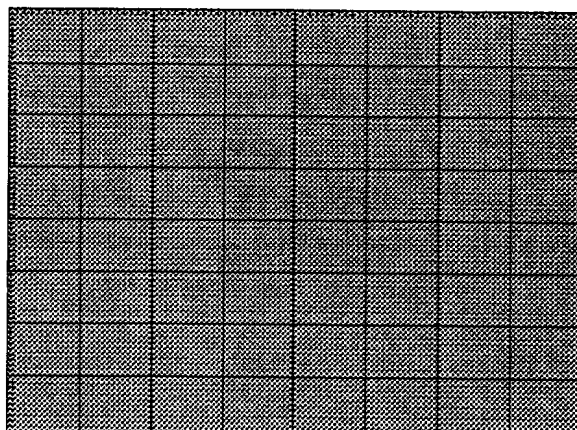

- Adjust **VPOS** and **VSIZE** controls on the external adjustment board to nominally centre the screen image vertically and obtain a vertical size of 125 mm \pm 0.5mm where there is approximately 5mm at the top and bottom between the test image area and the front panel bezel.

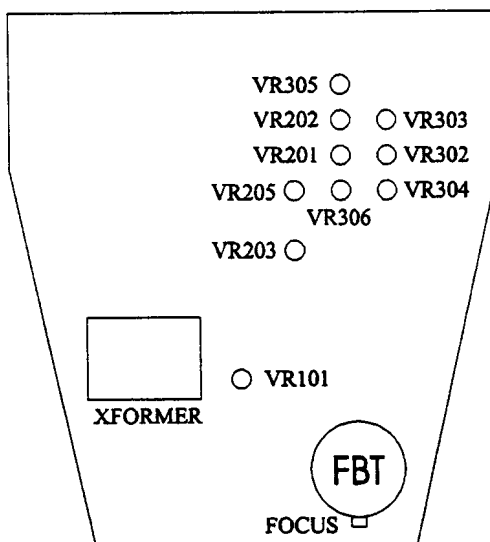

Position of Adjustment Potentiometers on Main Circuit Board

Adjustment	Purpose	Comments
VR101	Power Supply Adjust	Do Not Adjust
VR201, 202	Horizontal Phase	Do Not Adjust
VR203	Horizontal Position	Adjustable on external adjustment board
VR205	Horizontal Synchronization	Do Not Adjust
VR302	Vertical Size	Adjustable on external adjustment board
VR303	Trapezium	Adjust if required
VR305	Pin-Cushion	Adjust if required
VR304	Vertical Linearity	Adjust if required
VR306	Horizontal Size	Adjust if required
Focus	Focus	Adjust if required

- Remove the upper cover of display by removing the 9 retaining screws.
- Adjust **HSIZE** VR306 control on the main board to obtain a horizontal width of 170mm +3.00mm, -7.00mm.



note: the addition of the CD9610-2 cancellation coil assembly has the effect of reducing the screen width by approximately 4mm.


- Adjust HPOS control on the external adjustment board to center the screen image horizontally and to obtain a distance at either side of the screen image to the bezel of 2mm.

b. Image Rotation Adjustment Procedure

This procedure is carried out by aligning the CRT within the display chassis.

Note: The rotation of the deflection yoke on the CRT neck should not be attempted as it affects significantly the convergence adjustment of the screen.

CD96xx Test Grate 3

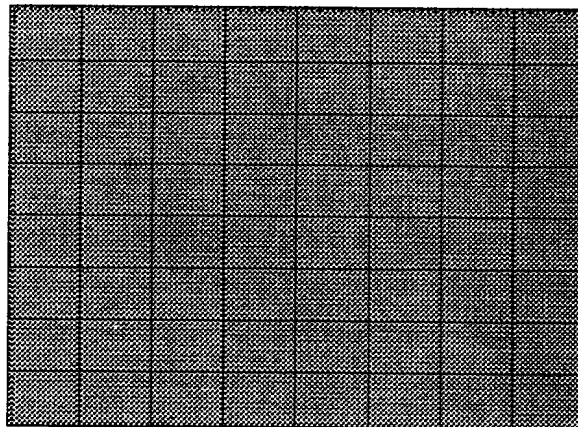


- Loosen the 4 CRT retaining screws, being careful not to damage the protective ground braid.
- Rotate the CRT within the chassis to obtain the optimal alignment of the screen test image reference points B1 and B2 within the bezel.
distance B1 to bezel - distance B2 to bezel | \leq 1.0 mm
- The 4 CRT mounting lugs should not be allowed to protrude outside the overall CRT chassis sides and bottom or above the CRT chassis top cover.
- Tighten the 4 CRT retaining screws.

c. Vertical Linearity

- Select screen test image CD4 (Magenta Grid on black background) by rotating the Time/Div front panel control.

-
- Adjust the **VPOS** and **VSIZE** controls to optimize the screen vertical size and position such that the best alignment is obtained of the soft-key menu markings on the bezel and the gray menu control markings on the screen of test image CD4.

CD96xx Test Grate 4

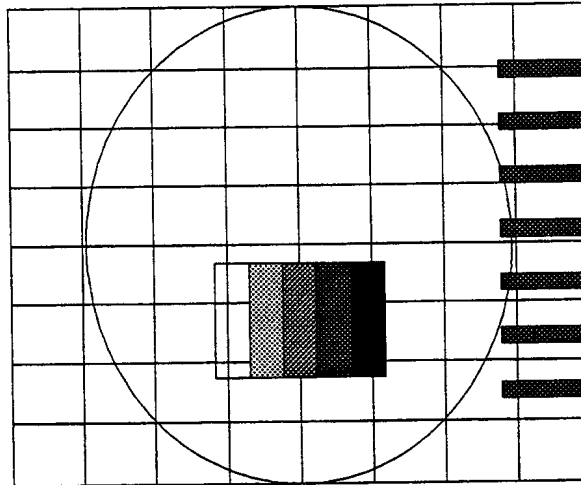

- Verify that the menu markings (each of the 7) on the bezel are aligned horizontally within ± 1.0 mm with the corresponding markings on the screen test image.

d. Control of Screen Image Quality

- Adjust the **Brightness** control on the external adjustment board until the gray-scale test bars on test image CD4 are evenly balanced in color graduation from White to Black. The Black bar (right hand side) should be easily distinguishable from the adjacent bar of dark gray.
- Adjust the **Contrast** on the external adjustment board and **Focus** on the main board until the image is of good quality.
- Verify that there is no jitter of the grid lines (X or Y), the background color is gray and is uniform:
 - No Black holes
 - No color (rainbow) variation
 - No Moiré fringe (wavy lines) visible within the gray background



e. Trapezium & Pin Cushion Adjustment Procedure

- Select screen test image CD3 by rotating the Time/Div front panel control
- Adjust the Trapezium / Pin-Cushion effect using Potentiometers **VR305** and **VR303** (toward the front left of the bottom PCB within the display assembly) until the minimum distortion is achieved.

6.6 Troubleshooting and Flow Charts

6.6.1 Introduction



The troubleshooting information contained in this section is intended for use by qualified personnel having a basic understanding of electronics (analog and digital). In order to simplify servicing and minimize downtime, the following list of possible symptoms, likely causes, and troubleshooting steps have been prepared.

The first step in troubleshooting is to check for obvious items like blown fuses. The power supply is the next item to check before proceeding to more detailed troubleshooting, since noise or low power supply voltages can cause a variety of digital and analog problems.

6.6.2 Line Fuses Replacement

The power supply of the oscilloscope is protected against short circuits and overload by means of two T6.3A / 250 V fuses located above the main plugs.



Turn off the power and disconnect the line cord from the instrument
Disconnect the instrument from other equipment.


To replace line fuses, proceed as follow :


- Open the fuse box by inserting a small flat screwdriver under the plastic cover and remove the fuse carrier from the holder
- Remove the fuse and replace it with the proper type: T6.3 A / 250 V, LeCroy part number: **433 162 630**

6.6.3 Initial Troubleshooting Chart


Most procedures in this section will allow troubleshooting down to the **BOARD LEVEL.**

Defective circuit boards will be repaired or exchanged by the regional LeCroy service office or the local representative (see section 2.2).

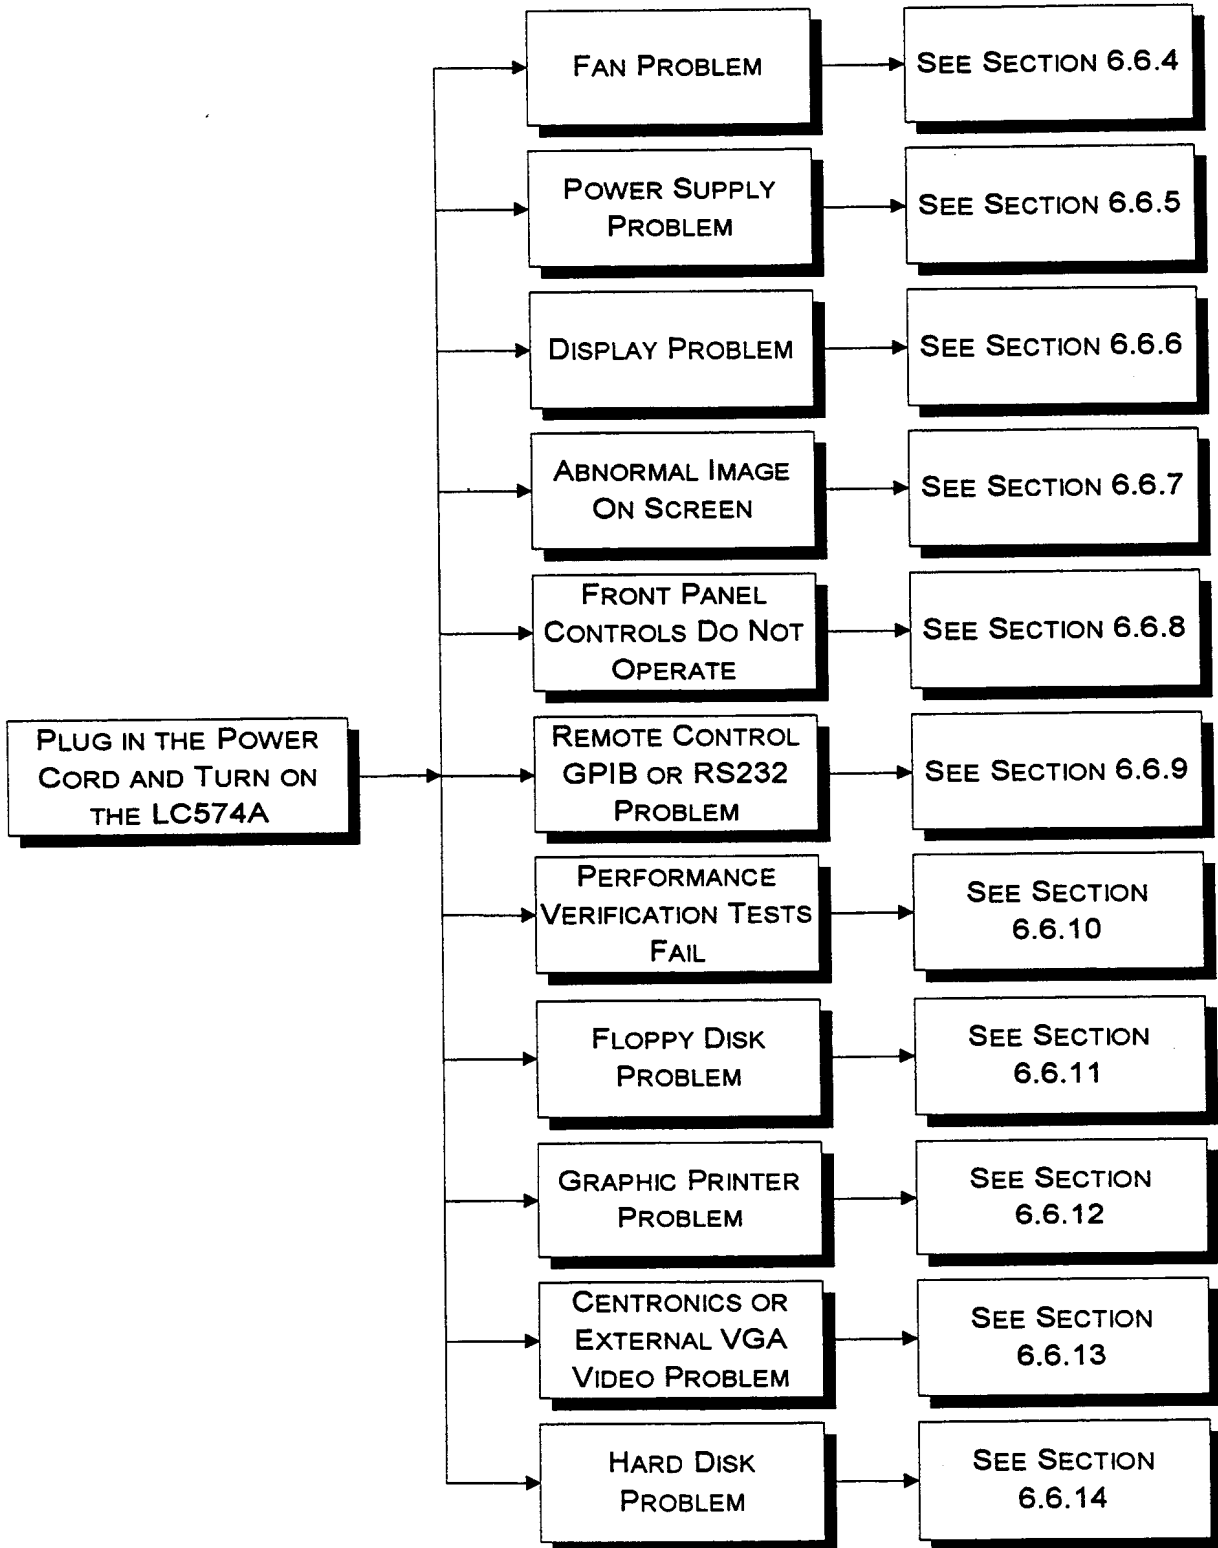


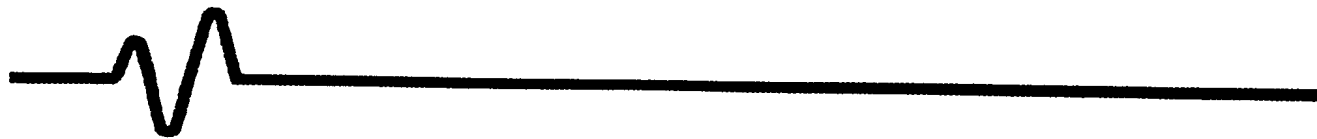


6.6.4 Fan Problem

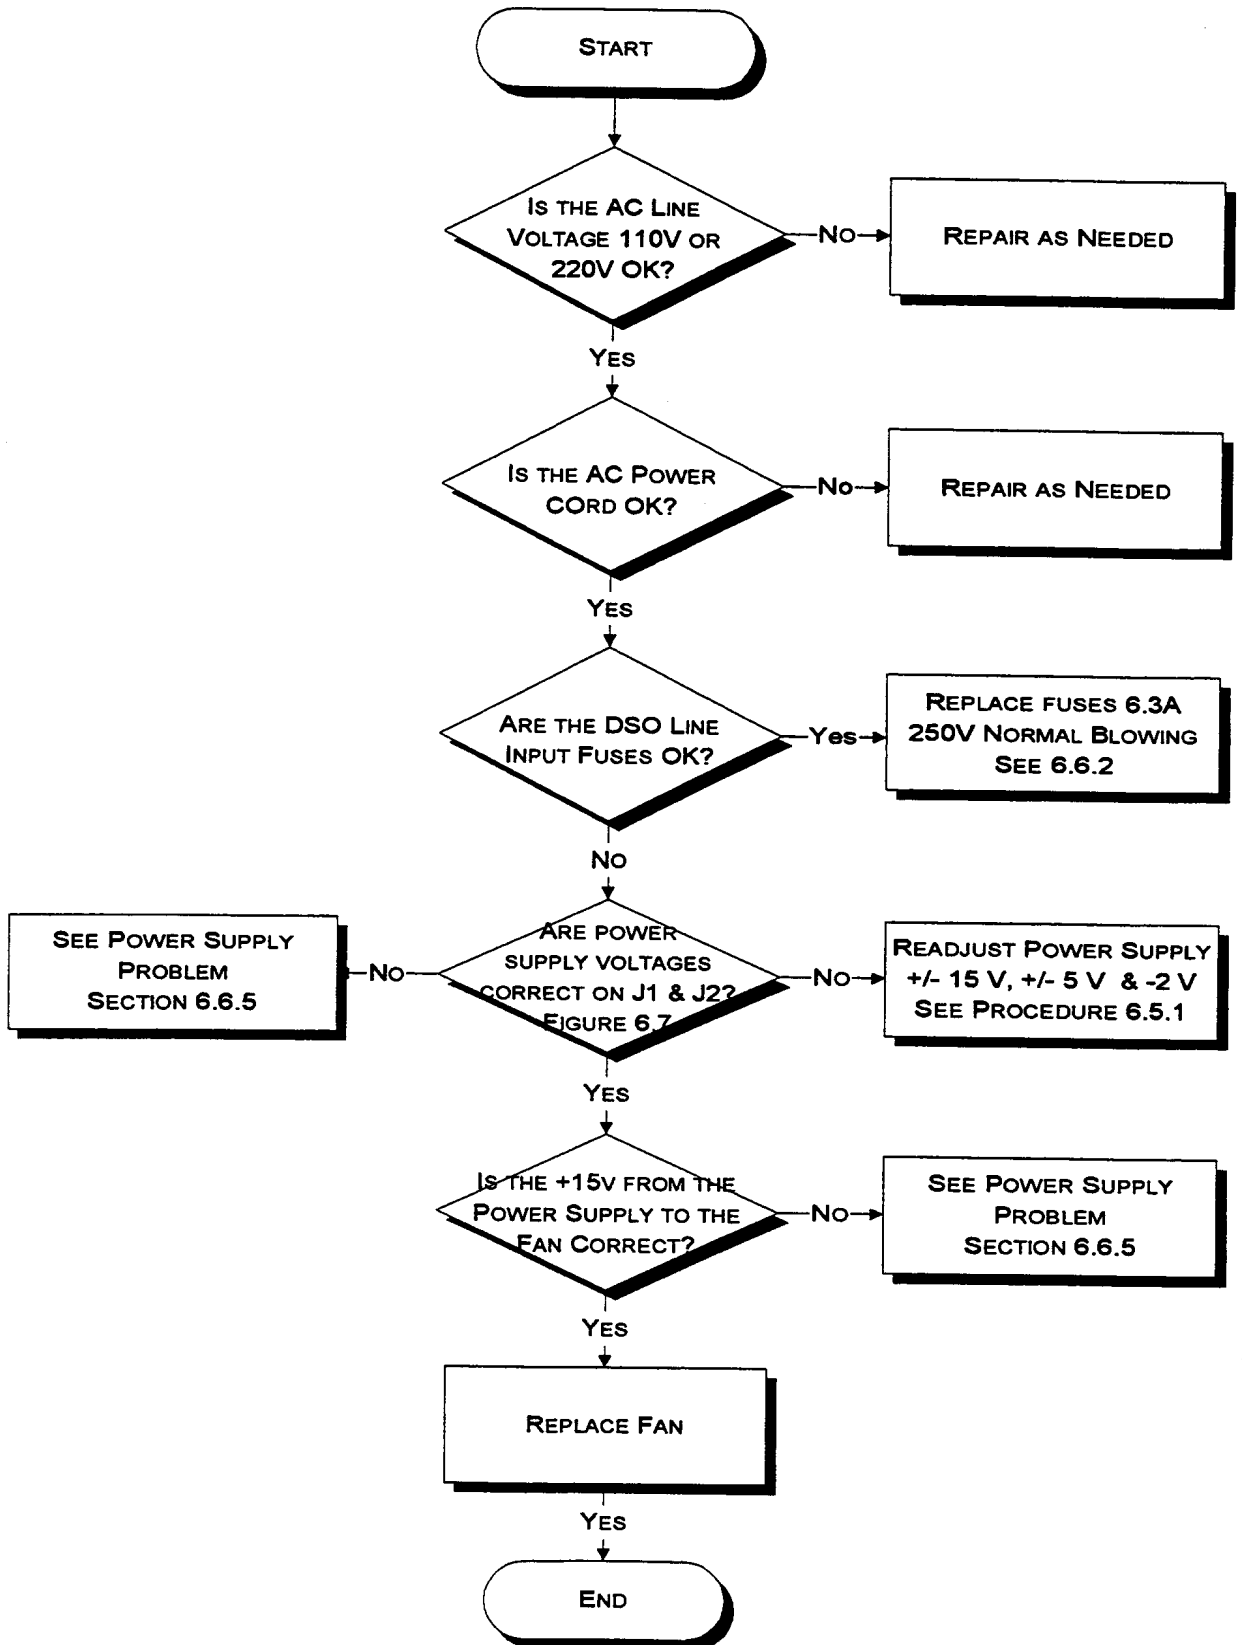


6.6.5 Power Supply Voltages Problem

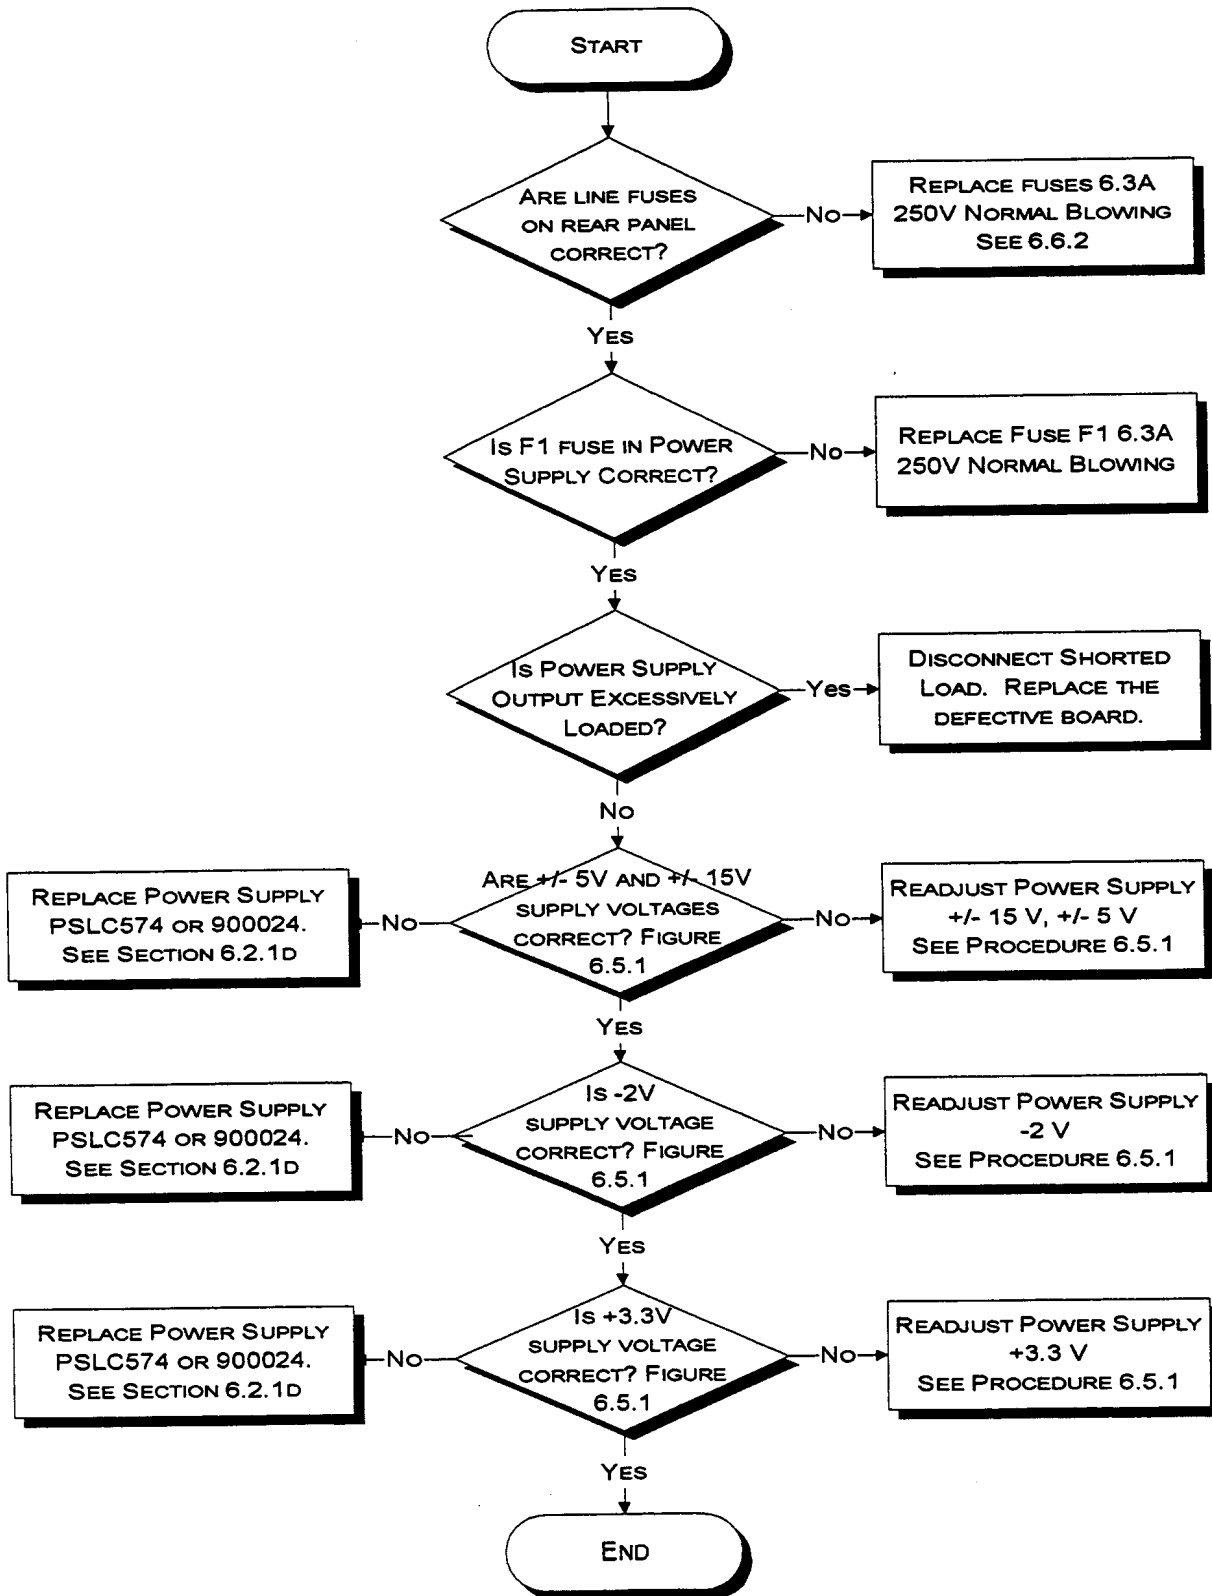


6.6.6 Display Problem

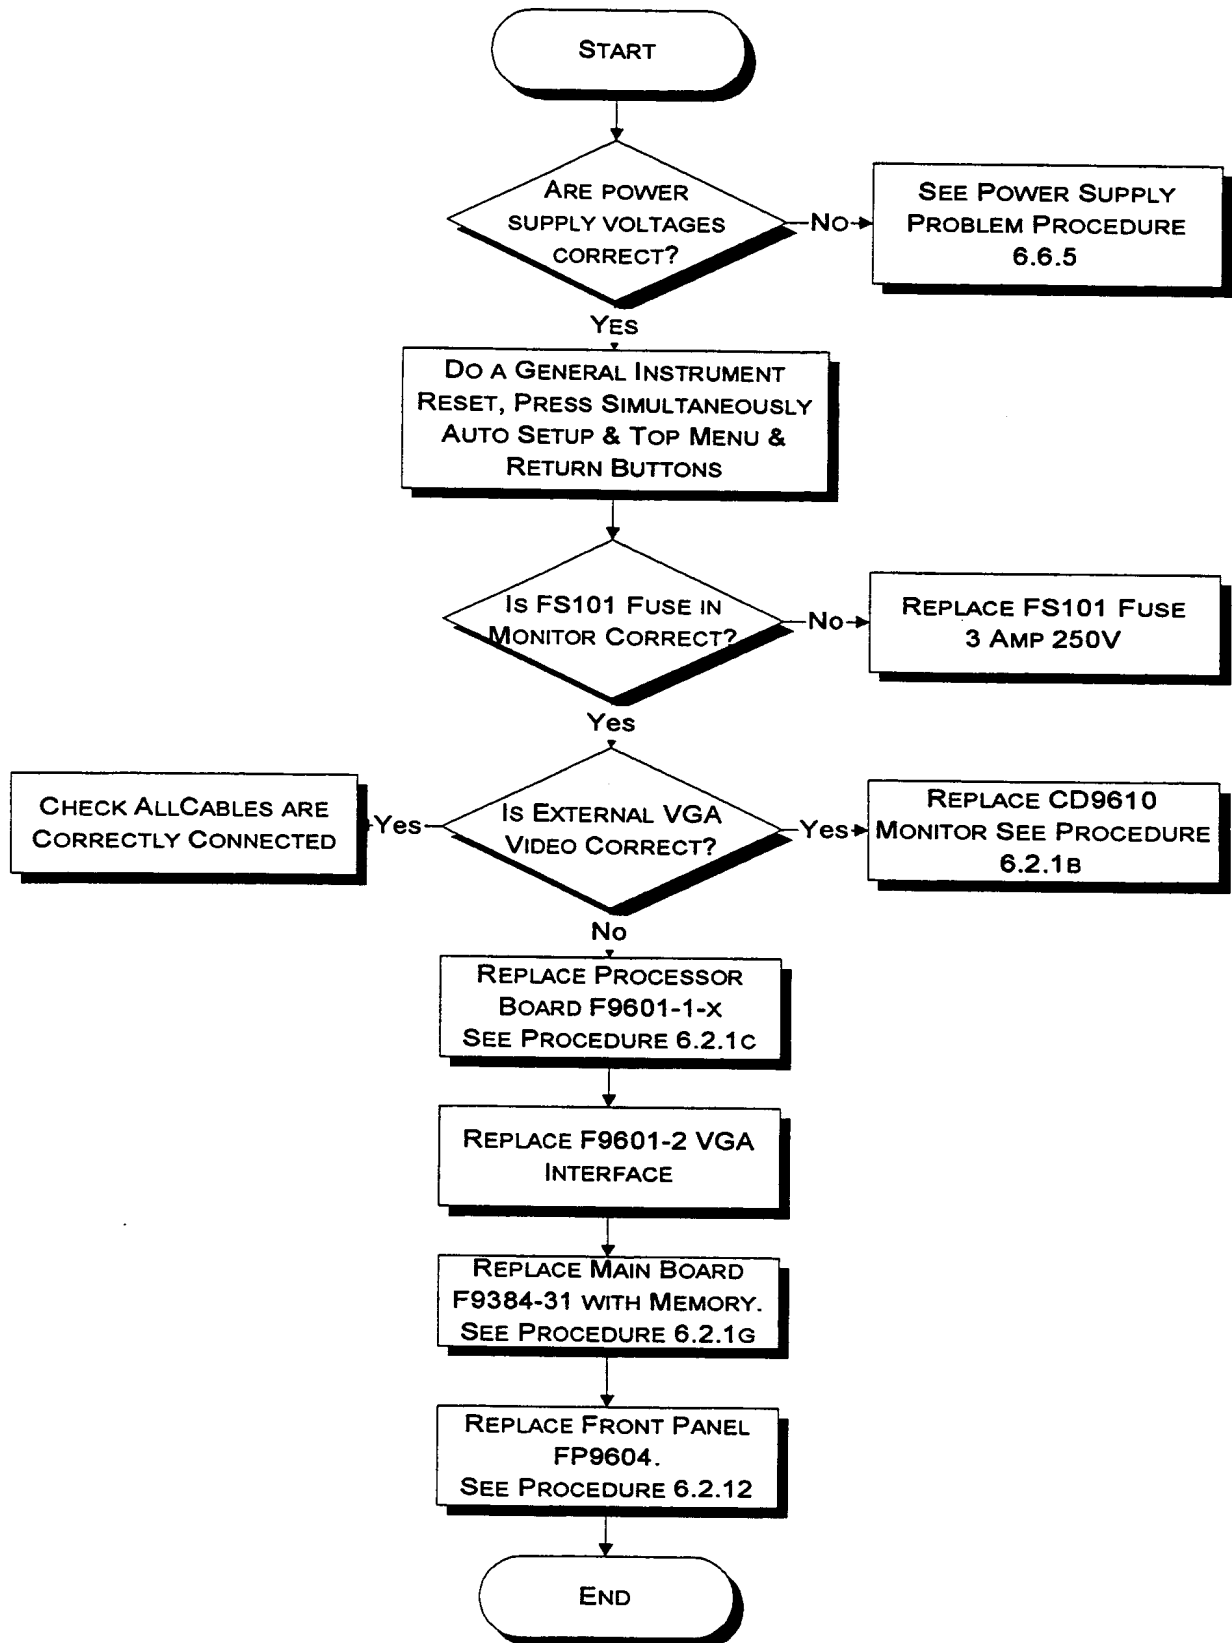


6.6.7 Abnormal Image On Screen

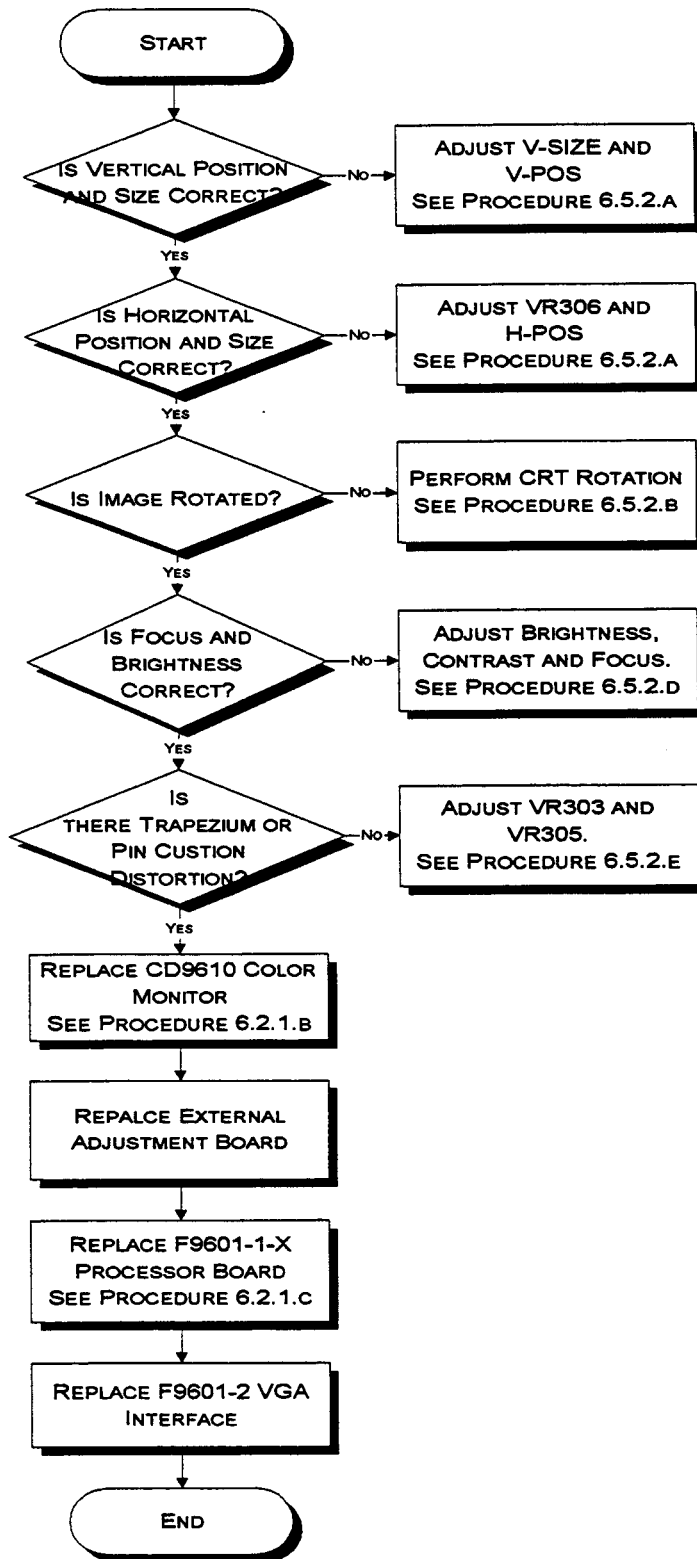


6.6.8 Front Panel Controls Do not Operate

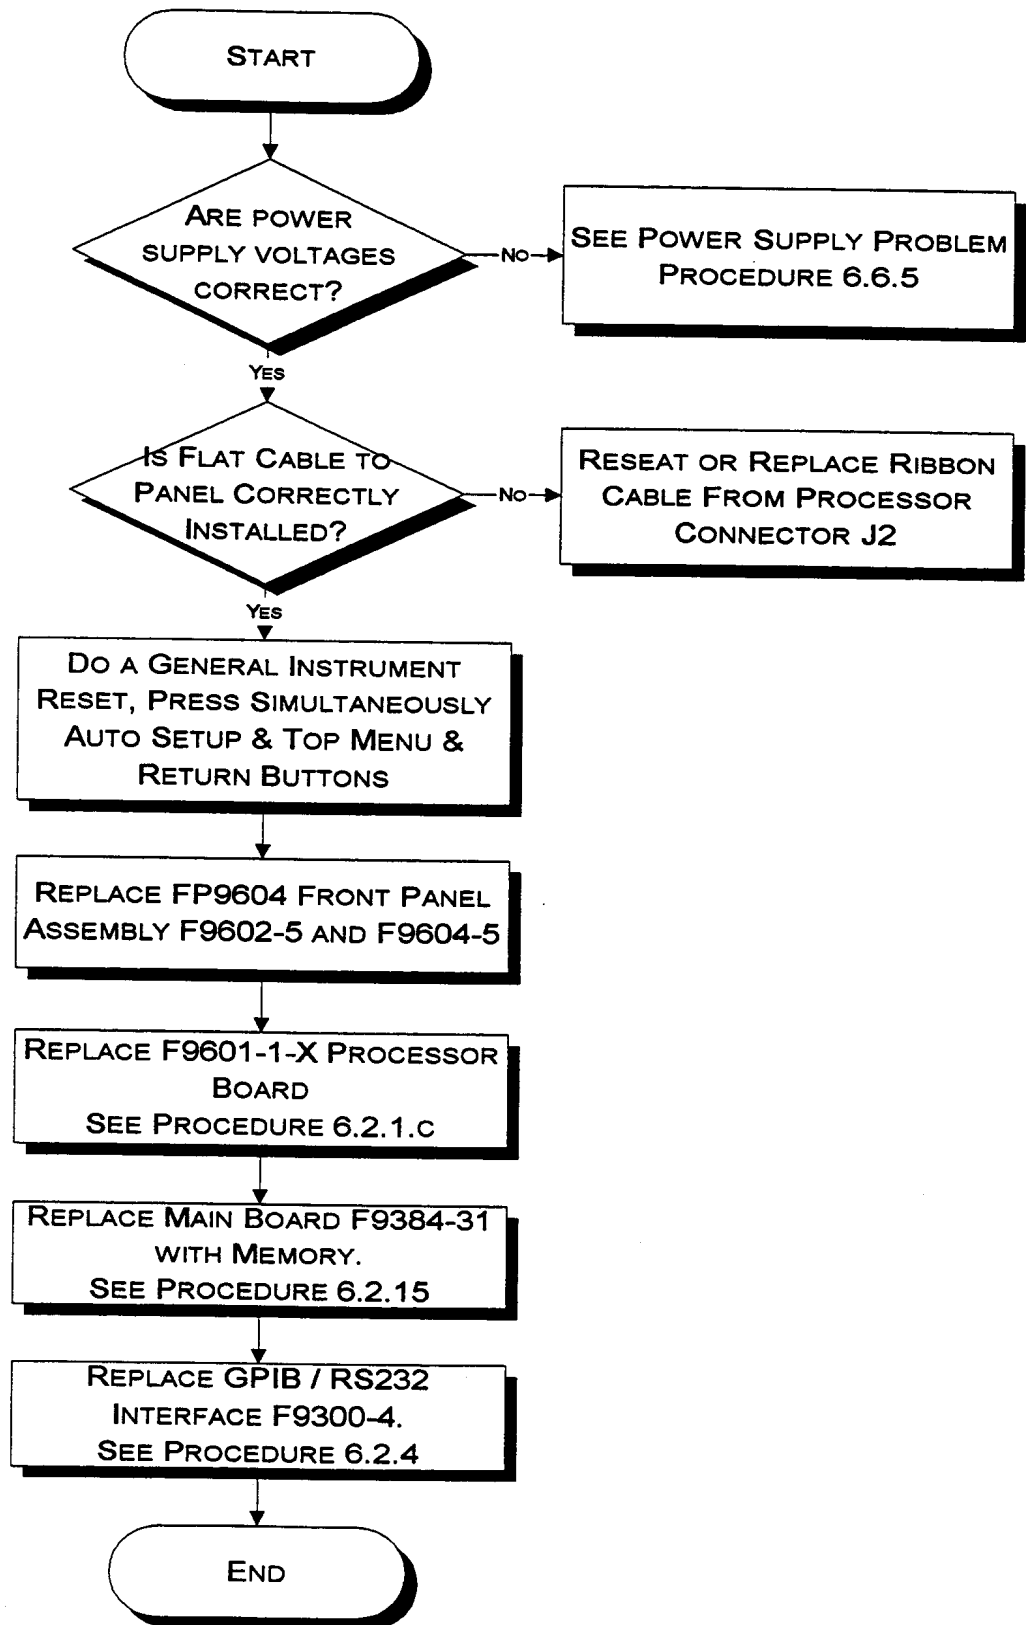


6.6.9 Remote Control GPIB or RS232 Problem

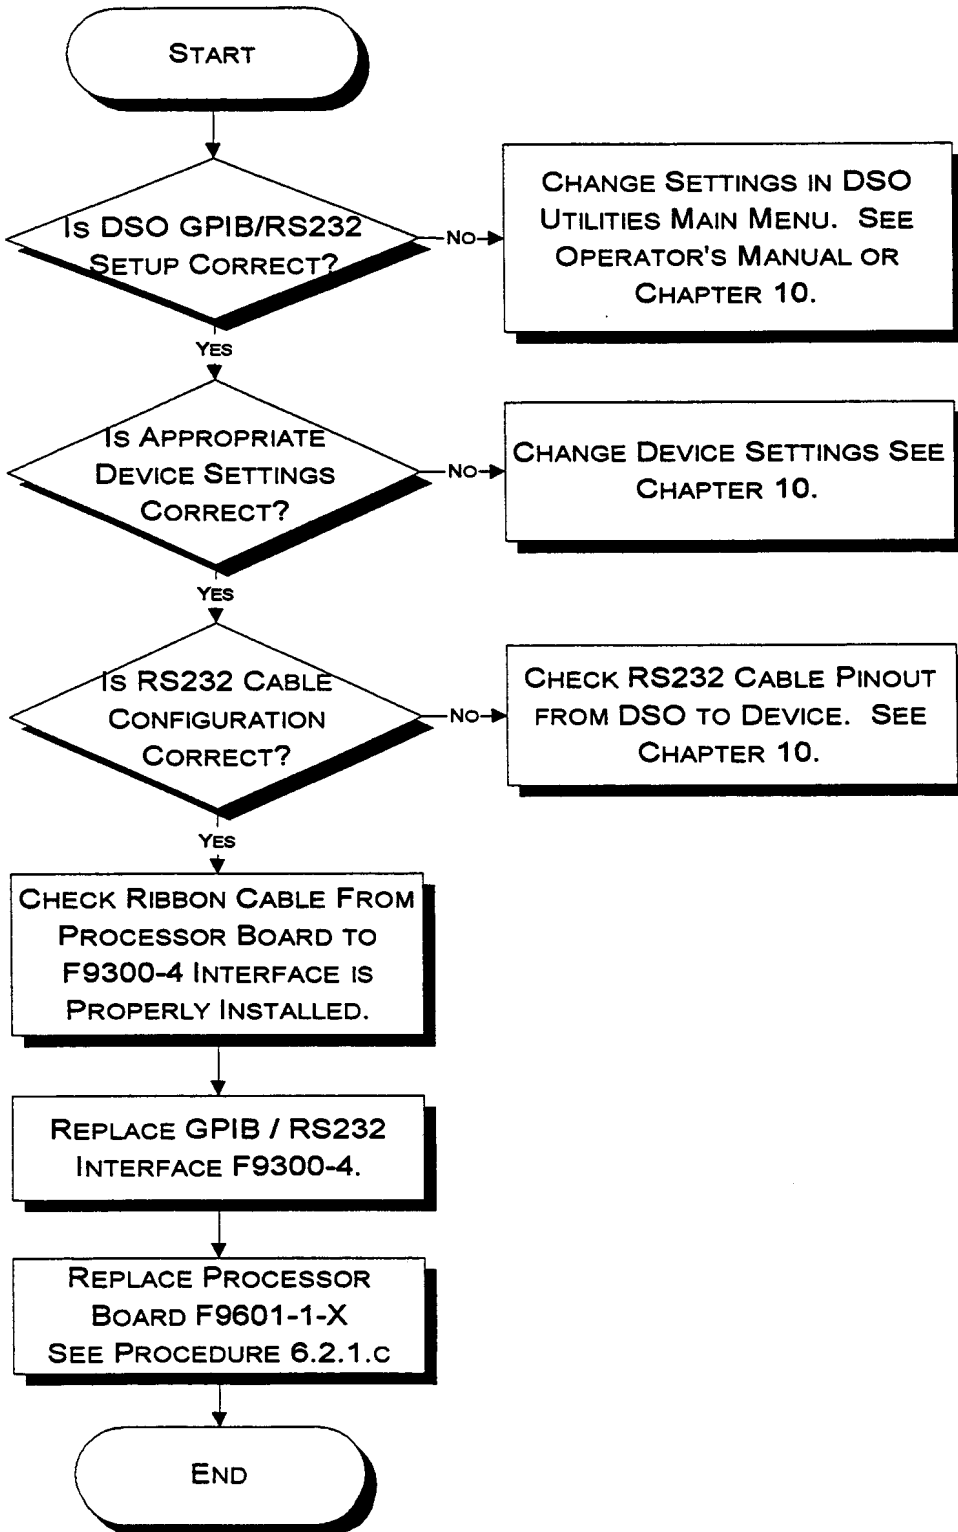


6.6.10 Performance Verification Fails

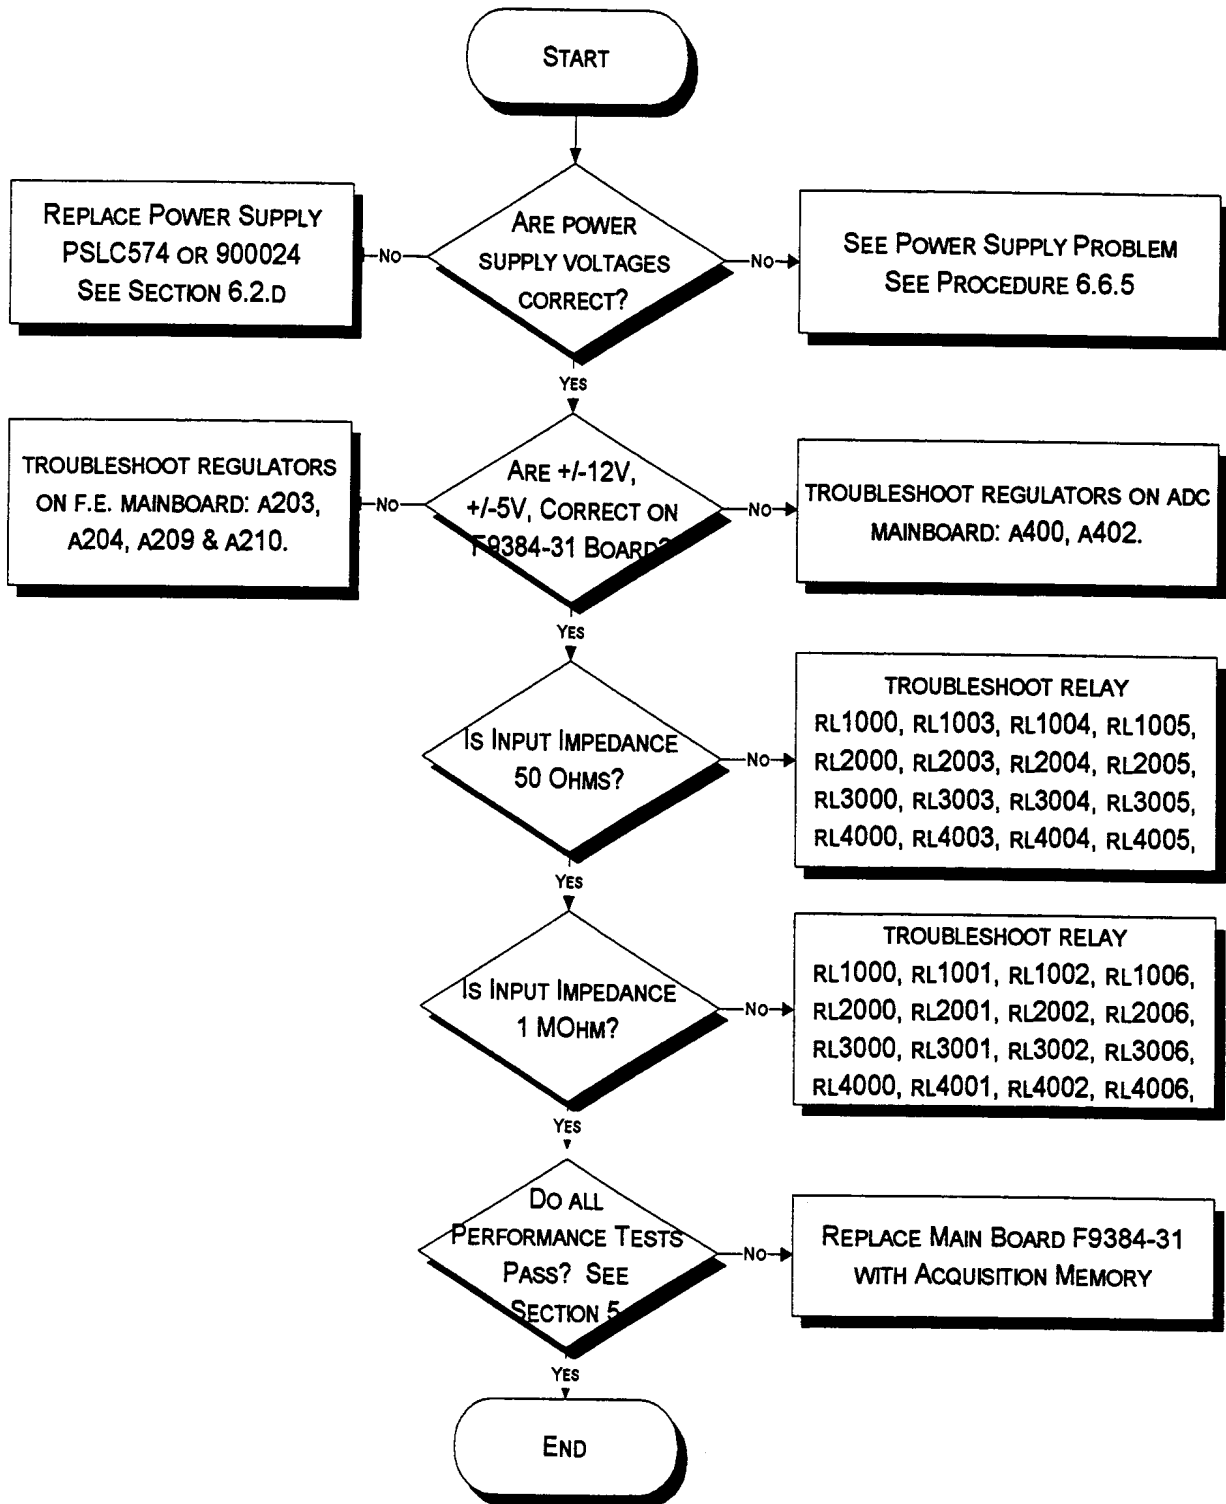


6.6.11 Floppy Disk Drive Problem

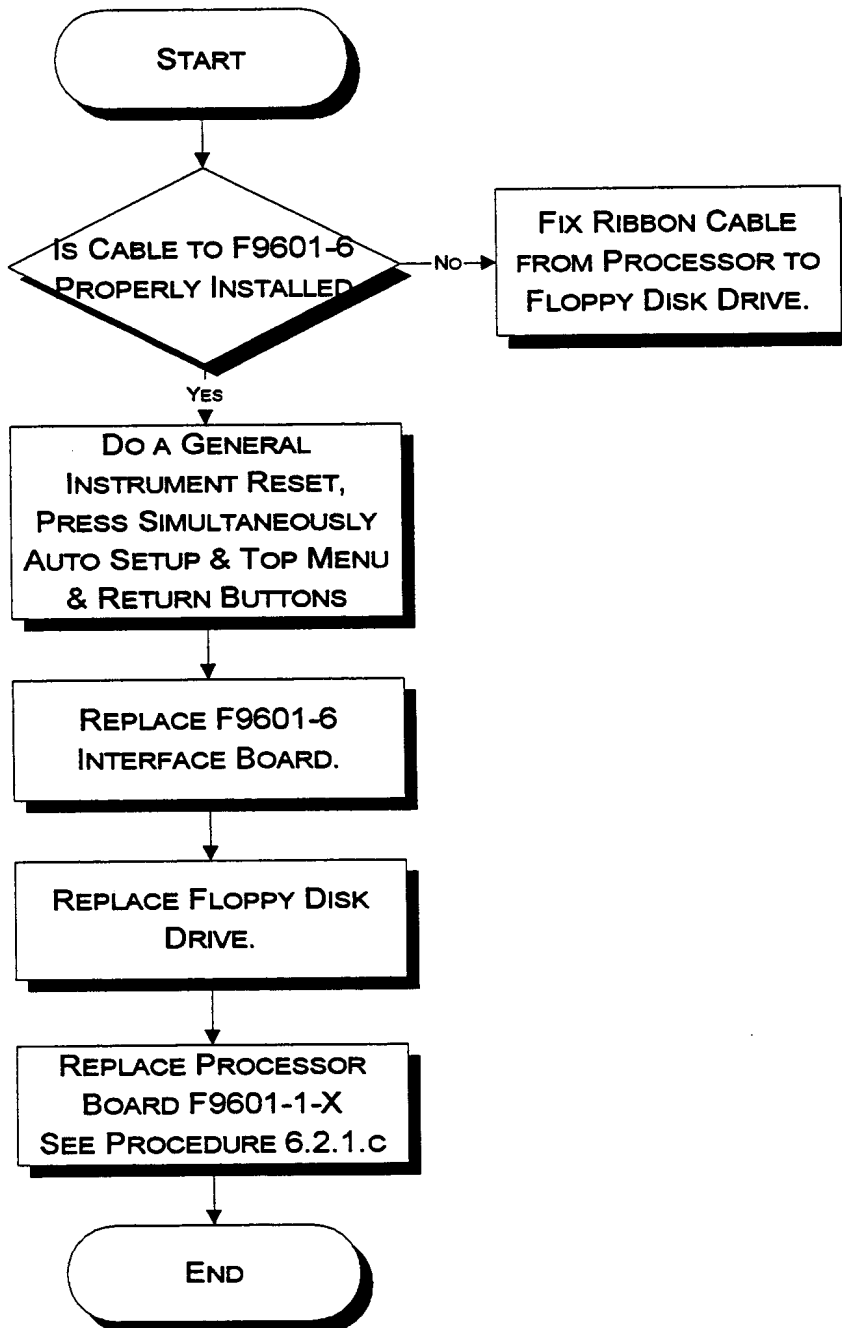

6.6.12 Graphic Printer Problem

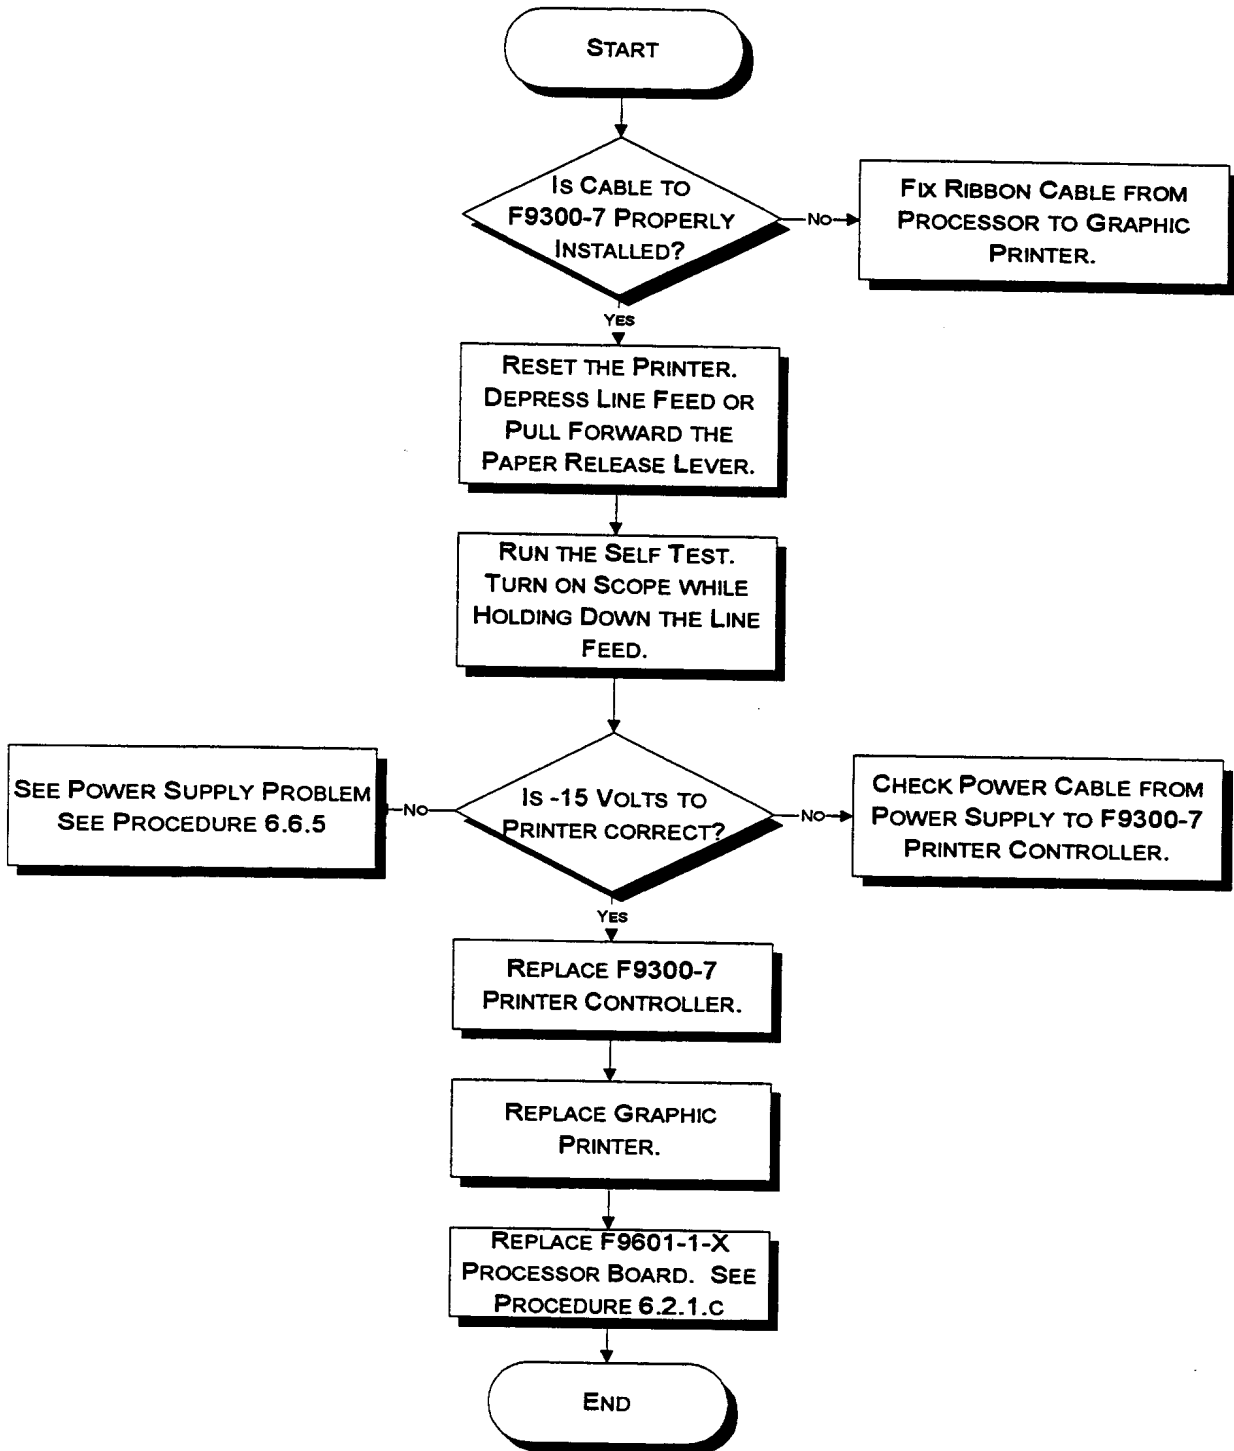

6.6.13 Centronics Problem

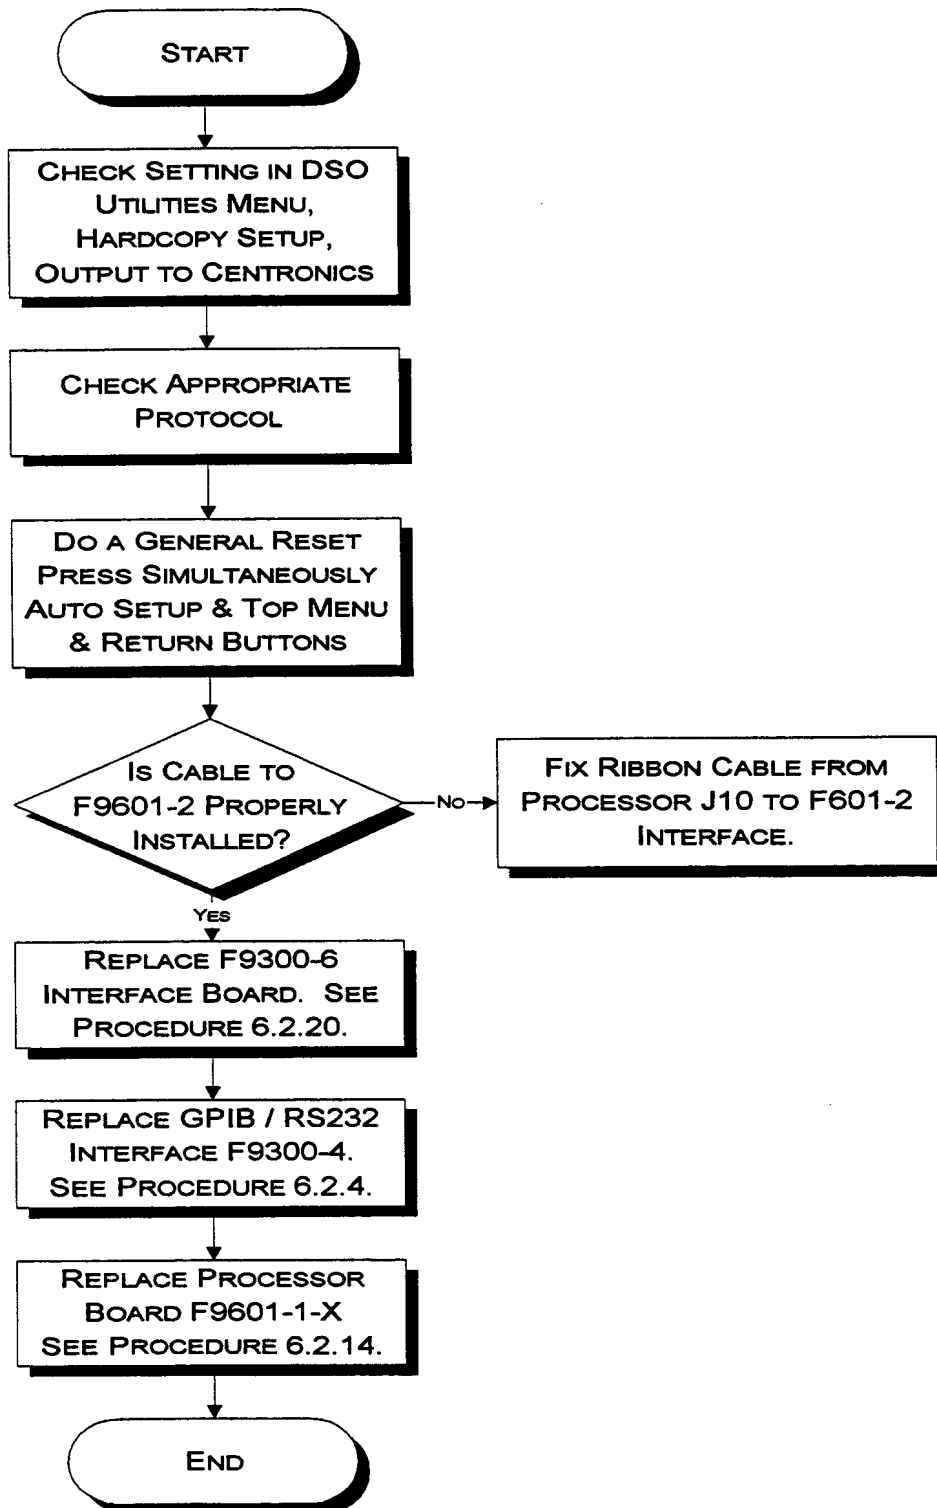

6.6.14 Hard Disk Drive Problem



7. Replaceable Parts

To order parts, contact your local LeCroy service office. A list of the service centers is given in section 2 of this manual. For boards, you can either order a new board or an exchange board. Exchange assemblies are factory repaired, inspected, tested and calibrated. If you order an exchange card, you must return the defective part.

This section applies to the following model :

LC574A, LC574AM & LC574AL

Lecroy Part Number	Description	Rev	Qty
F9601-1-8 for LC574A & AM	Color UP Card & 2X4MB DRAM	E	1
F9601-1-64 for LC574AL	Color UP Card & 2X32MB DRAM	E	1
F9601-2	Centronics & VGA Interface	F	1
9384M-2 for LC574A & AM	Acquisition Memory 2x500K	B	2
9384MEM-2 for LC574AL	Acquisition Memory 2x1M	B	2
F9384-31	Main Card Quad 1000MS/s	D	1
F9300-4	GPIB + RS232 Interface Card	A	1
F9354-4	Time Base Board	E	1
F9601-6	Floppy Disk Drive Assy	D	1
F9300-7	Printer Controller	F	1
F9300-8	Hard Disk Interface	B	1
F9601-8	Main Switch Assembly	A	1
CD9610	Color Display Assy	D	1
FP9604	Front panel Assy 4 channel	K	1
MLC574A	Mechanical parts	C	1
PSLC574 or 900024	Power supply for Color box	B	1
RPLC574	Rear panel assembly	B	1
LCXXX-GP01	Upper cover assembly	B	1
USLC574	Upper shield rod assembly	B	1
ACC-LC574A	Accessories	H	1
205750000	Gate Array 16v8	A	1
705740301	LC574A Front Label	A	1
705704302	LC574AM Front Label	A	1
705740303	LC574AL Front Label	A	1
709600050	9600 Logo LeCroy	A	1
705740017	LC574 Serial Number Plate	A	1
780981015	Flat cable 2x20 (15 cm)	A	1



F9601-1-8 : Processor Card with 2X4MB DRAM

Lecroy Part Number	Description	Rev	Qty
205800130	MODULE DRAM 1MX32 BIT		2
S9601-1	PROCESS. CARD WHOUT DRAM		1

F9601-1-64 : Processor Card with 2X32MB DRAM

Lecroy Part Number	Description	Rev	Qty
205800800	MODULE DRAM 8 MX32 BIT		2
S9601-1	PROCESS. CARD WHOUT DRAM		1

S9601-1 : Processor Card without DRAM

Lecroy Part Number	Description	Rev	Qty
161225103	RES CARBON FILM 10 K		1
161225910	RES CARBON FILM 91 OHMS		2
270170103	TRANSISTOR NPN MPS918		1
290120009	DELAY LINE 9 N-SEC		2
309380016	CRYSTAL OSCILLATOR (PROG) 16 MHZ		1
312590070	BATTERY LITHIUM 3V 70MAH		1
400331020	SOCKET IC SOLD TAIL DIP-20		1
404500068	CONN BD TO BD 68 POS		1
453250072	CONN PC EDGE/SOLD TAIL 72		2
454110026	HDR SOLD TAIL MALE 26 ST		1
454110040	HDR SOLD TAIL/MALE 40/STRAIGHT		2
454110120	HDR SOLD TAIL/MALE 20/STRAIGHT		2
454312010	HDR SOLD TAIL/MALE 10		1
454314016	HDR SOLD TAIL/MALE 16		2
455410096	CONN RT ANGL MALE 96 S-CLIP		1
550010108	SCREW PAN HEAD PHIL M3X8 W/NYLOCK		4
552130101	NUT HEX M3		2
591002130	WIRE TEF BLK SOLID AWG 30		1
595901020	SLEEVING TEFLON AWG 20		1
709450321	HEAT SINK		1
719601103	PC BD PREASS'Y 9601-1		1
CH599045013	THERMALLY CONDUCTIVE ADHESIVE		0
SM200172138	IC 3 TO 8 DECODER 74F138		2
SM200178002	IC 2-INPUT NOR HCT02		1

S9601-1 : Processor Card without DRAM

Lecroy Part Number	Description	Rev	Qty
SM200178004	IC HEX INVERTER HCT04		1
SM200178086	IC 2-IN EXCL-OR HCT86		2
SM200178139	IC 2-TO-4-LINE DECODER HCT139		1
SM200178374	IC D-TYP FLOP 74HCT374		2
SM200276068	IC RTC SERIAL 68HC68T1		1
SM200278390	IC 4-BIT RIPPLE COUNTER 74HCT390		1
SM200344174	IC HEX D-FLOP HCT 174		1
SM205144001	IC 8-MBIT FLASH MEM 28F008SA		2
SM205219257	IC 32K X 8 SCRAM		1
SM205244260	IC 256K X 16 DRAM MCM54260		2
SM205921982	PROGRAMMED GAL DRAMES_Y		1
SM205921983	PROGRAMMED GAL RASADE_Y		1
SM205921984	PROGRAMMED GAL RAMEUR_X		1
SM205921986	PROGRAMMED GAL CARDAN_Z		1
SM205921987	PROGRAMMED GAL GRANDS_Z		1
SM205921988	PROGRAMMED GAL OCCASE_Z		1
SM205921989	PROGRAMMED GAL PROFIL_Z		1
SM205921990	PROGRAMMED GAL SAVEUR_Z		1
SM205921991	PROGRAMMED GAL SEVERE_Z		1
SM205921992	PROGRAMMED GAL VIADUC_Z		1
SM205921993	PROGRAMMED GAL PETITS_Z		1
SM205921996	PROGRAMMED GAL BUDGET_Z		1
SM205921997	PROGRAMMED GAL ASSISE_Z		1
SM205921999	PROGRAMMED GAL RETINE_Z		1
SM207170036	IC HEX BUFFER 3-STATE 74HCT365		3
SM207178541	IC BUFFER/LINE DR HCT541		7
SM207179244	IC BUFFER/LINE DRIV HCT244		1
SM207660150	IC DYNAMIC BUS SIZER MC68150		1
SM207665545	IC FLAT PANEL VGA CONTROLLER		1
SM207878245	IC BUS TRANSCVR HCT245		3
SM207972157	IC DATA SEL/MUX 74F157A		4
SM207978157	IC 2-INPUT MUX HCT157		1
SM208277770	IC DUAL PWR SUPPLY SUPR 7770- 5		1
SM208470358	IC DUAL OP AMP LM358D		2
SM208680916	IC LOW SKEW CLOCK DRIVER 88916		1
SM208780109	IC MICROPOWER DC-DC CONV 1109CS8		1
SM227063201	IC IBM/PC FLOPPY DISK CONTROLLER		1



S9601-1 : Processor Card without DRAM

Lecroy Part Number	Description	Rev	Qty
SM227300059	IC INTERRUPT CONTROLLER UPD71059		1
SM227300603	IC RISC PROCESSOR MPC603E		1
SM232032814	DIODE ARRAY 2814		1
SM236030099	DIODE SO-PKG BAV99		3
SM253032823	DIODE SCHOTTKY 2823		1
SM256232013	DIODE LIGHT EMITTING RED		1
SM270130092	TRANSISTOR NPN BFR92A		1
SM270330848	TRANSISTOR NPN BC848C		1
SM275330858	TRANSISTOR PNP BC858C		1
SM280171005	TRANSISTOR POWER MOSFET MTD10N05E		2
SM300056332	INDUCTOR WOUND 33 UH		1
SM300327102	INDUCTOR WOUND 1 UH		1
SM301502001	BEAD (FERRITE CHIP)		3
SM310300406	CRYSTAL 32768 HZ		1
SM310900024	CRYSTAL 24 MHZ SMD		1
SM653101201	RES CHIP 1% 10.0 OHMS		4
SM653101218	RES CHIP 1% 15.0 OHMS		1
SM653101234	RES CHIP 1% 22.1 OHMS		28
SM653101266	RES CHIP 1% 47.5 OHMS		7
SM653101269	RES CHIP 1% 51.1 OHMS		9
SM653101289	RES CHIP 1% 82.5 OHMS		3
SM653101297	RES CHIP 1% 100 OHMS		10
SM653101314	RES CHIP 1% 150 OHMS		5
SM653101330	RES CHIP 1% 221 OHMS		1
SM653101334	RES CHIP 1% 243 OHMS		2
SM653101347	RES CHIP 1% 332 OHMS		1
SM653101362	RES CHIP 1% 475 OHMS		1
SM653101365	RES CHIP 1% 511 OHMS		10
SM653101393	RES CHIP 1% 1.00 K		53
SM653101401	RES CHIP 1% 1.21 K		2
SM653101410	RES CHIP 1% 1.50 K		3
SM653101426	RES CHIP 1% 2.21K		1
SM653101430	RES CHIP 1% 2.43 K		1
SM653101450	RES CHIP 1% 3.92 K		1
SM653101458	RES CHIP 1% 4.75 K		33
SM653101477	RES CHIP 1% 7.50 K		1
SM653101489	RES CHIP 1% 10.0 K		43
SM653101506	RES CHIP 1% 15.0 K		2
SM653101554	RES CHIP 1% 47.5 K		1
SM653101585	RES CHIP 1% 100 K		3
SM653101602	RES CHIP 1% 150 K		1

S9601-1 : Processor Card without DRAM

Lecroy Part Number	Description	Rev	Qty
SM653101635	RES CHIP 1% 332 K		2
SM653101650	RES CHIP 1% 475 K		1
SM653101777	RES CHIP 1% 10.0 M		2
SM654101000	CHIP JUMPER ZERO OHMS		14
SM661207102	CAP CERA CHIP 20% .001 UF		1
SM661207103	CAP CERA CHIP 20% .01 UF		102
SM661207104	CAP CERA CHIP 20% .1 UF		5
SM661255100	CAP CERA CHIP 5% 10 PF		2
SM661255101	CAP CERA CHIP 5% 100 PF		4
SM661255180	CAP CERA CHIP 5% 18 PF		2
SM661255221	CAP CERA CHIP 5% 220 PF		2
SM666217106	CAP MOLD TANT CHIP 10 UF		2
SM666237476	CAP MOLD TANT CHIP 47 UF		1
SM666257336	CAP MOLD TANT CHIP 33 UF		9
SM666327225	CAP MOLD TANT CHIP 2.2 UF		1

9384M-2: Acquisition Memory 2 X 500 K

Lecroy Part Number	Description	Rev	Qty
454110024	HDR 2MM PRESSFIT TO MALE 24		9
719384202	PC BD PREASS'Y 9384L-2	1002	1
SM200170032	IC 2-IN OR GATE 74F32		1
SM200470573	IC 3.3V D-TYPE LATCH		2
SM205211001	IC 32K X 36 SYNC SRAM		16
SM653101339	RES CHIP 1% 274 OHMS		2
SM654101000	CHIP JUMPER ZERO OHMS		9
SM661207104	CAP CERA CHIP 20% .1 UF		51
SM666267227	CAP TANT 220UF 10V 20%		31

9384MEM-2 : Acquisition Memory 2 X 2 M

Lecroy Part Number	Description	Rev	Qty
454110024	HDR 2MM PRESSFIT TO MALE 24		9
719384202	PC BD PREASS'Y 9384L-2	1002	1
SM200170032	IC 2-IN OR GATE 74F32		1
SM200470573	IC 3.3V D-TYPE LATCH		2
SM205211002	IC 64K X 32 SYNC SRAM		16
SM653101339	RES CHIP 1% 274 OHMS		2
SM654101000	CHIP JUMPER ZERO OHMS		9
SM661207104	CAP CERA CHIP 20% .1 UF		51
SM666267227	CAP TANT 220UF 10V 20%		31



F9601-2 : Centronics & VGA Interface

Lecroy Part Number	Description	Rev	Qty
405204000	JACKSCREW 3/16 HEX M/F 4-40THD		6
454110040	HDR SOLD TAIL/MALE 40/STRAIGHT		1
454520025	CONN RT ANGLE FEM 25 S-CLIP		1
454630015	CONN FEM SUBMINIATURE D-15		2
550010706	SCREW ECO-FIX PHIL PAN M3X6 W/NYLOC		2
709601211	9601-2 BRACKET	B	1
719601203	PC BD PREASS'Y 9601-2	B	1
SM253032823	DIODE SCHOTTKY 2823		4
SM270330848	TRANSISTOR NPN BC848C		3
SM301502001	BEAD (FERRITE CHIP)		6
SM653101269	RES CHIP 1% 51.1 OHMS		5
SM653101285	RES CHIP 1% 75.0 OHMS		3
SM653101393	RES CHIP 1% 1.00 K		3
SM653101439	RES CHIP 1% 3.01 K		6
SM653101522	RES CHIP 1% 22.1 K		2
SM661207104	CAP CERA CHIP 20% .1 UF		1
SM661255470	CAP CERA CHIP 5% 47 PF		19
SM661255471	CAP CERA CHIP 5% 470 PF		2

F9384-31 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
900022-01	4 CHANNEL 1 GS/S MAIN BOARD		1

FPLC574-3 : Main Card Panel

Lecroy Part Number	Description	Rev	Qty
FPLC574-3	MAIN CARD FRNT PANEL LC574XX (PEMS)		1

900022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
146544471	CAP MINI ALUM 20% 470 UF		1
146554476	CAP MINI ALUM 20% 47 UF		2
146574227	CAP MINI ALUM 20% 220 UF		3
146654107	CAP MINI ALUM 20% 100 UF		2
158899003	CAP VARIABLE .5 - 2.5 PF		4
161030000	RES COMP ZERO OHMS		1
161225390	RES CARBON FILM 39 OHMS		1
161225820	RES CARBON FILM 82 OHMS		1
168909001	RES ULTRA PREC 900K 0.25% 500V		10
169416473	RESISTOR DISC NTC 47 K		1
208123002	IC +12 VOLT REG LM340T-12		3
208124003	IC VOLT REG -12V LM320T-12		3
235010005	DIODE RECTIFIER 1N4005		1
290120005	DELAY LINE 5 N-SEC		1
290120009	DELAY LINE 9 N-SEC		1
290199015	DELAY LINE 1.5 NS		2
290199020	DELAY LINE 2.0 NS		1
311210010	CRYSTAL OSCILLATOR 3PPM 10MHZ		1
430430004	RELAY HF 12V MINIATURE		21
430490003	RELAY 2 FORM C DPDT		1
430490005	RELAY 1 FORM C SPDT		8
454111024	HDR 2MM PRESSFIT TO FEMALE 4X6		18
454112024	HDR SOLD TAIL/MAIL 24		1
454117003	FRICTION HEADER STRAIGHT .1 CENTERS		1
454220096	HDR PRESSFIT TO FEM 96		1
454312004	HDR SOLD TAIL/WW 4		4
454312010	HDR SOLD TAIL/MALE 10		1
454313010	HDR DIP SOLD TO PCB 2X5		7
454340002	HDR SOLD TAIL/WW 2		10
454390002	HDR FRICTION LOCK 2-PIN		1
454710002	HDR SOLD TAIL/MALE 2		1
505019968	HEAT SINK VERTICAL MTG		2
505070220	HEATSINK WITH TAG FOR TO-220		2
505112016	HEAT SINK FOR DIP-16		5
505121002	HEATSINK 1.5"X.65", .8" HIGH		2
505121003	HEATSINK, 1.1"X1.0", .8" HIGH		2
505121004	HEATSINK, .9"X1.0", 8" HIGH		1
530040007	BUZZER 85DB 5V SMALL		1
593910001	CABLE CO-AXIAL RG178B/U		5
594220026	MICRO WIRE CLIP, SIDE ENTRY		7



900022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
709354411	9354-4 OSCILLATOR SHIELD		1
709370311	HFE419 HEATSINK		4
709370321	HFE419 HEATSINK CLIP		4
709384013	HEATSINK 24 X 23 X 32H	1001	2
709384014	HEATSINK 42 X 25 X 32H	1000	2
7093XXP01	RIGHT ANGLE RECEPT. CONNECTOR		6
7093XXP21	BULKHEAD RECEPTACLE FEMALE BNC		6
719384301	PC BD PREASSEMBLY 9384-3	1301	1
CH599041022	HEAT SINK COMPOUND 251		0
CH599045013	THERMALLY CONDUCTIVE ADHESIVE		0
F9354-4	400-500MHZ PLL OSCILLATOR	1005	1
F9384-7	T-COIL 9384	1001	4
FP9384-3	MAIN CARD FRONT PANEL 9384-3	1100	1
HAD621	HYBRID 1GS/S DUAL DIFF INPUT ADC	1022	4
HFE624	HYBRID FRONT END HFE624	1000	4
MCL404	IC MEM GATE ARRAY MCL404		1
MDX622	IC 2:8 ECL TO TTL DEMULTIPLEXER		4
MST412	IC SMART TRIGGER GATE ARRAY MST412		1
MTB411	IC TIME BASE GATE ARRAY MTB411		1
MTR408	INTEGRATED TRIGGER		5
SM158240200	CAP VARIABLE .6 - 2.5 PF		10
SM158240201	CAP VARIABLE 1 - 5 PF		1
SM158240203	CAP VARIABLE 5 - 18 PF		8
SM168651297	RES METAL FILM 1% 100 OHM		2
SM168651315	RES METAL FILM 1% 154 OHMS		14
SM168659004	RES METAL FILM .1% 900 OHMS		1
SM168659006	RES METAL FILM .1% 111.1 K		1
SM168659007	RES METAL FILM .1% 3.00K		4
SM168659297	RES METAL FILM .1% 100 OHMS		3
SM185457201	RES VARI CERMET 200 OHMS		5
SM185457203	RES VARI CERMET 20 K		5
SM185457501	RES VARI CERMET 500 OHMS		4
SM185457502	RES VARI CERMET 5 K		1
SM185457503	RES VARI CERMET 50 K		4
SM185657500	RES VARI CERMET 500 OHMS 3MM		12
SM190361222	RES NETWORK 2.2K		1
SM200167102	IC NOR GATE 10H102		2

90022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
SM200167164	IC 8 TO 1 MPLX 10H164		1
SM200169016	IC BINARY UP COUNTER 10E016		3
SM200169191	IC UP-DOWN BIN COUNTER N74F191D		5
SM200170032	IC 2-IN OR GATE 74F32		2
SM200178000	IC 2-INPUT NAND HCT00		1
SM200178002	IC 2-INPUT NOR HCT02		3
SM200178030	IC 8-IN NAND HCT30		1
SM200178074	IC D-TYP FLOP 74HCT74		2
SM200178138	IC 3-TO-8-LINE DECODER HCT138		4
SM200178273	IC D-TYP FLOP 74HCT273		2
SM200178374	IC D-TYP FLOP 74HCT374		1
SM200278040	IC COUNTER HCT4040		1
SM200470573	IC 3.3V D-TYPE LATCH		4
SM201164104	IC QUINT 2-IN AND/NAND 10E104		1
SM201164131	IC M/S D-TYP FLOP 10E131		1
SM201174001	IC ECL 4 IN OR/NOR 10EL01D		3
SM201174005	IC ECL 2-IN DIFF AND/NAND 10EL05D		16
SM201174011	IC ECL 1:2 DIFF CLOCK DRVR 10EL11D		25
SM201174031	IC ECL FLIP FLOP SET/RESET 10EL31D		9
SM201274032	IC ECL DIVIDE BY 2 10EL32D		3
SM201274033	IC ECL DIVIDE BY 4 MC10EL33		1
SM201570016	IC ECL DIFF RECEIVER 10EL16D		2
SM201574058	IC ECL 2:1 MUX 10EL58D		1
SM205045300	PROGRAMMED GAL MIMOSA-A		1
SM205045350	PROGRAMMED GAL ROUTE1-A		1
SM205045351	PROGRAMMED GAL ROUTE2-A		1
SM205045352	PROGRAMMED GAL ROUTE2-B		1
SM205045354	PROGRAMMED GAL AVENUE-A		1
SM205045355	PROGRAMMED GAL RUELLE-A		1
SM205045357	PROGRAMMED GAL CHEMIN-A		1
SM205045358	PROGRAMMED GAL ROUTE 3-C		1
SM205045359	PROGRAMMED GAL ARTERE-B		1
SM205108016	IC EEPROM 16K BIT IIC BUS		2
SM205618165	IC 8-BIT SHIFT REG 74HCT165		1
SM205618594	IC 8-BIT SHIFT REG 74HC594		23
SM205701070	IC 128KX8 STAT RAM 70 NS		4
SM206070584	IC BUS CONTROLLER 8584		1
SM206260858	IC OCT 8-BIT ADC SYSTEM 858		1
SM206884623	IC OCTAL BUS TRANSCVR ABT623		6
SM206885245	IC BUS TRANSCVR ABT245		2



900022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
SM206970457	IC 3 DIFF 2:1 MUX MC10E457		1
SM206980056	IC ECL DUAL DIFF 2:1 MUX MC100EL56		7
SM207130025	TRANSISTOR NPN BFT25A		1
SM207170367	IC HEX BUFFER 74HC367		1
SM207171244	IC OCTAL BUFFER ABT244		4
SM207280703	IC 16-BIT DAC 703		1
SM207288800	IC OCTL 8-BIT CMOS D/A CONV DAC8800		3
SM207360125	IC TRANSLATOR MC10125		3
SM207367124	IC TRANSLATOR 10H124		1
SM207367125	IC TRANSLATOR 10H125		1
SM207770201	IC ANALOG SWITCH DG201		4
SM207770403	IC ANALOG SWITCH DG403		1
SM207770442	IC ANALOG SWITCH DG442		5
SM207960157	IC QUAD 2:1 MULTIPLEXER 10E157		1
SM207970057	IC 4:1 DIFF MUX 10EL57		3
SM207970139	IC DECODER/DEMUX 74F139		3
SM207970351	IC OCTAL ANALOG MUX/DEMUX 74HC4351		1
SM207970508	IC ANALOG MULT PLX 8 TO 1 DG508		1
SM207972157	IC DATA SEL/MUX 74F157A		1
SM207978153	IC 4-INPUT MUX HCT153		1
SM207978251	IC 8-IN MUX 3-ST 74HCT251		2
SM208030245	IC TRANS ARRAY NPNX6 SL3245		1
SM208470037	IC OP AMP 37GS		1
SM208470111	IC HF BUFFER CLC111		4
SM208470324	IC OP AMP LM324M		1
SM208470347	IC J-FET OP AMP 347		12
SM208470351	IC J-FET OP AMP 351		1
SM208470353	IC DUAL OP AMP LF353		3
SM208470705	IC OP AMP PICOAMP INPUT AD705		13
SM208480640	IC WIDEBAND OP AMP OPA640		4
SM208570078	IC LOW POWER REG +12V 78L12		1
SM208570805	IC POS VOLT REG 78L05		2
SM208591336	IC VOLT REF DIODE LM336		2
SM208870339	IC VOLT COMPARATOR 339		6
SM208880079	IC LOW POW REG -12V 79L12		1
SM208880337	IC ADJ VOLT REG LM337		4
SM208971881	IC VIDEO SYNC SEPARATOR LM1881		1
SM229020150	MLC TRANS VOLT SUPPRESSOR		6
SM232022822	DIODE ARRAY SCHOTTKY 2822		2

90022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
SM232120070	DIODE ARRAY BAV70		3
SM236030099	DIODE SO-PKG BAV99		76
SM236654004	DIODE RECTIFIER 4004		2
SM240050033	DIODE ZENER TZM-C-3V3		5
SM240050051	DIODE ZENER TZM-C-5V1		1
SM240218451	DIODE ZENER BZX84C5V1		19
SM240218462	DIODE ZENER BZX84C6V2		4
SM240218475	DIODE ZENER BZX84C7V5		2
SM252023018	DIODE PIN BAT18		5
SM252080682	DIODE PIN BA682		5
SM253032823	DIODE SCHOTTKY 2823		11
SM270030020	TRANSISTOR NPN BFS20		1
SM270130092	TRANSISTOR NPN BFR92A		4
SM270130093	TRANSISTOR NPN BFR93A		3
SM270160520	TRANSISTOR NPN HF BFG520/X		13
SM275030092	TRANSISTOR PNP BFT92		4
SM275030093	TRANSISTOR PNP BFT93		2
SM275030550	TRANSISTOR PNP BF550		6
SM275330858	TRANSISTOR PNP BC858C		10
SM280120416	TRANSISTOR JFET N MMBF4416		5
SM280171005	TRANSISTOR POWER MOSFET MTD10N05E		4
SM289772003	TRANSISTOR ARRAY 2003		4
SM300446150	INDUCTOR 10% .015 UH		1
SM301502001	BEAD (FERRITE CHIP)		36
SM311414318	CRYSTAL OSCILLATOR 14.31818MHZ		1
SM454120025	CONN 1MM FEMALE 25		1
SM651104182	RES CHIP 1% 25PPM 1.8K		1
SM651104183	RES CHIP 1% 25PPM 18 K		1
SM651104204	RES CHIP 1% 25PPM 200 K		1
SM651104241	RES CHIP 1% 25PPM 240 OHM		1
SM651104392	RES CHIP 1% 25PPM 3.9K		5
SM652061024	RES CHIP 1% 2.4 OHM .063W		4
SM652061181	RES CHIP 1% 182 OHM .063W		4
SM652061820	RES CHIP 1% 82.0 OHM .063W		4
SM652110904	RES CHIP (E24) 0.5% 900K		1
SM652115062	RES CHIP (E24) 5% 6.2 OHMS		1
SM652181590	RES CHIP 1% PRECISION 113K		8
SM653101201	RES CHIP 1% 10.0 OHMS		5
SM653101230	RES CHIP 1% 20.0 OHMS		2
SM653101234	RES CHIP 1% 22.1 OHMS		18
SM653101251	RES CHIP 1% 33.2 OHMS		24
SM653101255	RES CHIP 1% 36.5 OHMS		2



900022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
SM653101266	RES CHIP 1% 47.5 OHMS		2
SM653101269	RES CHIP 1% 51.1 OHMS		85
SM653101273	RES CHIP 1% 56.2 OHMS		20
SM653101281	RES CHIP 1% 68.1 OHMS		99
SM653101285	RES CHIP 1% 75.0 OHMS		15
SM653101289	RES CHIP 1% 82.5 OHMS		13
SM653101297	RES CHIP 1% 100 OHMS		32
SM653101305	RES CHIP 1% 121 OHMS		74
SM653101308	RES CHIP 1% 130 OHMS		37
SM653101314	RES CHIP 1% 150 OHMS		28
SM653101322	RES CHIP 1% 182 OHMS		150
SM653101326	RES CHIP 1% 200 OHMS		41
SM653101330	RES CHIP 1% 221 OHMS		13
SM653101334	RES CHIP 1% 243 OHMS		8
SM653101339	RES CHIP 1% 274 OHMS		6
SM653101343	RES CHIP 1% 301 OHMS		13
SM653101347	RES CHIP 1% 332 OHMS		13
SM653101351	RES CHIP 1% 365 OHMS		3
SM653101354	RES CHIP 1% 392 OHMS		21
SM653101358	RES CHIP 1% 432 OHMS		16
SM653101362	RES CHIP 1% 475 OHMS		23
SM653101365	RES CHIP 1% 511 OHMS		5
SM653101369	RES CHIP 1% 562 OHMS		5
SM653101373	RES CHIP 1% 619 OHMS		7
SM653101377	RES CHIP 1% 681 OHMS		1
SM653101381	RES CHIP 1% 750 OHMS		3
SM653101385	RES CHIP 1% 825 OHMS		1
SM653101393	RES CHIP 1% 1.00 K		111
SM653101397	RES CHIP 1% 1.10 K		10
SM653101401	RES CHIP 1% 1.21 K		7
SM653101410	RES CHIP 1% 1.50 K		3
SM653101416	RES CHIP 1% 1.74K		4
SM653101418	RES CHIP 1% 1.82 K		15
SM653101422	RES CHIP 1% 2.00 K		6
SM653101439	RES CHIP 1% 3.01 K		1
SM653101443	RES CHIP 1% 3.32 K		30
SM653101450	RES CHIP 1% 3.92 K		5
SM653101458	RES CHIP 1% 4.75 K		8
SM653101461	RES CHIP 1% 5.11 K		40
SM653101465	RES CHIP 1% 5.62 K		8
SM653101481	RES CHIP 1% 8.25 K		6
SM653101489	RES CHIP 1% 10.0 K		119
SM653101506	RES CHIP 1% 15.0 K		1
SM653101509	RES CHIP 1% 16.2 K		5

90022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
SM653101514	RES CHIP 1% 18.2 K		1
SM653101522	RES CHIP 1% 22.1 K		1
SM653101531	RES CHIP 1% 27.4 K		1
SM653101557	RES CHIP 1% 51.1 K		4
SM653101569	RES CHIP 1% 68.1 K		5
SM653101585	RES CHIP 1% 100 K		2
SM653101602	RES CHIP 1% 150 K		4
SM653101614	RES CHIP 1% 200 K		4
SM653101638	RES CHIP 1% 357K		8
SM653101639	RES CHIP 1% 365 K		8
SM653101642	RES CHIP 1% 392 K		8
SM653101650	RES CHIP 1% 475 K		1
SM653101665	RES CHIP 1% 681 K		1
SM653101673	RES CHIP 1% 825 K		2
SM653101681	RES CHIP 1% 1.00 M		9
SM653181999	THERMAL SHUNT		1
SM653185107	RES CHIP 5% 100PPM 100M		5
SM654101000	CHIP JUMPER ZERO OHMS		50
SM661205822	CAP CERA CHIP 8200 PF		5
SM661207102	CAP CERA CHIP 20% .001 UF		4
SM661207103	CAP CERA CHIP 20% .01 UF		522
SM661207104	CAP CERA CHIP 20% .1 UF		157
SM661207223	CAP CERA CHIP 20% .022 UF		8
SM661255010	CAP CERA CHIP 1.0 PF		1
SM661255039	CAP CERA CHIP +/-0.25PF 3.9 PF		4
SM661255056	CAP CERA CHIP 5.6 PF		2
SM661255100	CAP CERA CHIP 5% 10 PF		9
SM661255101	CAP CERA CHIP 5% 100 PF		22
SM661255102	CAP CERA CHIP 5% 1000 PF		11
SM661255180	CAP CERA CHIP 5% 18 PF		1
SM661255181	CAP CERA CHIP 5% 180 PF		1
SM661255220	CAP CERA CHIP 5% 22 PF		1
SM661255270	CAP CERA CHIP 5% 27 PF		5
SM661255330	CAP CERA CHIP 5% 33 PF		1
SM661255470	CAP CERA CHIP 5% 47 PF		6
SM661255560	CAP CERA CHIP 5% 56 PF		2
SM661255821	CAP CERA CHIP 5% 820 PF		5
SM661256120	CAP CERA CHIP 10% 12 PF		4
SM661286103	CAP CERA CHIP 10% .01 UF		52
SM661446474	CAP CERA CHIP 10% .47 UF		2
SM661526561	CAP CERA CHIP 560PF 500V		5
SM661535620	CAP CERA CHIP 62PF 200V		4
SM661540033	CAP CERA CHIP 3.3PF 500V		6
SM661545150	CAP CERA CHIP 15PF 500V		9



900022-01 : Main Acquisition Board

Lecroy Part Number	Description	Rev	Qty
SM661726103	CAP CERA CHIP 10% .01 UF		15
SM666237476	CAP MOLD TANT CHIP 47 UF		9
SM666247106	CAP MOLD TANT CHIP 10 UF		4
SM666257336	CAP MOLD TANT CHIP 33 UF		2
SM666267227	CAP TANT 220UF 10V 20%		8
SM666327225	CAP MOLD TANT CHIP 2.2 UF		50
SM666377226	CAP MOLD TANT CHIP 22 UF		8
SM666387336	CAP MOLD TANT CHIP 33 UF		2
SM666427105	CAP MOLD TANT CHIP 1 UF		5
SM669080181	CHIP FERRITE BEAD		36

F9354-4 : Time Base Board

Lecroy Part Number	Description	Rev	Qty
719354403	PC BD PREASS'Y 9354-4	D	1
SM200169016	IC BINARY UP COUNTER 10E016		1
SM201274032	IC ECL DIVIDE BY 2 10EL32D		1
SM201549040	IC PHASE-FREQ DET MC12040		1
SM201570016	IC ECL DIFF RECEIVER 10EL16D		1
SM208272148	IC LOW POWER VCO MC12148		1
SM208470027	IC SINGLE OP AMP OP-27		1
SM208570078	IC LOW POWER REG +12V 78L12		1
SM208570805	IC POS VOLT REG 78L05		1
SM208880079	IC LOW POW REG -12V 79L12		1
SM230080619	DIODE TUNING SMD BB619		1
SM236030099	DIODE SO-PKG BAV99		4
SM240218475	DIODE ZENER BZX84C7V5		2
SM281120610	LOW POWER PMOSFET TRANSISTOR		1
SM301502001	BEAD (FERRITE CHIP)		1
SM303062068	INDUCTOR CHIP COIL 2% 6.8NH		1
SM454110025	CONN 1MM MALE 25		1
SM653101314	RES CHIP 1% 150 OHMS		1
SM653101322	RES CHIP 1% 182 OHMS		5
SM653101365	RES CHIP 1% 511 OHMS		2
SM653101389	RES CHIP 1% 909 OHMS		2
SM653101393	RES CHIP 1% 1.00 K		3
SM653101426	RES CHIP 1% 2.21K		1
SM653101447	RES CHIP 1% 3.65 K		4
SM653101557	RES CHIP 1% 51.1 K		1
SM661207103	CAP CERA CHIP 20% .01 UF		13
SM661207104	CAP CERA CHIP 20% .1 UF		2
SM661207223	CAP CERA CHIP 20% .022 UF		2

F9354-4 : Time Base Board

Lecroy Part Number	Description	Rev	Qty
SM661255010	CAP CERA CHIP 1.0 PF		1
SM661255152	CAP CERA CHIP 5% 1500 PF		2
SM661255270	CAP CERA CHIP 5% 27 PF		1
SM666247106	CAP MOLD TANT CHIP 10 UF		7

F9300-4 : GPIB + RS232 INTERFACE CARD

Lecroy Part Number	Description	Rev	Qty
102484471	CAP CERA DISC 100V 470 PF		6
106435103	CAP CERA MONO .01UF		5
106438104	CAP CERA MONO .1UF		5
147436033	CAP ALUM METAL CAN 33 UF		4
161225302	RES CARBON FILM 3 K		1
161225471	RES CARBON FILM 470 OHMS		1
161225682	RES CARBON FILM 6.8 K		2
190832102	RESISTOR NETWORK 1 K		1
200333000	IC QUAD 2-IN NAND HCT00		1
205750000	IC GAL16V8A-15LP		1
207197210	IC BUS INTERF CONTR 7210		1
207440232	IC XMTR/RCVR MAX232		1
207470160	IC BUS TRANSCEIVER 75160B		1
207470161	IC OCTL BUS XCEIVR 75161A		1
207552661	IC INTERFACE 2661A		1
309040005	CRYSTAL OSCILLATOR 4.9152 MHZ		1
453521024	CONN RT ANGLE IEEE FEM 24		1
454511040	HDR SOLD TAIL/MALE 40/RT		1
455413009	CONN RT ANGL MALE 9 S-CLIP		1
455980002	MOUNTING HDW FOR CONN SHELL		2
550010106	SCREW PAN HEAD PHIL M3X6 W/NYLOCK		4
550010108	SCREW PAN HEAD PHIL M3X8 W/NYLOCK		2
551430400	WASHER SHAKEPROOF M3		4
709300411	GPIB-RS232 INTERFACE BRACKET		1
709300421	LABEL RS232-IEEE488-2		1
719300403	PC BD PREASS'Y 9300-4		1



F9601-6 : Floppy Disk Drive Assembly

Lecroy Part Number	Description	Rev	Qty
330000002	FLOPPY DISK DRIVE 3.5"		1
453411026	CONN ZIF FOR FFC 26 POS		1
454511026	HDR SOLD TAIL/MALE 26		1
550010103	SCREW PAN HEAD PHIL M2.5X3 W/NYLOCK		4
550010706	SCREW ECO-FIX PHIL PAN M3X6 W/NYLOC		2
709600611	FLOPPY DRIVE SUPPORT		1
719601603	PC BD PREASS'Y FOR 9601-6		1
780919905	FLAT FLEX CABLE 26 P. 5CM		1
453411026	CONN ZIF FOR FFC 26 POS		1
454511026	HDR SOLD TAIL/MALE 26		1
719601603	PC BD PREASS'Y FOR 9601-6		1

FP9604 : Front Panel Assembly

Lecroy Part Number	Description	Rev	Qty
551090001	LOCKWASHER M9		4
552090075	MOUNTING NUT M9 X 0.75		4
709600030	9600 FRONT FRAME	G	1
709600560	9600-5 KNOB DIAM 9	C	7
709600570	9600-5 KNOB DIAM 12	C	4
780721022	FLAT CABLE 2X10 (22CM)	A	1
F9602-5	KEYPAD FRONT PANEL	I	1
F9604-5	QUAD CHANNEL FRONT PANEL	C	1

F9602-5 : Keypad Assembly

Lecroy Part Number	Description	Rev	Qty
551423100	FLAT WASHER M2.3		5
554422005	SCREW SELF TAPPING PT KA22x6		5
709600510	9600-5 SWITCH CAP, LIGHT GREY	D	32
709600512	9600-5 SWITCH CAP DARK GREY	D	11
709600514	9600-5 SWITCH CAP, BLUE	D	1
709600516	9600-5 SWITCH CAP, GREEN	D	1
709600534	9600-5 FRONT PANEL 4CH	A	1
709600550	9600-5 RUBBER MAT 4 CH.	D	1
S9602-5	KEYBOARD PCB ASSY 4 CHANNEL	B	1
256400105	LED YELLOW LOW CUR.		1
454224030	HDR 41612 PRESSF. FEM 30		1
719602503	PC BD PREASS'Y 9602-5	C	1

F9604-5 : Front Panel

Lecroy Part Number	Description	Rev	Qty
106438104	CAP CERA MONO .1UF		4
147436033	CAP ALUM METAL CAN 33 UF		1
161225471	RES CARBON FILM 470 OHMS		1
190042103	RESISTOR NETWORK 10 K		2
190642103	RESISTOR NETWORK 10 K		1
200331074	IC D-TYP FLOP 74HCT74		1
230020062	DIODE SWITCHING BAW62		34
425100024	ENCODER DIGITAL 24 POS		3
425101024	ENCODER DIGITAL 24 POS		8
454200030	HDR MALE THIRD 41612 TO FEM 30		1
454511020	HEADER RT ANGLE MALE 20		1
719603503	PC BD PREASS'Y 9603-5		1
MFP414	IC MONO FRNT PANEL PROCESSOR MFP414		1

CD9610 : Color Display Assembly

Lecroy Part Number	Description	Rev	Qty
CD9600-B	COLOR DISPLAY ASS'Y		1
709600230	9600-2 MONITOR SHIELD		1
CD9610-RK	RETIRFIT KIT FOR 9610		1

MLC574A : Mechanical

Lecroy Part Number	Description	Rev	Qty
315972600	RFI FILTER W/DBL FUSE BLOCK		1
377000104	LABEL, CE & UL, TEST EQUIP.	1000	1
405154002	CONN HOUSING 2-POS		1
405708001	TERMINAL ANTI-FISHHOOKING CRIMP		2
433162630	FUSE SLO-BLO 250V 6.30AMP		2
485325001	SET OF 4 FEET, DARK GREY		1
524010037	STANDOFF M3 37MM X 4.5MM HEX W/NYLO		3
530409212	FAN AXIAL 12V 1"THK 2.4W		1
550010106	SCREW PAN HEAD PHIL M3X6 W/NYLOCK	1001	13
550010116	SCREW PAN HEAD PHIL M3X16 W/NYLOCK		7



MLC574A : Mechanical

Lecroy Part Number	Description	Rev	Qty
550010130	SCREW PAN HEAD PHIL M3X30 W/NYLOCK	1001	12
550010508	SCREW FLAT HEAD PHIL M3X8 W/NYLOCK		2
550010705	SCREW ECO-FIX PHIL PAN M4X5 W/NYLOC		5
550010706	SCREW ECO-FIX PHIL PAN M3X6 W/NYLOC		48
550011106	SCREW PAN HD M2X6 BLK W/NYLOCK		12
550151116	SCREW PAN HD PHIL M5X16	1001	4
551620100	#2 FLAT WASHER S.STEEL/BLACK OXIDE		12
554035101	CLIP-ON NUT DIAM. 3.5		4
554422006	SCREW S/TAP PAN PHIL KA22X5		2
554435006	SCREW S/TAP PAN PHIL KA35X7		8
554440001	SCREW S/TAP PAN PHIL KA40X12		4
554525901	CLIP DIAM 3.1MM		1
705740013	TOP PARTITION FOR LC574	1000	1
705740015	LABEL, PROTECTIVE GND SYMBOL		1
705740016	LABEL, LC574 FUSE DATA		1
705740017	SERIAL NUMBER PLATE FOR DSO		1
705740038	LOWER COVER LCXXX DUAL FAN		1
7093XX931	INTERF. HOLE CLOSURE 93XX-9		3
7093XXP41	PROBE HOLDER		6
7093XXP91	PROBE RING CONTACT		6
709424096	MEMORY CARD INSERT		1
709600010	9600 BEZEL		1
709600020	9600 RIGHT HUB CAP		1
709600024	9600 LEFT HUB CAP		1
709600048	9600 UPPER COVER LOCK INSERT		2
709600050	9600 LOGO LECROY		1
709600075	9600 REAR FOOT		4
709600078	REAR FOOT RUBBER		4
709600810	9600-8 POWER SWITCH BUTTON		1
709600820	9600-8 POWER SWITCH ROD		1
709674351	9674-3 SHIELD LOWER PARTITION		6
780721105	20 LINE FLAT CABLE		1
780834509	GROUND CABLE YELLOW/GREEN 9CM		1
780891032	FLAT CABLE 2X20 (4 CONNECT)		1
780981003	FLAT CABLE 2X20 (3.5 CM)		1
780991606	FLAT CABLE 2X13 (6 CM)		1

MLC574A : Mechanical

Lecroy Part Number	Description	Rev	Qty
785740005	LC574 LINE INPUT CABLE	1001	1
900024	LCXXX POWER SUPPLY W/FAN		1
CD9610	COLOR DISPLAY ASSY (MODIFY)		1
CH599012012	"5-MINUTE EPOXY"		0
F9300-4	GPIB & RS232 INTERFACE CARD	1000	1
F9601-2	CONNECTOR BOARD	1002	1
F9601-6	FLOPPY DISK DR ASSY	1000	1
F9601-8	MAIN SWITCH BOARD	1001	1
FP9604X	FRONT PANEL ASSY 4 CHANNEL		1
FPLC574-3	MAIN CARD FRNT PANEL LC574XX (PEMS)	1002	1
RP9602-9X	REAR PANEL 9602-9		1
USLC574-3	UPPER SHIELD ASS'Y LC574	1002	1

900024: Power Supply

Lecroy Part Number	Description	Rev	Qty
235010005	DIODE RECTIFIER 1N4005		1
315116045	45W POWER SUPPLY -2V +/-6V		1
377051005	LABEL "DANGER -----ONLY"		1
377141000	LABEL MATRIX ADHESIVE PAPER		1
377900001	LABEL BARCODE 0.25" X 1.50"		1
455011002	CONTACT (CRIMP) MALE		2
455110002	BLOCK FOR MALE PINS 2 POS		1
520001006	LOCKIN NYLON P.C.BOARD SUPPORT		2
520014124	LOCKING NYLON PCB STANDOFF		6
530409406	FAN AXIAL 12V 3.1W 43 CFM		1
550010108	SCREW PAN HEAD PHIL M3X8 W/NYLOCK		7
550010706	SCREW ECO-FIX PHIL PAN M3X6 W/NYLOC		4
554035101	CLIP-ON NUT DIAM. 3.5		3
554440001	SCREW S/TAP PAN PHIL KA40X12		3
594120001	TIEWRAP		4
705740003	POWER SUPPLY CHASSIS		1
705740008	CABLE HARNESS FOR PSLC574-2		1
705740020	900024 POWER SUPPLY COVER		1
780834509	GROUND CABLE YELLOW/GREEN 9CM		1
785740001	CABLE PSLC574-2 TO PSI 1724		1



900024: Power Supply

Lecroy Part Number	Description	Rev	Qty
785740002	CABLE PSLC574-2 TO REAR PNL AC CABL		1
789384002	-2V SUPPLY LINE CABLE		1
935X-PS1225	POWER SUPPLY PS1724		1
PSLC574-2	LINE TRIG CARD & 3.3V DC-DC CONV P/S		1

PSLC574-2 : Auxiliary Power Supply

Lecroy Part Number	Description	Rev	Qty
106435102	CAP CERA MONO .001UF		2
142824685	CAP TANT DIP CASE 6.8 UF		1
146544471	CAP MINI ALUM 20% 470 UF		1
146564227	CAP MINI ALUM 20% 220 UF		3
161225201	RES CARBON FILM 200 OHMS		1
161225511	RES CARBON FILM 510 OHMS		1
161335104	RES CARBON FILM 100 K		1
161335201	RES CARBON FILM 200 OHMS		1
161335271	RES CARBON FILM 270 OHMS		1
161445104	RES COMP 1/2W 5% 100 K		1
230110005	DIODE SWITCHING 1N4448		2
235010006	DIODE RECTIFIER 1N4006		1
240035333	DIODE ZENER 3.3V 1N5333A		1
260000111	OPTOISOLATOR H11L1		1
270110003	TRANSISTOR NPN PN2222A		1
270121003	TRANSISTOR PWR NPN MJE13003		1
315826501	PWR CONVERTER DC-DC 3.3VDC OUTPUT		1
454115003	HDR FRICTION LOCK 3		1
454115014	HDR FRICTION LOCK 14		1
454115103	HDR FRICTION LOCK 3X1-PIN		2
454810002	HDR FRICTION LOCK 2-PIN,RIGHT ANGLE		1
455021008	CONTACT (CRIMP) FEMALE		2
455123002	BLOCK FOR FEM PINS 2 POS		1
510140002	P.C. MOUNT SPADE LUG		1
590001022	WIRE TEFLON 7/30 BLK 22		0
590221022	WIRE TEFLON 7/30 RED 22		0
715740002	PCB PREASS'Y FOR PSLC574-2 PWR SPLY		1

RPLC574 : Rear Panel Assembly

Lecroy Part Number	Description	Rev	Qty
315972600	RFI FILTER W/DBL FUSE BLOCK		1
377000104	LABEL, CE & UL, TEST EQUIP.		1
405154002	CONN HOUSING 2-POS		1
405708001	TERMINAL ANTI-FISHHOOKING CRIMP		2
433162630	FUSE SLO-BLO 250V 6.30AMP		2
530409212	FAN AXIAL 12V 1"THK 2.4W		1
550010508	SCREW FLAT HEAD PHIL M3X8 W/NLOCK		2
550010706	SCREW ECO-FIX PHIL PAN M3X6 W/NYLOC		48
554035101	CLIP-ON NUT DIAM. 3.5		4
554440001	SCREW S/TAP PAN PHIL KA40X12		4
705740015	LABEL, PROTECTIVE GND SYMBOL		1
705740016	LABEL, LC574 FUSE DATA		1
705740017	SERIAL NUMBER PLATE FOR DSO		1
7093XX931	INTERF. HOLE CLOSURE 93XX-9		3
780834509	GROUND CABLE YELLOW/GREEN 9CM		1
RP9602-9X	REAR PANEL 9602-9		1

UCLCXXX : Upper Cover Assembly

Lecroy Part Number	Description	Rev	Qty
350150001	GASKET, ULTRAFLEX, PSA, 6" X 0.25"DIA		1
350920024	MONEL MESH STRIP DIAM 2.4MM		28
380450012	NR ADHESIVE TAPE 4X12 MM		25
550011120	SCREW PAN HEAD PHIL M4X20 W/NYLOCK		2
709600040	9600 UPPER COVER		1
709600090	TIP-UP HANDLE		1

USLC574 : Upper Shield Assembly

Lecroy Part Number	Description	Rev	Qty
550010706	SCREW ECO-FIX PHIL PAN M3X6		3
554525901	CLIP DIAM 3.1MM		1
709600810	9600-8 POWER SWITCH BUTTON		1
709600820	9600-8 POWER SWITCH ROD		1
F9601-8	MAIN SWITCH BOARD	1001	1
USLC574-3	UPPER SHIELD ASS'Y LC574	1002	1



F9601-8 : Main Switch Assembly

Lecroy Part Number	Description	Rev	Qty
161445105	RES CARBON FILM 1 MEG		1
416121004	MAIN POWER SWITCH		1
454115103	HDR FRICTION LOCK 3X1-PIN		3
719601803	PC BD PREASS'Y FOR 9601-8		1

LCXXX-HD01 : Hard Disk Drive Assembly

Lecroy Part Number	Description	Rev	Qty
780891032	FLAT CABLE 2X20 (4 CONNECT)	A	1
F9300-8	PCMCIA III CONTROLLER	D	1

F9300-8 : Hard Disk Interface

Lecroy Part Number	Description	Rev	Qty
205750000	IC AND-OR GATE ARRAY 16V8		2
330100100	PCMCIA HEADER ASS'Y TOP/LEFT		1
389340009	AUTO-ADHES. RUBBER 12X4MM		1
454511040	HDR SOLD TAIL/MALE/40/RT		1
550120606	SCREW OVAL HD PHIL M2X6		4
550430106	SCREW CYL HD PHIL M3X6		4
551430400	WASHER SHAKEPROOF M3		4
552120100	NUT HEX M2X0.5D		4
594230002	CABLE CLIP ADHESIVE BACK		1
709300811	9300-8 PCMCIA III CONT.BRACKET	B	1
709300821	9300-8 PCMCIA III CONT. COVER	B	1
709300831	9300-8 PCMCIA III CONTR. LABEL	A	1
719300803	PC BD PREASS'Y 9300-8	B	1
CH599011002	LOCTITE SCREW LOCK GLUE		1
SM200178002	IC 2-INPUT NOR HCT02		1
SM200178374	IC D-TYP FLOP 74HCT374		2
SM201178175	IC QUAD D FLIP/FLOP 74HCT175		1
SM206885245	IC BUS TRANSCVR ABT245		1
SM207170036	IC HEX BUFFER 3-ST. PC74HCT365		3
SM208470358	IC DUAL OP AMP 358D		1
SM208780109	IC MICROPOWER DC-DC CONV.		1
SM232032814	DIODE 2814		3
SM275330858	TRANSISTOR PNP BC858C		1
SM280171005	TRANS MOSFET MTD10N05E		1
SM300056332	INDUCTOR WOUND 33 UH		1
SM652101102	RES CHIP (E24) 1% 1 K		3

F9300-8 : Hard Disk Interface

Lecroy Part Number	Description	Rev	Qty
SM652101103	RES CHIP (E24) 1% 10 K		18
SM652101104	RES CHIP (E24) 1% 100 K		1
SM652101122	RES CHIP (E24) 1% 1.2 K		1
SM652101220	RES CHIP (E24) 1% 22 OHMS		1
SM652101334	RES CHIP (E24) 1% 330 K		1
SM652101511	RES CHIP (E24) 1% 510 OHM		1
SM652101513	RES CHIP (E24) 1% 51 K		1
SM654101000	CHIP JUMPER ZERO OHMS		1
SM661207103	CAP CERA CHIP 20% .01UF (0805)		11
SM661207104	CAP CERA CHIP 20% .1 UF		6
SM666327225	CAP MOLD TANT CHIP 2.2 UF		1
SM666377226	CAP MOLD TANT CHIP 22 UF		3

LCXXX-GP01 : Graphic Printer Assembly

Lecroy Part Number	Description	Rev	Qty
334000402	THERMAL PAPER FOR SEIKO PRINTER		1
334000832	THERMAL PRINTER UNIT		1
350150001	GASKET,ULTRAFLEX,PSA,6" X 0.25"DIA		1
350920024	MONEL MESH STRIP DIAM 2.4MM		28
380450012	NR ADHESIVE TAPE 4X12 MM		25
389340008	AUTO-ADHESIVE RUBBER BAND 12X2MM		3
530040005	SLIDE LATCH TAB STYLE		2
550010105	SCREW PAN HEAD PHIL M3X5 W/NYLOCK		6
550010106	SCREW PAN HEAD PHIL M3X6 W/NYLOCK	1001	4
550011120	SCREW PAN HEAD PHIL M4X20 W/NYLOCK		2
551430100	FLAT WASHER M3		3
551430400	WASHER SHAKEPROOF M3		4
552430300	NUT OPEN-END ACORN M3		3
594120003	TIEWRAP		2
709450523	PUSH SWITCH EXTENDER		1
709600090	TIP-UP HANDLE		1
709601010	GP01 OPTION UPPER COVER		1
709601020	GRAPHIC PRINTER FRAME		1
70GP01041	GRAPHIC PRINTER COVER AXLE		1
70GP01051	GRAPHIC PRINTER CUTTER		1



LCXXX-GP01 : Graphic Printer Assembly

Lecroy Part Number	Description	Rev	Qty
70GP01061	GRAPHIC PRINTER SWITCH BUTTON		1
780721022	FLAT CABLE 2X10 (22CM)		1
780791604	FLAT CABLE 2X13 (4CM)		1
BOX-GP01	GP01 GRAPHIC PRINTER BOX		1
COVER-GP01	GP01 GRAPHIC PRINTER COVER		1
F9300-7	PRINTER CONTROLLER	1005	1

LC574-CKTRIG Option : External Clock, External Reference and Trigger Out

Lecroy Part Number	Description	Rev	Qty
550010706	SCREW ECO-FIX PHIL PAN M3X6 W/NYLOC		2
594120001	TIEWRAP		2
594220026	MICRO WIRE CLIP, SIDE ENTRY		1
709350331	935X-CKTRIG PANEL		1
709350341	10MHZ EXT REF LABEL		1
709350351	500MHZ EXT CLK LABEL		1
709350361	TRIG COMP OUT LABEL		1
780881135	CABLE COAX 50 OHM, MCA-BNC		3
93XX-CKTRIG-OM	- CKTRIG OPERATOR'S MANUAL		1

F9300-7 : Printer Controller

Lecroy Part Number	Description	Rev	Qty
146544471	CAP MINI ALUM 20% 470UF		1
147494472	CAP ALU COMPACT AXIAL 4700 UF		1
190042103	RESISTOR NETWORK 10 K		1
190042472	RESISTOR NETWORK 4.7 K		2
207140007	IC QUAD STEP MOTOR DRIVER		1
208122002	IC VOLT REG POS UA7805		2
208590350	IC ADJ POWER REG 3A LM350		1
309380016	CRYSTAL OSC (PROGR) 16 MHZ		1
416161003	SWITCH PUSHBUTTON SPST		1
430430002	RELAY 1 FORM C SPDT		1
454111002	HEADER STRAIGHT 2-PINS		1
454111006	HEADER STRAIGHT 6-PINS		1
454113003	HEADER STRAIGHT 3-PINS		1
454121003	BLOC FOR SOCKETS 3-PIN		1
454511020	HDR SOLD TAIL/MALE 20		1

F9300-7 : Printer Controller

Lecroy Part Number	Description	Rev	Qty
454511026	HDR SOLD TAIL/MALE 26		1
554435401	RIVET "RIVSCREW" M 3.5		3
719300703	PC BD PREASS'Y 9300-7	F	1
SM200330125	IC QUAD BUFFER 74HC125		1
SM207470175	IC QUAD DIFF LINE RECEIVER		4
SM208580336	IC REF DIODE LM336-2.5V		1
SM208650393	IC DUAL VOLT COMP LM393M		1
SM227080500	IC THERM PRINTER GATE ARRAY		1
SM227090501	IC THERM PRINTER CPU		1
SM236030099	DIODE SO-PKG BAV99		8
SM270330848	TRANSISTOR NPN BC848C		2
SM652101101	RES CHIP (E24) 1% 100 OHM		12
SM652101102	RES CHIP (E24) 1% 1 K		1
SM652101103	RES CHIP (E24) 1% 10 K		26
SM652101104	RES CHIP (E24) 1% 100 K		1
SM652101132	RES CHIP (E24) 1% 1.3 K		3
SM652101151	RES CHIP (E24) 1% 150 OHM		1
SM652101162	RES CHIP (E24) 1% 1.6 K		2
SM652101201	RES CHIP (E24) 1% 200 OHM		1
SM652101223	RES CHIP (E24) 1% 22 K		1
SM652101301	RES CHIP (E24) 1% 300 OHM		3
SM652101302	RES CHIP (E24) 1% 3 K		1
SM652101303	RES CHIP (E24) 1% 30 K		1
SM652101391	RES CHIP (E24) 1% 390 OHM		1
SM652101472	RES CHIP (E24) 1% 4.7 K		4
SM652101510	RES CHIP (E24) 1% 51 OHMS		1
SM652101513	RES CHIP (E24) 1% 51 K		1
SM652101514	RES CHIP (E24) 1% 510 K		1
SM652101563	RES CHIP (E24) 1% 56 K		2
SM652101621	RES CHIP (E24) 1% 620 OHM		2
SM652101682	RES CHIP (E24) 1% 6.8 K		1
SM654101000	CHIP JUMPER ZERO OHMS		2
SM661127104	CAP CERA CHIP 20% .1 UF		2
SM661207103	CAP CERA CHIP 20% .01UF (0805)		23
SM661255101	CAP CERA CHIP 5% 100 PF		1
SM661255471	CAP CERA CHIP 5% 470 PF		4



UCLCGP01 : GPO1 Upper Cover

Lecroy Part Number	Description	Rev	Qty
350150001	GASKET,ULTRAFLEX,PSA,6" X 0.25"DIA		1
350920024	MONEL MESH STRIP DIAM 2.4MM		28
380450012	NR ADHESIVE TAPE 4X12 MM		25
389340008	AUTO-ADHESIVE RUBBER BAND 12X2MM		3
550011120	SCREW PAN HEAD PHIL M4X20 W/NYLOCK		2
709600090	TIP-UP HANDLE		1
709601010	GP01 OPTION UPPER COVER		1

PP094 : 4GS/s Adapter

Lecroy Part Number	Description	Rev	Qty
554425003	SCREW S/TAP PHIL M2.5X6 BLACK		6
554425005	SCREW TAPTITE M2.5X6		4
7093XXP41	PROBE HOLDER		1
7093XXP53	PROBE FRAME		2
7093XXP91	PROBE RING CONTACT		1
70PP09400	PP094 LEFT LABEL	1000	1
70PP09401	PP094 RIGHT LABEL	1002	1
BOX-PP092	PP092 BOX		1
FPP094	4GS/S ADAPTOR FOR 9384	1000	1

BOX-PP092 : Box for PP092

Lecroy Part Number	Description	Rev	Qty
554420501	RETAINING PIN 2 X 18		3
554425005	SCREW TAPTITE M2.5X6		4
70PP09211	PP092 FRONT PANEL		1
70PP09221	PP092 LEFT SHELL		1
70PP09231	PP092 RIGHT SHELL		1
70PP09241	PP092 SPACER		1

FPP094 : Adapter Board

Lecroy Part Number	Description	Rev	Qty
454340002	HDR SOLD TAIL/WW 2		1
7093XXP01	RIGHT ANGLE RECEPT. CONNECTOR		1
7093XXP11	RIGHT ANGLE PIN CONNECTOR		2
7093XXP21	BULKHEAD RECEPTACLE FEMALE BNC		1
7093XXP31	CONN BULKHEAD MALE BNC		2
71PP09400	PP094 P.C. PREASS'Y		1
SM205108002	IC EEPROM 2K BIT IIC BUS		1
SM240218451	DIODE ZENER BZX84C5V1		1
SM653101251	RES CHIP 1% 33.2 OHMS		6
SM653101339	RES CHIP 1% 274 OHMS		1
SM653101410	RES CHIP 1% 1.50 K		1
SM653101489	RES CHIP 1% 10.0 K		1
SM661207103	CAP CERA CHIP 20% .01 UF		1

Accessories

Lecroy Part Number	Description	Rev	Qty
433162630	FUSE SLO-BLO 250V 6.30AMP		2
530500017	BOOK CASE FOR LCXXX		1
589203218	AC CORD/US-CANADA PLUG		1
597574011	ACCESSORY CARTON W/URETHANE INSERT		1
597574012	PE FOAM END-CAPS(PAIR) FOR LCXXX		1
597574013	MASTER CARTON FOR LCXXX SHIPPING		1
597940014	PLASTIC BAG FOR 94XX & 93XX		1
598761004	RECLOSABLE 2 MIL BAG 3" X 5"		1
700009002	REGISTRATION CARD INTERNATIONAL VER		1
700009003	REGISTRATION CARD DOMESTIC VERSION		1
700101100	LABEL, OSCILLOSCOPE BOX	1000	1
709600015	LCXXX PROTECTIVE COVER		1
CALIB-DE1	CALIBRATION DOCUMENT ENVELOPE	1000	1
LCXXX-HG-E	HANDS ON GUIDE FOR LCXXX SCOPES		1
LCXXX-OM-E	OPERATORS MANUAL FOR LCXXX SCOPES		1

Accessories

Lecroy Part Number	Description	Rev	Qty
LCXXX-RM-E	REMOTE CNTRL MANUAL FOR LCXXX SCOPE		1
LCXXX-WP01	ADVANCED WAVEFORM MATH PACKAGE		0
LCXXX-WP02	SPECTRUM ANALYSIS PACKAGE		0
LCXXX-WP03	HISTOGRAMS PACKAGE		0
LCXXX-WP03-OM-E	STATIST. ANALYS. PACK. MANUAL		1
LCXXXCECERT	DECLARATION OF CONFORMITY LCXXX		2
PP005	PROBE 10 MOHM 10:1 500V 500MHZ		4
PP094	4GS/S ADAPTER FOR 9384/LC574	1000	1

8. Mechanical Parts

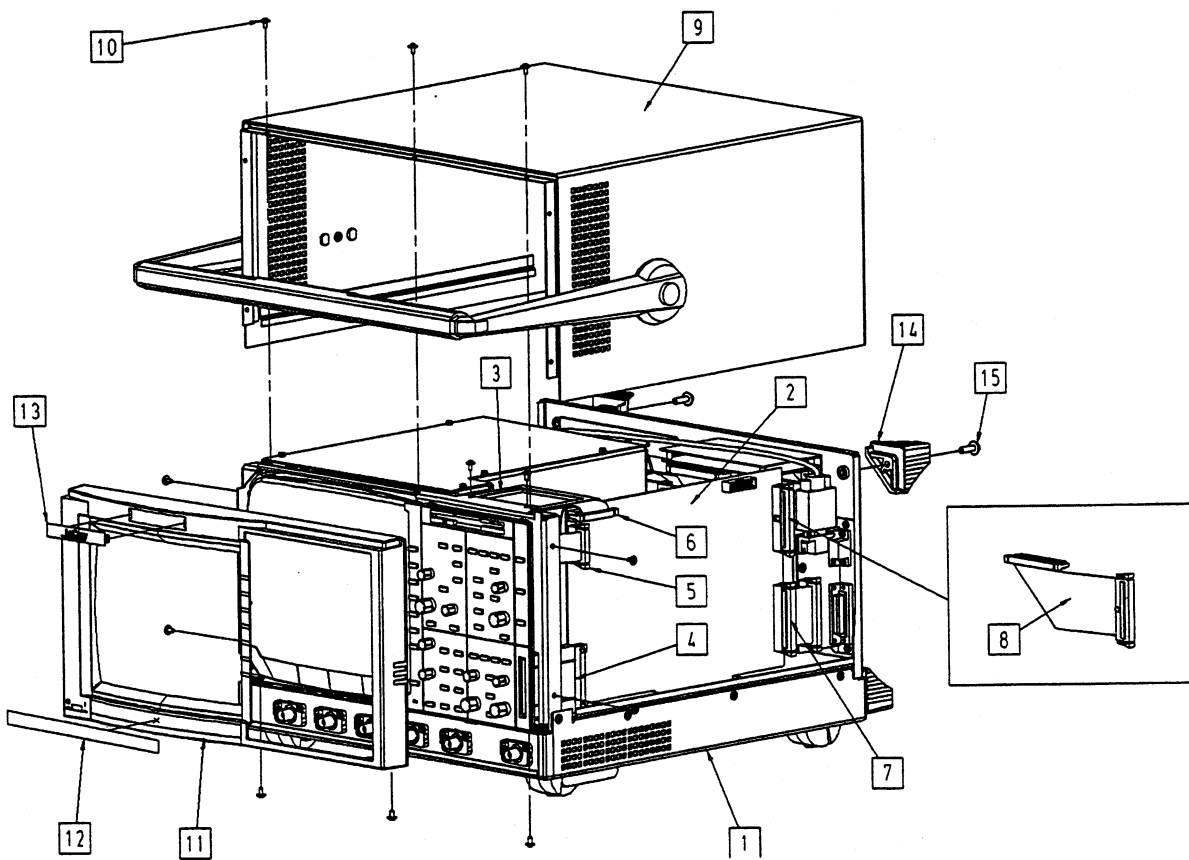


Figure 8-1 : LC574A Cabinet

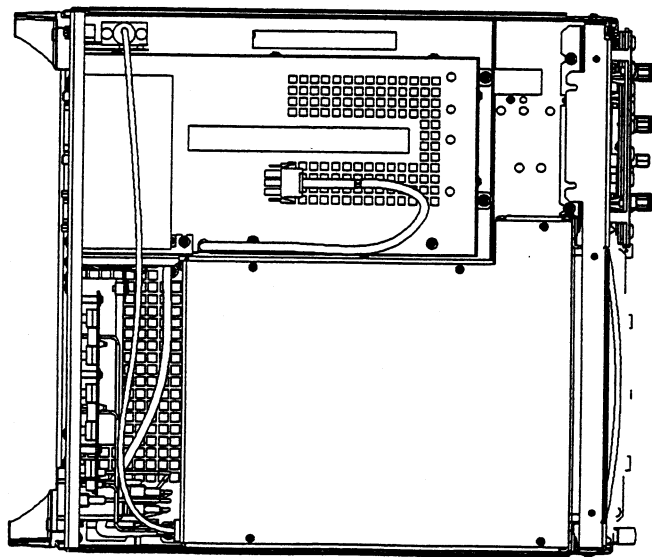
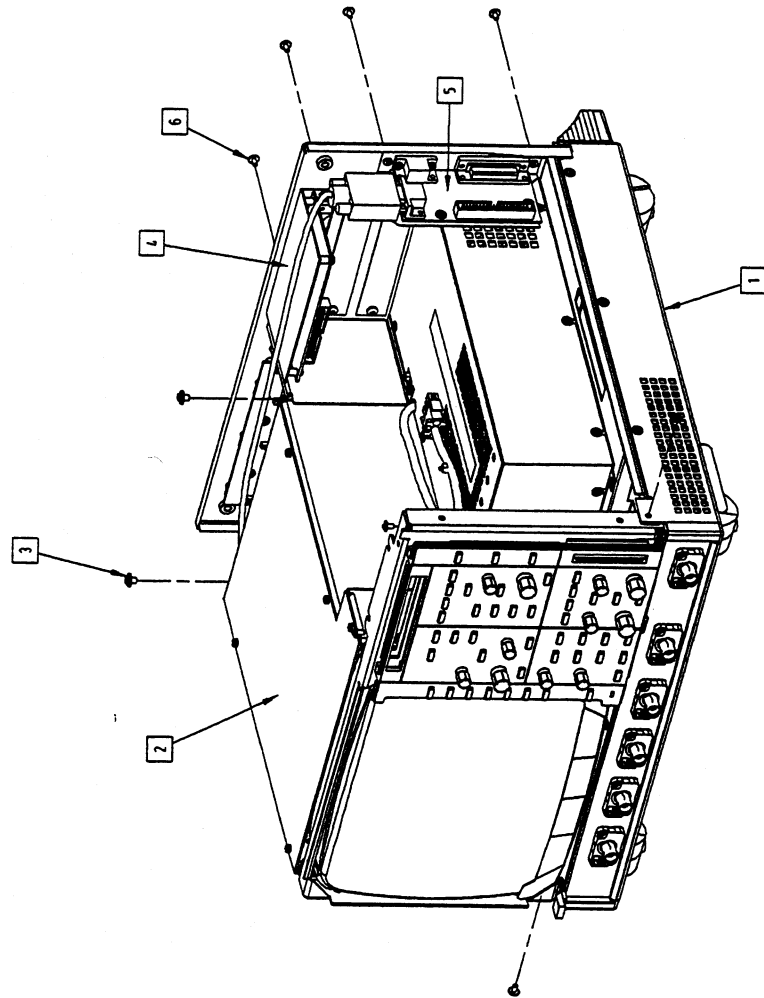


Figure 8-2 : LC574A Assembly

LC574A Cabinet Replaceable Parts (Figure 8-1)

Item	LeCroy Part Number	Qty	Description
1	LCXXX	1	Lower Cover Assembly
2	F9601-1-8 for LC574A	1	Processor Board
2	F9601-1-8 for LC574AM	1	Processor Board
2	F9601-1-64 for LC574AL	1	Processor Board
3	F9601-6	1	Floppy Disk Drive Assembly
4	709424096	1	Insertion Guide for Memory Card
5	780721105	1	Flat Cable 2X10 (5,5 cm)
6	780991606	1	Flat Cable 2X13 (6 cm)
7	780981003	1	Flat Cable 2X20 (3,5 cm)
8	780981032	1	Flat Cable 2X20 (4 connector)
9	UCLCXXX-GP01	1	LCXXX Upper Cover Assembly
10	550010706	12	Screw eco-fix M3x6 w/Nylock
11	709600010	1	9600 Bezel
12	705740301	1	LC574A Front Label
12	705740302	1	LC574AM Front Label
12	705740303	1	LC574AL Front Label
13	709600050	1	LeCroy Logo
14	709600075	2	9600 Rear Foot
15	550151116	2	Screw Pan Hd Phil M5x16
16	709600078	2	Rear Foot Rubber

LC574A Assembly Replaceable Parts (Figure 8-2)

Item	LeCroy Part Number	Qty	Description
1	LCXXX	1	Lower Cover Assembly
2	CD9610	1	Monitor Assembly
3	550010705	2	Screw eco-fix M4x5 w/Nylock
4	F9300-4	1	GPIB & RS232 Interface Card
5	F9601-2	1	Centronics & VGA Interface Card
6	550010706	8	Screw eco-fix M3x6 w/Nylock

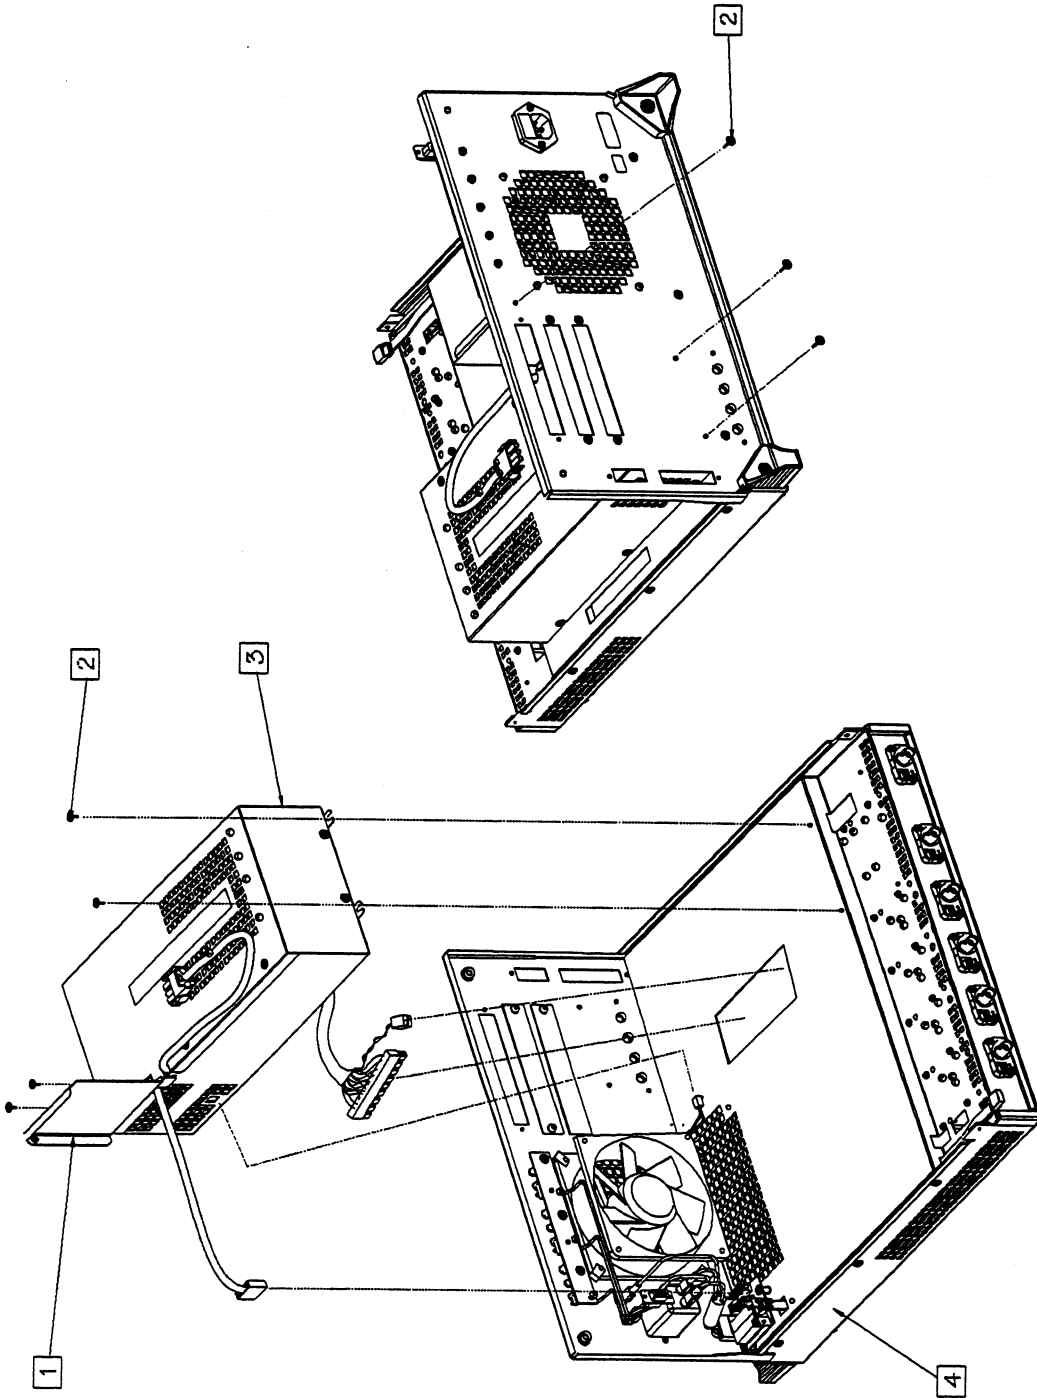


Figure 8-3 : LC574A Chassis


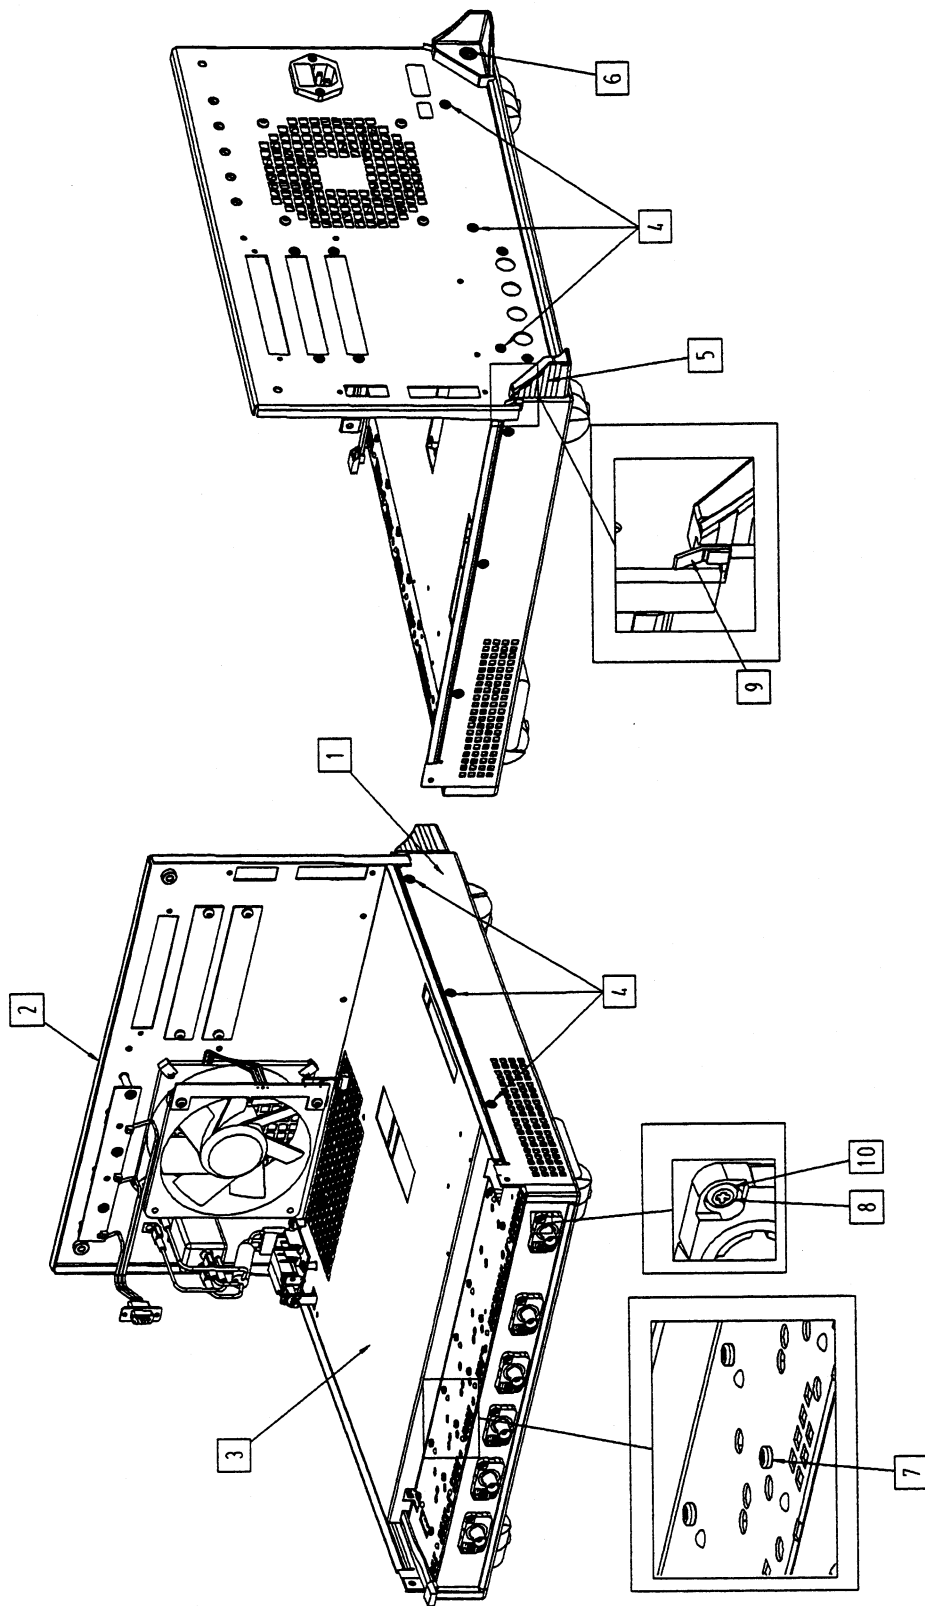


Figure 8-4 : LC574A Lower Cover

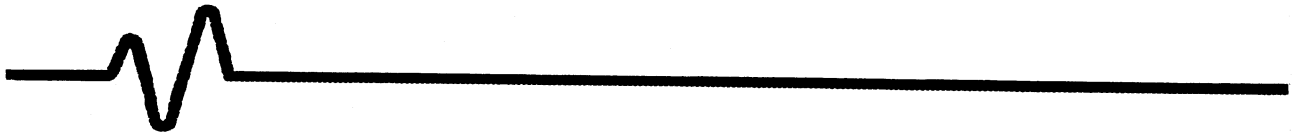

LC574A Chassis Replaceable Parts (Figure 8-3)

Item	LeCroy Part Number	Qty	Description
1	705740013	1	Top partition LC574
2	550010706	7	Screw eco-fix M3x6 w/Nylock
3	900024	1	Power Supply w Fan
3	PSLC574	1	Power Supply w/o Fan
4	LCXXX	1	Lower Cover Assembly
5	USLC574-3	1	Upper Shield Assy LC574

LC574A Lower Cover Replaceable Parts (Figure 8-4)

Item	LeCroy Part Number	Qty	Description
1	LCXXX	1	Lower Cover Assembly
2	RPLC574	1	Rear Panel Assembly
3	USLC574-3	1	Upper Shield
4	550010706	9	Screw eco-fix M3x6 w/Nylock
5	709600070	2	Rear Foot
6	550151116	2	Screw eco-fix M5X16 w/Nylock
7	550010130	12	Screw cyl hd phil M3X30 w/ Nylock
8	550011106	6	Screw pan hd M2X6 black w/Nylock
9	709600048	2	Lock Spring
10	551620100	6	Flat Washers steel/black
11	709600078	2	Rear Foot Rubber

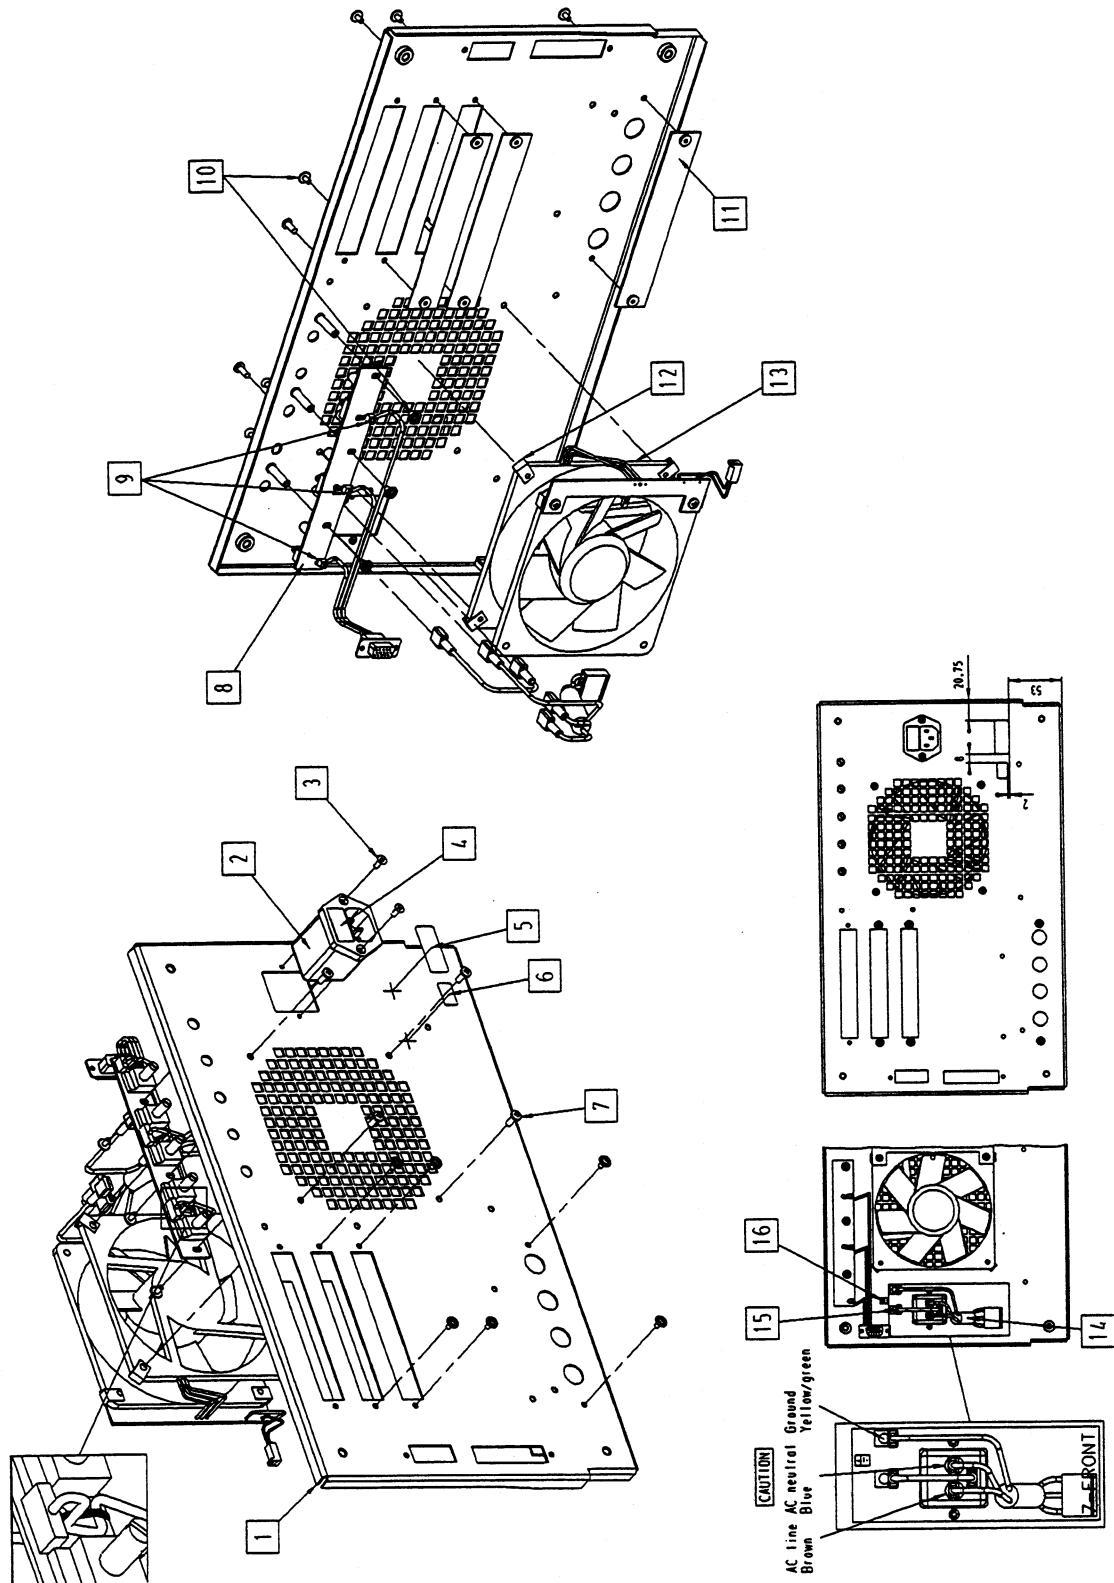


Figure 8-5 : LC574A Rear Panel Assembly

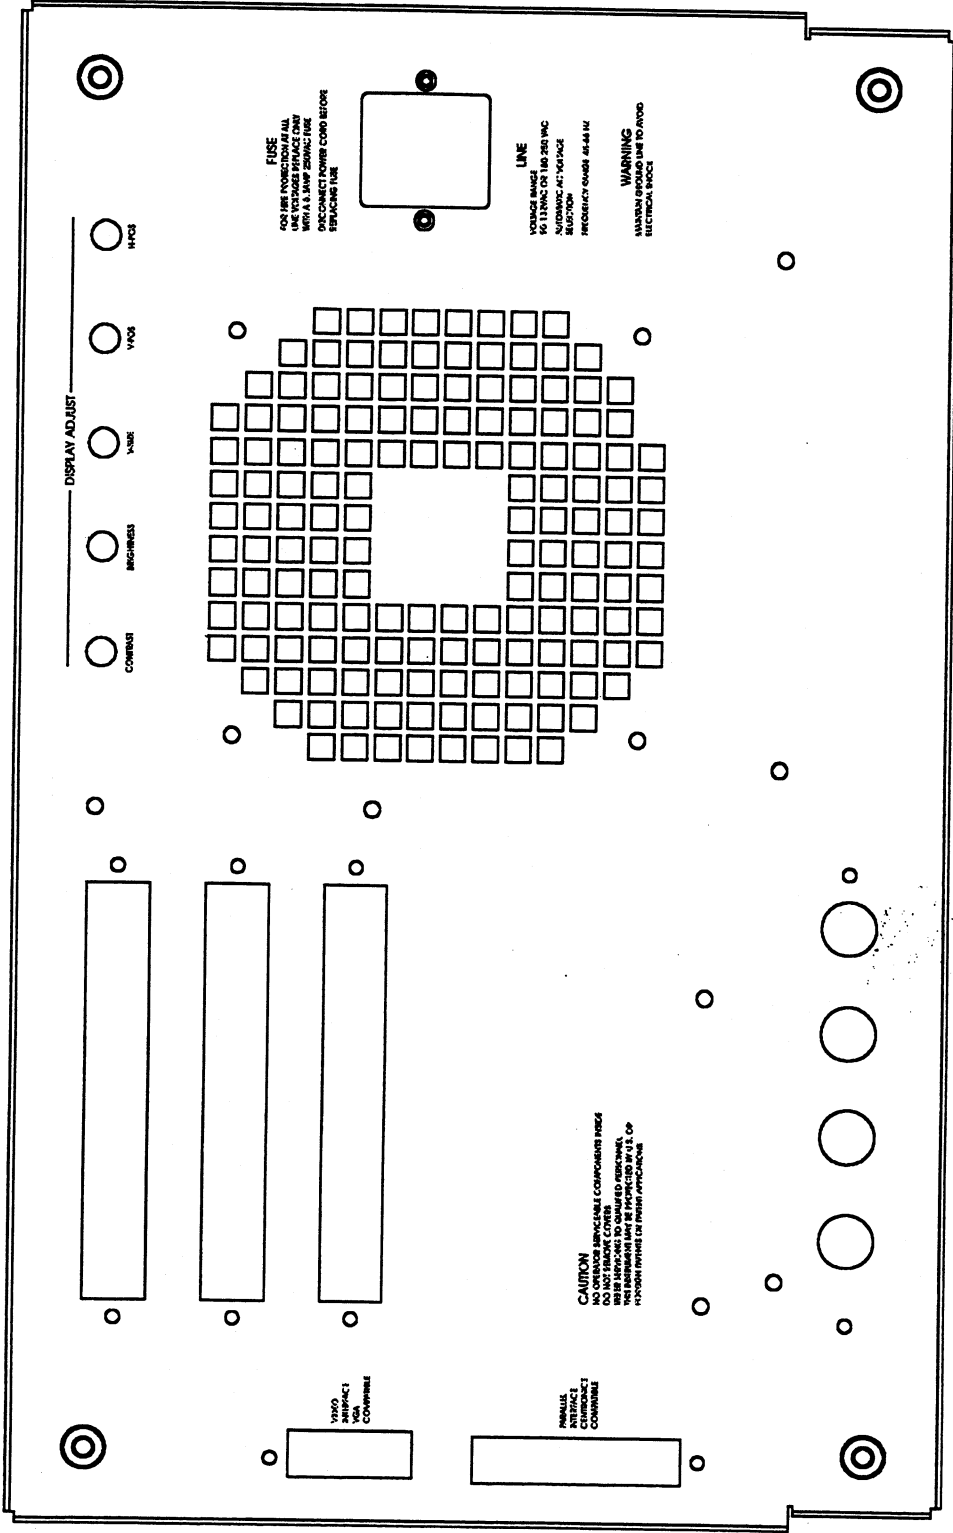


Figure 8-6 : LC574A Rear Panel

LC574A Rear Panel Replaceable Parts (Figure 8-5)

Item	LeCroy Part Number	Qty	Description
1	RP9602-9	1	Rear Panel
2	315972600	1	Line input Filter
3	550010508	2	Screw flat hd phil M3X8 w/ Nylock
4	433162630	2	Fuse slow-blo 6.3A/250 V
5	705740017	1	Serial Number Plate
6	377000104	1	CE Label
7	554440001	4	Screw pt phil KA40X12 w/Nylock
8	CD9610-1	1	CD9610 Adjustment Board
9	594120006	3	Tiewrap
10	550010706	9	Screw eco-fix M3X6
11	7093XX931	3	Interface Hole Closure
12	554035101	4	Clip on nut diam 3.5
13	530409212	1	Fan Axial 12V 1" Thick 2.4 W
14	785740005	1	Line Input cable
15	780834509	1	Ground Cable yellow/green 9 cm
16	705540015	1	Label Ground Symbol
17	705740016	1	Label Fuse Data

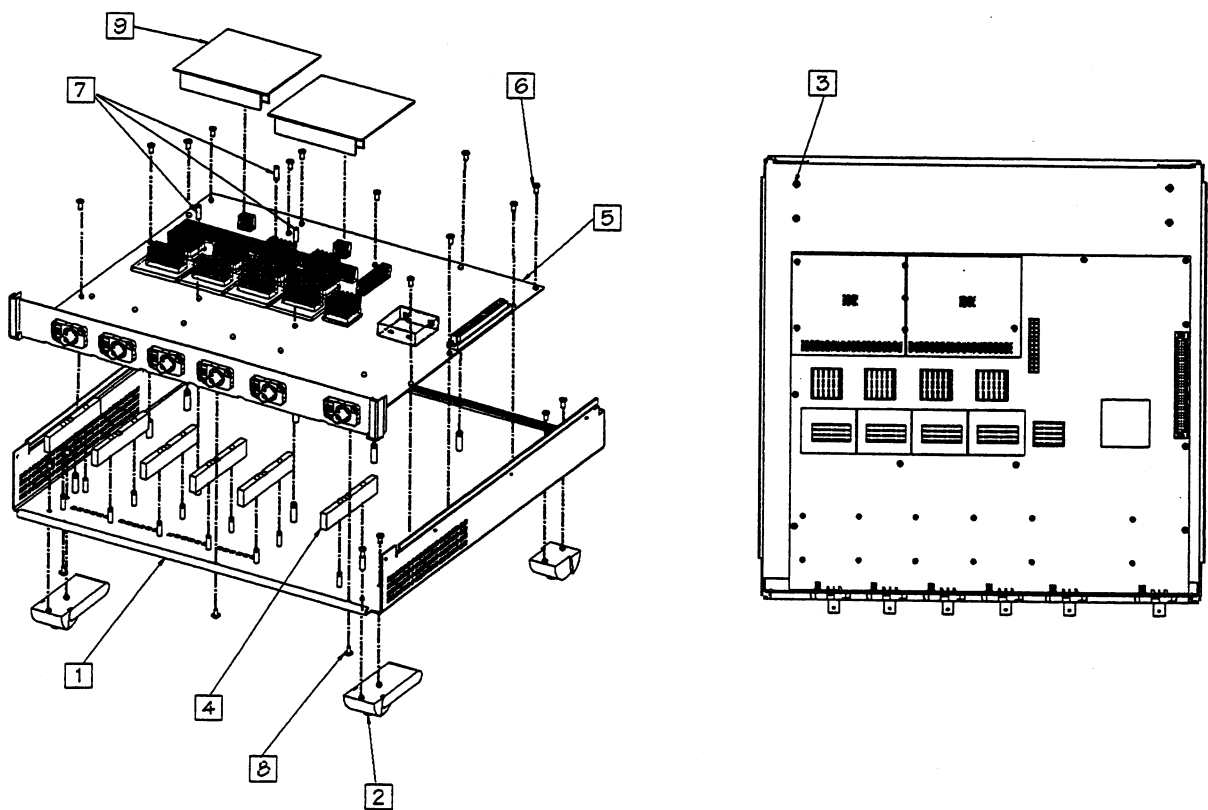
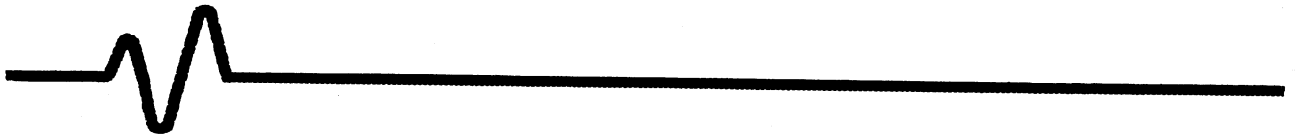


Figure 8-7 : LC574A Main Board Assembly

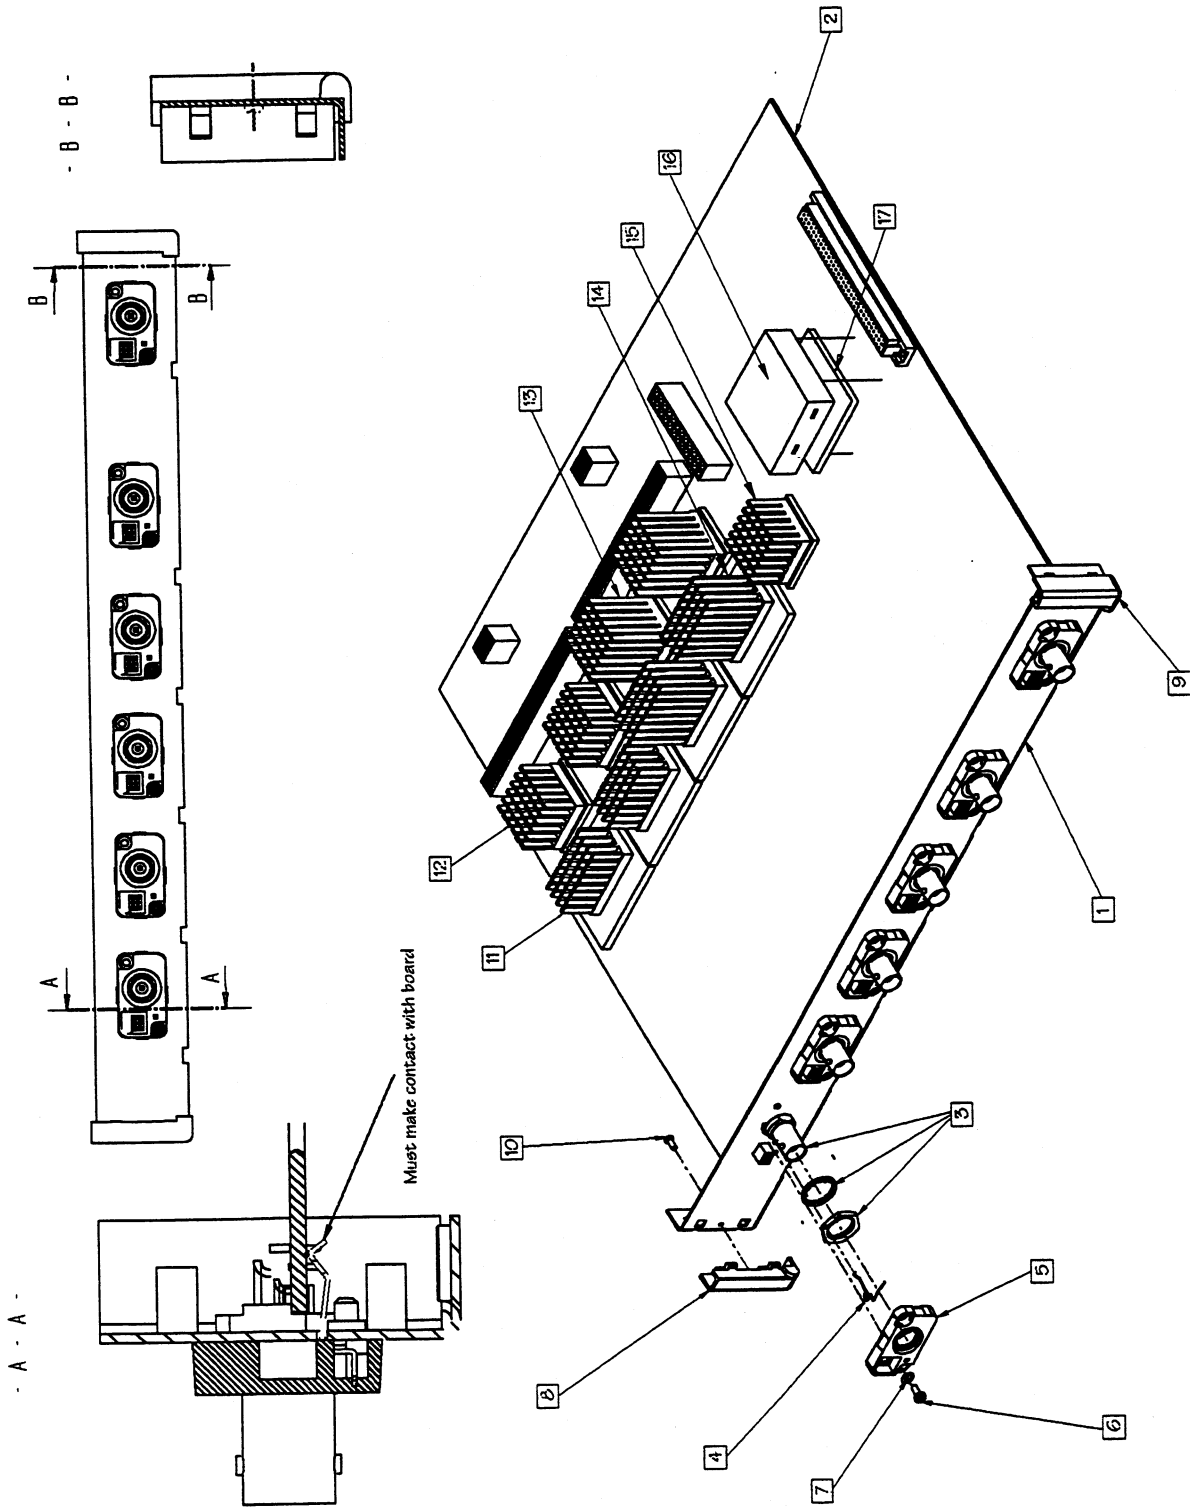


Figure 8-8 : LC574A Main Board

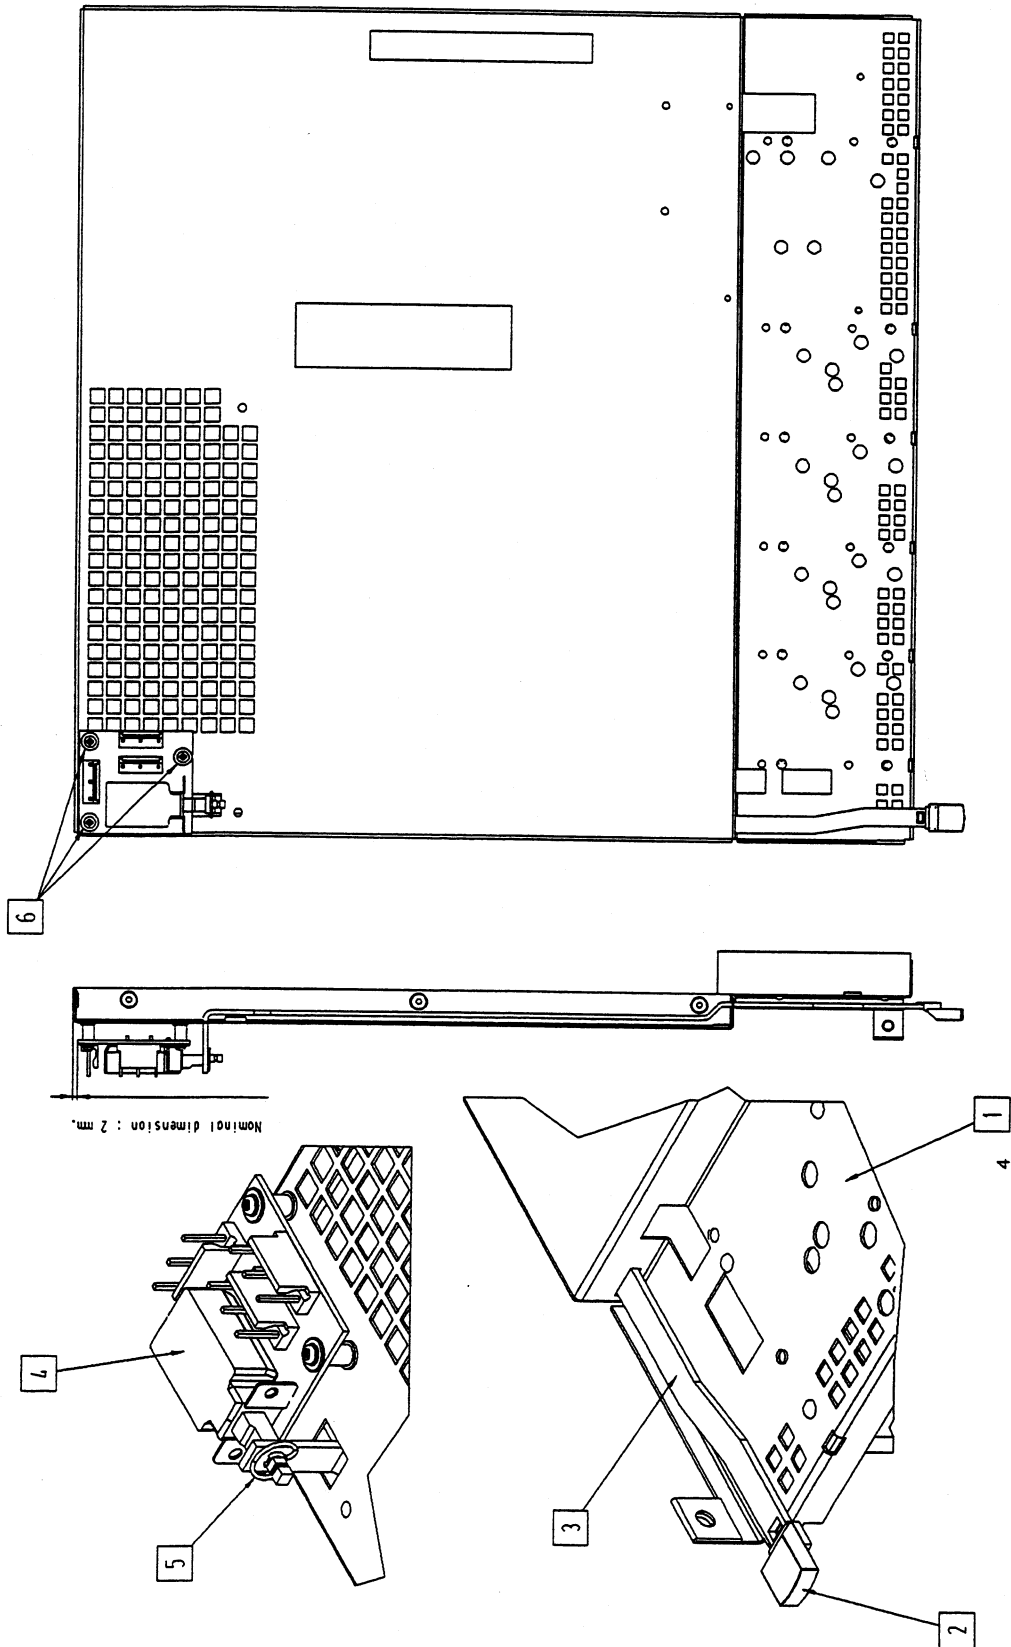
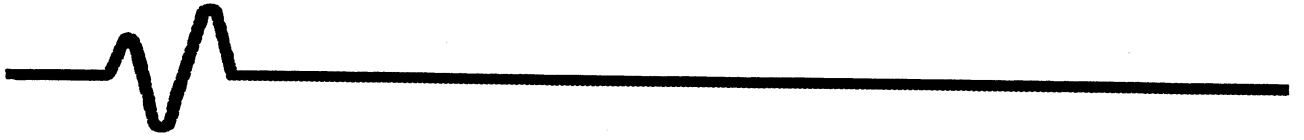


Figure 8-9 : LC574A Upper Shield

LC574A Main Board Assembly Replaceable Parts (Figure 8-7)

Item	LeCroy Part Number	Qty	Description
1	705740038	1	Lower Cover LCXXX Dual Fan
2	485325001	1	Set of 4 Feet dark grey
3	554435006	8	Screw pt phil KA35X7
4	709674351	6	Shield Lower Partition
5	F9394-31 or 900022	1	Main Board
6	554430401	12	Screw with lockwasher M3X6
7	524010037	3	Standoff M3 37MMx4.5MM Hex w/Nylock
8	550010706	3	Screw eco-fix M3X6 w/Nylock
9	9384M-2	2	Acquisition Memory 2X100k, LC574A
9	9384M-2	2	Acquisition Memory 2X500k, LC574AM
9	9384MEM-2	2	Acquisition Memory 2X2G, LC574AL

LC574A Main Board Replaceable Parts (Figure 8-8)

Item	LeCroy Part Number	Qty	Description
1	FPLC574-3	1	Main Card Panel LC574XX
2	F9384-31 or 900022	1	Main Card
3	7093XXP21	6	Bulkhead Receptacle Female BNC
4	7093XXP91	6	Probe Ring Contact
5	7093XXP41	6	Probe Holder
6	554425003	6	Screw Pan Head M2X6 black w/ Nylock
7	551620100	6	#2 Flat Washer S. Steel, Black Oxide
8	709600024	1	Left Hub Cap
9	709600020	1	Right Hub Cap
10	554422006	2	Screw Self Tapping KA22X5
11	505121002	2	Heatsink 1.5"X.65", .8" High
12	505121003	2	Heatsink 1.1"X1.0", .8" High
13	709384013	2	Heatsink 24X23X32H
14	709384014	2	Heatsink 42X25X32H
15	505121004	1	Heatsink .9"X1.0", .8" High
16	709354411	1	9354-4 Oscillator Shield
17	F9354-4	1	400-500 MHz PLL Oscillator

LC574A Upper Shield Replaceable Parts (Figure 8-9)

Item	LeCroy Part Number	Qty	Description
1	USLC574-3	1	Upper Shield Assembly
2	709600810	1	Main Switch Button
3	709600820	1	Power Switch Rod
4	F9601-8	1	Main Switch
5	554525901	1	Clip diam 3.1 mm
6	550010706	3	Screw eco-fix M3X6

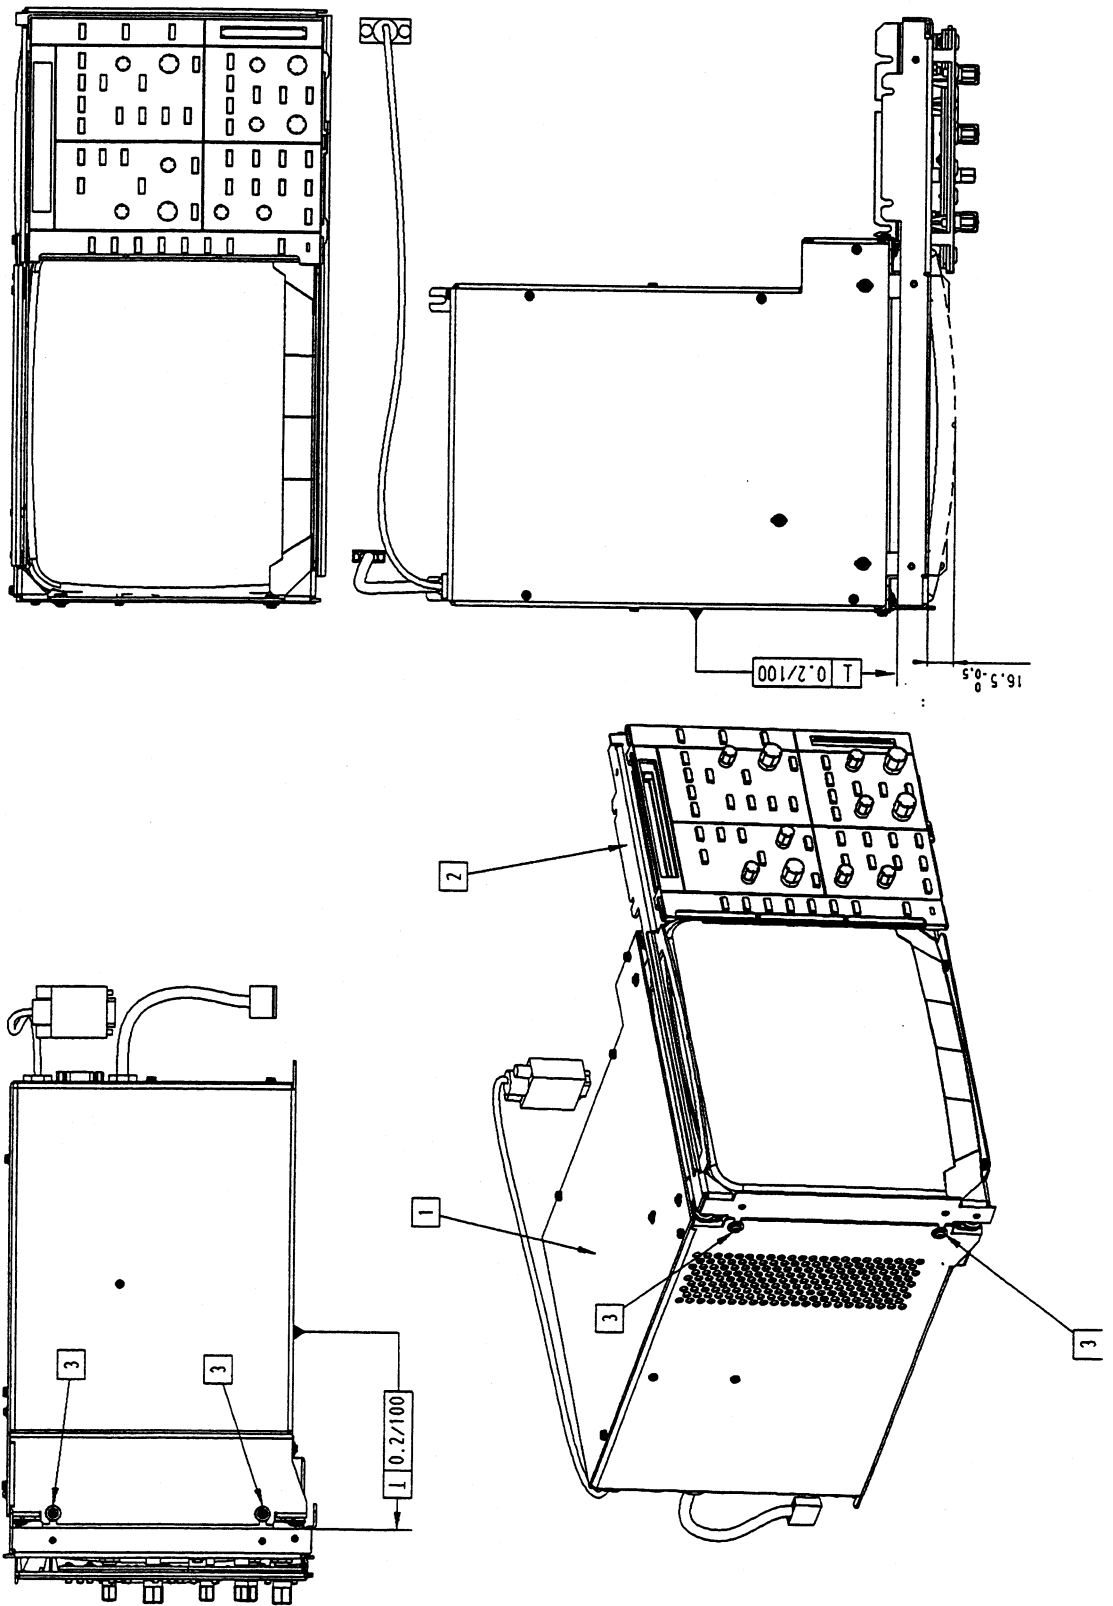


Figure 8-10 : LC574A Monitor and Frame Assembly

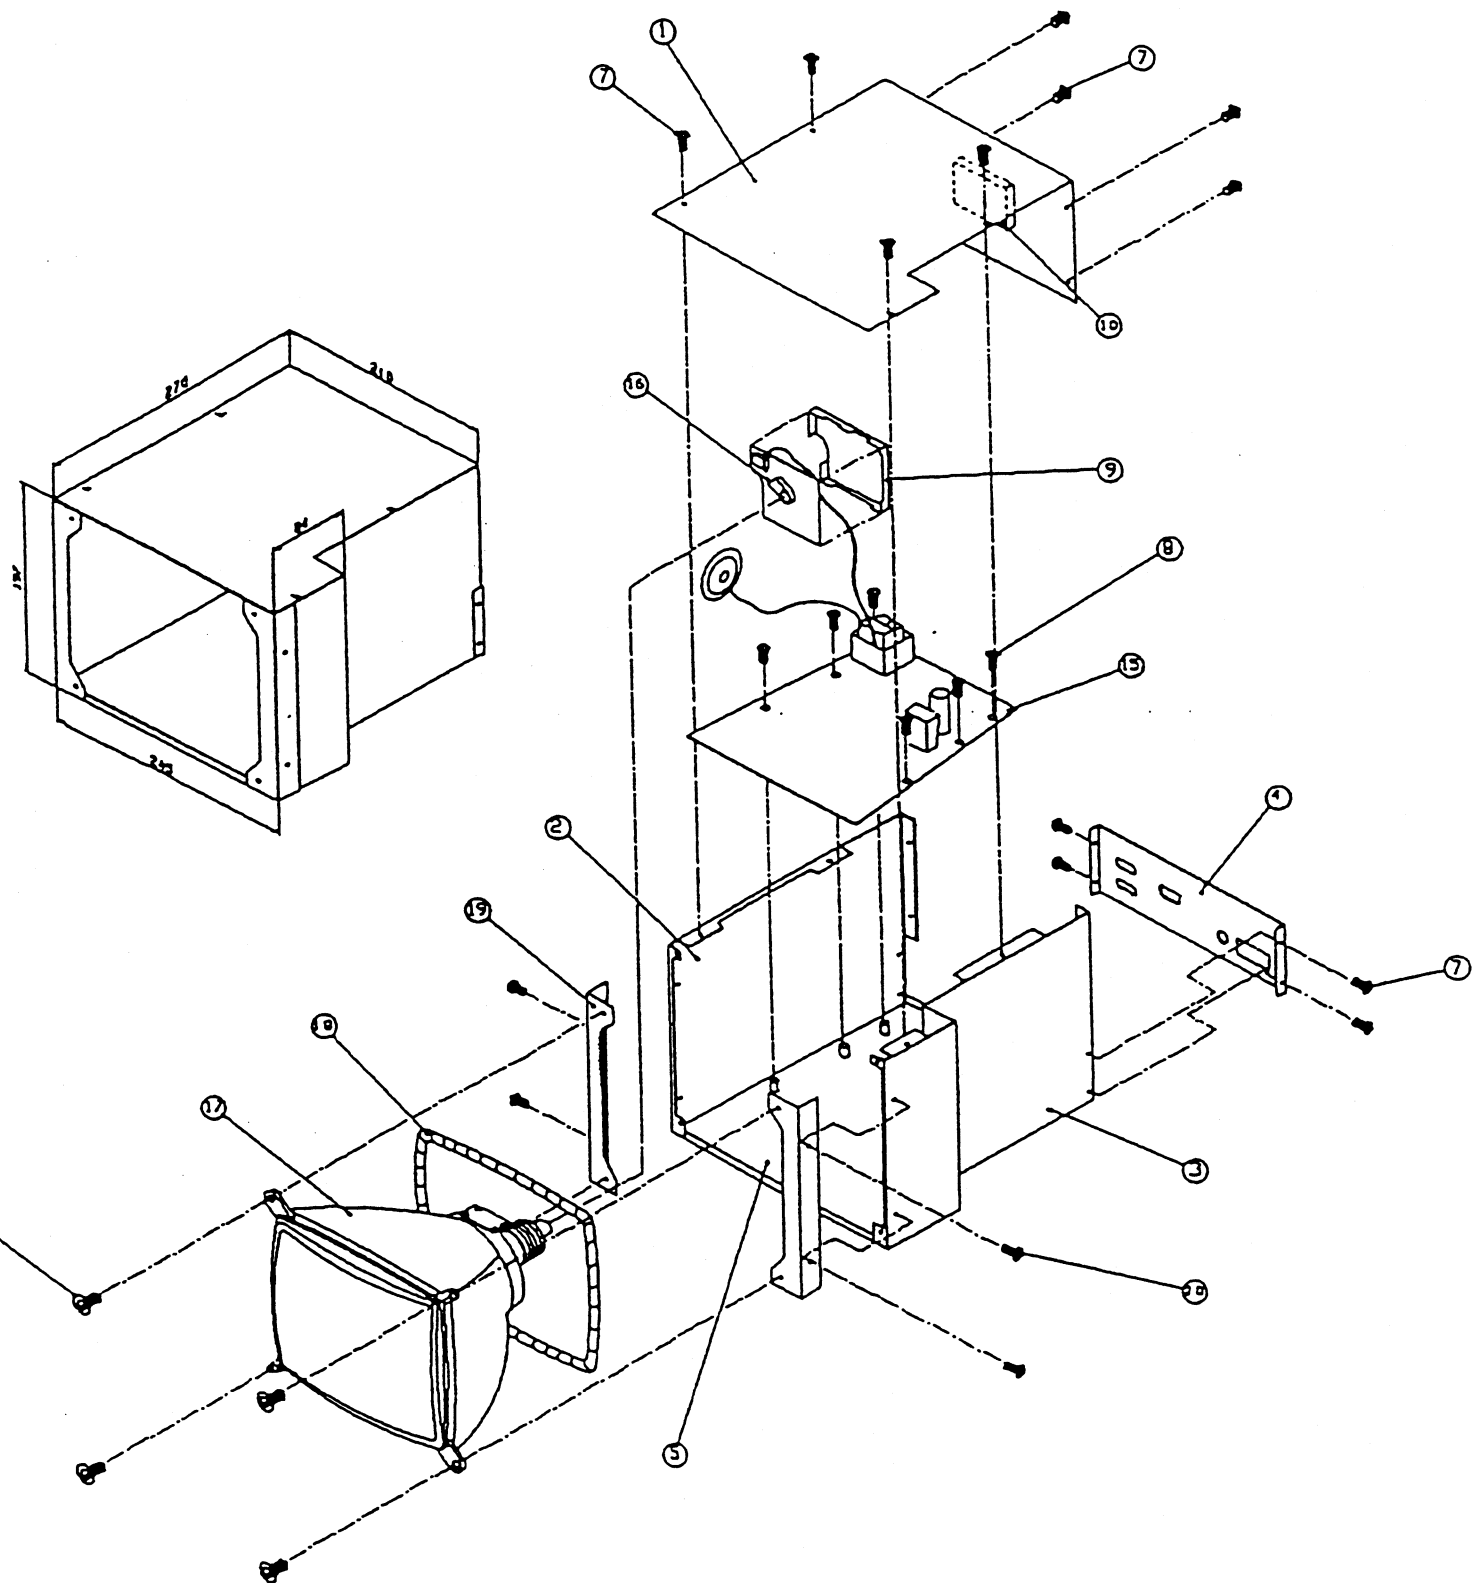


Figure 8-11 : CD9600 Monitor Assembly

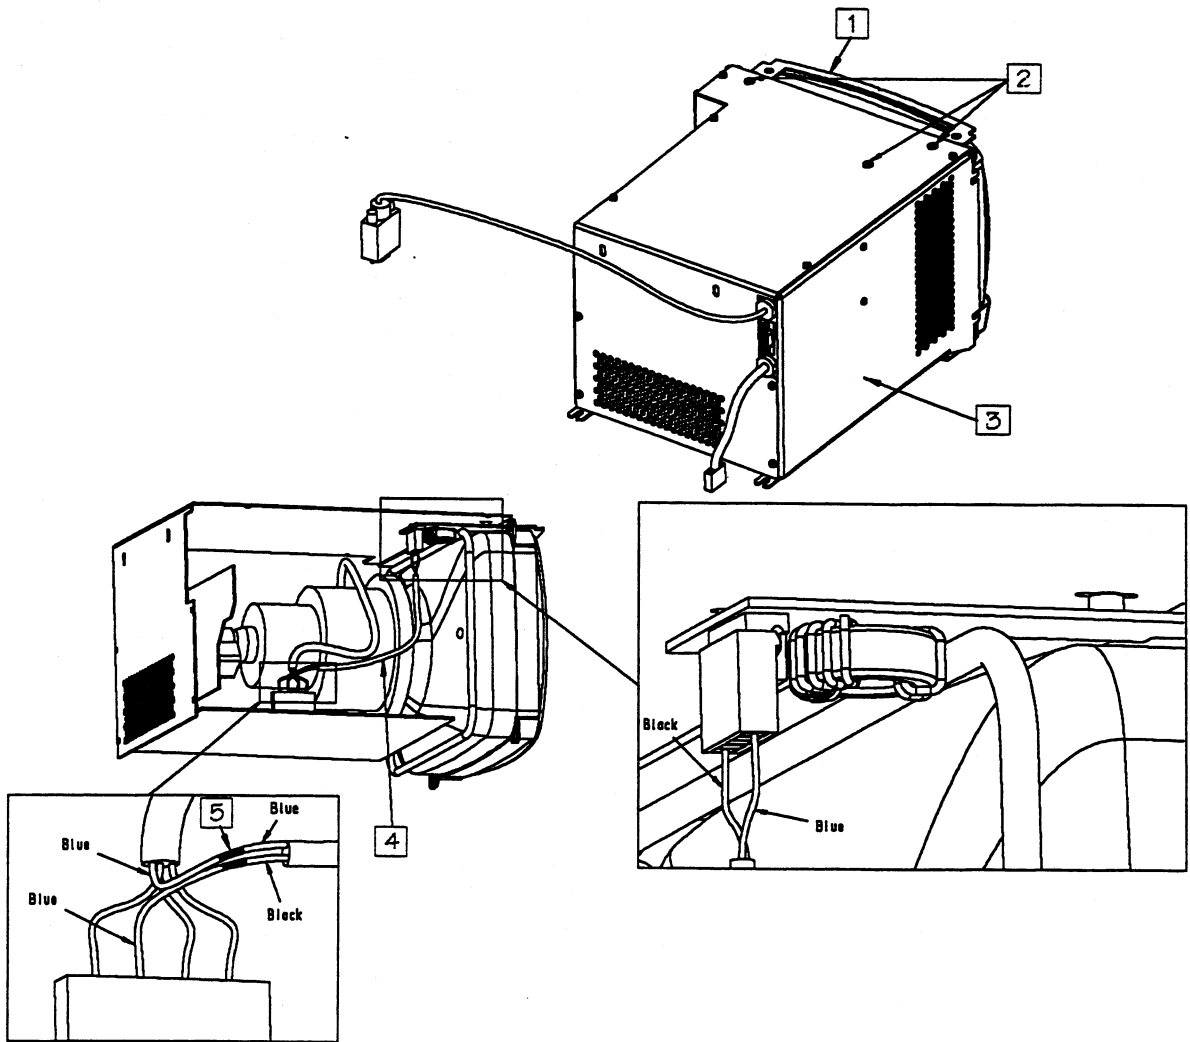
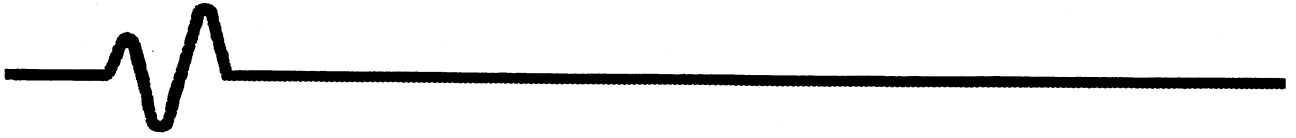


Figure 8-12 : CD9610 Monitor Assembly


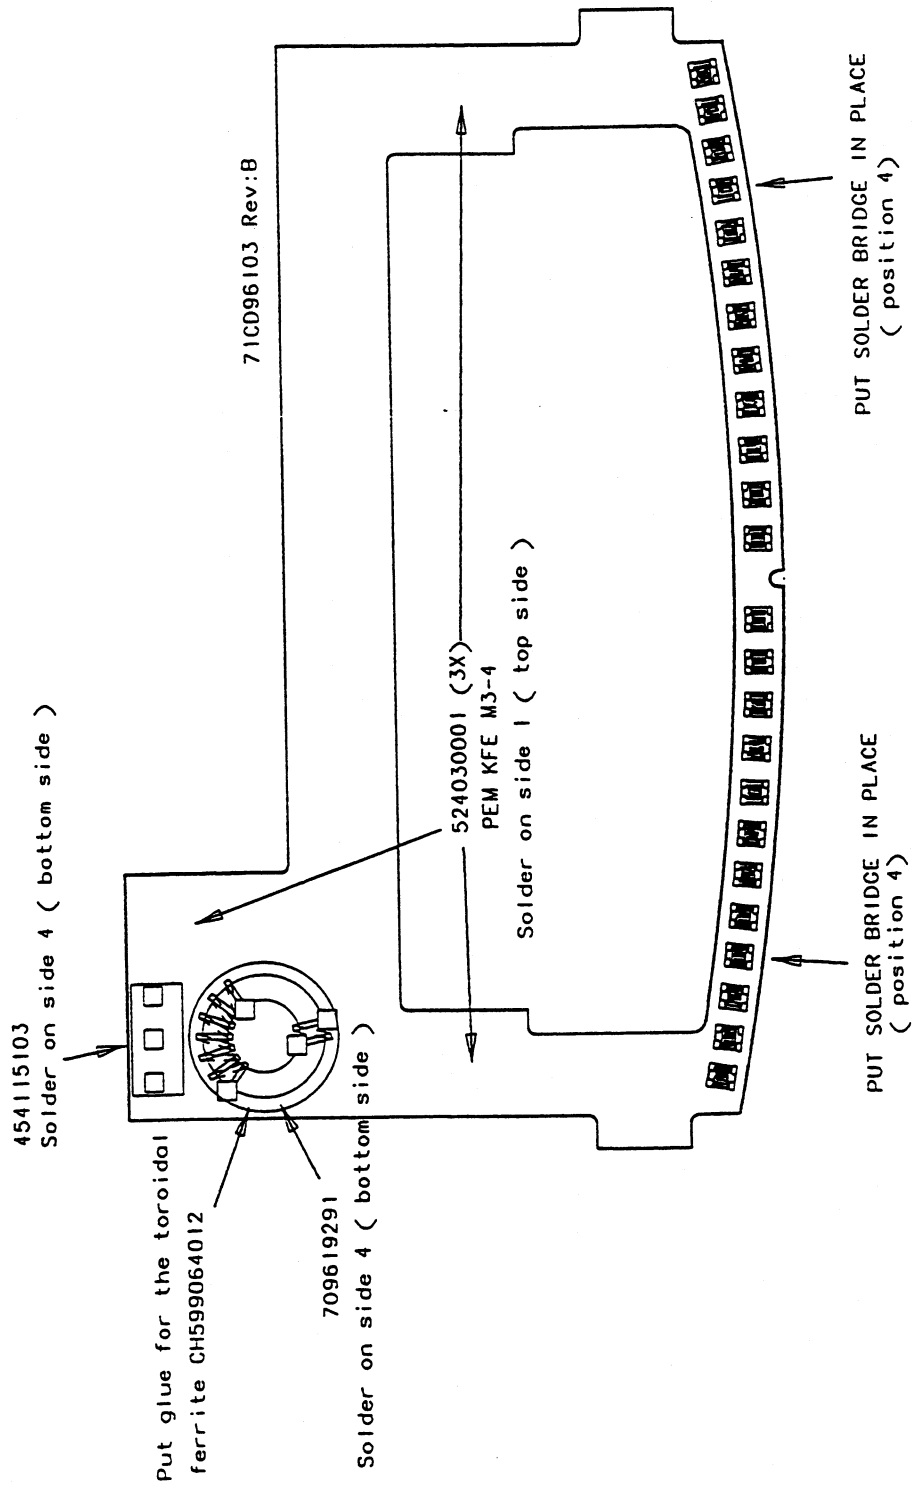


Figure 8-13 : CD9610 Magnetic Field Cancellation Coil

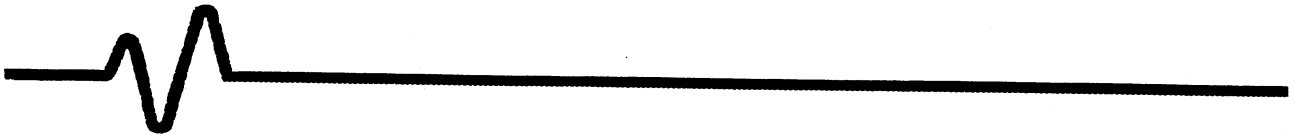

LC574A Monitor and Frame Replaceable Parts (Figure 8-10)

Item	LeCroy Part Number	Qty	Description
1	CD9610	1	Color Display Monitor Assembly
2	FP9604	1	Front Panel Assembly
3	550010705	4	Screw eco-fix M4X5 w/Nylock

LC574A Monitor and Frame Replaceable Parts (Figure 8-11)

Item	Part Number	Qty	Description
1	30150160126	1	Top Cover
2	30150161122	1	Left Cover
3	30150161129	1	Right Cover
4	30150161124	1	Rear Cover
5	30150171128	1	Base Assembly
6	3SM4010CCF3	4	Screw M4X10
7	3SM4008WBB2	12	Screw M4X8
8	3SM3006WBS1	6	Screw M3X6
9	30150168127	1	CRT PWB Bracket
10	30181069119	1	Foam
15	393T35M1002	1	Main board
16	393T35C1007	1	CRT Board
17	33311000247	1	CRT 10 "
18	36080111538	1	Degaussing
19	30150165128	2	CRT Holder
20	3SM4008WBB2	4	Screw M4X8

CD9610 Color Monitor Replaceable Parts (Figure 8-12)

Item	LeCroy Part Number	Qty	Description
1	CD9610-2	1	Magnetic Coil
2	550010706	3	Screw eco-fix M3X6
3	CD9600	1	Color Display Monitor Assembly
4	781010018	1	Cable Assembly
5	595603218	2	Heat Shrink Sleeving

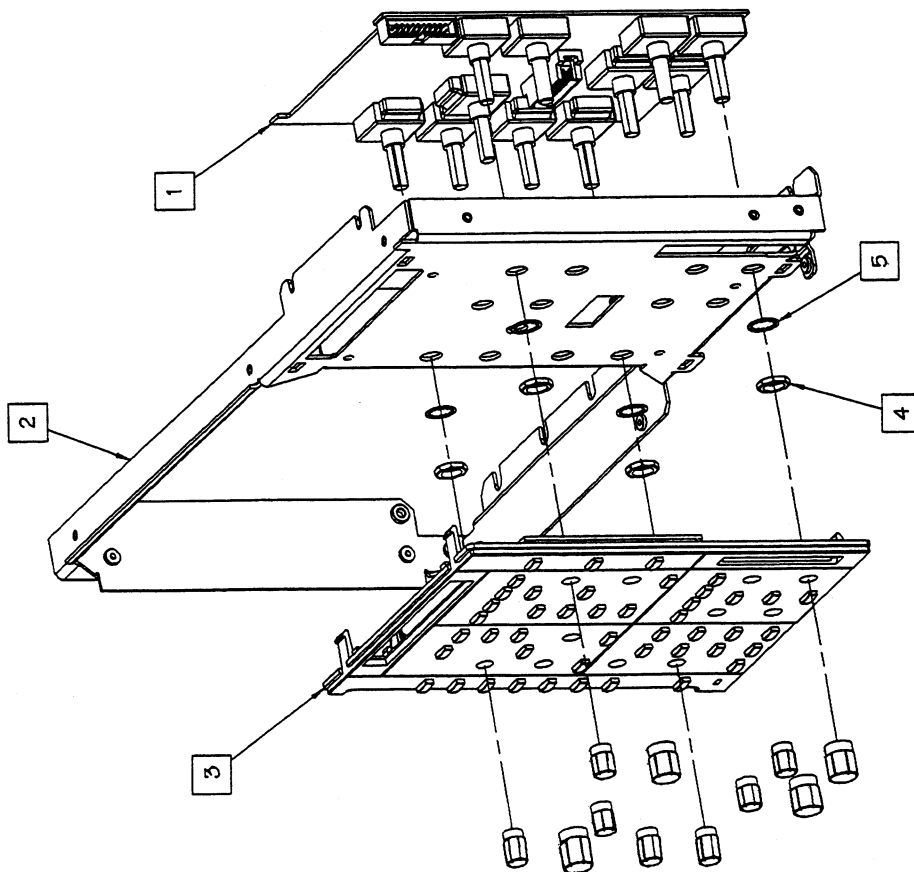
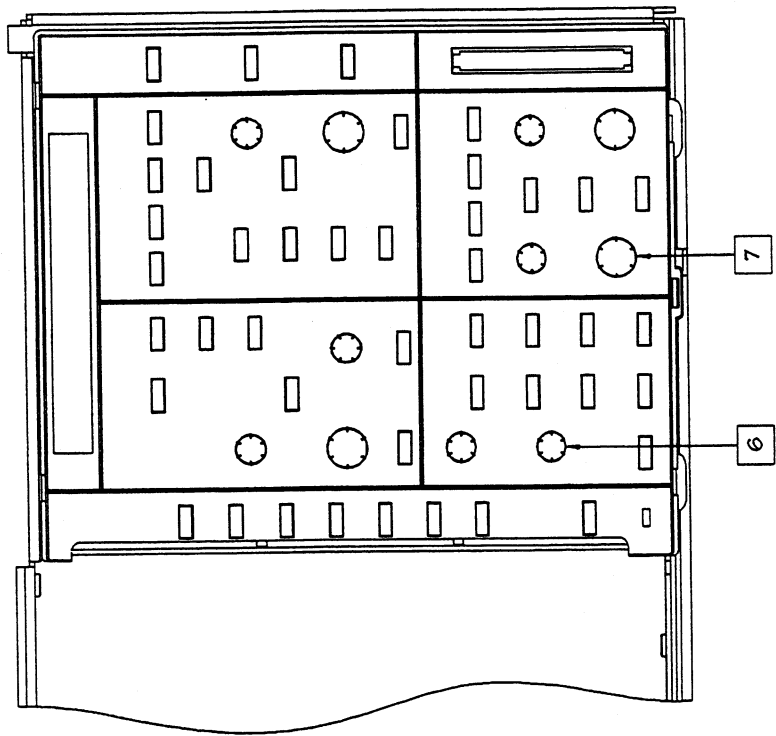


Figure 8-14 : LC574A Front Panel Assembly

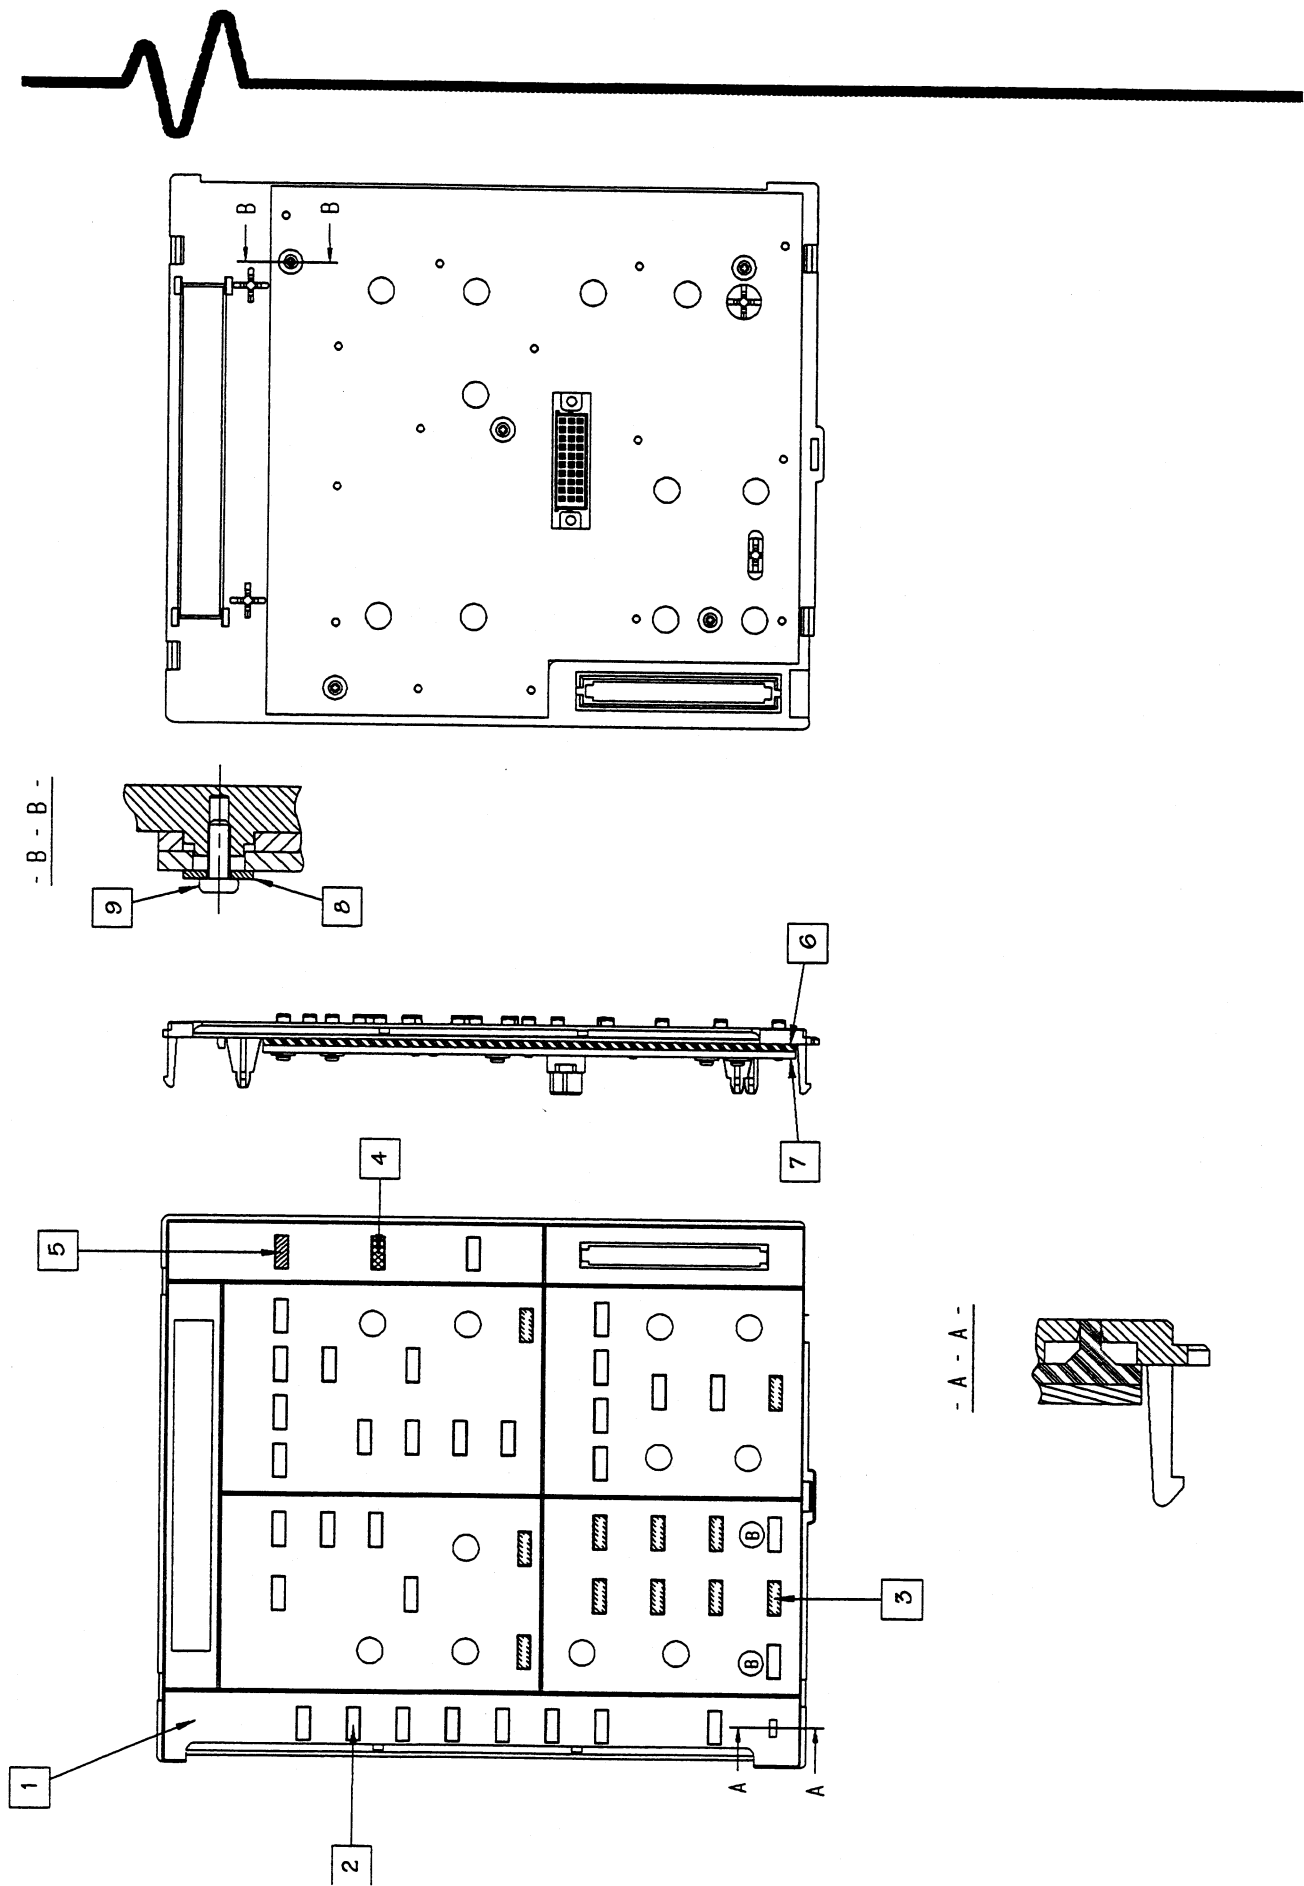


Figure 8-15 : LC574A Keypad Assembly

LC574A Front Panel Replaceable Parts (Figure 8-14)

Item	LeCroy Part Number	Qty	Description
1	F9604-5	1	Quad Channel Front Panel
2	709600030	1	Front Frame
3	F9602-5	1	Keypad Front Panel
4	552090075	4	Mounting Nut M9X0.75
5	551090001	4	Lockwasher M9
6	709600560	7	Knob diam 9
7	709600570	4	Knob diam 12

LC574A Keypad Replaceable Parts (Figure 8-15)

Item	LeCroy Part Number	Qty	Description
1	709600534	1	Front Panel Plate
2	709960510	32	Switch Cap, Light Grey
3	709600512	11	Switch Cap, Dark Grey
4	709600516	1	Switch Cap, Green
5	709600514	1	Switch Cap, Blue
6	709600550	1	Rubber Mat
7	S9602-5	1	PCB Assembly
8	551423100	5	Flat Washer M2.3
9	554422005	5	Screw Self Tapping KA22X6

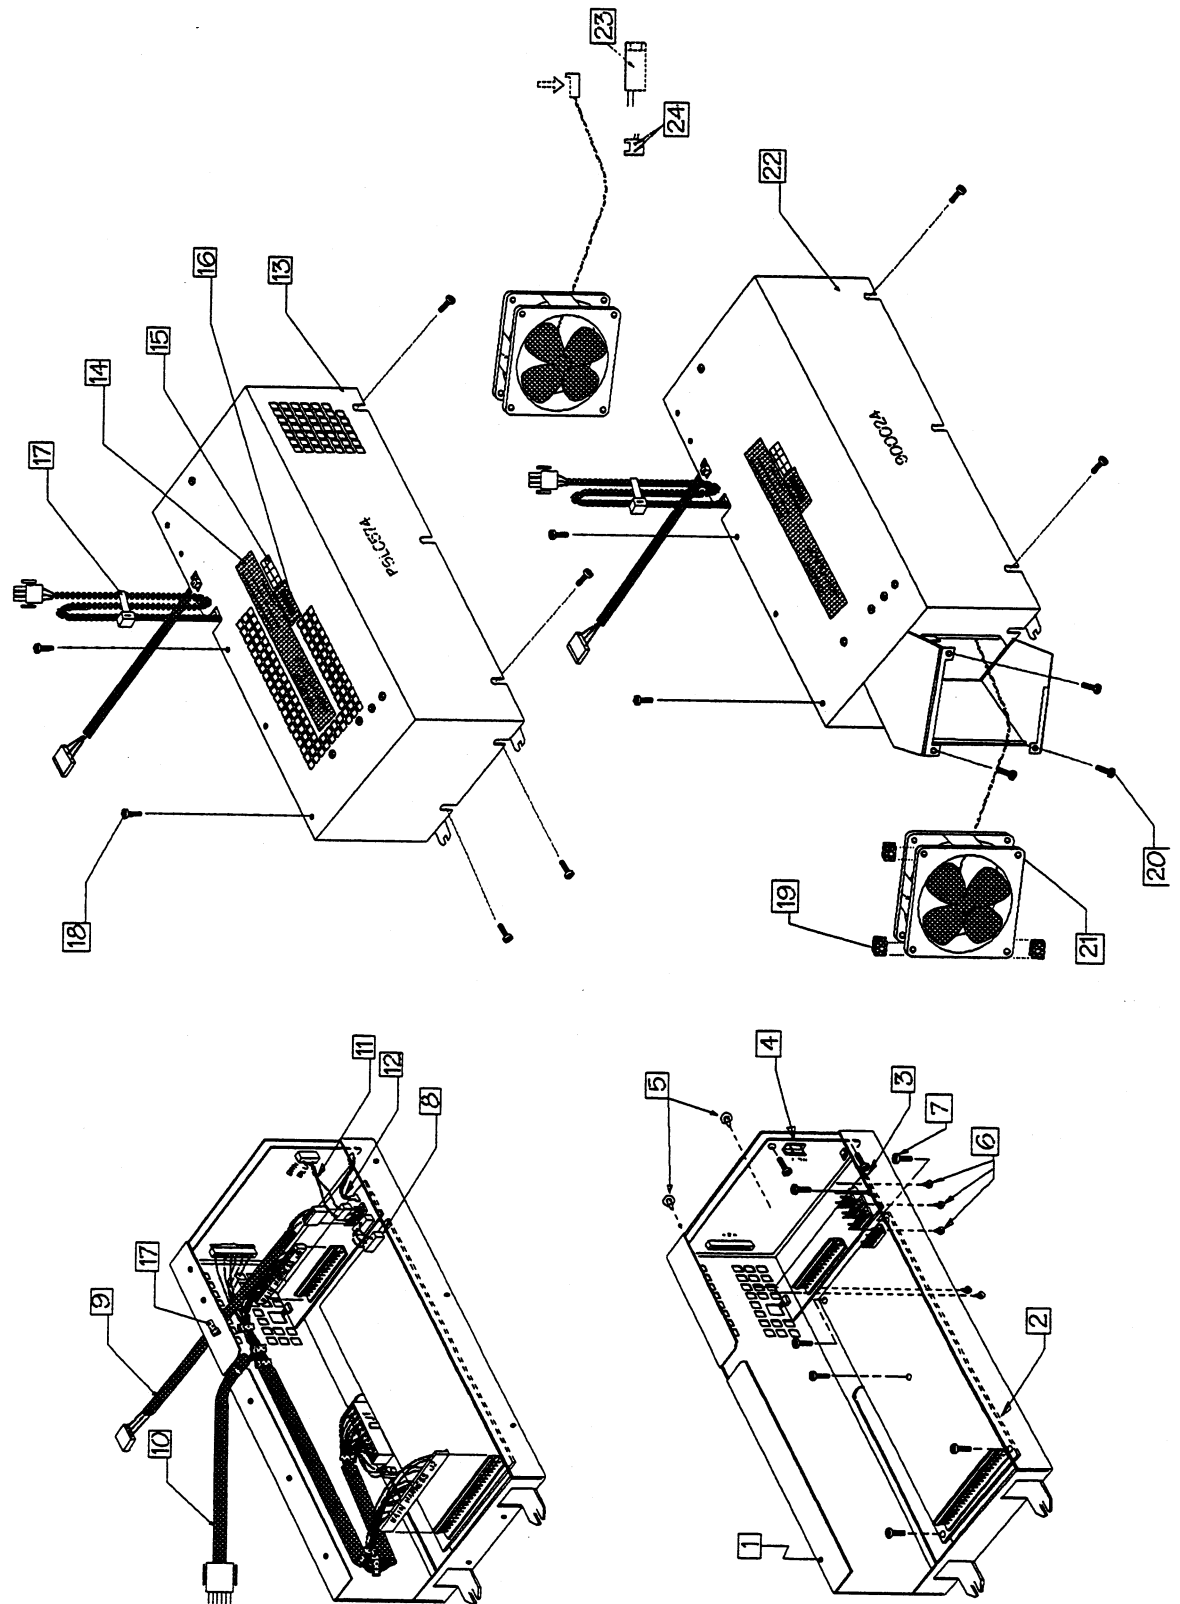


Figure 8-16 : LC574A Power Supply Assembly

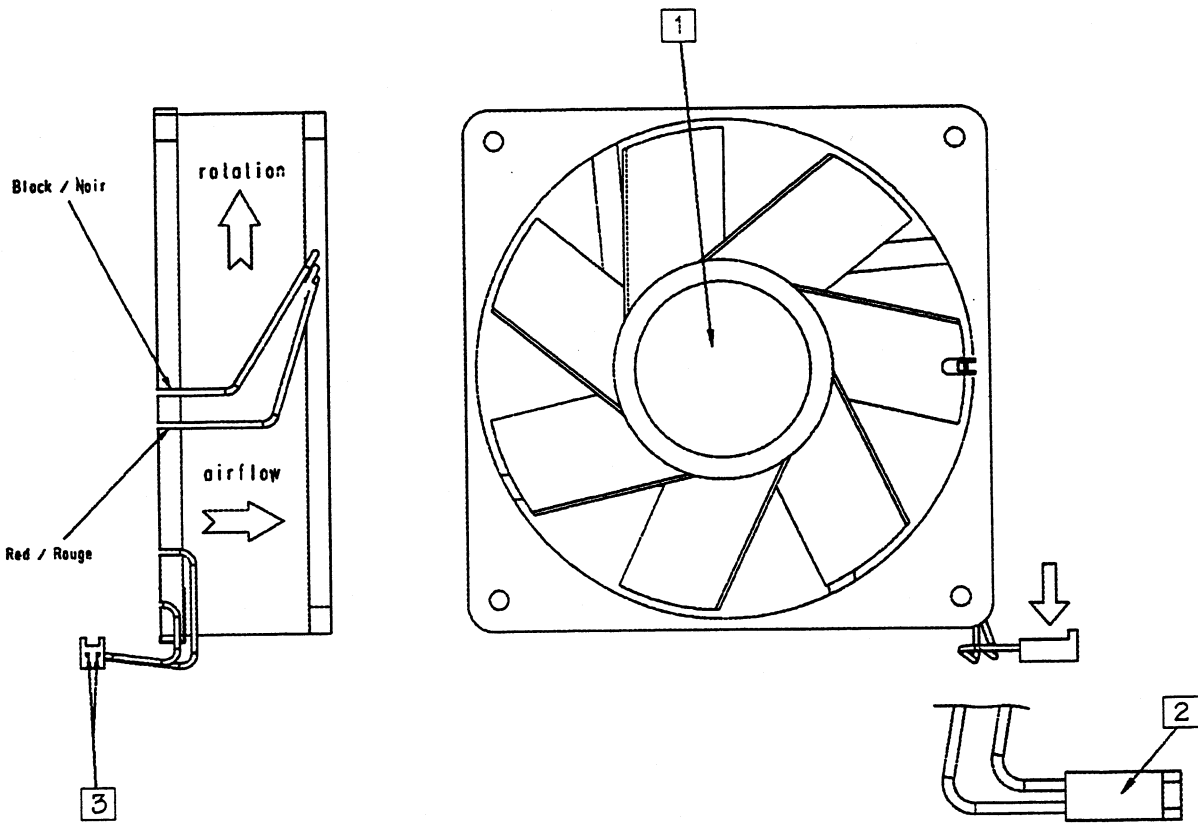


Figure 8-17 : LC574A Fan Assembly



LC574A Power Supply Replaceable Parts (Figure 8-16)

Item	LeCroy Part Number	Qty	Description
1	705740003	1	Power Supply Chassis
2	935X-PS1225	1	Power Supply Ps1724
3	PSLC574-2	1	Line Trig Card & 3.3v Dc-Dc Conv P/S
4	315116045	1	45w Power Supply -2v +/-6v
5	520001006	2	Lockin Nylon P.C.Board Support
6	520014124	6	Locking Nylon Pcb Standoff
7	550010108	7	Screw Pan Head Phil M3x8 W/Nylock
8	785740001	1	Cable Pslc574-2 To Psi 1724
9	785740002	1	Cable Pslc574-2 To Rear Pnl Al Cabl
10	705740008	1	Cable Harness For Pslc574-2
11	789384002	1	-2v Supply Line Cable
12	780834509	1	Ground Cable Yellow/Green 9cm
14	377051005	1	Label "Danger ——Only"
15	377141000	1	Label Matrix Adhesive Paper
16	377900001	1	Label Barcode 0.25" X 1.50"
17	594120001	4	Tiewrap
18	550010706	4	Screw Eco-Fix Phil Pan M3x6 W/Nyloc
19	554035101	3	Clip-On Nut Diam. 3.5
20	554440001	3	Screw S/Tap Pan Phil Ka40x12
21	530409406	1	Fan Axial 12v 3.1w 43 Cfm
22	705740020	1	900024 Power Supply Cover
23	455011002	2	Contact (Crimp) Male
24	455110002	1	Block For Male Pins 2 Pos
25	235010005	1	Diode Rectifier 1n4005

LC574A Fan Replaceable Parts (Figure 8-17)

Item	LeCroy Part Number	Qty	Description
1	530409212 (used with unit with 900024 Power supply)	1	Fan Axial 12V 1" Thick 2.4W
1	530409006 (used with unit with PSLC574 power supply)	1	Fan Axial 12 V
2	405154002	1	Connector Housing 2 Pos
3	405708001	2	Terminal anti-fishhook crimp

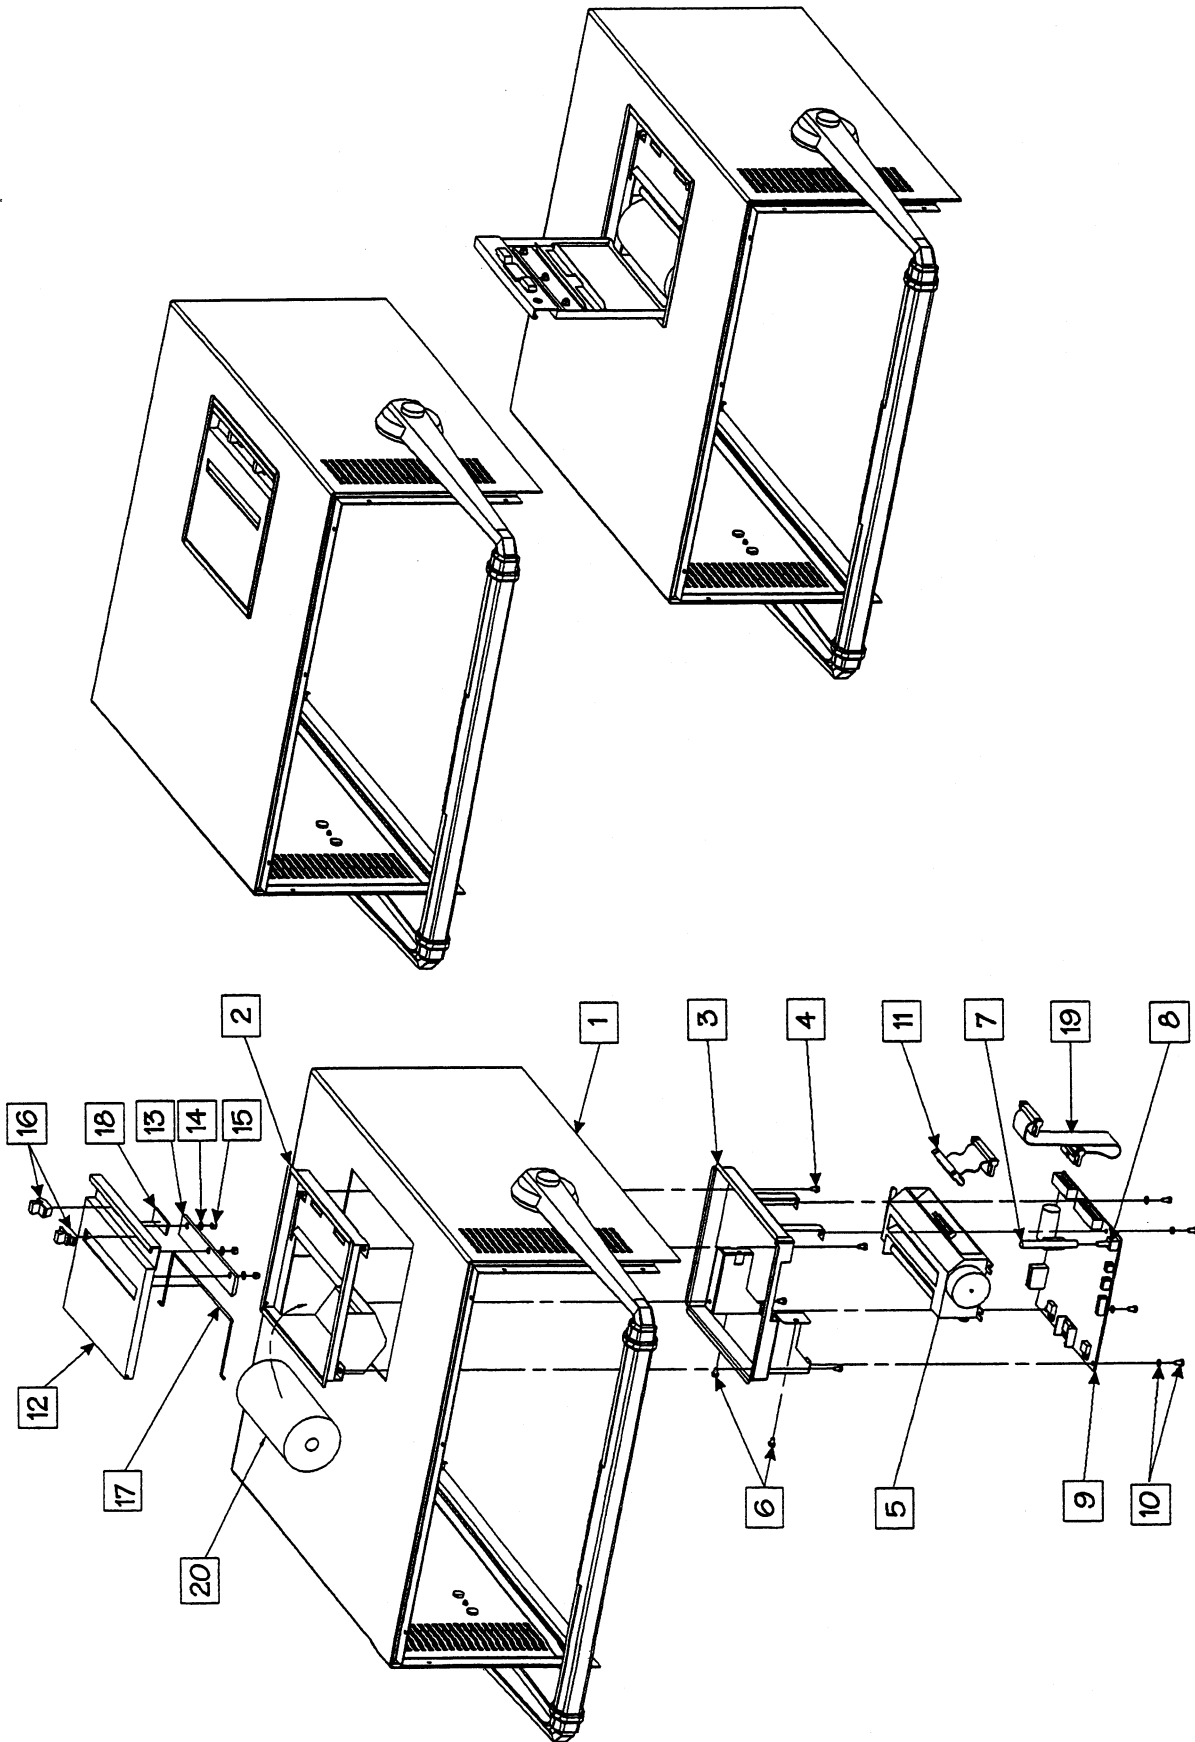


Figure 8-18 : LC574A Graphic Printer Assembly

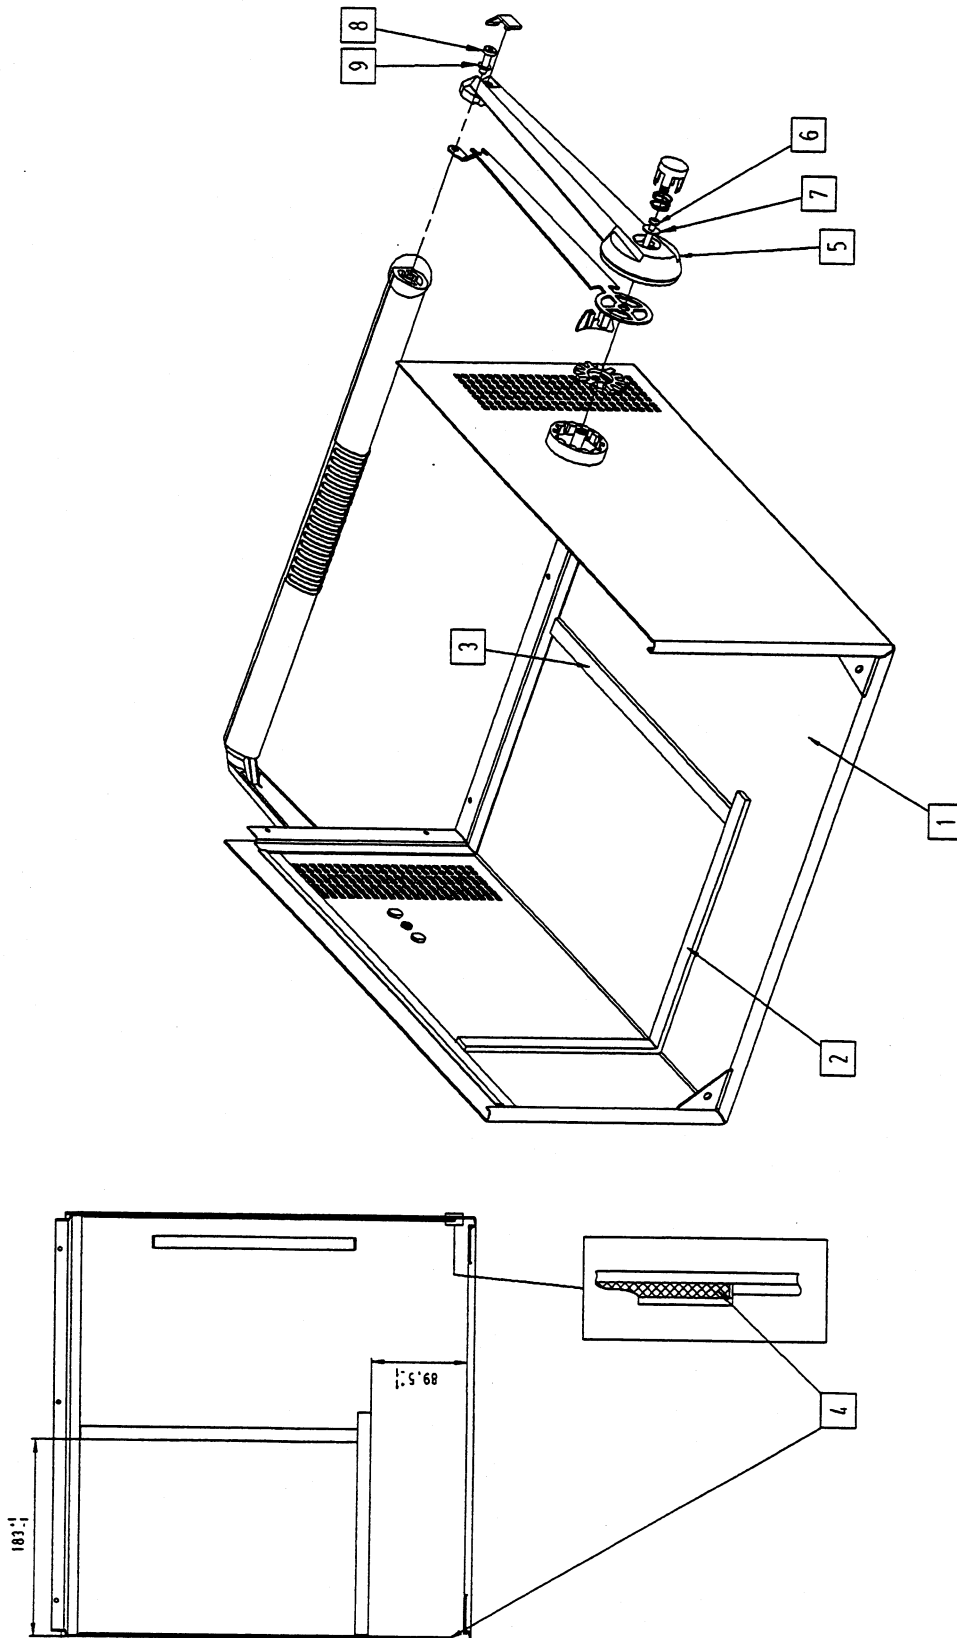
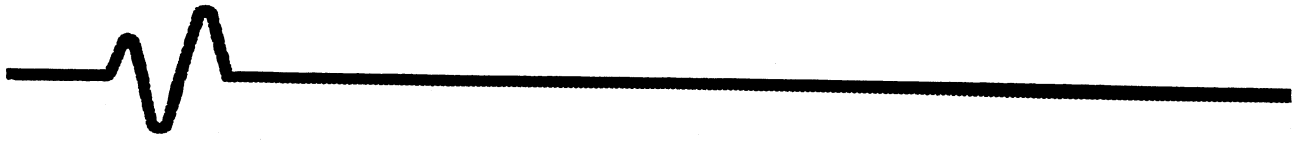


Figure 8-19 : LC574A Upper Cover Assembly

LC574A Graphic Printer Replaceable Parts (Figure 8-18)

Item	LeCroy Part Number	Qty	Description
1	709601010	1	GP01 Upper Cover Assembly
2	BOX-GP01	1	Graphic Printer Box
3	709601020	1	Graphic Printer Frame
4	550010105	4	Screw pan hd phil M3X5 w/Nylock
5	334000832	1	Thermal Printer
6	550010105	2	Screw pan hd phil M3X5 w/Nylock
7	709450523	1	Push Switch Extender
8	70GP01061	1	Printer Switch Button
9	F9300-7	1	Printer controller
10	550010106	4	Screw pan hd phil M3X6 w/Nylock
10	551430400	4	Washer Shockproof M3
11	780791604	1	Flat cable 2X13 (4cm)
12	Cover-GP01	1	Graphic Printer cover
13	70GP01051	1	Graphic Printer cutter
14	551430100	3	Flat Washer M3
15	552430300	3	Nut open end acorn M3
16	530040005	2	Slide Latch tab style
17	70GP01041	1	Graphic Printer cover axle
18	389340008	3	Auto adhesive rubber band 12X2 mm
19	780721022	1	Flat cable 2X10 (22 cm)
20	334000402	1	Thermal Paper for Seiko Printer

LC574A Upper Cover Replaceable Parts (Figure 8-19)

Item	LeCroy Part Number	Qty	Description
1	709600040	1	Upper Cover
2	380450012	1	NR adhesive tape 4X12 mm, length 370 mm
3	380450012	1	NR adhesive tape 4X12 mm, length 358 mm
4	350920024	2	Monel mesh strip diam 2.4 mm
5	709600090	1	Tip-up Carrying Handle
6	550440120	2	Screw pan hd phil M4X20 w/Nylock
7	709600090 kit	2	Flat Washer M4
8	709600090 kit	2	Socket head Screw M5X16 Loctite Coated
9	709600090 kit	2	Washer M5
10			

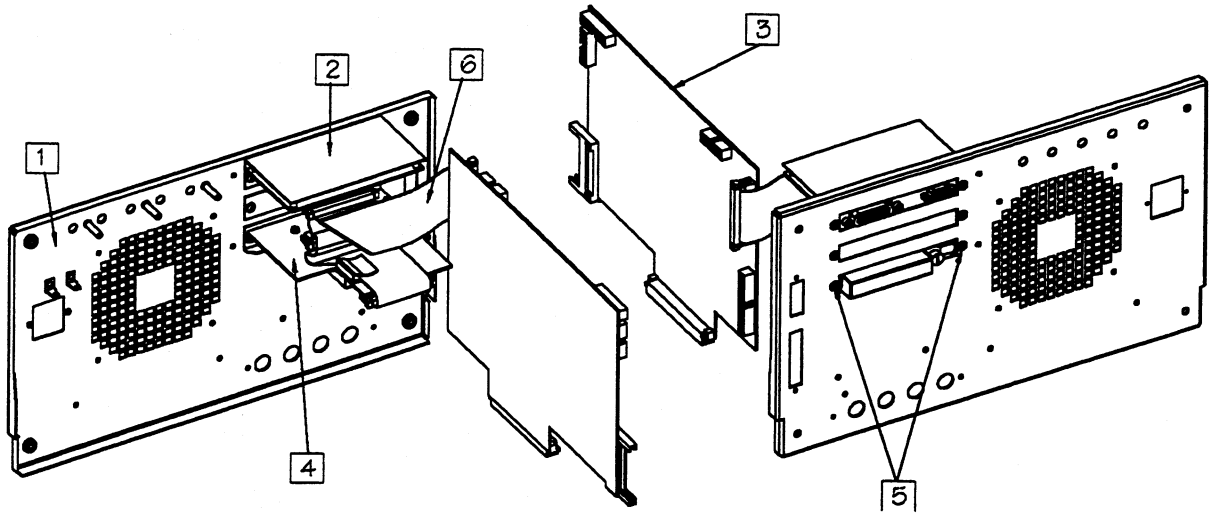


Figure 8-20 : LC574A Hard Disk Assembly

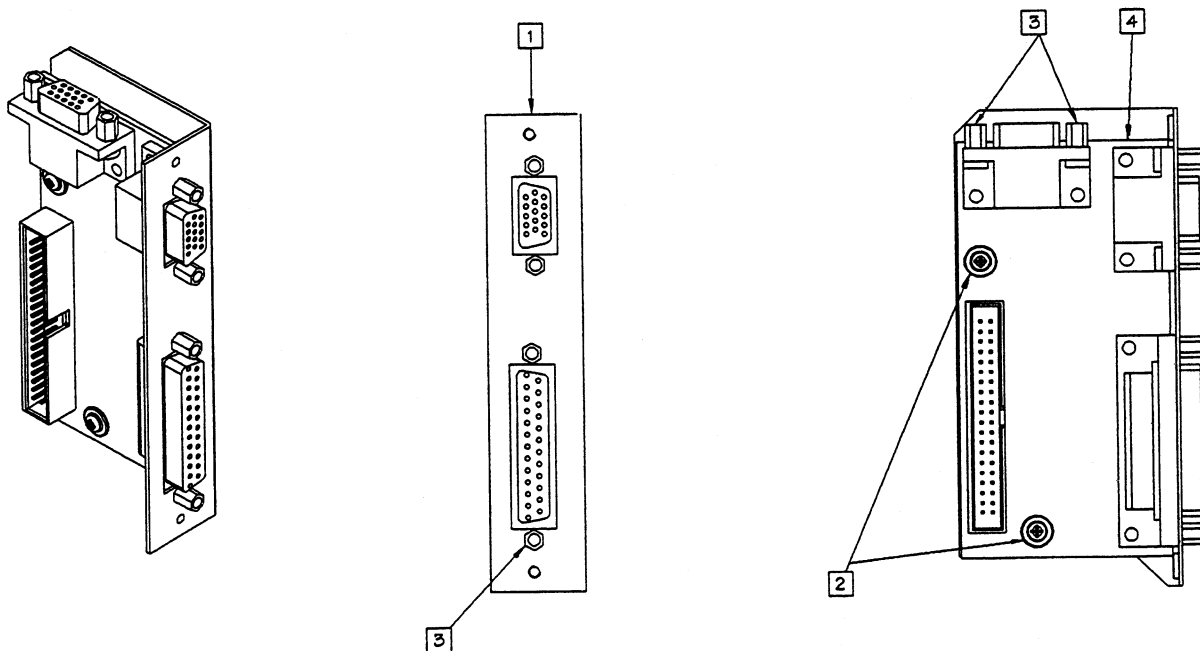


Figure 8-21 : LC574A Centronics & VGA Interface Assembly

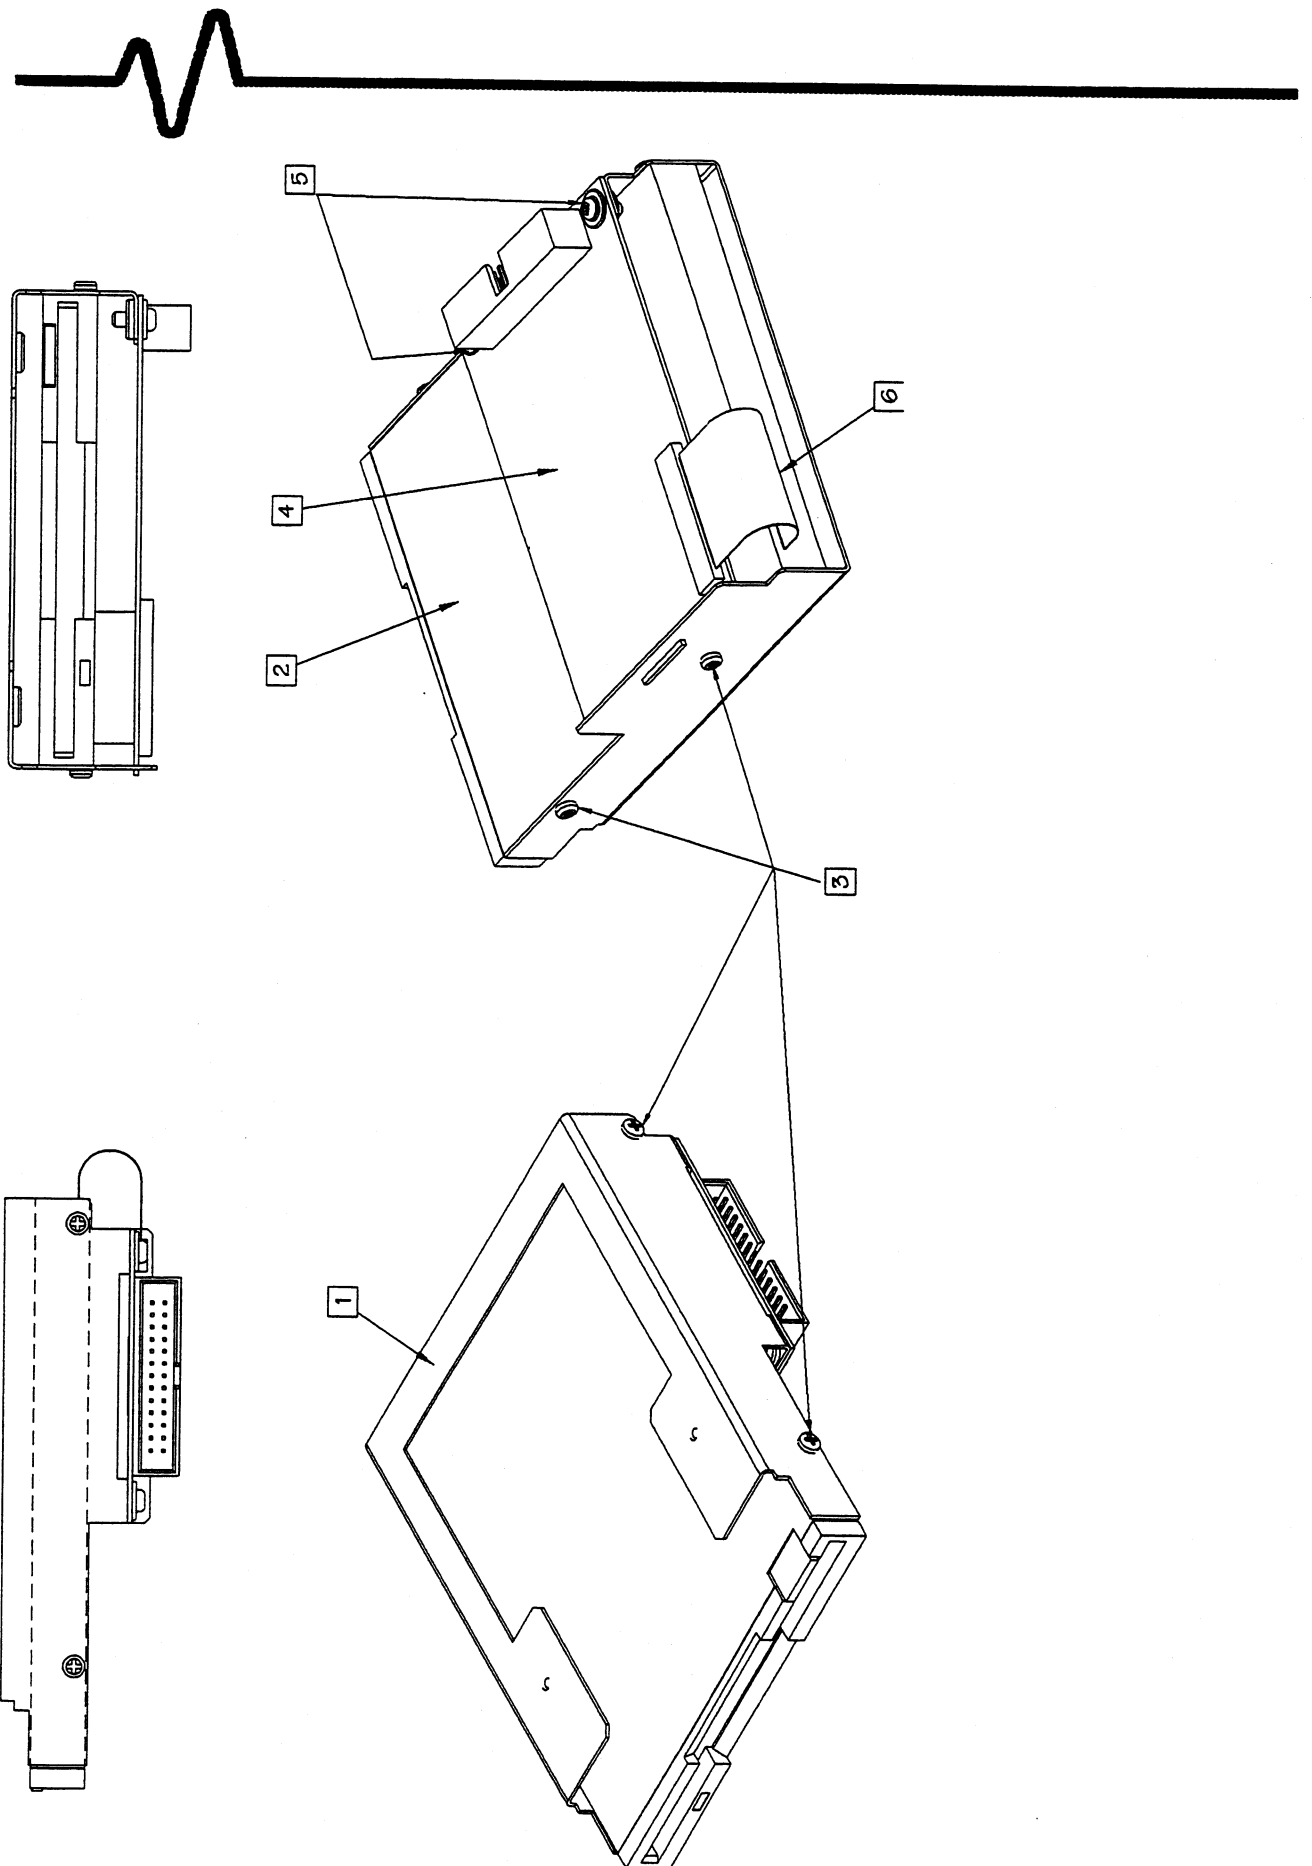


Figure 8-22 : LC574A Floppy Disk Assembly

LC574A Hard Disk Replaceable Parts (Figure 8-20)

Item	LeCroy Part Number	Qty	Description
1	RP9602-9	1	Rear Panel
2	F9300-4	1	GPIO & RS232 Interface
3	F9601-1-X	1	Processor Card
4	LCXXX-HD01	1	PCMCIA III Controller Assembly
5	550010706	2	Screw eco-fix M3X6 w/Nylock
6	780891032	1	Flat cable 2X20 (4 connect)

LC574A Centronics & VGA Replaceable Parts (Figure 8-21)

Item	LeCroy Part Number	Qty	Description
1	709601211	1	Bracket
2	550010706	2	Screw eco-fix M3X5 w/Nylock
3	405204000	6	Mounting hdw for conn.shell
4	F9601-2	1	Centronics & VGA Card

LC574A Floppy Replaceable Parts (Figure 8-22)

Item	LeCroy Part Number	Qty	Description
1	709600611	1	Floppy Drive support
2	330000002	1	Floppy Disk Drive 3.5"
3	550010103	4	Screw cyl hd phil M2.5X3 w/Nylock
4	S9601-6	1	Interface Card
5	550010706	2	Screw eco-fix M3X6 w/Nylock

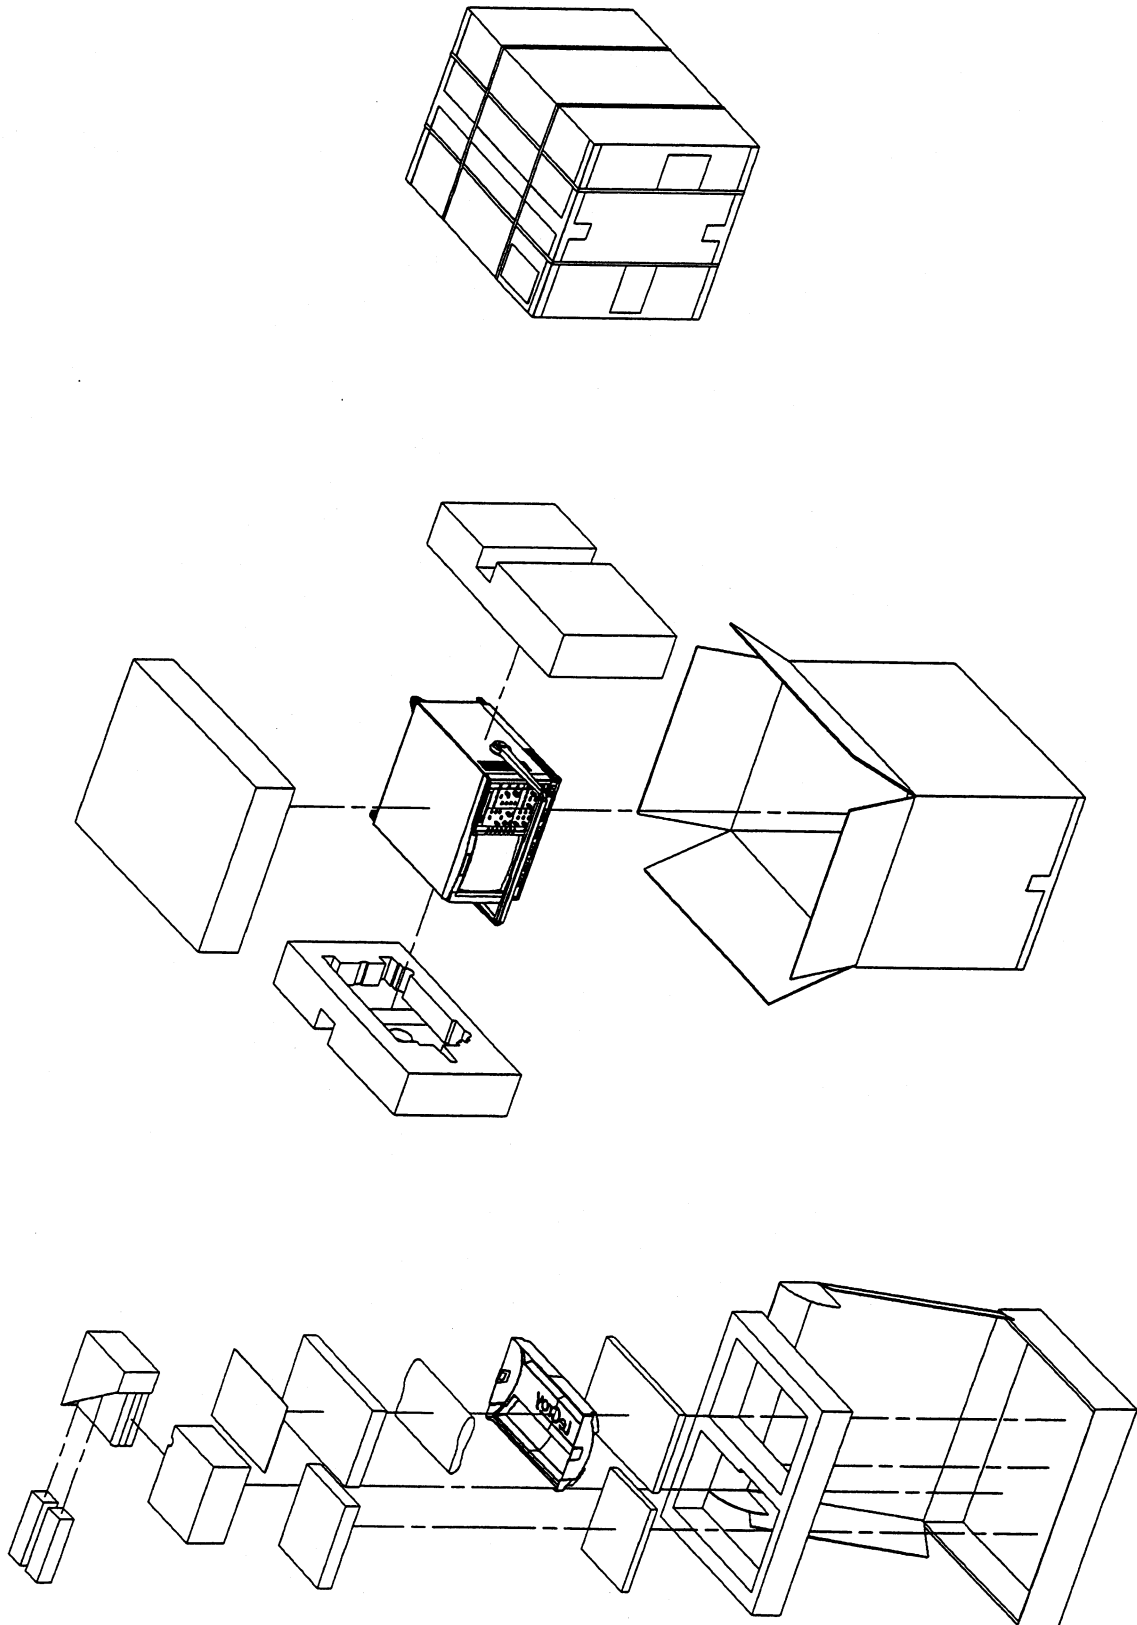
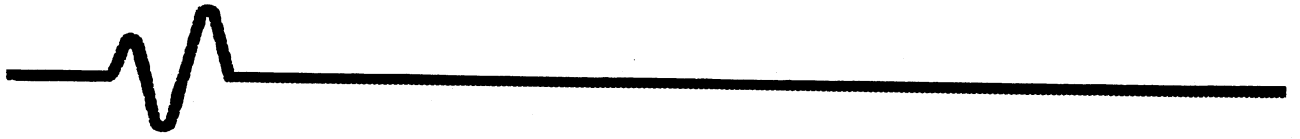


Figure 8-23 : LC574A Packaging Assembly

Schematics, Layouts

9. Schematics, Layouts, Parts List

This chapter contains the following schematics, layouts and parts list :

F9601-1-X Processor

9484M-2 Acquisition Memory

9384MEM-2 Acquisition Memory

F9601-2 Centronics and VGA Interface

F9384-31 Main Acquisition Card

F9300-4 GPIB & RS232 Interface

F9354-4 Time Base

F9602-5 Front Panel Keypad

F9604-5 Front Panel

F9601-6 Floppy Disk Interface

F9300-7 Printer Controller


F9300-8 Hard Disk Interface

PS9651 Power Supply (PS1724) Diagram

PSLC574-2 -2v Power Supply and Line Trigger Card

CD9610 Color Display






Schematics, Layouts

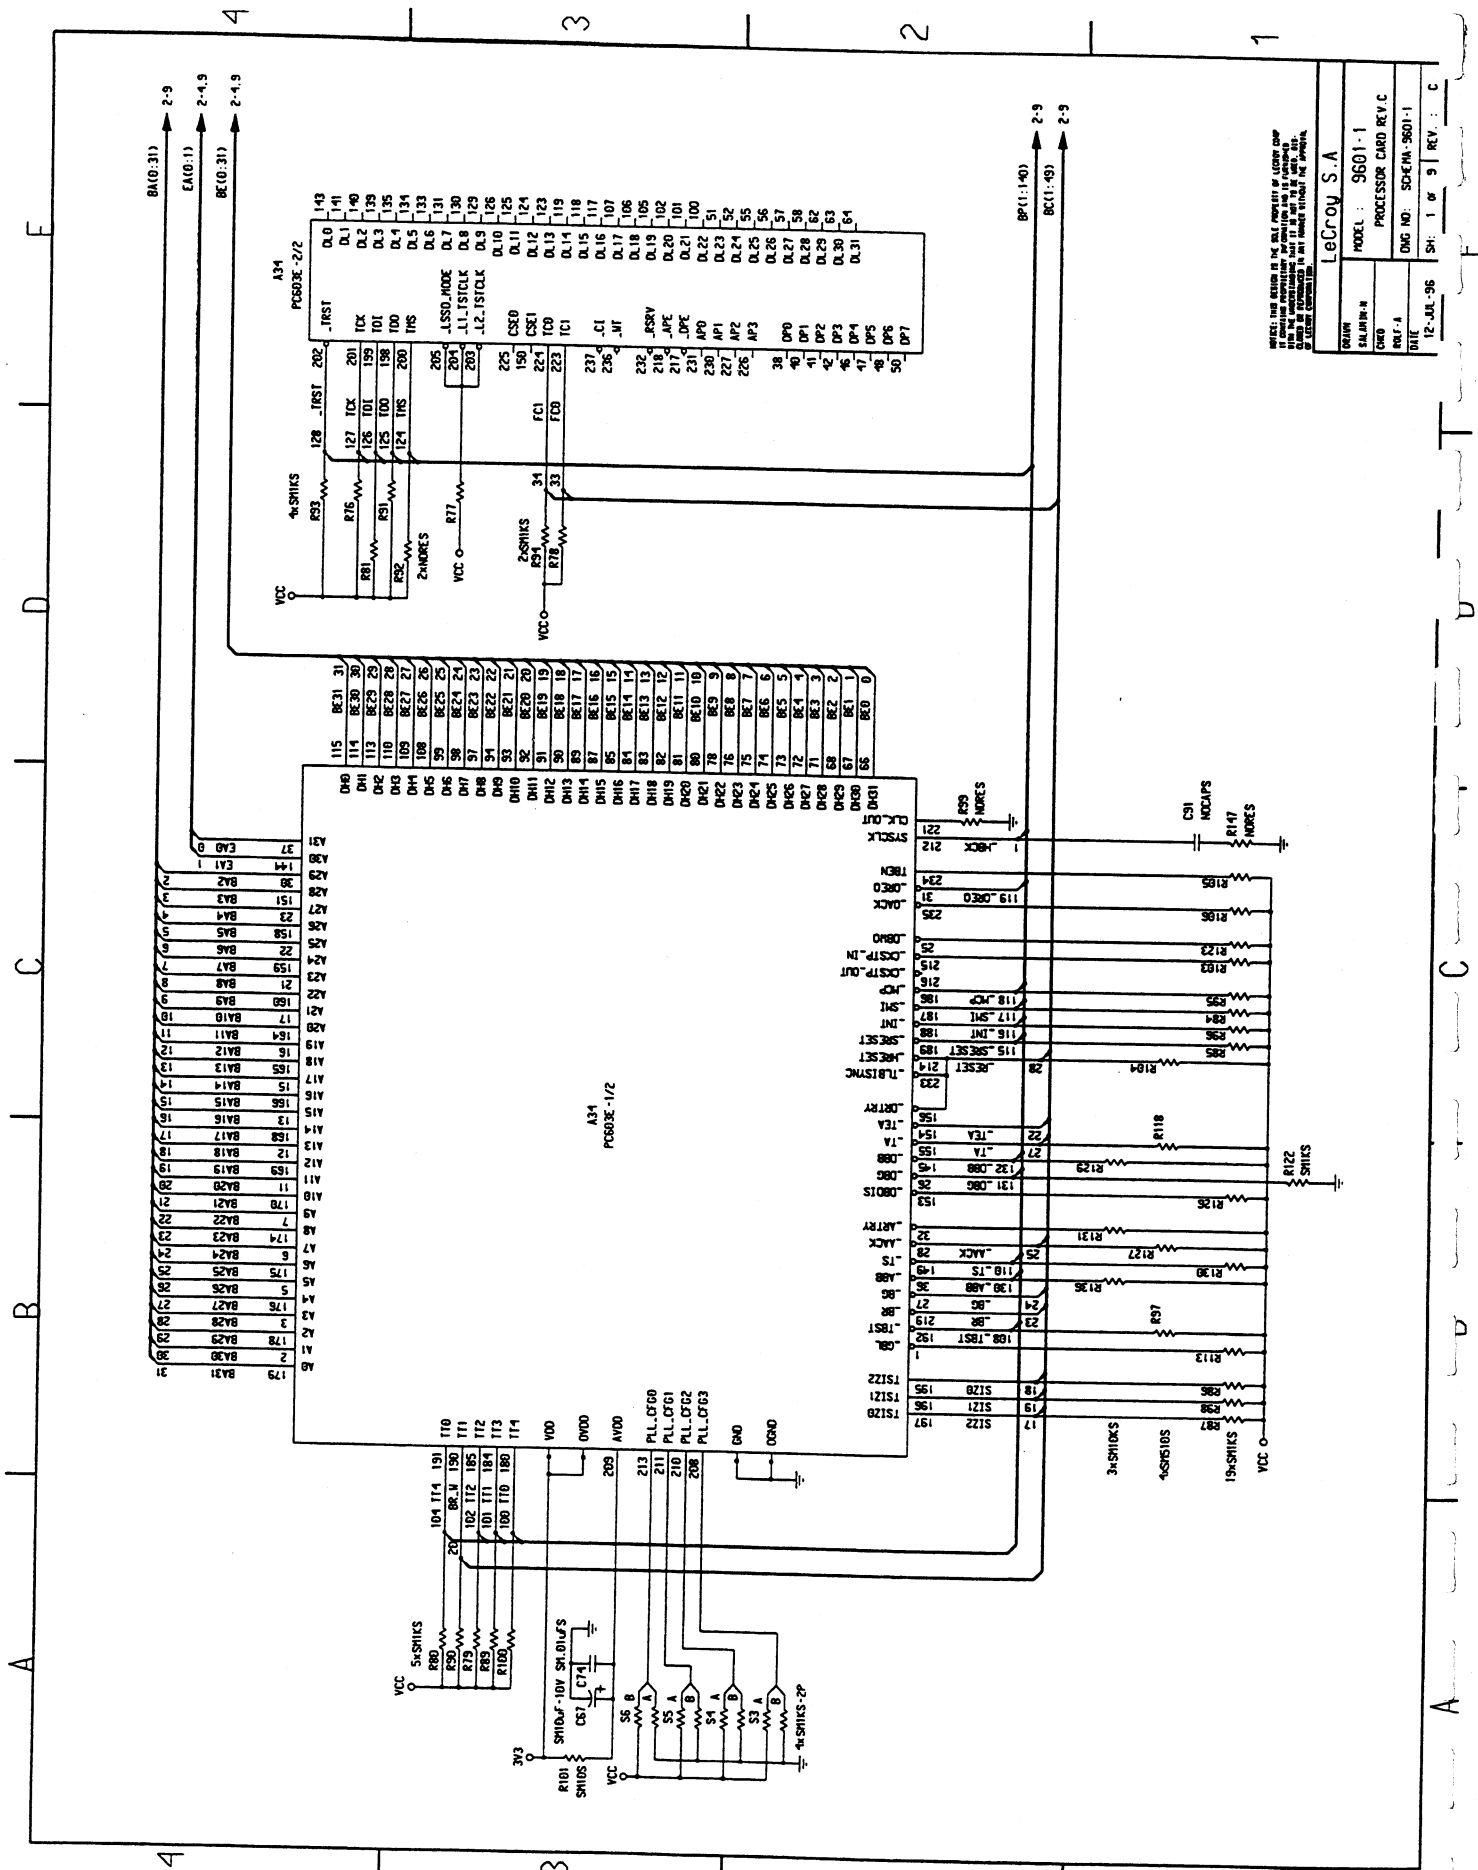

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LEICROY CORP. THE USER ASSUMES ALL LIABILITY FOR THE PROPER USE OF THIS DESIGN. THE USER AGREES TO HOLD LEICROY CORP. HARMLESS FROM ALL SUCH LIABILITY.

LeCroy S.A.
 MODEL : 9601-1
 PROCESSOR CARD REV. C
 DWG NO. SCK-PA-9601-1
 SHEET 1 OF 9 | REV. : C
 12-JUL-96

DYNAMIC RAM

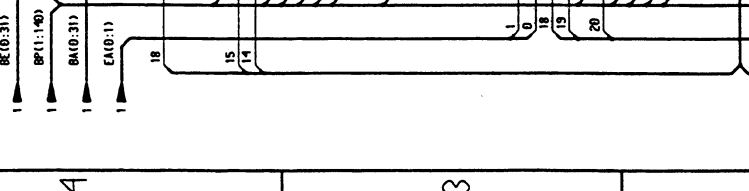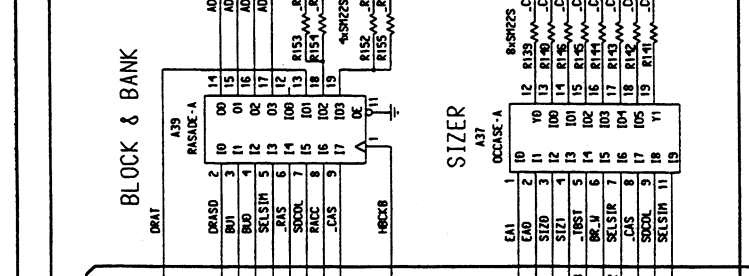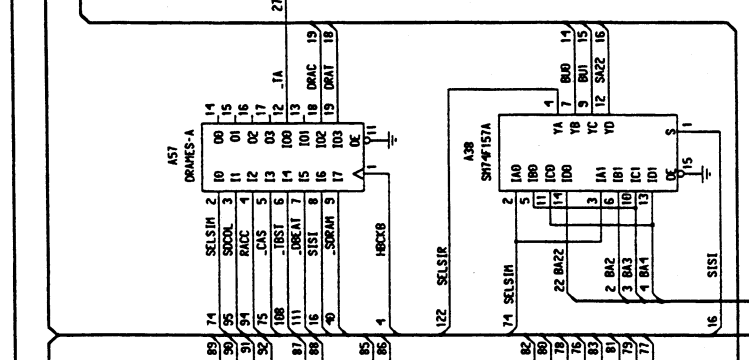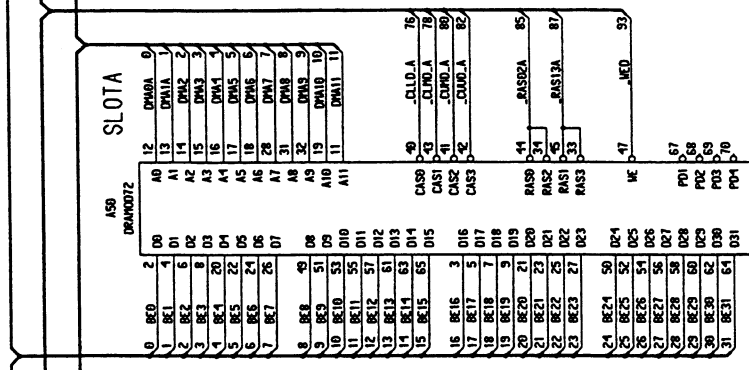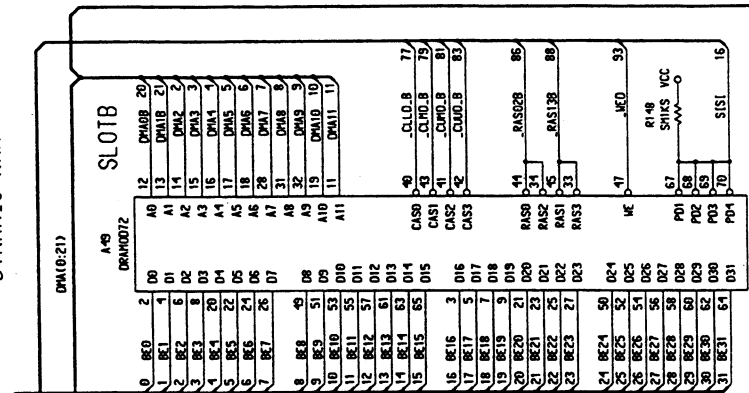


NOTE: THIS SYSTEM IS THE PROPERTY OF LEADCO CORP.
 IT CONTAINS INFORMATION OF LEADCO CORP. AND IS TO BE KEPT CONFIDENTIAL.
 IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE ORDER.
 CHANGES TO THIS DESIGN ARE TO BE MADE THROUGH THE COMPANY.
 © 1987 LEADCO CORP.

DRIVER	MODEL	9601-1
PROCESSOR CARD REV C		
CROO	ONG NO.	SOE-EM-9601-1
REF-A	SH:	2 of 9
DATE	REV:	C
12-JUL-96		

LeCroy S.A

Schematics, Layouts

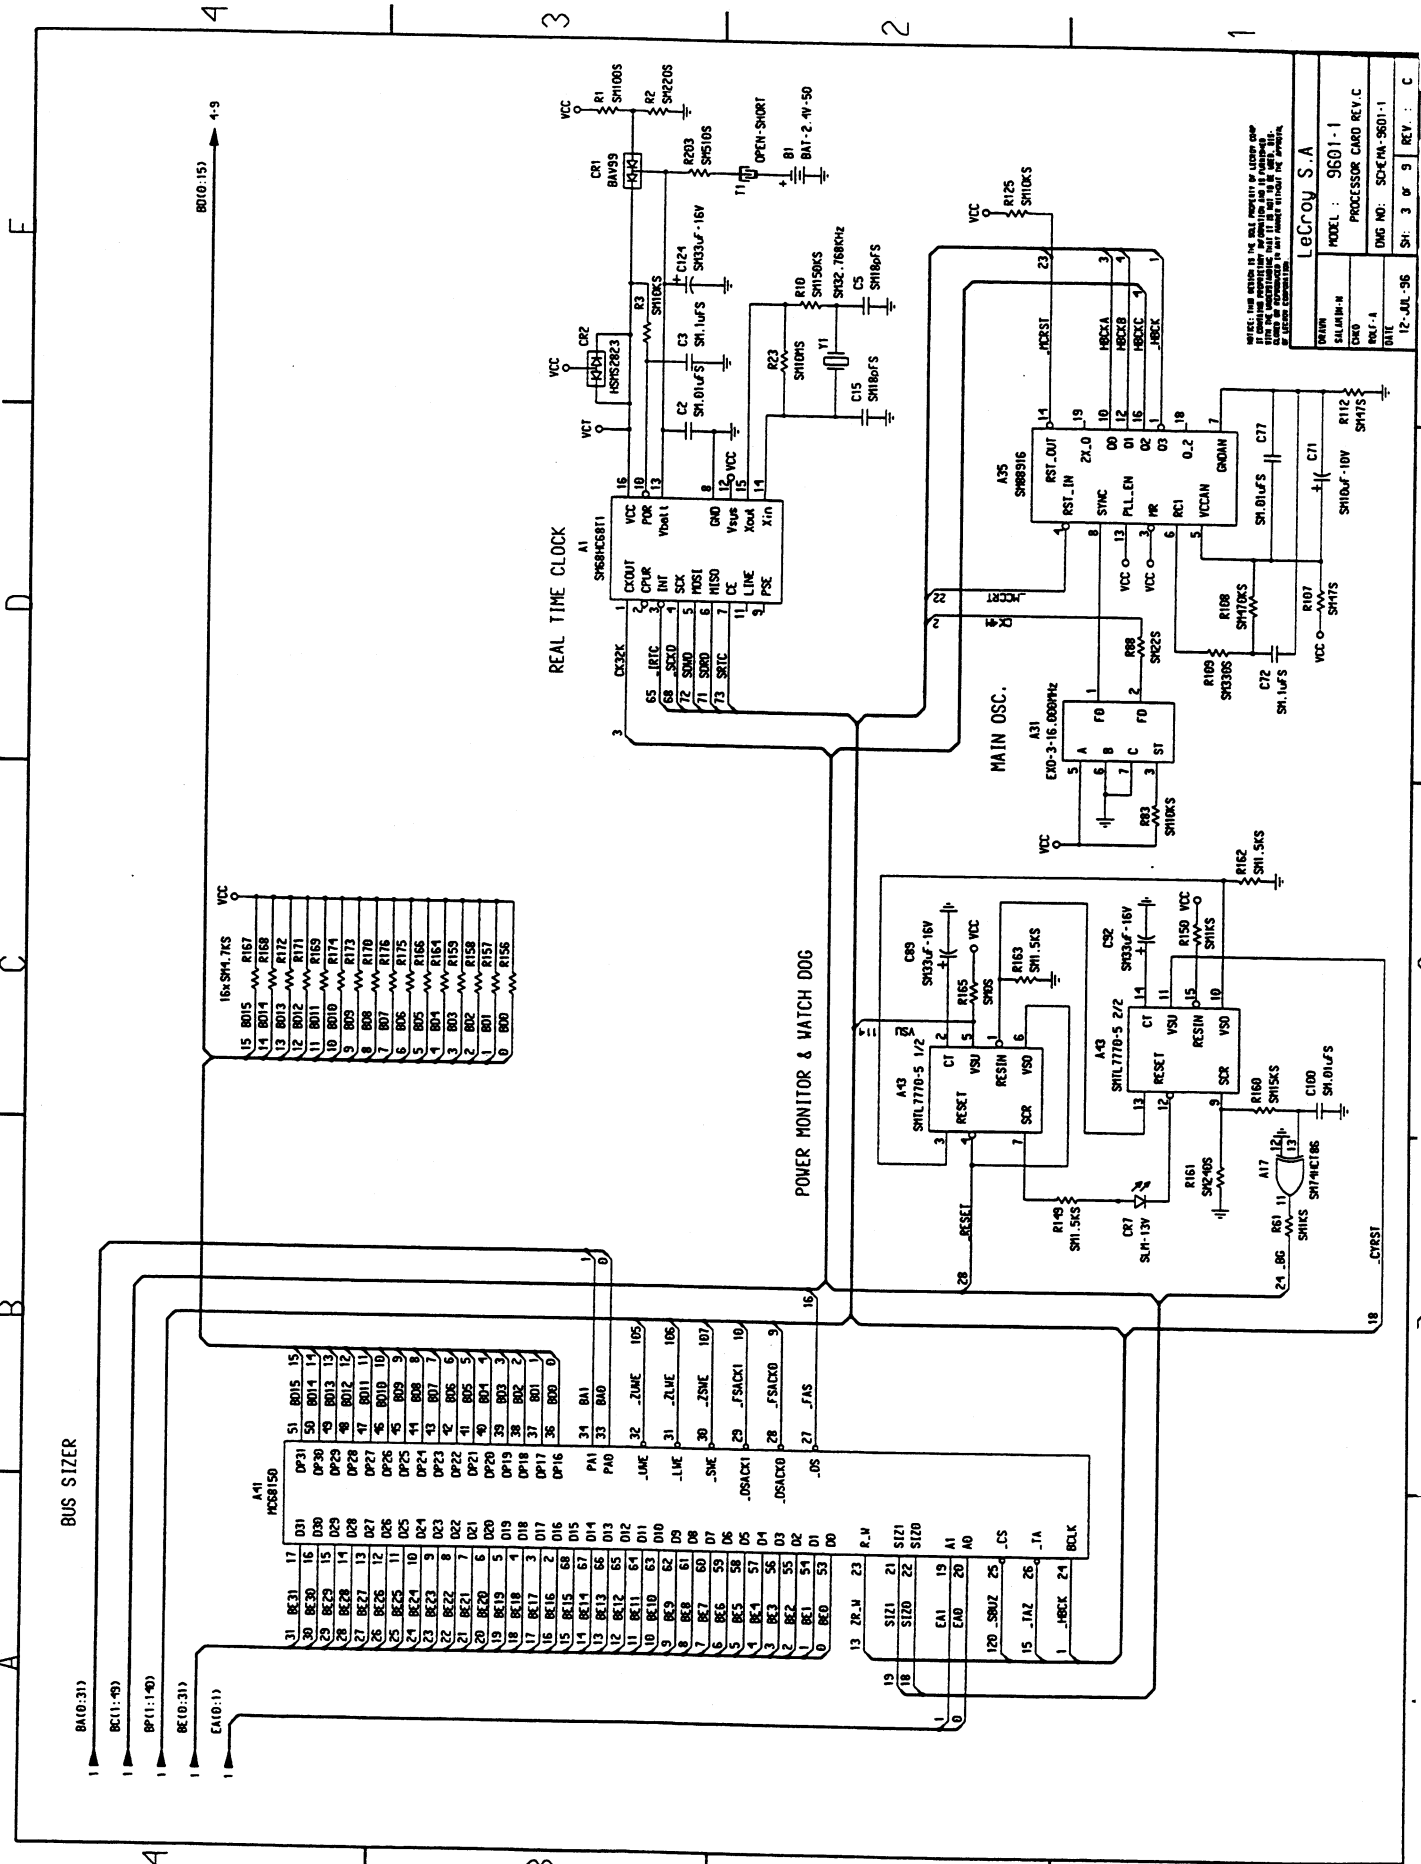


LeCroy S.A.

MODEL : 9601 - 1
 PROCESSOR CARD REV. C

DATE : 12-JUL-96
 SHEET : 3 OF 9 REV. : C

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY S.A. IT IS THE PROPERTY OF LECROY S.A. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF LECROY S.A.

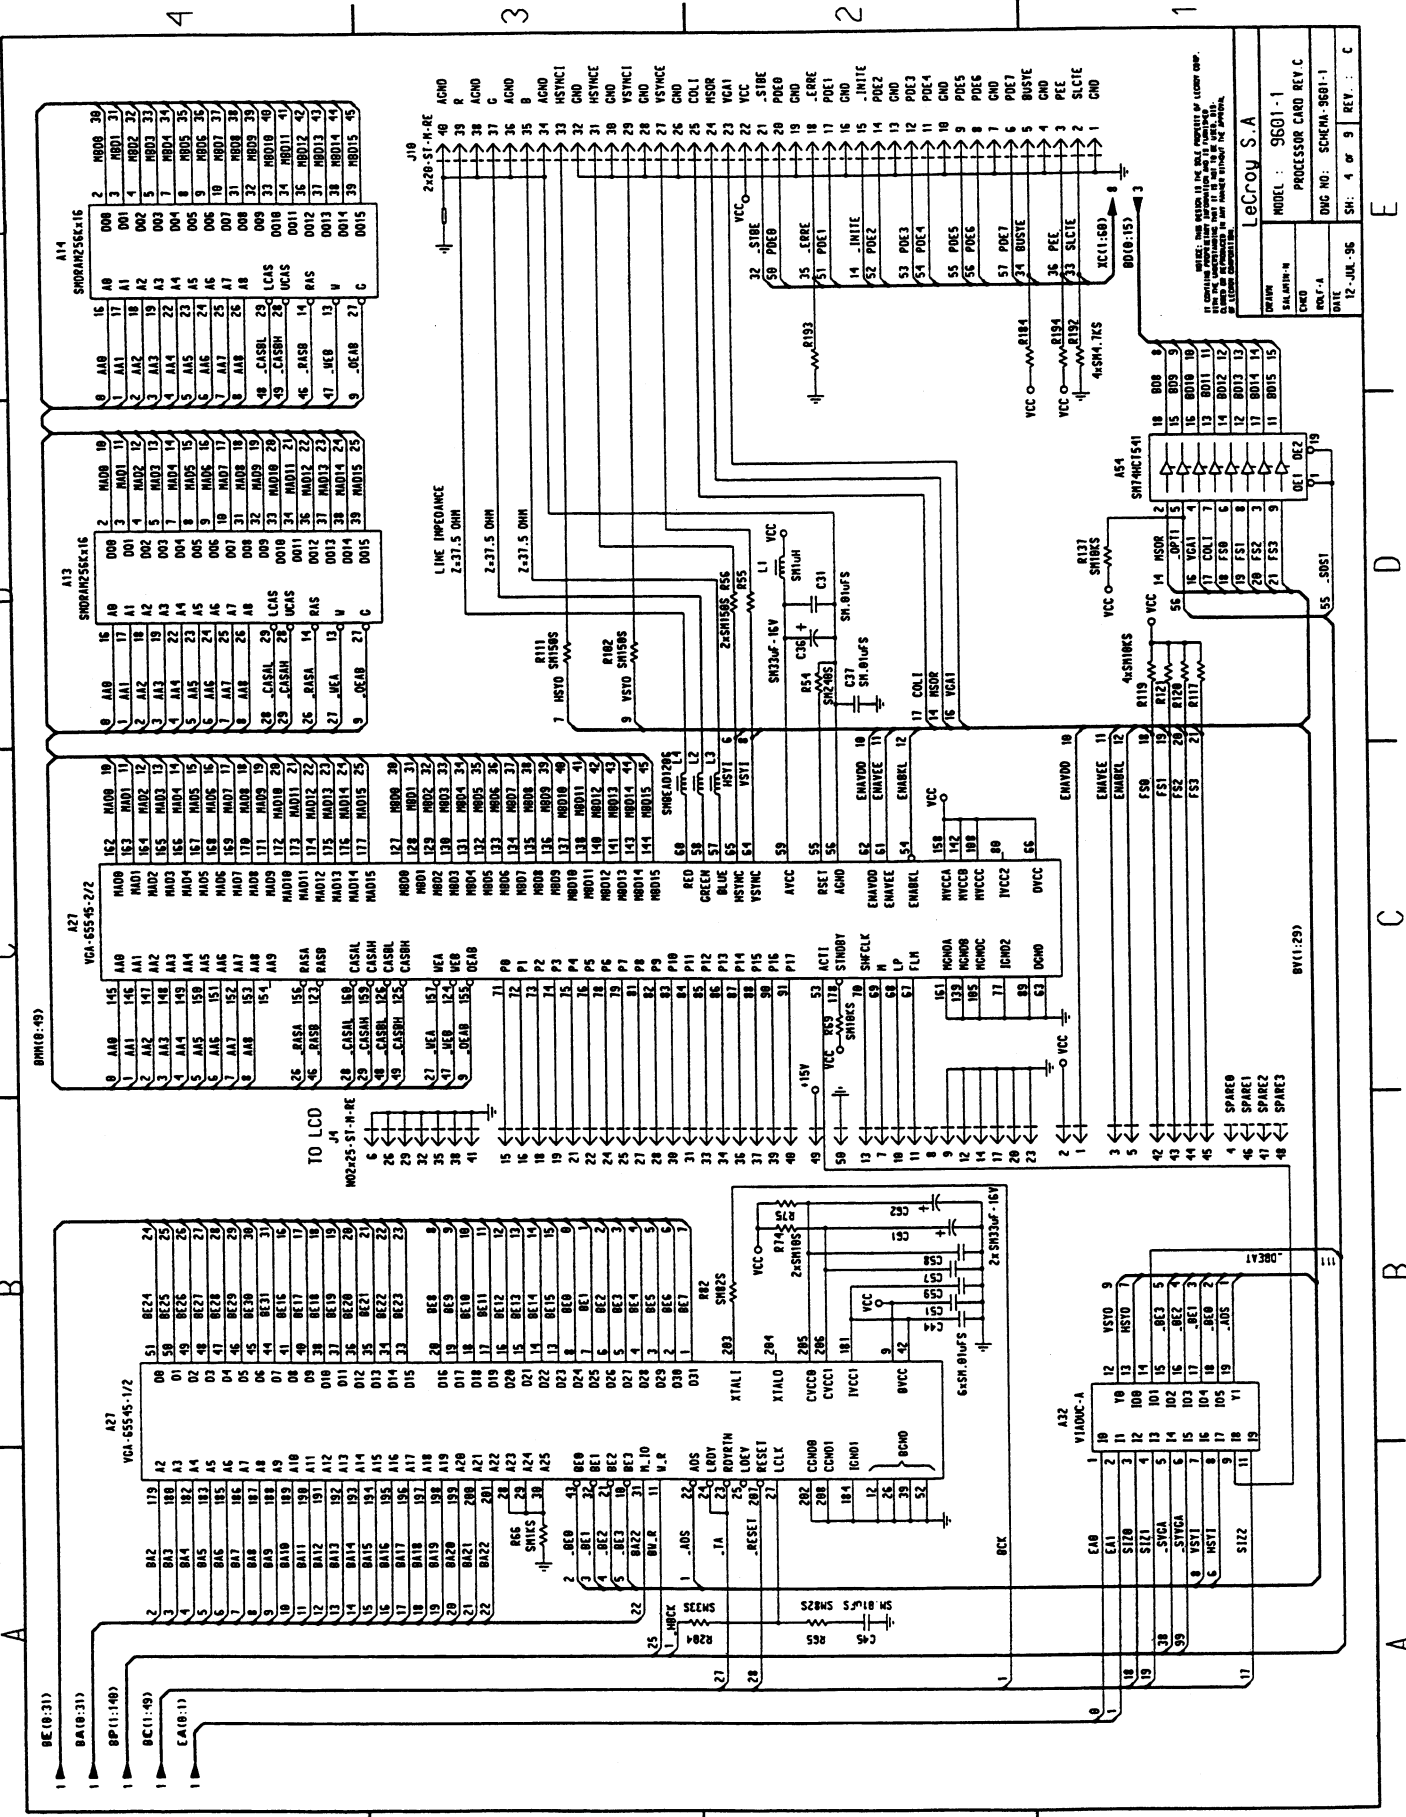


NOTES: THIS BOARD IS THE ONLY COMPLETE PCB LAYOUT SHIP.
IT CONTAINS ALL THE INFORMATION AND IS THE ONLY ONE TO BE USED FOR REPAIRS.
ALL INFORMATION IS THE PROPERTY OF LEICROY S.A.
NO PARTS TO BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF LEICROY S.A.

LeCroy S.A.
MODEL : 9601-1
PROCESSOR CARD REV C
DRAWN :
CHKD :
REV : A
DATE : 12-JUL-96
SH : 4 or 9
REV : C

A B C D E
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48

Schematics, Layouts

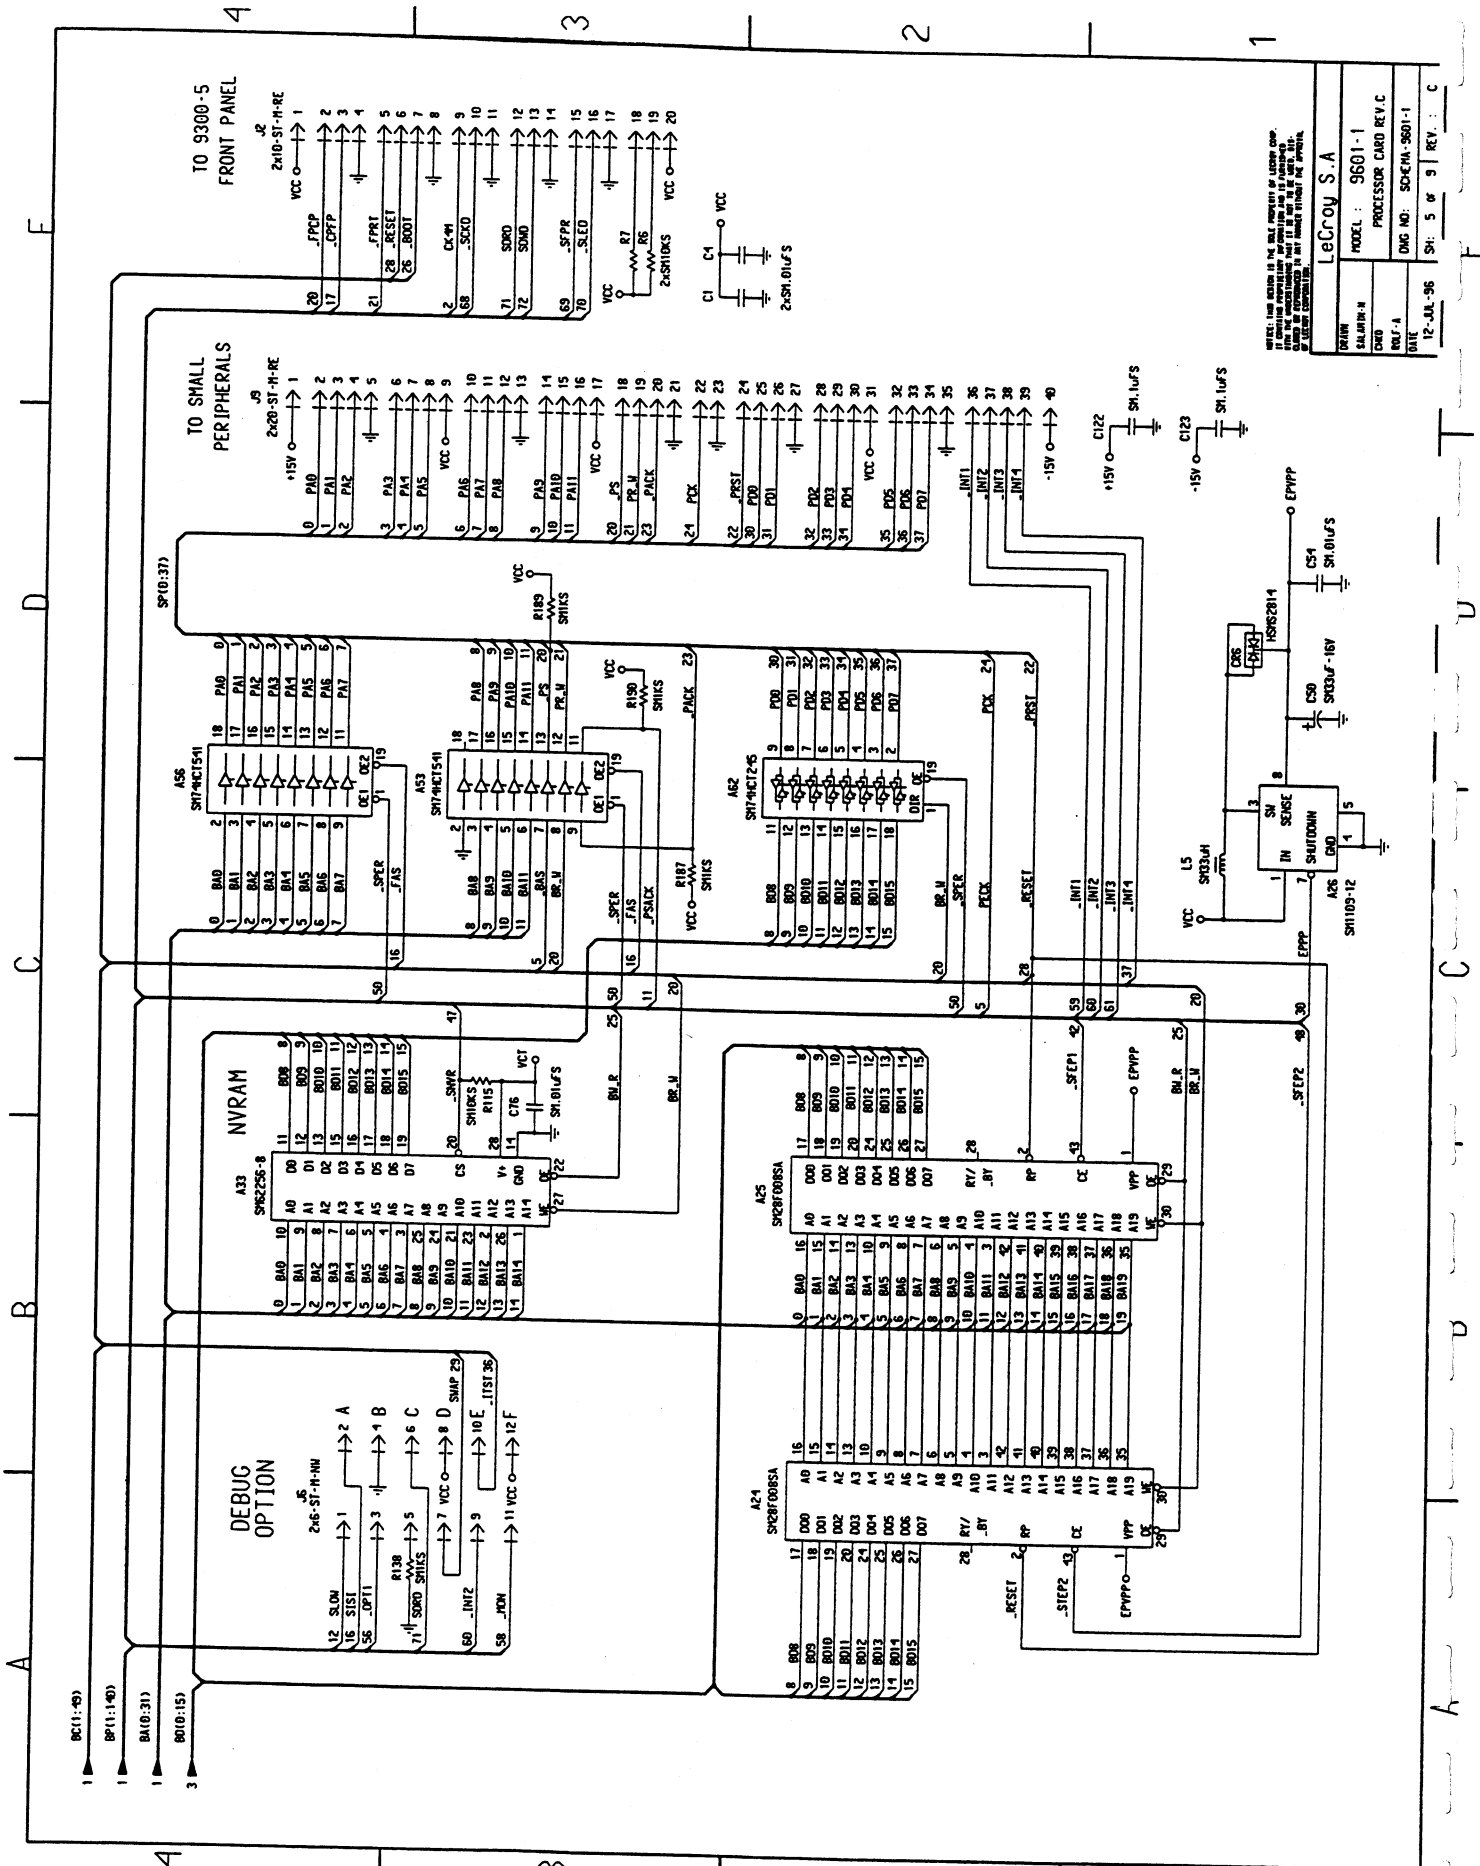

NOTES: THIS BOARD IS THE FULL INTEGRITY OF LEADERSHIP IN THE MICROPROCESSOR MARKET. THE BOARD IS DESIGNED TO BE USED IN THE 9300-5 FRONT PANEL. THE BOARD IS DESIGNED TO BE USED IN THE 9300-5 FRONT PANEL.


LeCroy S.A.

MODEL: 9601-1

PROCESSOR CARD REV. C

DATE: 12-JUL-96

SH: 5 of 9 REV: C

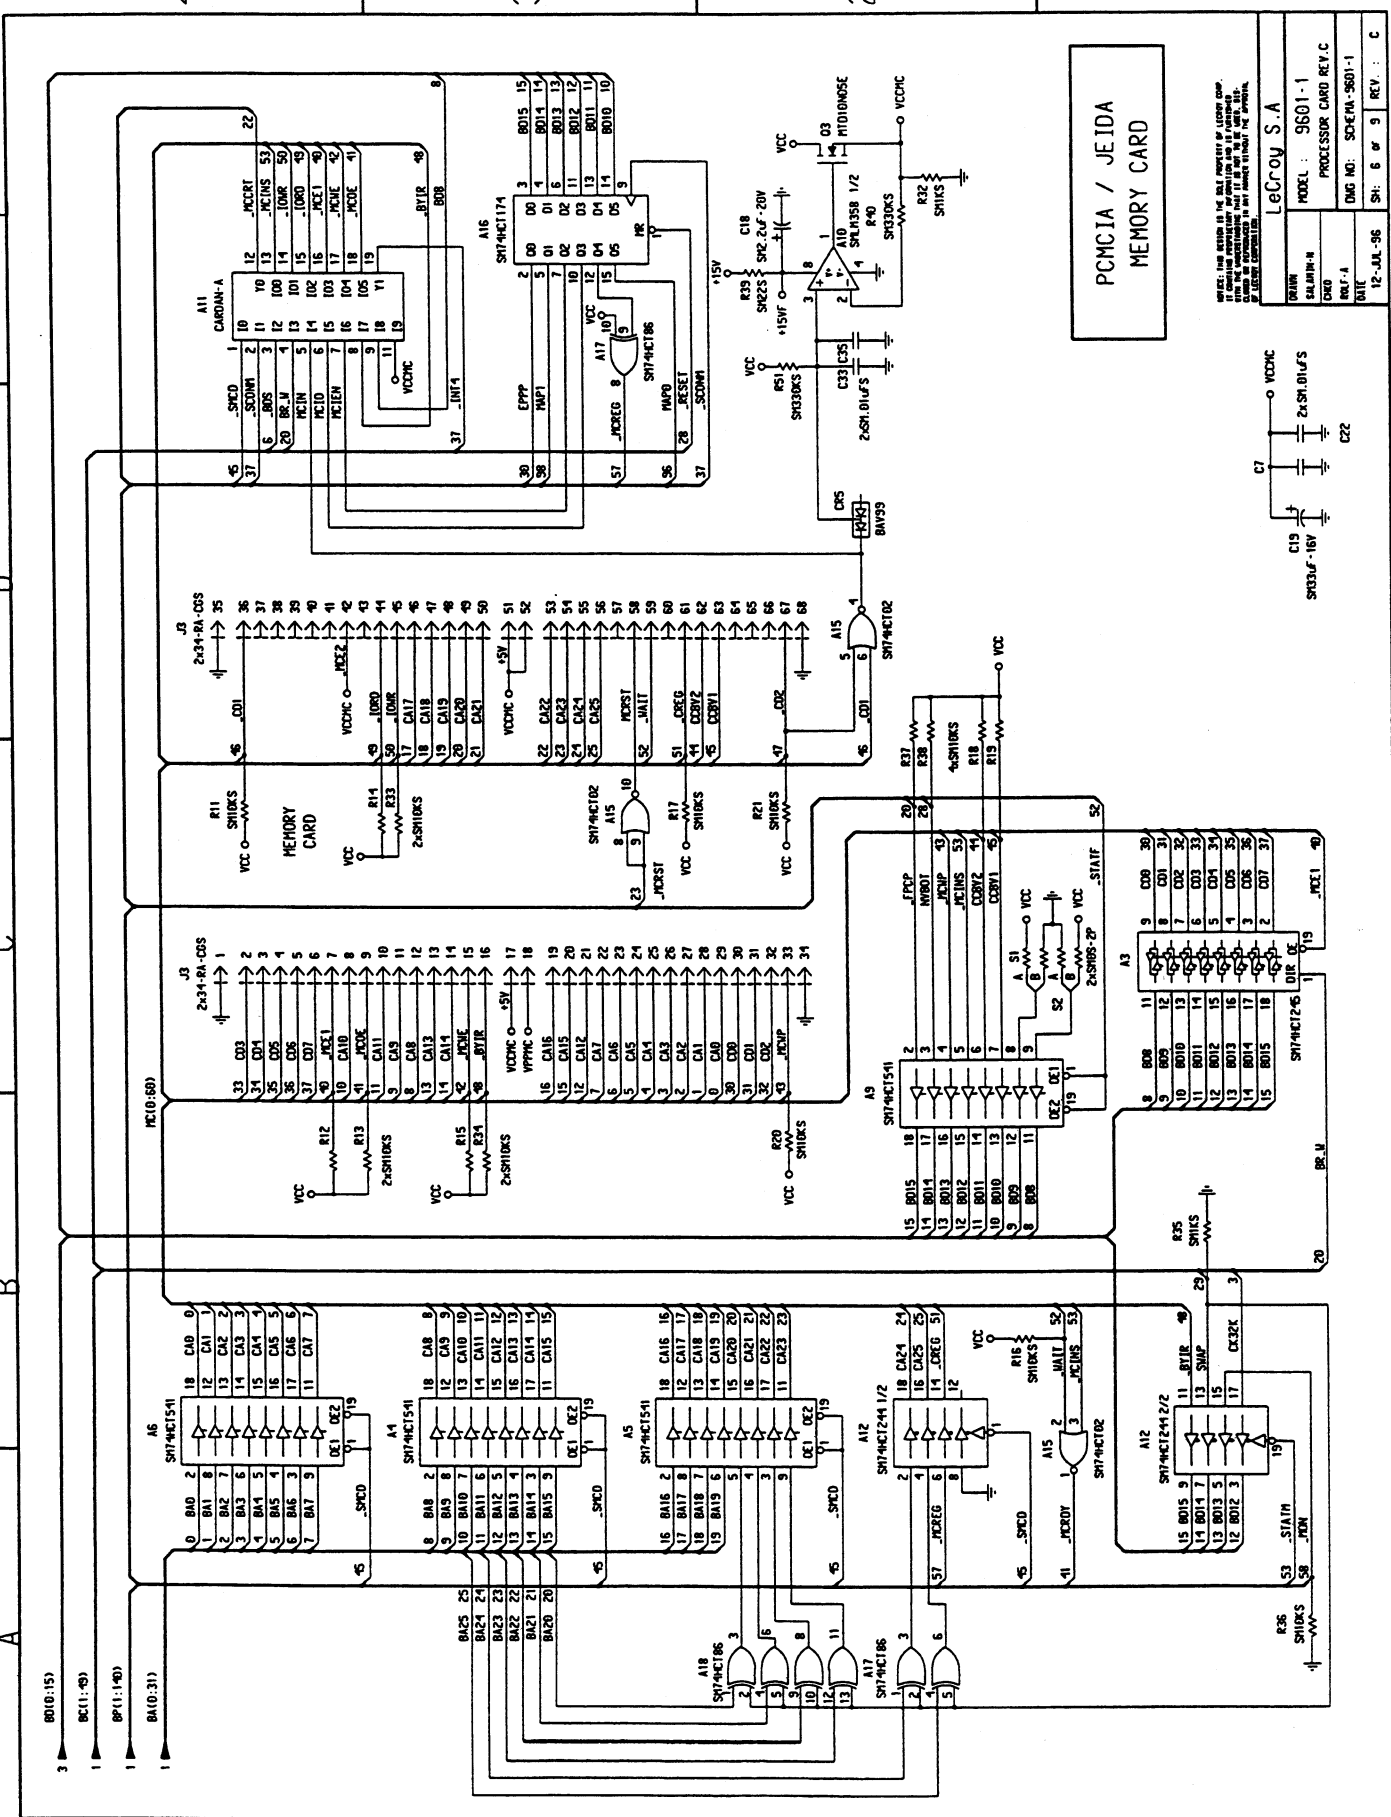


PCMCIA / JEIDA
MEMORY CARD

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE ORIGINAL CONTRACT. ANY REUSE OR MODIFICATION OF THIS DESIGN WITHOUT THE WRITTEN CONSENT OF LECROY CORP. IS STRICTLY PROHIBITED.


DATE	12-JUL-96
DESIGNER	SALEH/HR
CHKD	HR
APP'D	HR
MODEL	9601-1
PROCESSOR CARD REV.	C
DATE	12-JUL-96
SH:	6 of 9
REV:	C

Schematics, Layouts

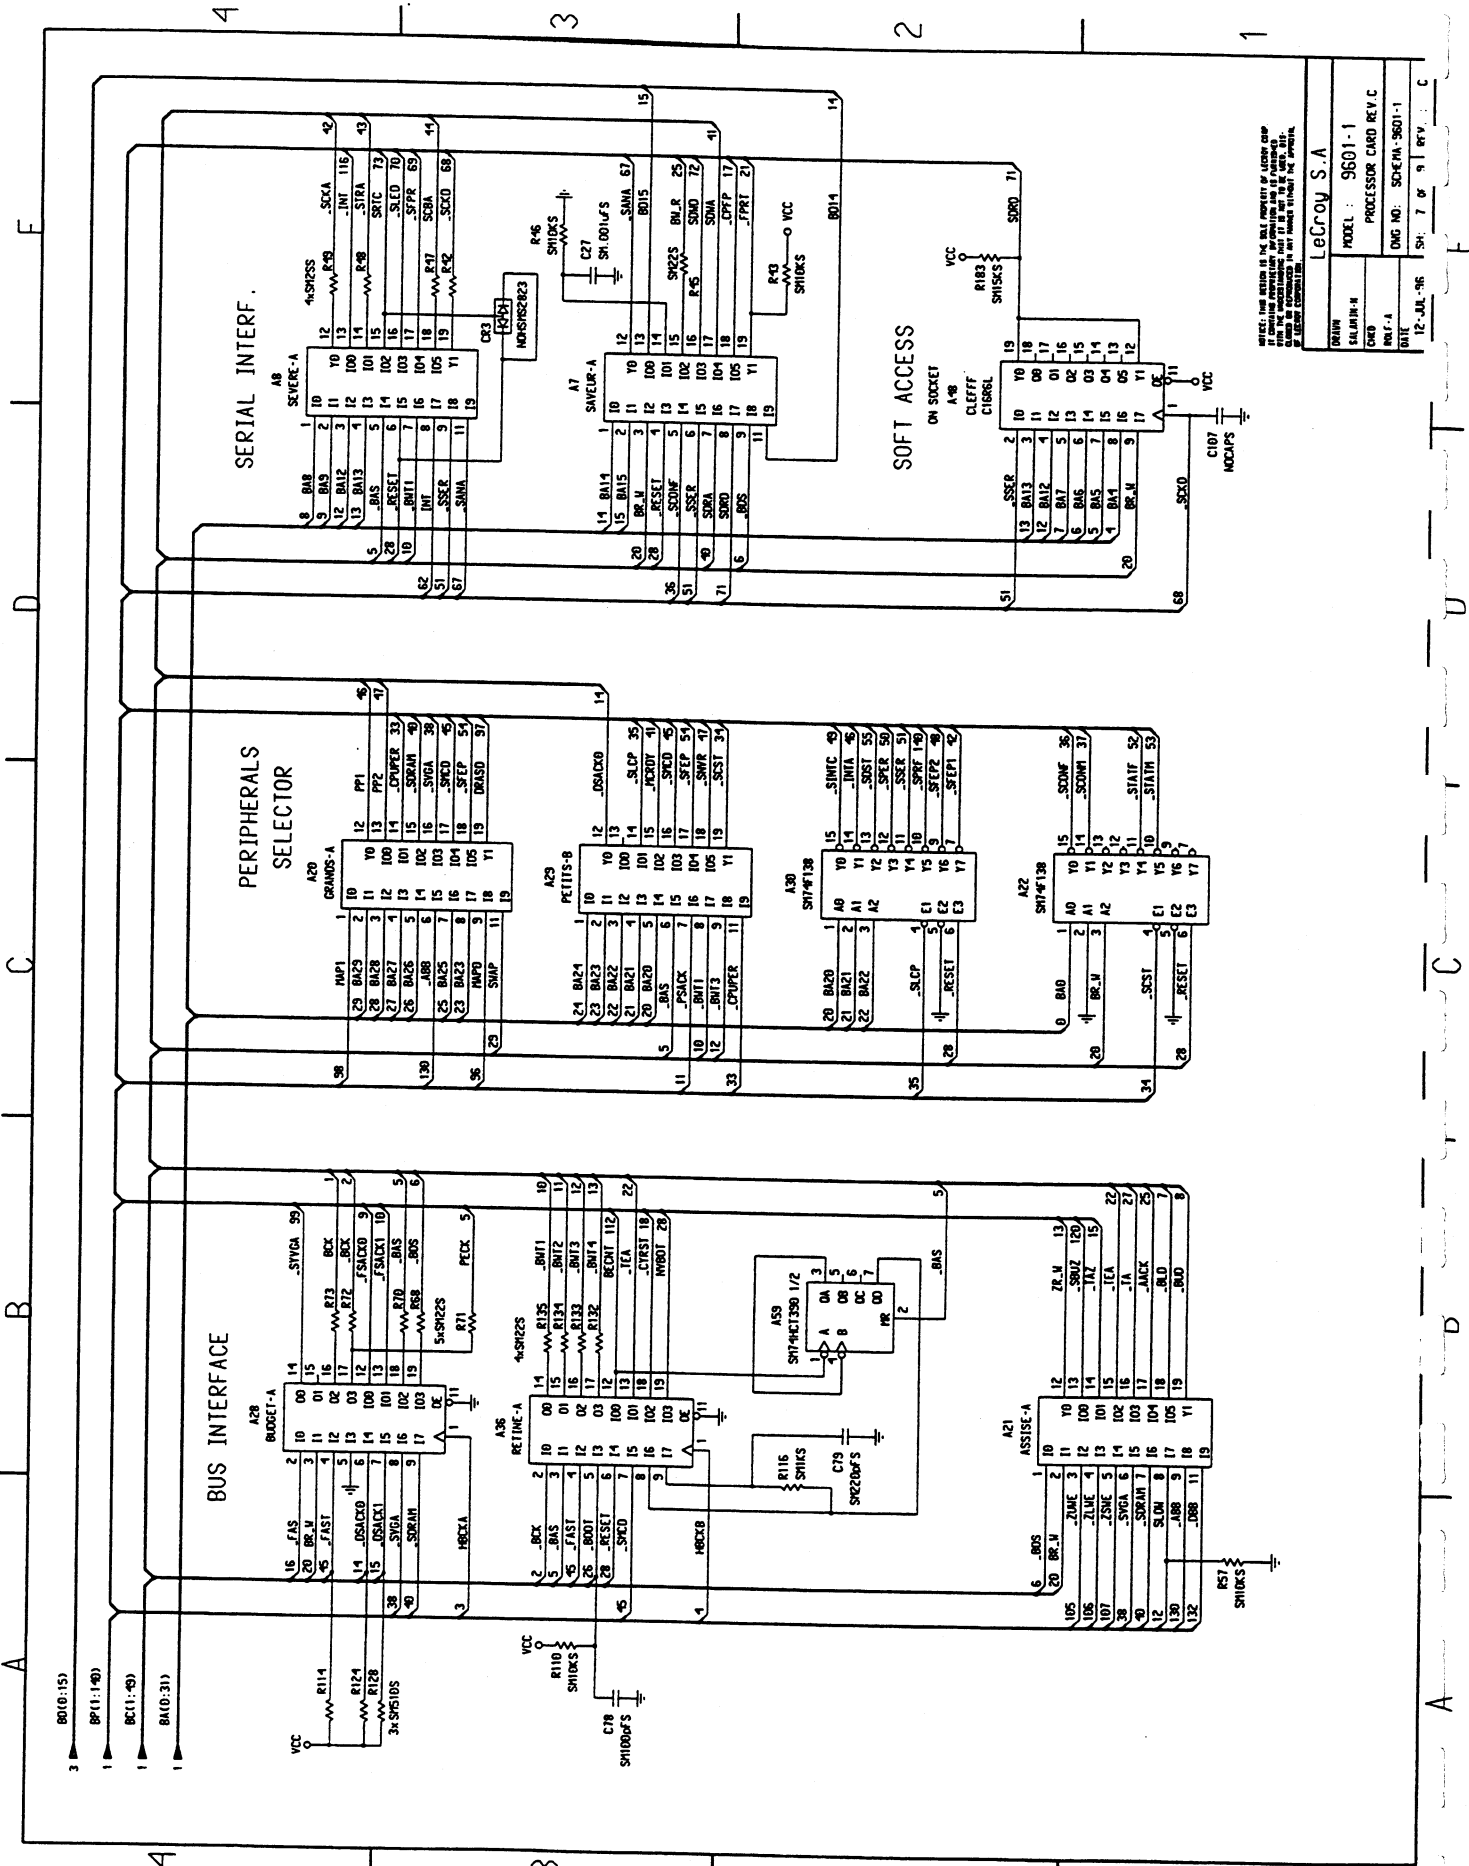


NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LUCAS GEAR
 THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED
 EXCEPT WHERE SHOWN OTHERWISE. IT IS THE PROPERTY OF
 LUCAS GEAR AND IS NOT TO BE REPRODUCED OR TRANSMITTED
 IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN
 PERMISSION OF LUCAS GEAR.


LeCroy S.A.
 MODEL : 9601-1
 PROCESSOR CARD REV. C
 DWG NO. SCHEM-9601-1
 DATE 12-JUL-86
 SH. 7 OF 9 REV. C

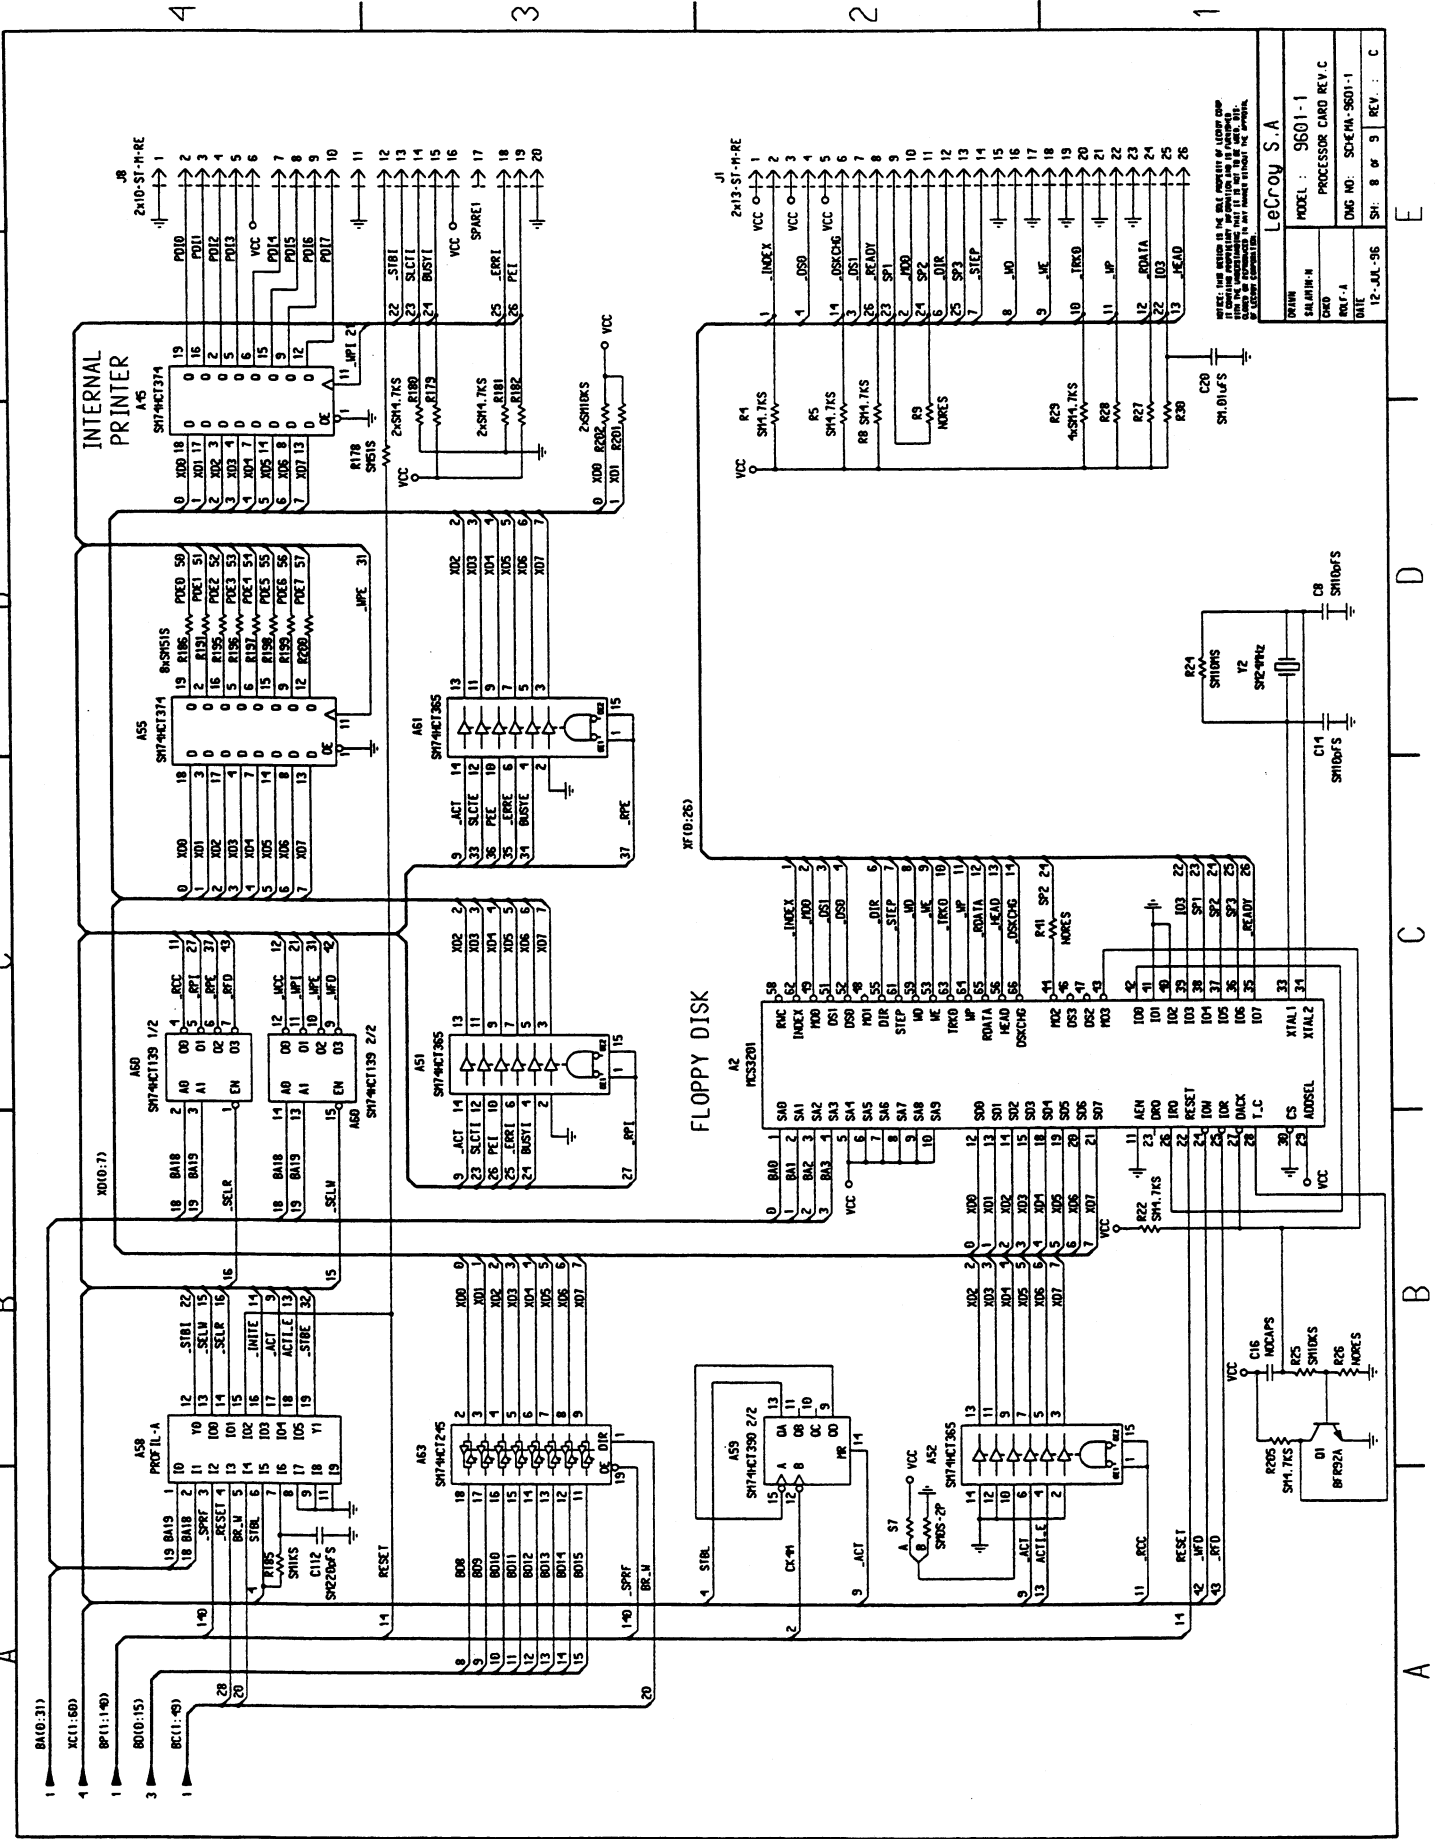


Schematics, Layouts

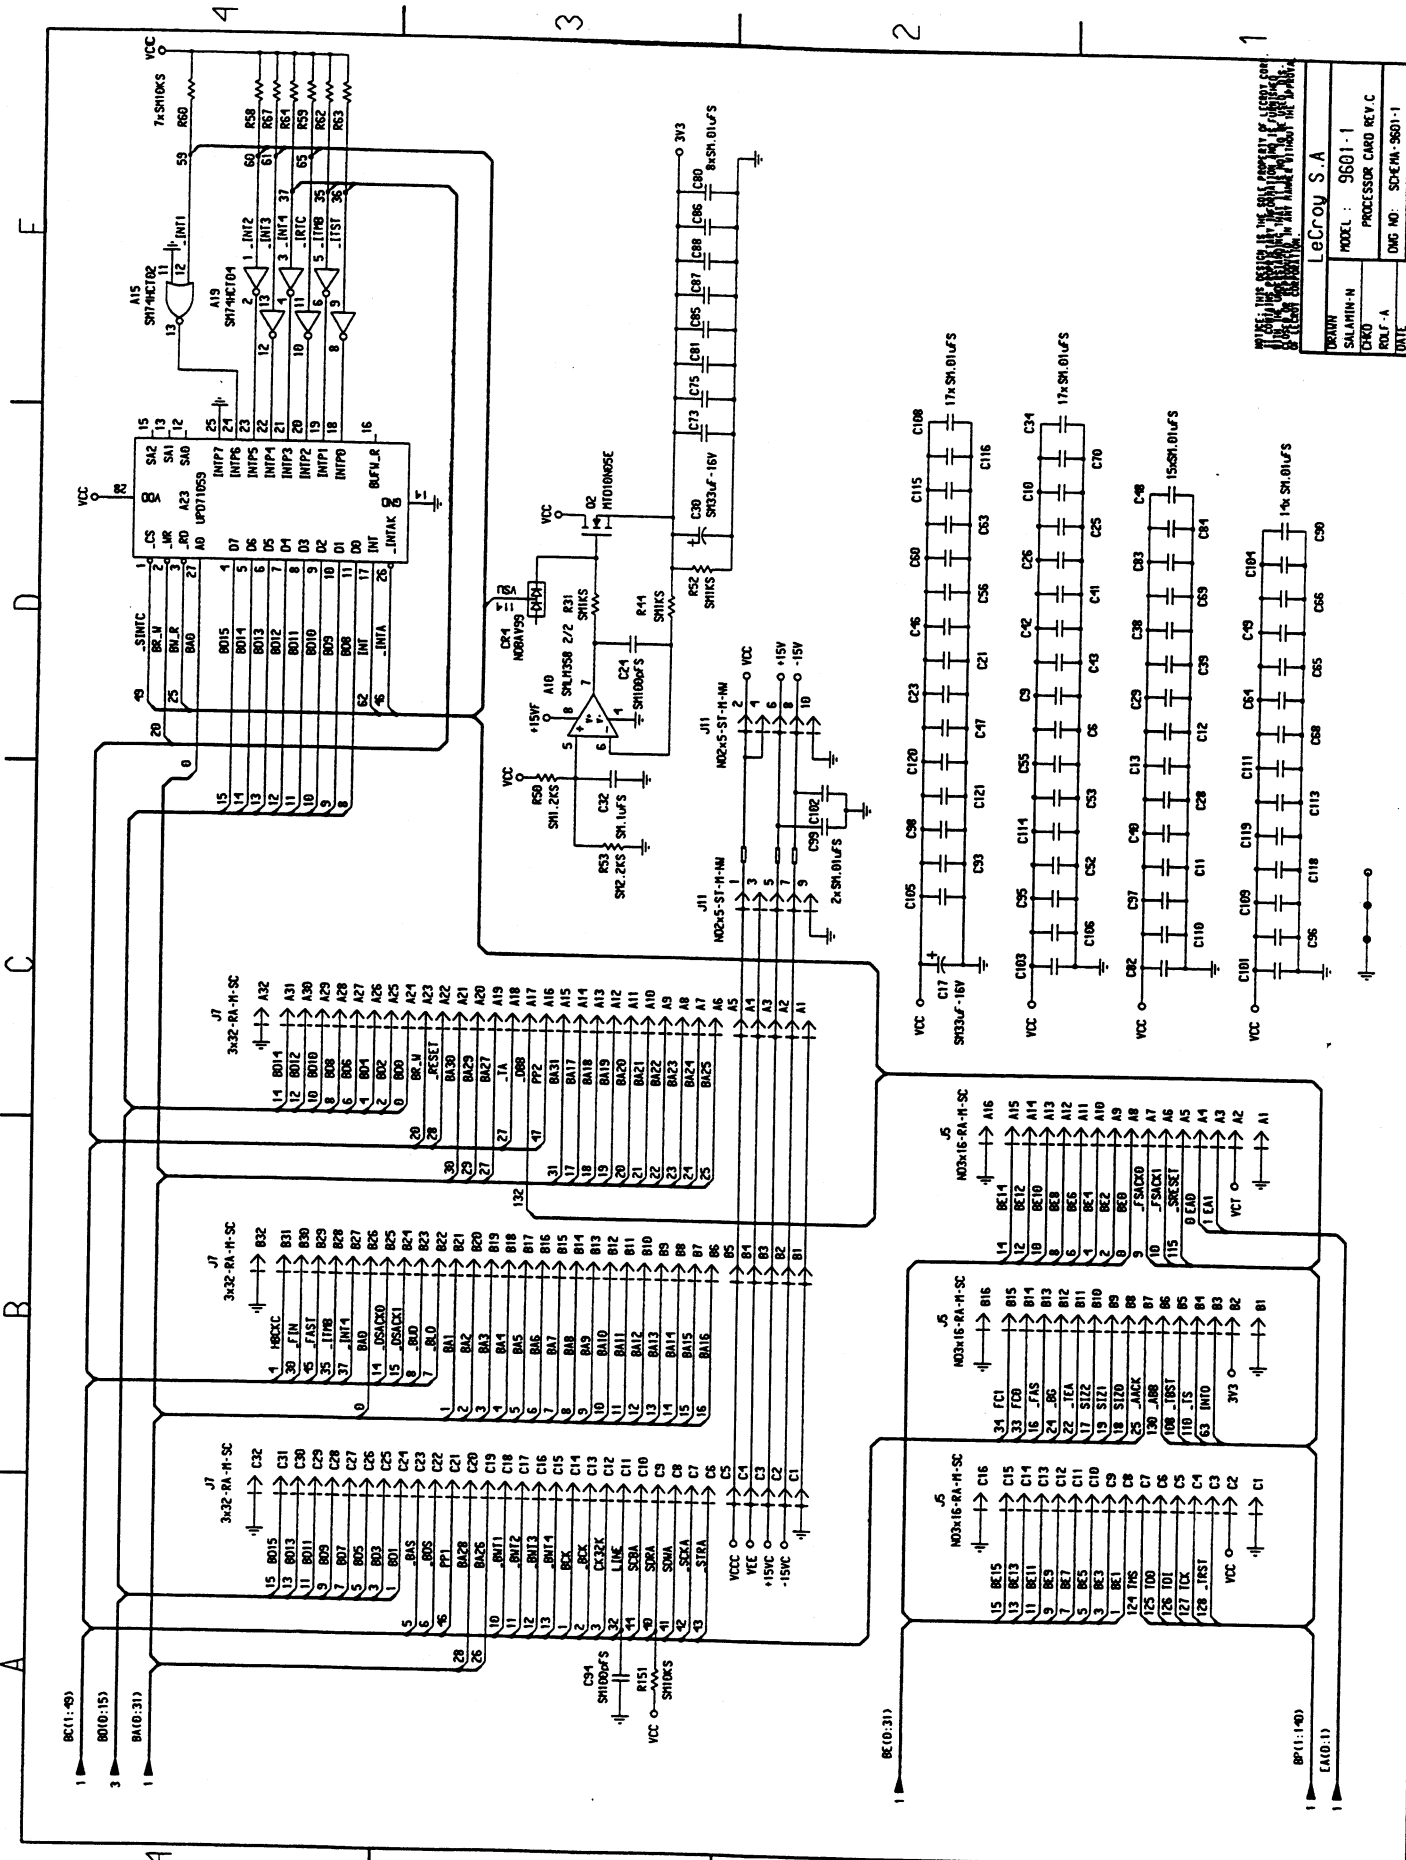

LeCroy S.A.	
MODEL :	9601-1
PROCESSOR CARD REV C	
DATE :	12-JUN-96
SH :	9 OF 9
REV :	C

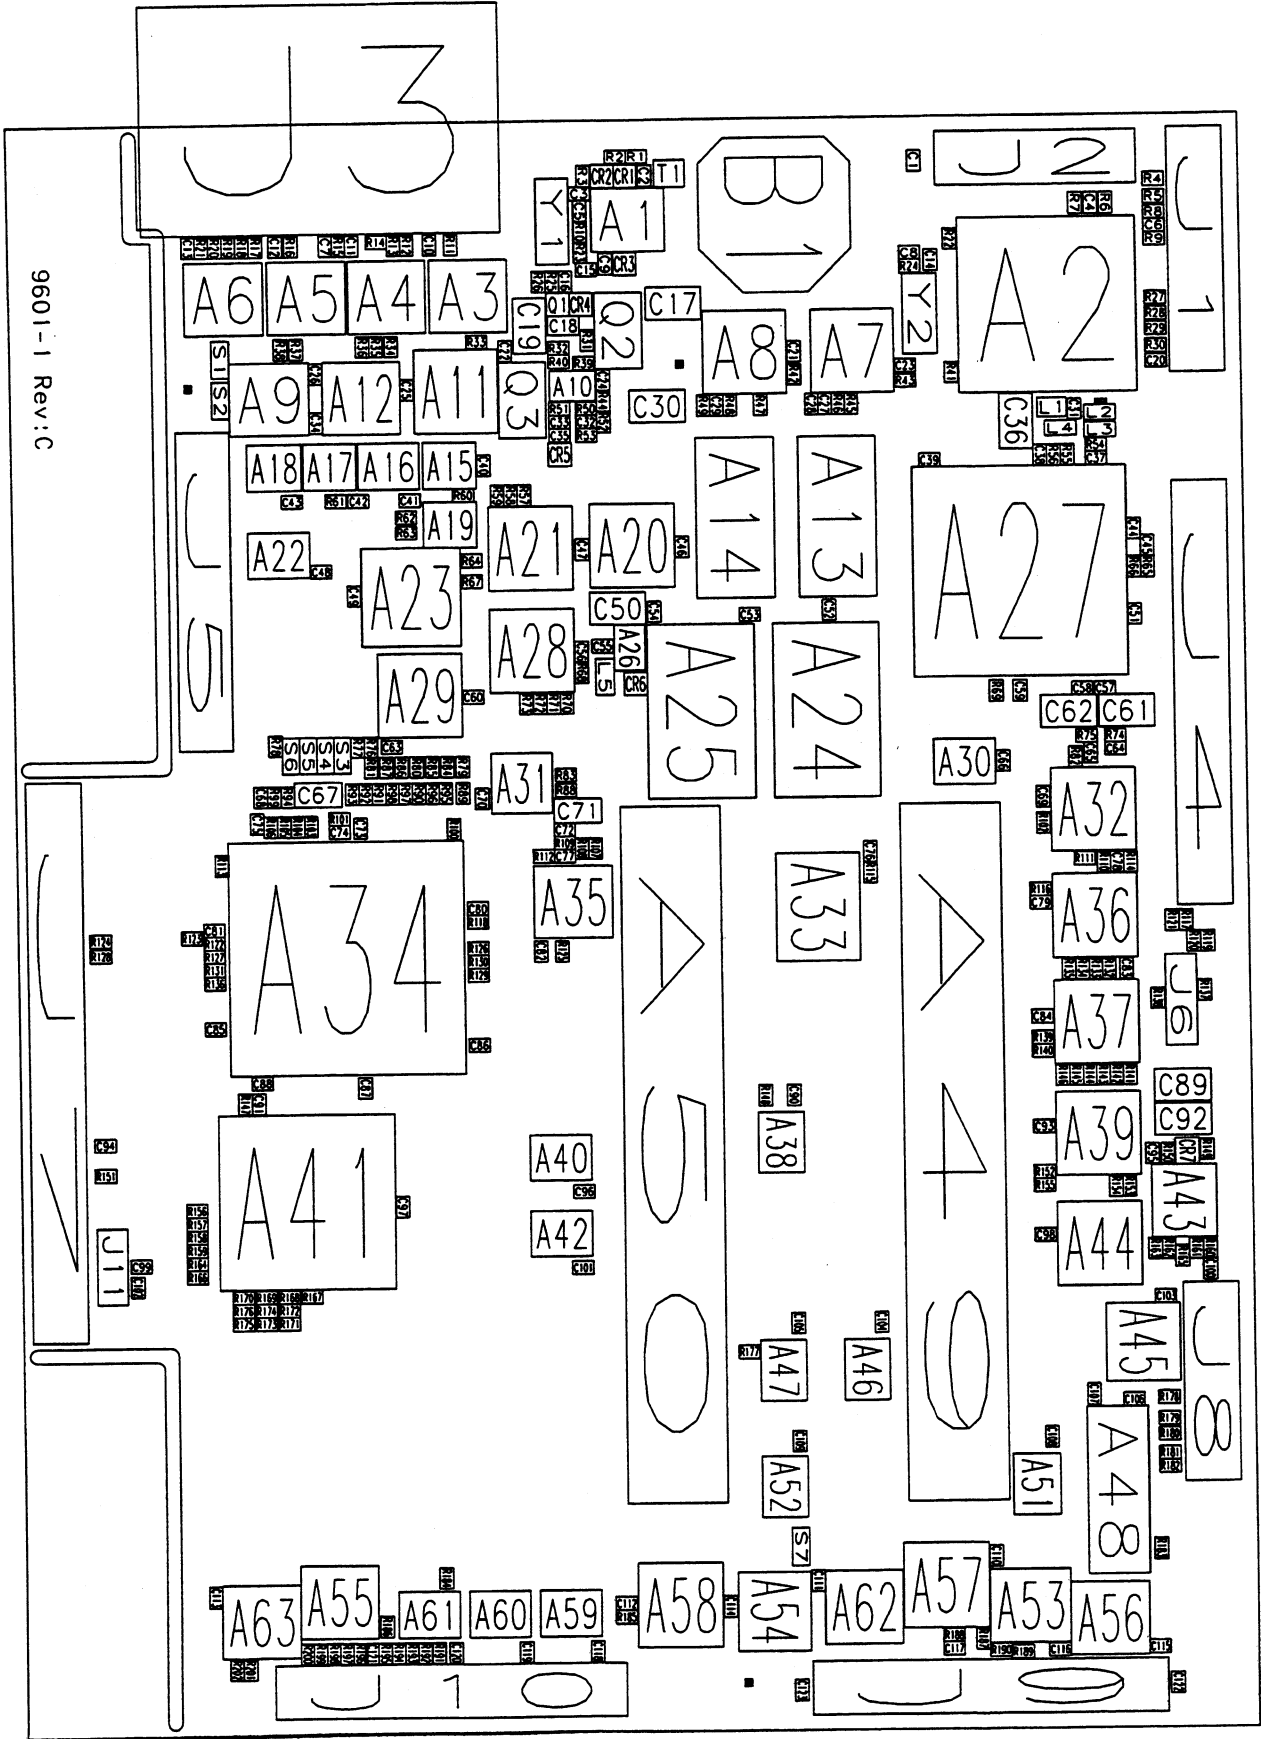

9601-1 Rev:C

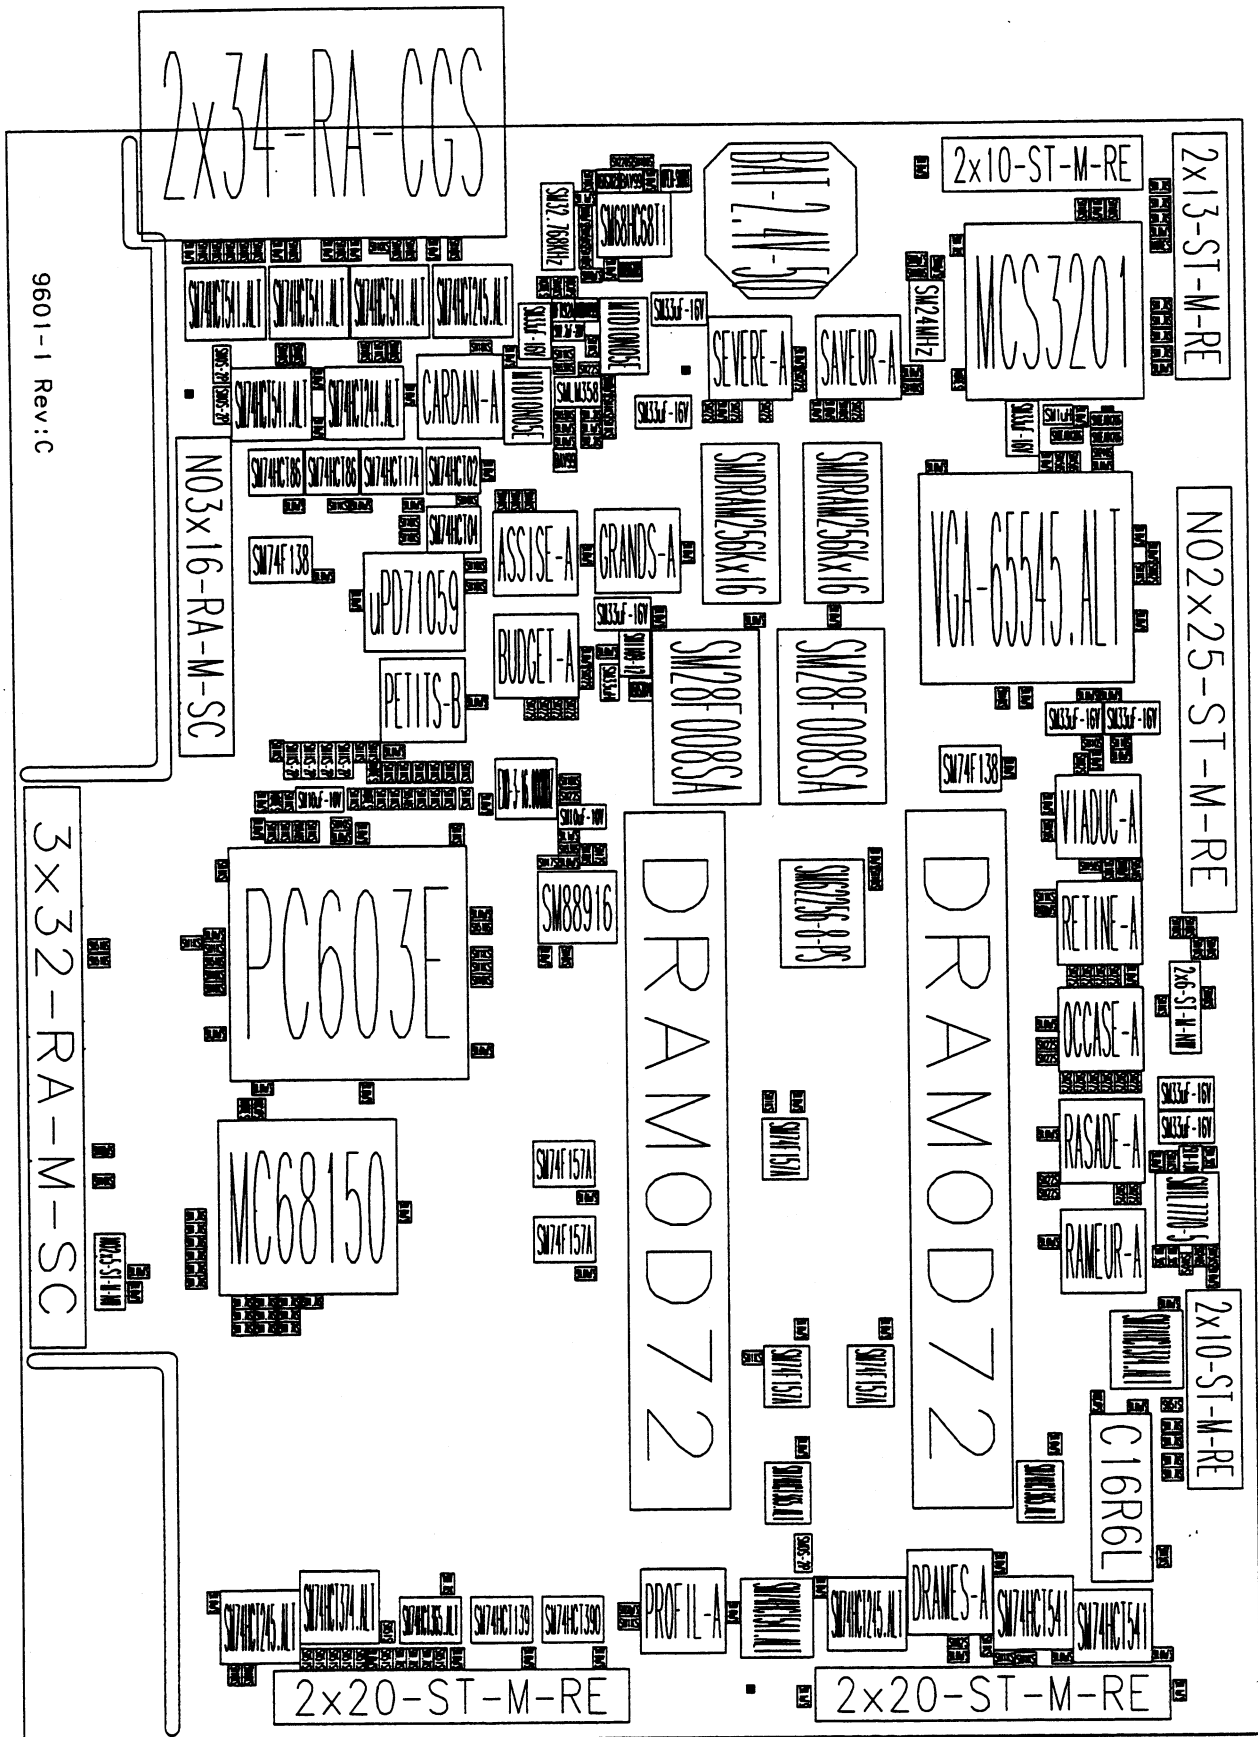

9601-1 Rev:C

3x32-RA-M-SC

2x34-RA-CGS

NO3x16-RA-M-SC

PC603E

MC68150

DRAMOD72

DRAMOD72

VGA-65545.ALT

2x10-ST-M-RE

MCS3201

NO2x25-ST-M-RE

2x13-ST-M-RE

2x10-ST-M-RE

C16R6L

2x20-ST-M-RE

2x20-ST-M-RE

Schematics, Layouts

PART: F9601-1-X

DESC : PROCESSOR with 8Mb or 64Mb RAM

Location	Part Number	Description	Location	Part Number	Description
A1	SM200276068	SM68HC68T1	A43	SM208277770	SMTL7770-5
A2	SM227063201	MCS3201	A44	SM205001113	RAMEUR-A
A3	SM207878245	SM74HCT245	A45	SM200178374	SM74HCT374
A4	SM207178541	SM74HCT541	A46	SM207972157	SM74F157A
A5	SM207178541	SM74HCT541	A47	SM207972157	SM74F157A
A6	SM207178541	SM74HCT541	A48	205750000	C16R6L
A7	SM205001108	SAVEUR-A	A49	453250072	DRAMOD72
A8	SM205001109	SEVERE-A	A50	453250072	DRAMOD72
A9	SM207178541	SM74HCT541	A51	SM207170036	SM74HCT365
A10	SM208470358	SMLM358	A52	SM207170036	SM74HCT365
A11	SM205001102	CARDAN-A	A53	SM207178541	SM74HCT541
A12	SM207179244	SM74HCT244	A54	SM207178541	SM74HCT541
A13	SM205244260	DRAM256Kx16	A55	SM200178374	SM74HCT374
A14	SM205244260	DRAM256Kx16	A56	SM207178541	SM74HCT541
A15	SM200178002	SM74HCT02	A57	SM205001115	DRAMES-A
A16	SM200344174	SM74HCT174	A58	SM205001106	PROFIL-A
A17	SM200178086	SM74HCT86	A59	SM200278390	SM74HCT390
A18	SM200178086	SM74HCT86	A60	SM200178139	SM74HCT139
A19	SM200178004	SM74HCT04	A61	SM207170036	SM74HCT365
A20	SM205001103	GRANDS-A	A62	SM207878245	SM74HCT245
A21	SM205001100	ASSISE-A	A63	SM207878245	SM74HCT245
A22	SM200172138	SM74F138	B1	312590070	BAT-2.4V-50
A23	SM227300059	uPD71059	C1	SM661207103	SM.01uFS
A24	SM205144001	SM28F008SA	C2	SM661207103	SM.01uFS
A25	SM205144001	SM28F008SA	C3	SM661207104	SM.1uFS
A26	SM208780109	SM1109-12	C4	SM661207103	SM.01uFS
A27	SM207665545	VGA-65545	C5	SM661255180	SM18pFS
A28	SM205001116	BUDGET-C	C6	SM661207103	SM.01uFS
A29	SM205001111	PETITS-B	C7	SM661207103	SM.01uFS
A30	SM200172138	SM74F138	C8	SM661255100	SM10pFS
A31	309380016	3-16.000MHZ	C9	SM661207103	SM.01uFS
A32	SM205001110	VIADUC-A	C10	SM661207103	SM.01uFS
A33	SM205219257	SM62256-8-HD	C11	SM661207103	SM.01uFS
A34	SM227300603	PC603E	C12	SM661207103	SM.01uFS
A35	SM208680916	SM88916	C13	SM661207103	SM.01uFS
A36	SM205001107	RETINE-A	C14	SM661255100	SM10pFS
A37	SM205001104	OCCASE-A	C15	SM661255180	SM18pFS
A38	SM207972157	SM74F157A	C17	SM666257336	SM33uF-16V
A39	SM205001114	RASADE-A	C18	SM666327225	SM2.2uF-20V
A40	SM207972157	SM74F157A	C19	SM666257336	SM33uF-16V
A41	SM207660150	MC68150	C20	SM661207103	SM.01Ufs
A42	SM207972157	SM74F157A	C21	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9601-1-X DESC : PROCESSOR with 8Mb or 64Mb RAM

Location	Part Number	Description	Location	Part Number	Description
C22	SM661207103	SM.01uFS	C65	SM661207103	SM.01uFS
C23	SM661207103	SM.01uFS	C66	SM661207103	SM.01uFS
C24	SM661255101	SM100pFS	C67	SM666217106	SM10uF-10V
C25	SM661207103	SM.01uFS	C68	SM661207103	SM.01uFS
C26	SM661207103	SM.01uFS	C69	SM661207103	SM.01uFS
C27	SM661207102	SM.001uFS	C70	SM661207103	SM.01uFS
C28	SM661207103	SM.01uFS	C71	SM666217106	SM10uF-10V
C29	SM661207103	SM.01uFS	C72	SM661207104	SM.1uFS
C30	SM666257336	SM33uF-16V	C73	SM661207103	SM.01uFS
C31	SM661207103	SM.01uFS	C74	SM661207103	SM.01uFS
C32	SM661207104	SM.1uFS	C75	SM661207103	SM.01uFS
C33	SM661207103	SM.01uFS	C76	SM661207103	SM.01uFS
C34	SM661207103	SM.01uFS	C77	SM661207103	SM.01uFS
C35	SM661207103	SM.01uFS	C78	SM661255101	SM100pFS
C36	SM666257336	SM33uF-16V	C79	SM661255221	SM220pFS
C37	SM661207103	SM.01uFS	C80	SM661207103	SM.01uFS
C38	SM661207103	SM.01uFS	C81	SM661207103	SM.01uFS
C39	SM661207103	SM.01uFS	C82	SM661207103	SM.01uFS
C40	SM661207103	SM.01uFS	C83	SM661207103	SM.01uFS
C41	SM661207103	SM.01uFS	C84	SM661207103	SM.01uFS
C42	SM661207103	SM.01uFS	C85	SM661207103	SM.01uFS
C43	SM661207103	SM.01uFS	C86	SM661207103	SM.01uFS
C44	SM661207103	SM.01uFS	C87	SM661207103	SM.01uFS
C46	SM661207103	SM.01uFS	C88	SM661207103	SM.01uFS
C47	SM661207103	SM.01uFS	C89	SM666257336	SM33uF-16V
C48	SM661207103	SM.01uFS	C90	SM661207103	SM.01uFS
C49	SM661207103	SM.01uFS	C92	SM666257336	SM33uF-16V
C50	SM666257336	SM33uF-16V	C93	SM661207103	SM.01uFS
C51	SM661207103	SM.01uFS	C94	SM661255101	SM100pFS
C52	SM661207103	SM.01uFS	C95	SM661207103	SM.01uFS
C53	SM661207103	SM.01uFS	C96	SM661207103	SM.01uFS
C54	SM661207103	SM.01uFS	C97	SM661207103	SM.01uFS
C55	SM661207103	SM.01uFS	C98	SM661207103	SM.01uFS
C56	SM661207103	SM.01uFS	C99	SM661207103	SM.01uFS
C57	SM661207103	SM.01uFS	C100	SM661207103	SM.01uFS
C58	SM661207103	SM.01uFS	C101	SM661207103	SM.01uFS
C59	SM661207103	SM.01uFS	C102	SM661207103	SM.01uFS
C60	SM661207103	SM.01uFS	C103	SM661207103	SM.01uFS
C61	SM666257336	SM33uF-16V	C104	SM661207103	SM.01uFS
C62	SM666257336	SM33uF-16V	C105	SM661207103	SM.01uFS
C63	SM661207103	SM.01uFS	C106	SM661207103	SM.01uFS
C64	SM661207103	SM.01uFS	C108	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9601-1-X

DESC : PROCESSOR with 8Mb or 64Mb RAM

Location	Part Number	Description	Location	Part Number	Description
C109	SM661207103	SM.01uFS	R4	SM652101472	SM4.7KS
C110	SM661207103	SM.01uFS	R5	SM652101472	SM4.7KS
C111	SM661207103	SM.01uFS	R6	SM652101103	SM10KS
C112	SM661255221	SM220pFS	R7	SM652101103	SM10KS
C113	SM661207103	SM.01uFS	R8	SM652101472	SM4.7KS
C114	SM661207103	SM.01uFS	R10	SM652101154	SM150KS
C115	SM661207103	SM.01uFS	R11	SM652101103	SM10KS
C116	SM661207103	SM.01uFS	R12	SM652101103	SM10KS
C117	SM661207103	SM.01uFS	R13	SM652101103	SM10KS
C118	SM661207103	SM.01uFS	R14	SM652101103	SM10KS
C119	SM661207103	SM.01uFS	R15	SM652101103	SM10KS
C120	SM661207103	SM.01uFS	R16	SM652101103	SM10KS
C121	SM661207103	SM.01uFS	R17	SM652101103	SM10KS
C122	SM661207104	SM.1uFS	R18	SM652101103	SM10KS
C123	SM661207104	SM.1uFS	R19	SM652101103	SM10KS
C124	SM666257336	SM33uF-16V	R20	SM652101103	SM10KS
C125	SM661207104	SM.1uFS	R21	SM652101103	SM10KS
C126	SM661207104	SM.1uFS	R22	SM652101472	SM4.7KS
CR1	SM236030099	BAV99	R23	SM652101106	SM10MS
CR2	SM253032823	HSMS2823	R24	SM652101106	SM10MS
CR5	SM236030099	BAV99	R25	SM652101103	SM10KS
CR6	SM232032814	HSMS2814	R27	SM652101472	SM4.7KS
CR7	SM256232013	SLM-13V	R28	SM652101472	SM4.7KS
J1	454110026	2x13-ST-M-RE	R29	SM652101472	SM4.7KS
J2	454110120	2x10-ST-M-RE	R30	SM652101472	SM4.7KS
J3	404500068	2x34-RA-CGS	R31	SM652101102	SM1KS
J6	454340012	2x6-ST-M-NW	R32	SM652101102	SM1KS
J7	455410096	3x32-RA-M-SC	R33	SM652101103	SM10KS
J8	454110120	2x10-ST-M-RE	R34	SM652101103	SM10KS
J9	454110040	2x20-ST-M-RE	R35	SM652101102	SM1KS
J10	454110040	2x20-ST-M-RE	R36	SM652101103	SM10KS
L1	SM300327102	SM1uH	R37	SM652101103	SM10KS
L2	SM301502001	SMBEAD1206	R38	SM652101103	SM10KS
L3	SM301502001	SMBEAD1206	R39	SM652101220	SM22S
L4	SM301502001	SMBEAD1206	R40	SM652101334	SM330KS
L5	SM300056332	SM33uH	R42	SM652101220	SM22S
Q1	SM270130092	BFR92A	R43	SM652101103	SM10KS
Q2	SM280171005	MTD10N05E	R44	SM652101102	SM1KS
Q3	SM280171005	MTD10N05E	R45	SM652101220	SM22S
R1	SM652101101	SM100S	R46	SM652101103	SM10KS
R2	SM652101221	SM220S	R47	SM652101220	SM22S
R3	SM652101103	SM10KS	R48	SM652101220	SM22S

Schematics, Layouts

PART: F9601-1-X DESC : PROCESSOR with 8Mb or 64Mb RAM


Location	Part Number	Description	Location	Part Number	Description
R49	SM652101220	SM22S	R93	SM652101102	SM1KS
R50	SM652101122	SM1.2KS	R94	SM652101102	SM1KS
R51	SM652101334	SM330KS	R95	SM652101102	SM1KS
R52	SM652101102	SM1KS	R96	SM652101102	SM1KS
R53	SM652101222	SM2.2KS	R97	SM652101511	SM510S
R54	SM652101241	SM240S	R98	SM652101102	SM1KS
R55	SM652101151	SM150S	R100	SM652101102	SM1KS
R56	SM652101151	SM150S	R101	SM652101100	SM10S
R57	SM652101102	SM1KS	R102	SM652101151	SM150S
R58	SM652101103	SM10KS	R103	SM652101102	SM1KS
R59	SM652101103	SM10KS	R104	SM652101511	SM510S
R60	SM652101103	SM10KS	R105	SM652101102	SM1KS
R61	SM652101102	SM1KS	R106	SM652101102	SM1KS
R62	SM652101103	SM10KS	R107	SM652101470	SM47S
R63	SM652101103	SM10KS	R108	SM652101474	SM470KS
R64	SM652101103	SM10KS	R109	SM652101331	SM330S
R65	SM652101151	SM150S	R110	SM652101103	SM10KS
R66	SM652101102	SM1KS	R111	SM652101151	SM150S
R67	SM652101103	SM10KS	R112	SM652101470	SM47S
R68	SM652101220	SM22S	R113	SM652101102	SM1KS
R69	SM652101103	SM10KS	R114	SM652101511	SM510S
R70	SM652101220	SM22S	R115	SM652101103	SM10KS
R71	SM652101220	SM22S	R116	SM652101102	SM1KS
R72	SM652101220	SM22S	R117	SM652101103	SM10KS
R73	SM652101220	SM22S	R118	SM652101511	SM510S
R74	SM652101100	SM10S	R119	SM652101103	SM10KS
R75	SM652101100	SM10S	R120	SM652101103	SM10KS
R76	SM652101102	SM1KS	R121	SM652101103	SM10KS
R77	SM652101102	SM1KS	R122	SM652101102	SM1KS
R78	SM652101102	SM1KS	R123	SM652101102	SM1KS
R79	SM652101102	SM1KS	R124	SM652101511	SM510S
R80	SM652101102	SM1KS	R125	SM652101103	SM10KS
R82	SM652101820	SM82S	R126	SM652101102	SM1KS
R83	SM652101103	SM10KS	R127	SM652101511	SM510S
R84	SM652101102	SM1KS	R128	SM652101511	SM510S
R85	SM652101102	SM1KS	R129	SM652101103	SM10KS
R86	SM652101102	SM1KS	R130	SM652101102	SM1KS
R87	SM652101102	SM1KS	R131	SM652101103	SM10KS
R88	SM652101220	SM22S	R132	SM652101220	SM22S
R89	SM652101102	SM1KS	R133	SM652101220	SM22S
R90	SM652101102	SM1KS	R134	SM652101220	SM22S
R91	SM652101102	SM1KS	R135	SM652101220	SM22S

Schematics, Layouts

PART: F9601-1-X

DESC : PROCESSOR with 8Mb or 64Mb RAM

Location	Part Number	Description	Location	Part Number	Description
R136	SM652101103	SM10KS	R176	SM652101472	SM4.7KS
R137	SM652101103	SM10KS	R177	SM652101102	SM1KS
R138	SM652101102	SM1KS	R178	SM652101510	SM51S
R139	SM652101220	SM22S	R179	SM652101472	SM4.7KS
R140	SM652101220	SM22S	R180	SM652101472	SM4.7KS
R141	SM652101220	SM22S	R181	SM652101472	SM4.7KS
R142	SM652101220	SM22S	R182	SM652101472	SM4.7KS
R143	SM652101220	SM22S	R183	SM652101153	SM15KS
R144	SM652101220	SM22S	R184	SM652101472	SM4.7KS
R145	SM652101220	SM22S	R185	SM652101102	SM1KS
R146	SM652101220	SM22S	R186	SM652101510	SM51S
R147	SM652101101	SM100S	R187	SM652101102	SM1KS
R148	SM652101102	SM1KS	R188	SM652101820	SM82S
R149	SM652101152	SM1.5KS	R189	SM652101102	SM1KS
R150	SM652101102	SM1KS	R190	SM652101102	SM1KS
R151	SM652101103	SM10KS	R191	SM652101510	SM51S
R152	SM652101220	SM22S	R192	SM652101472	SM4.7KS
R153	SM652101220	SM22S	R193	SM652101472	SM4.7KS
R154	SM652101220	SM22S	R194	SM652101472	SM4.7KS
R155	SM652101220	SM22S	R195	SM652101510	SM51S
R156	SM652101472	SM4.7KS	R196	SM652101510	SM51S
R157	SM652101472	SM4.7KS	R197	SM652101510	SM51S
R158	SM652101472	SM4.7KS	R198	SM652101510	SM51S
R159	SM652101472	SM4.7KS	R199	SM652101510	SM51S
R160	SM652101153	SM15KS	R200	SM652101510	SM51S
R161	SM652101241	SM240S	R201	SM652101103	SM10KS
R162	SM652101152	SM1.5KS	R202	SM652101103	SM10KS
R163	SM652101152	SM1.5KS	R203	SM652101511	SM510S
R164	SM652101472	SM4.7KS	R204	SM652101150	SM15S
R165	SM654101000	SM0S	R205	SM652101472	SM4.7KS
R166	SM652101472	SM4.7KS	R206	SM654101000	SM0S
R167	SM652101472	SM4.7KS	S1	SM654101000	SM0S-2P
R168	SM652101472	SM4.7KS	S2	SM654101000	SM0S-2P
R169	SM652101472	SM4.7KS	S3	SM652101102	SM1KS-2P
R170	SM652101472	SM4.7KS	S4	SM652101102	SM1KS-2P
R171	SM652101472	SM4.7KS	S5	SM652101102	SM1KS-2P
R172	SM652101472	SM4.7KS	S6	SM652101102	SM1KS-2P
R173	SM652101472	SM4.7KS	S7	SM654101000	SM0S-2P
R174	SM652101472	SM4.7KS	Y1	SM310300406	SM32.768KHz
R175	SM652101472	SM4.7KS	Y2	SM310900024	SM24MHz

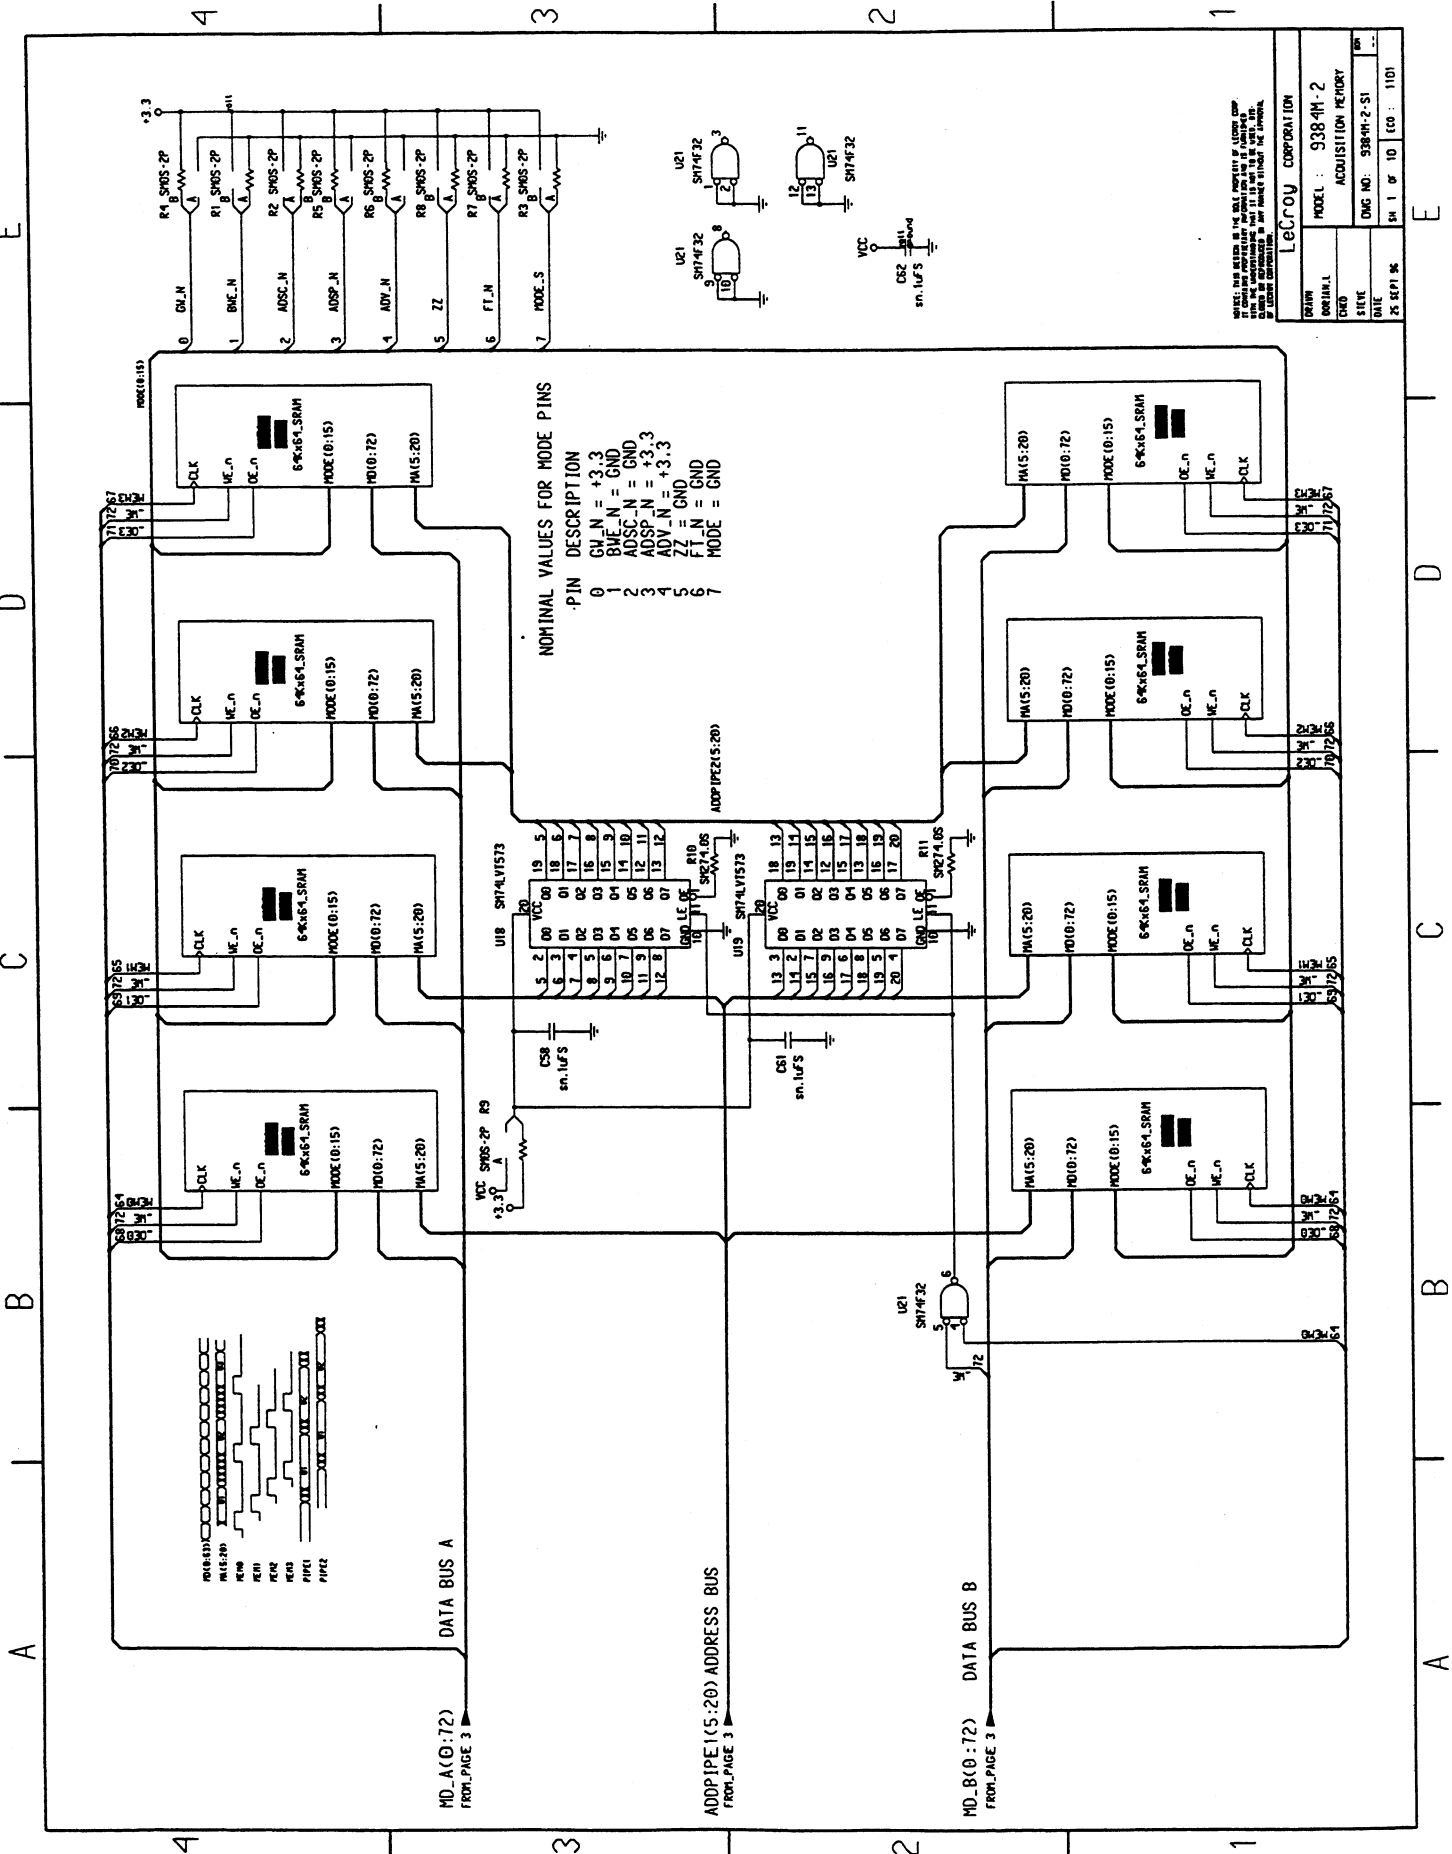

LECROY CORPORATION

MODEL: 9384M-2

ACQUISITION MEMORY


DWG NO: 9384M-2-S1

DATE

PS 8P11 BK

SN 1 OF 10 (CO: 110)


Schematics, Layouts

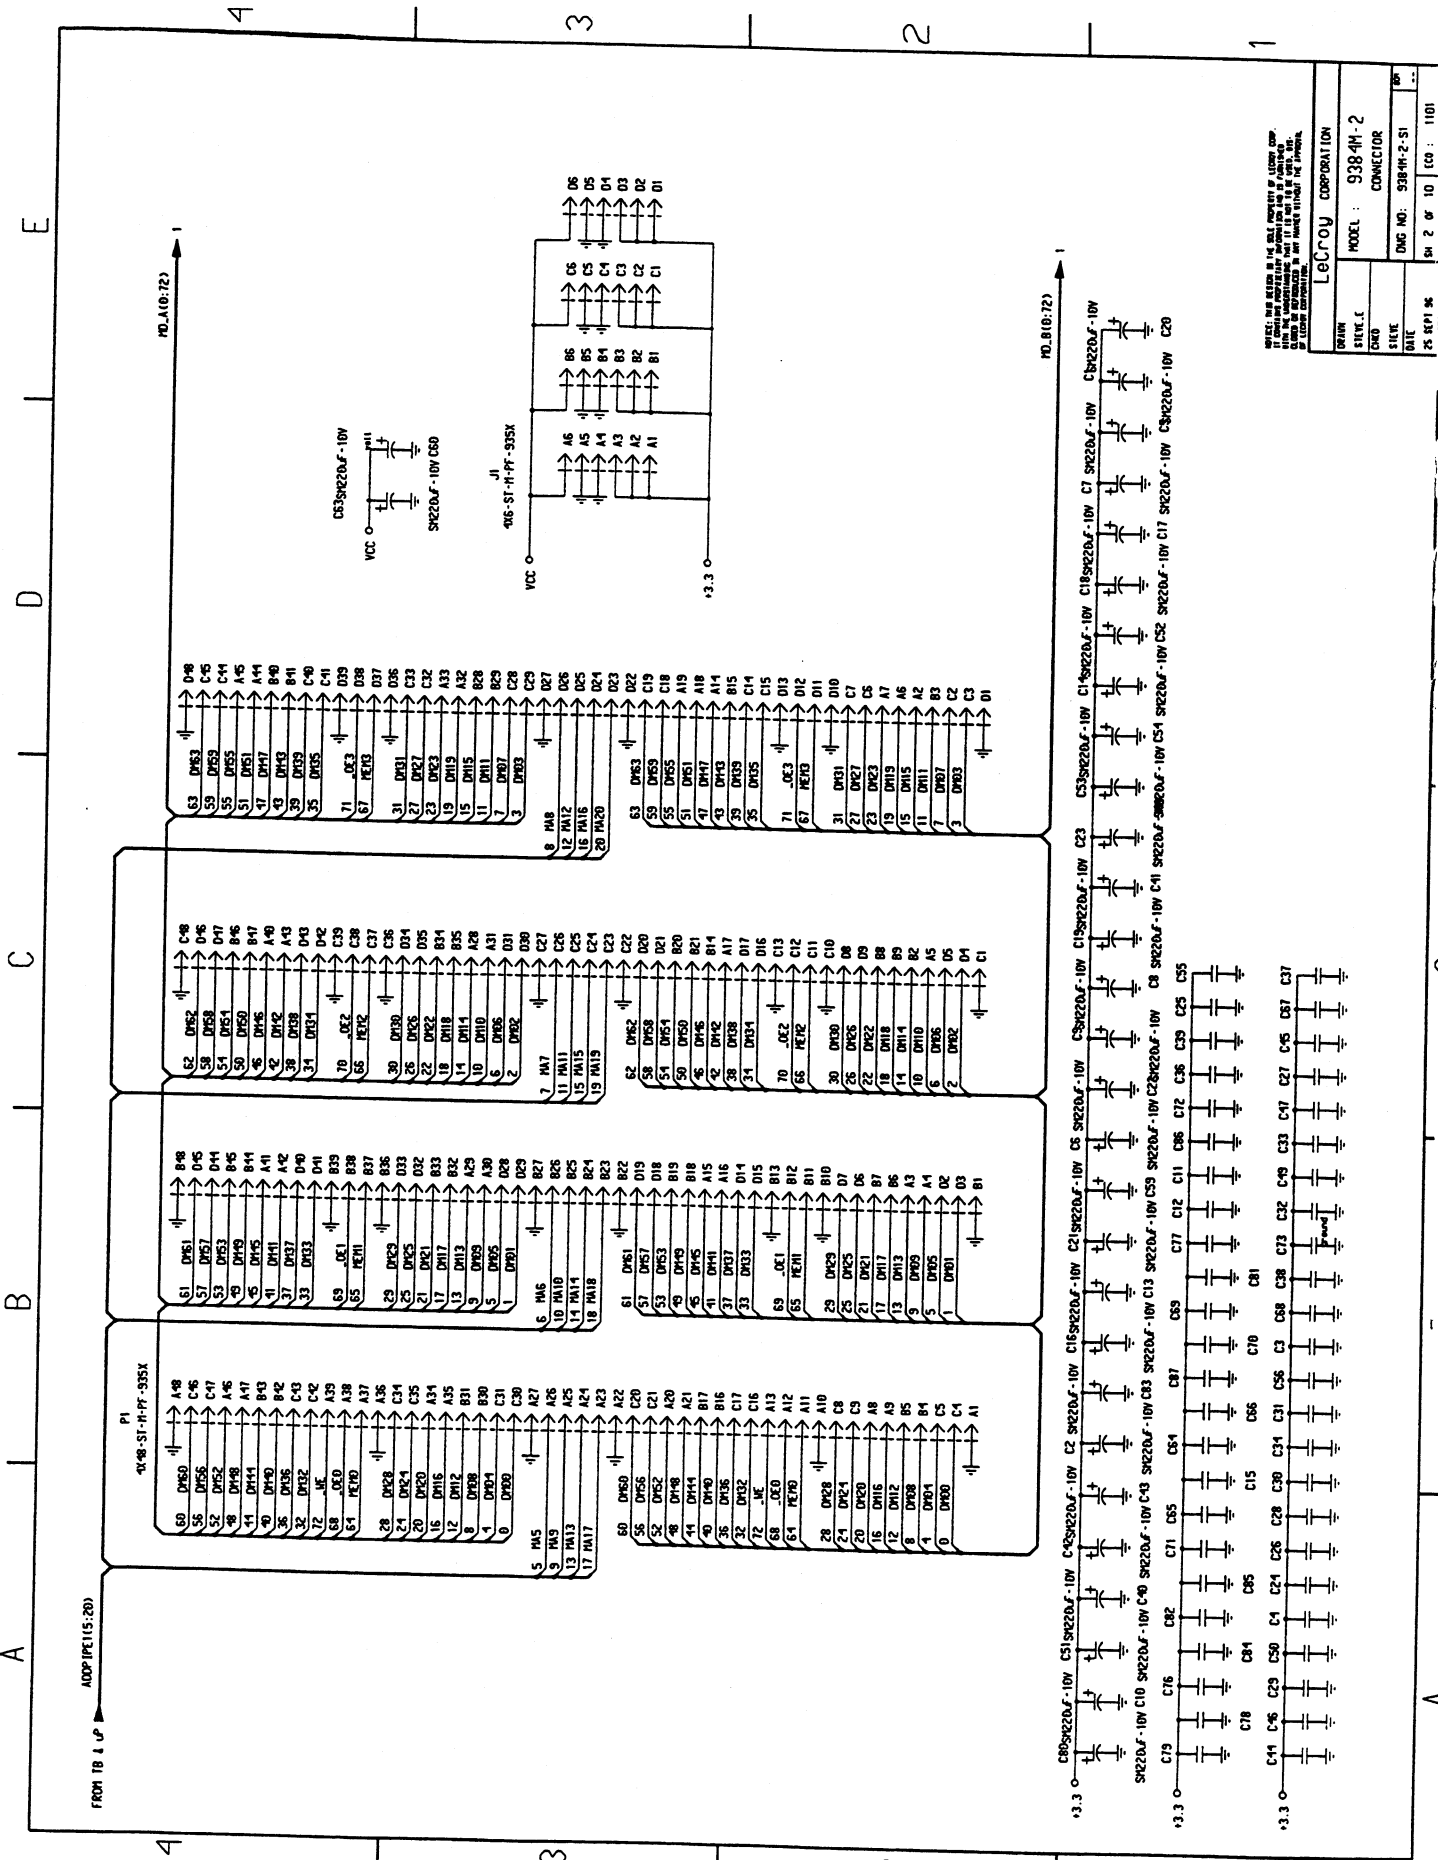

MODEL: 9384H-2
 SHEET: E
 DATE: 25 SEP 88
 SIZE: 25 5014 88
 DWG NO: 9384H-2-51
 REV: 01
 CO: 10
 ECN: 1101

LeCroy CORPORATION
 MODEL: 9384H-2
 SHEET: E
 DATE: 25 SEP 88
 SIZE: 25 5014 88
 DWG NO: 9384H-2-51
 REV: 01
 CO: 10
 ECN: 1101

THESE PARTS ARE THE PROPERTY OF LeCroy CORPORATION. ALL RIGHTS ARE RESERVED. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM LeCroy CORPORATION.

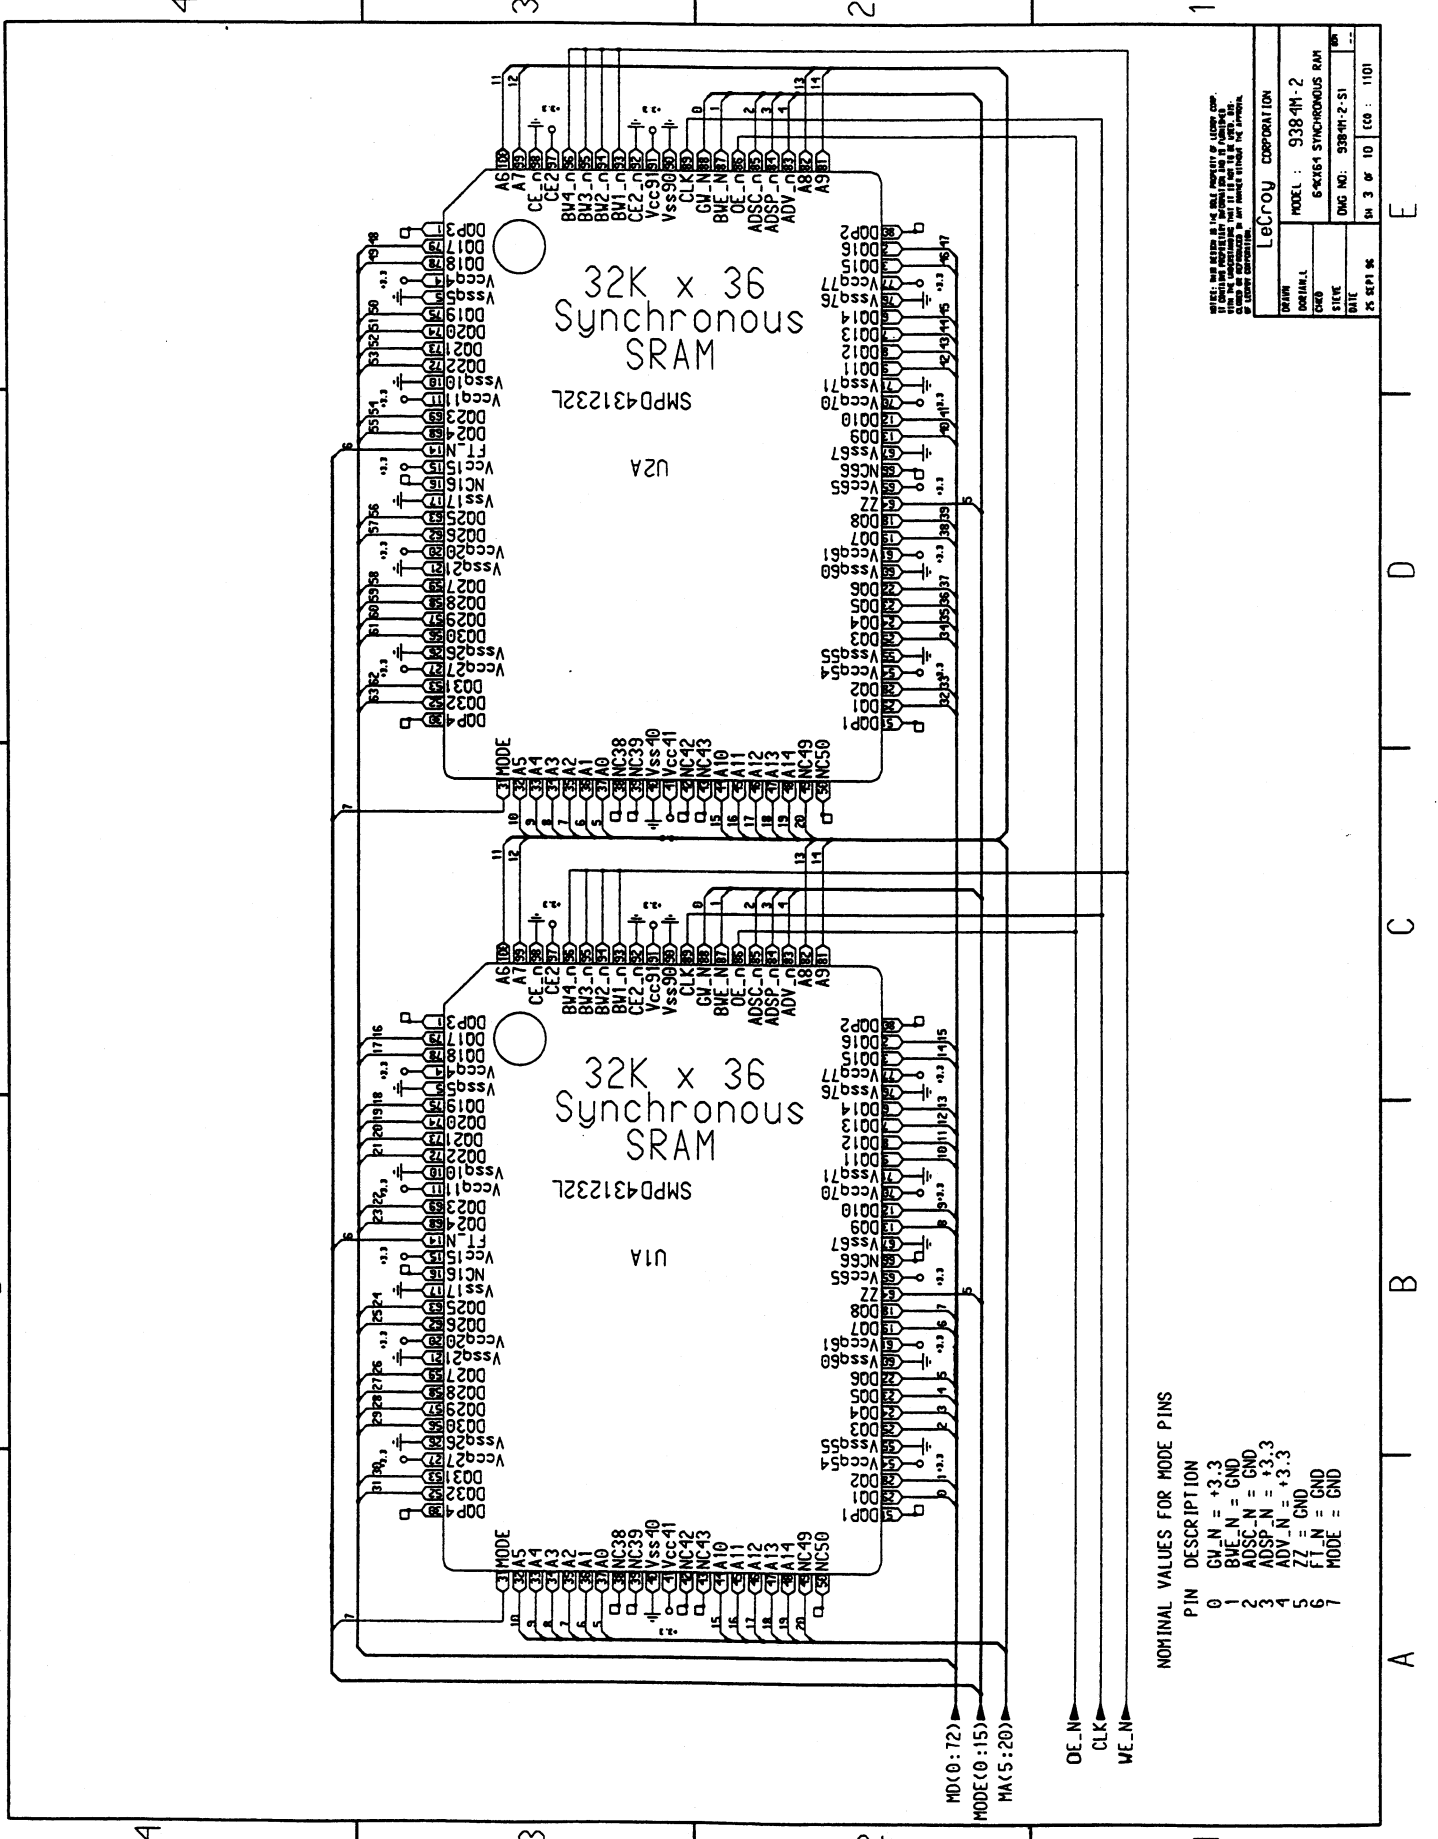


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GV.N = +3.3
1	BVE.N = GND
2	ADSC.N = GND
3	ADSP.N = +3.3
4	ADV.N = +3.3
5	ZZ = GND
6	MA.N = GND
7	MODE = GND

WHILE THIS DRAWING IS THE SOLE PROPERTY OF LUCENT TECHNOLOGIES, INC., IT IS LOANED TO YOU BY THE USER OF THIS DRAWING. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF LUCENT TECHNOLOGIES, INC.

LUCENT CORPORATION	
MODEL :	9384M-2
DESCRIPTION :	64K641 SYNCHRONOUS SRAM
DATE :	9384M-2-S1
REV :	25 SEPT 96
DRN :	9384M-2-S1
ECO :	1101

Schematics, Layouts

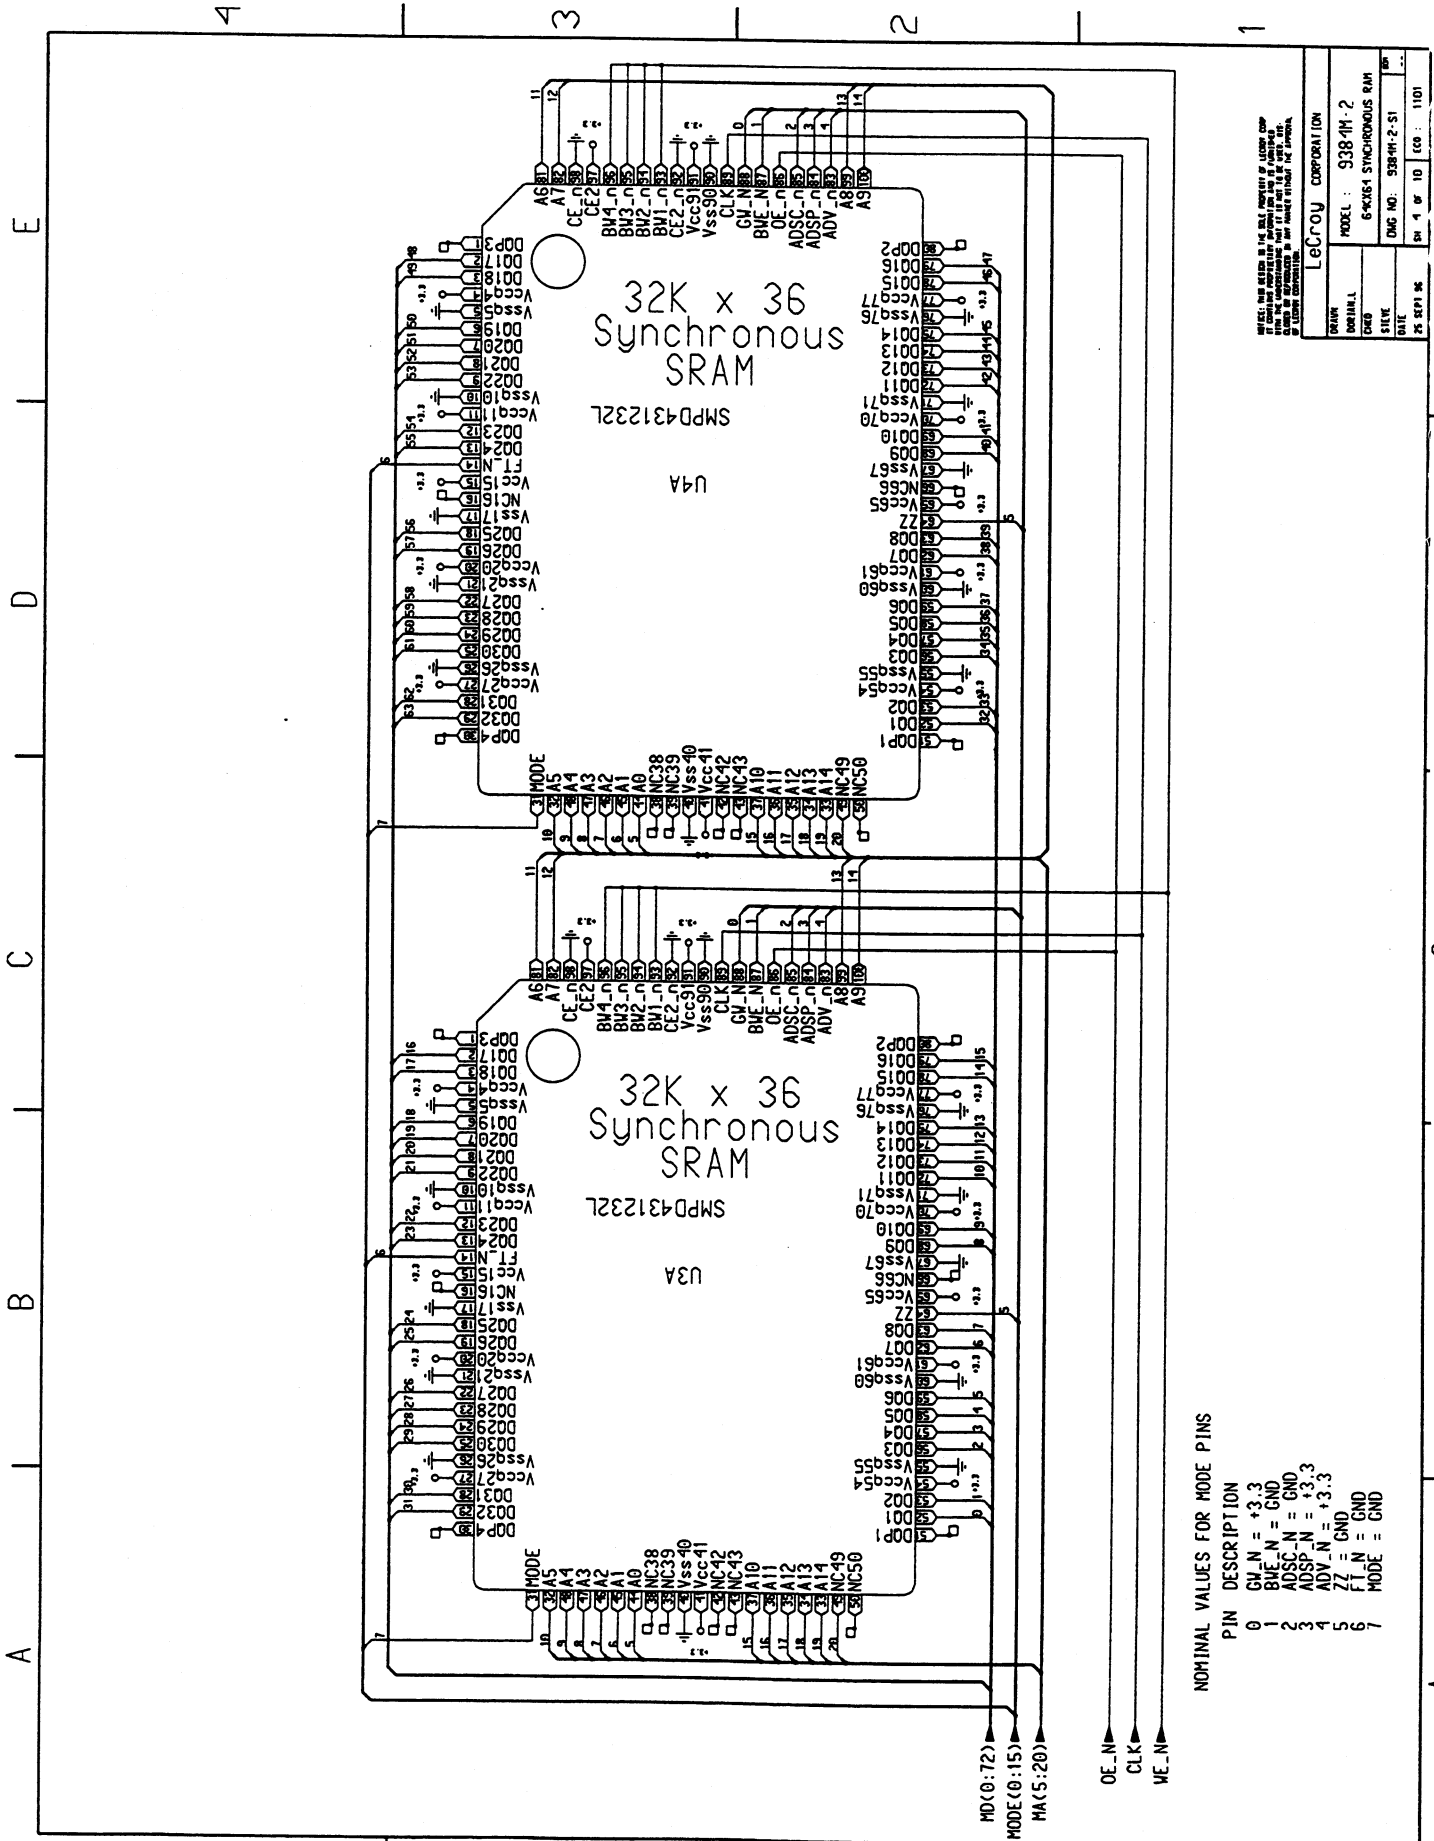


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GM_N = +3.3
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = +3.3
4	ADV_N = +3.3
5	ZZ = GND
6	FT_N = GND
7	MODE = GND

THIS DRAWING IS THE PROPERTY OF ADT, INC. IT IS TO BE USED ONLY FOR THE DESIGN AND FABRICATION OF THE PRODUCT SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM ADT, INC.

LeCroy CORPORATION	
DRAWN	MODEL: 938-IM-2
CHECKED	6-938S1 SYNCHRONOUS RAM
DATE	DMC NO: 938-IM-2-S1
BY	REV: 4 OF 10
DATE	ECO: 1101

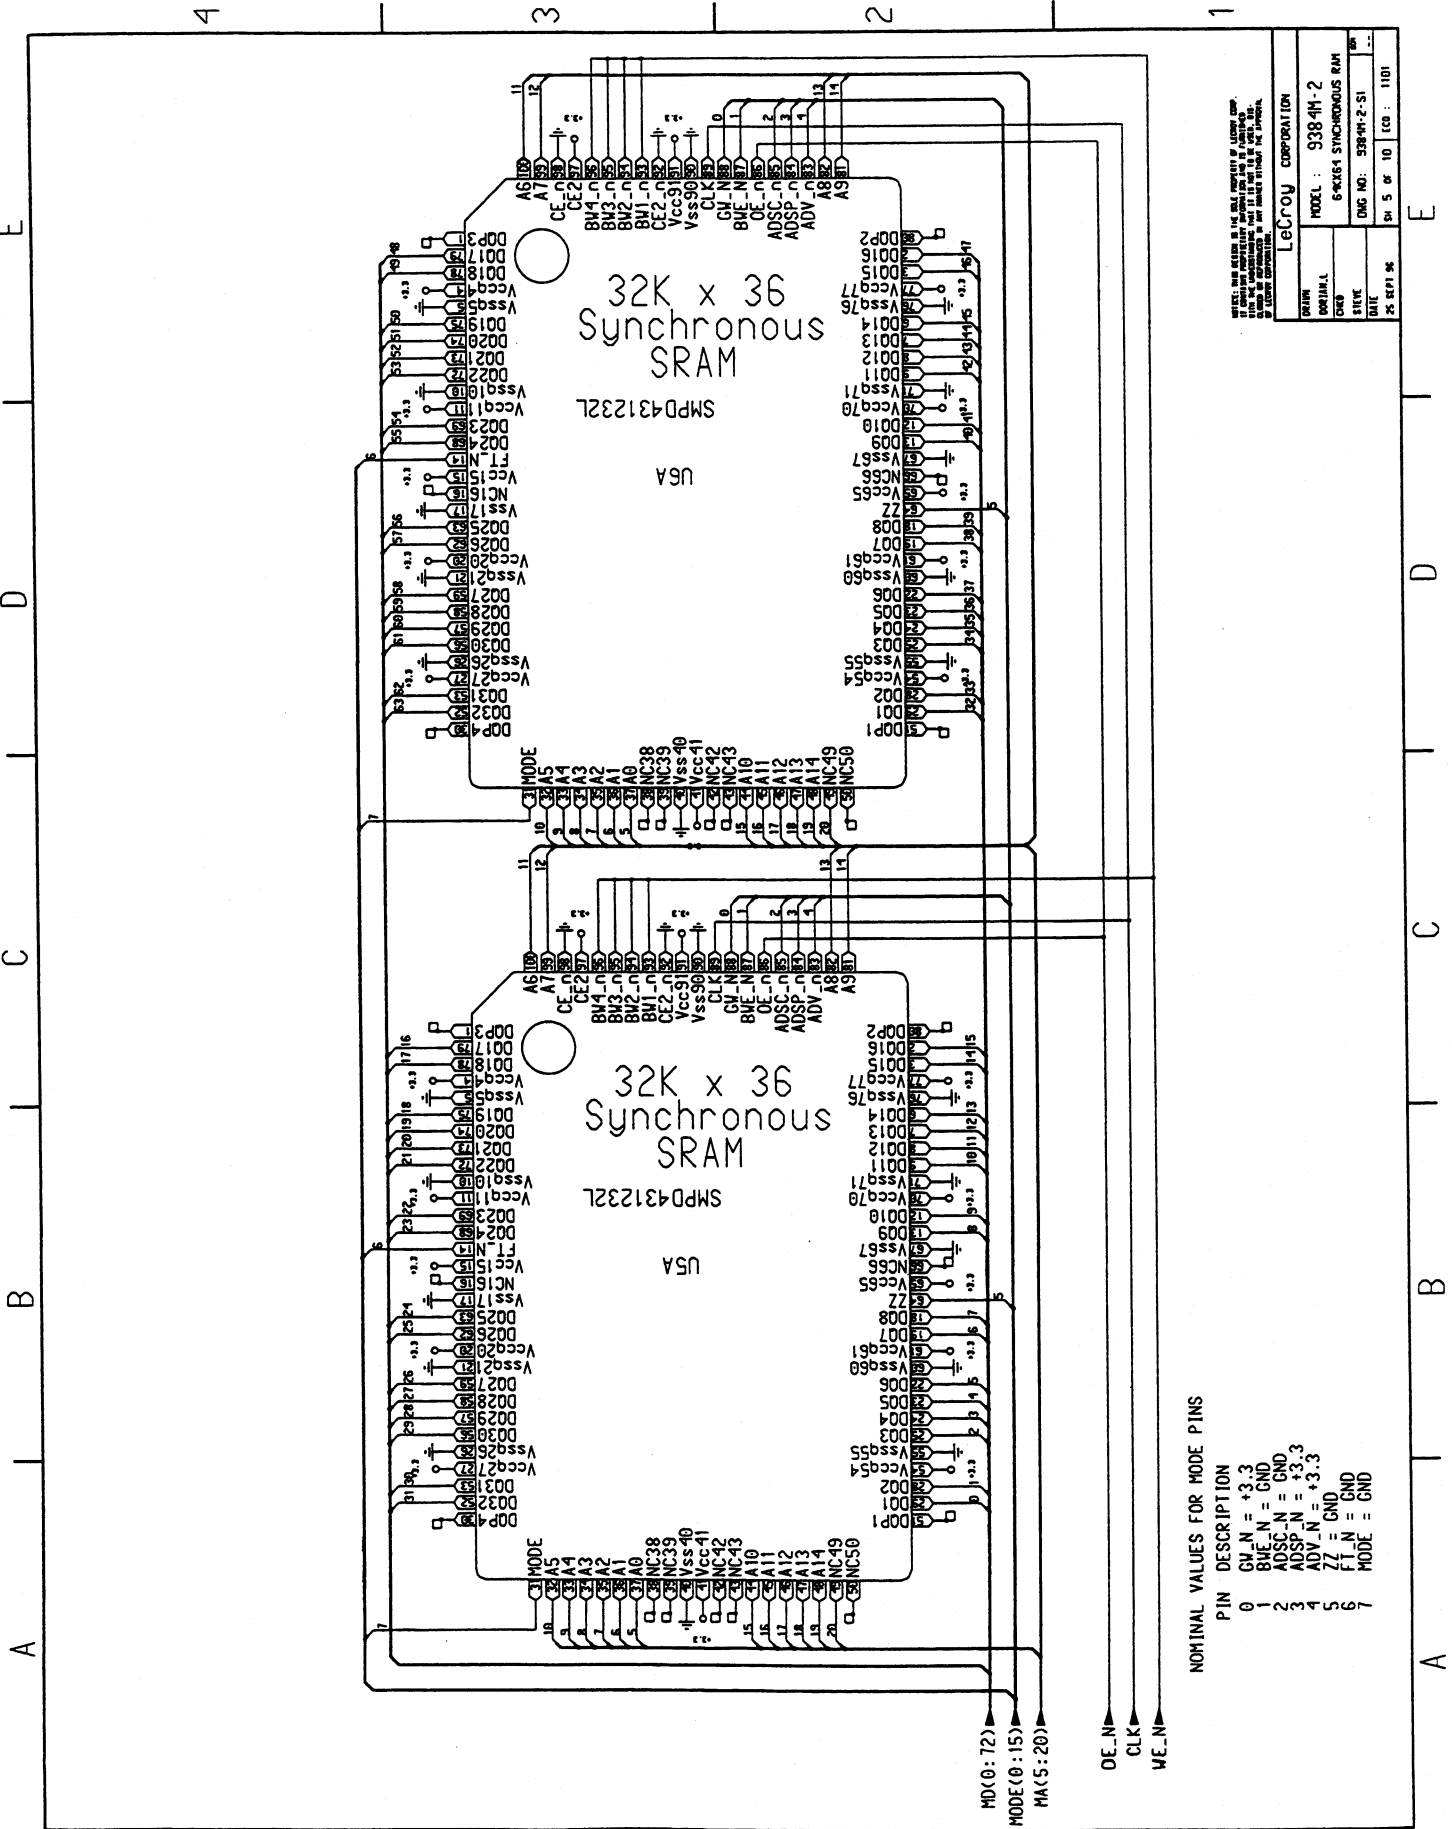


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GN_N = +3.3
1	BME_N = GND
2	ADSC_N = GND
3	ADSP_N = +3.3
4	ADV_N = +3.3
5	ZZ = GND
6	FT_N = GND
7	MODE = GND

NOTES: THIS DEVICE IS THE SOLE PROPERTY OF LEXTRON CORP. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE MANNER SPECIFIED IN THIS DOCUMENT. THE USER ASSUMES ALL LIABILITY FOR THE PROPER USE OF THIS DEVICE.

LECRON CORPORATION	
MODEL :	938-4H-2
DESCRIPTION :	64Kx36 SYNCHRONOUS RAM
DWG NO. :	938-4H-2-S1
DATE :	...
REV. :	...
DESIGNED BY :	...
DRN. NO. :	...
REV. :	...
DATE :	...
DESIGNED BY :	...
DRN. NO. :	...
REV. :	...
DATE :	...
DESIGNED BY :	...
DRN. NO. :	...
REV. :	...
DATE :	...

Schematics, Layouts

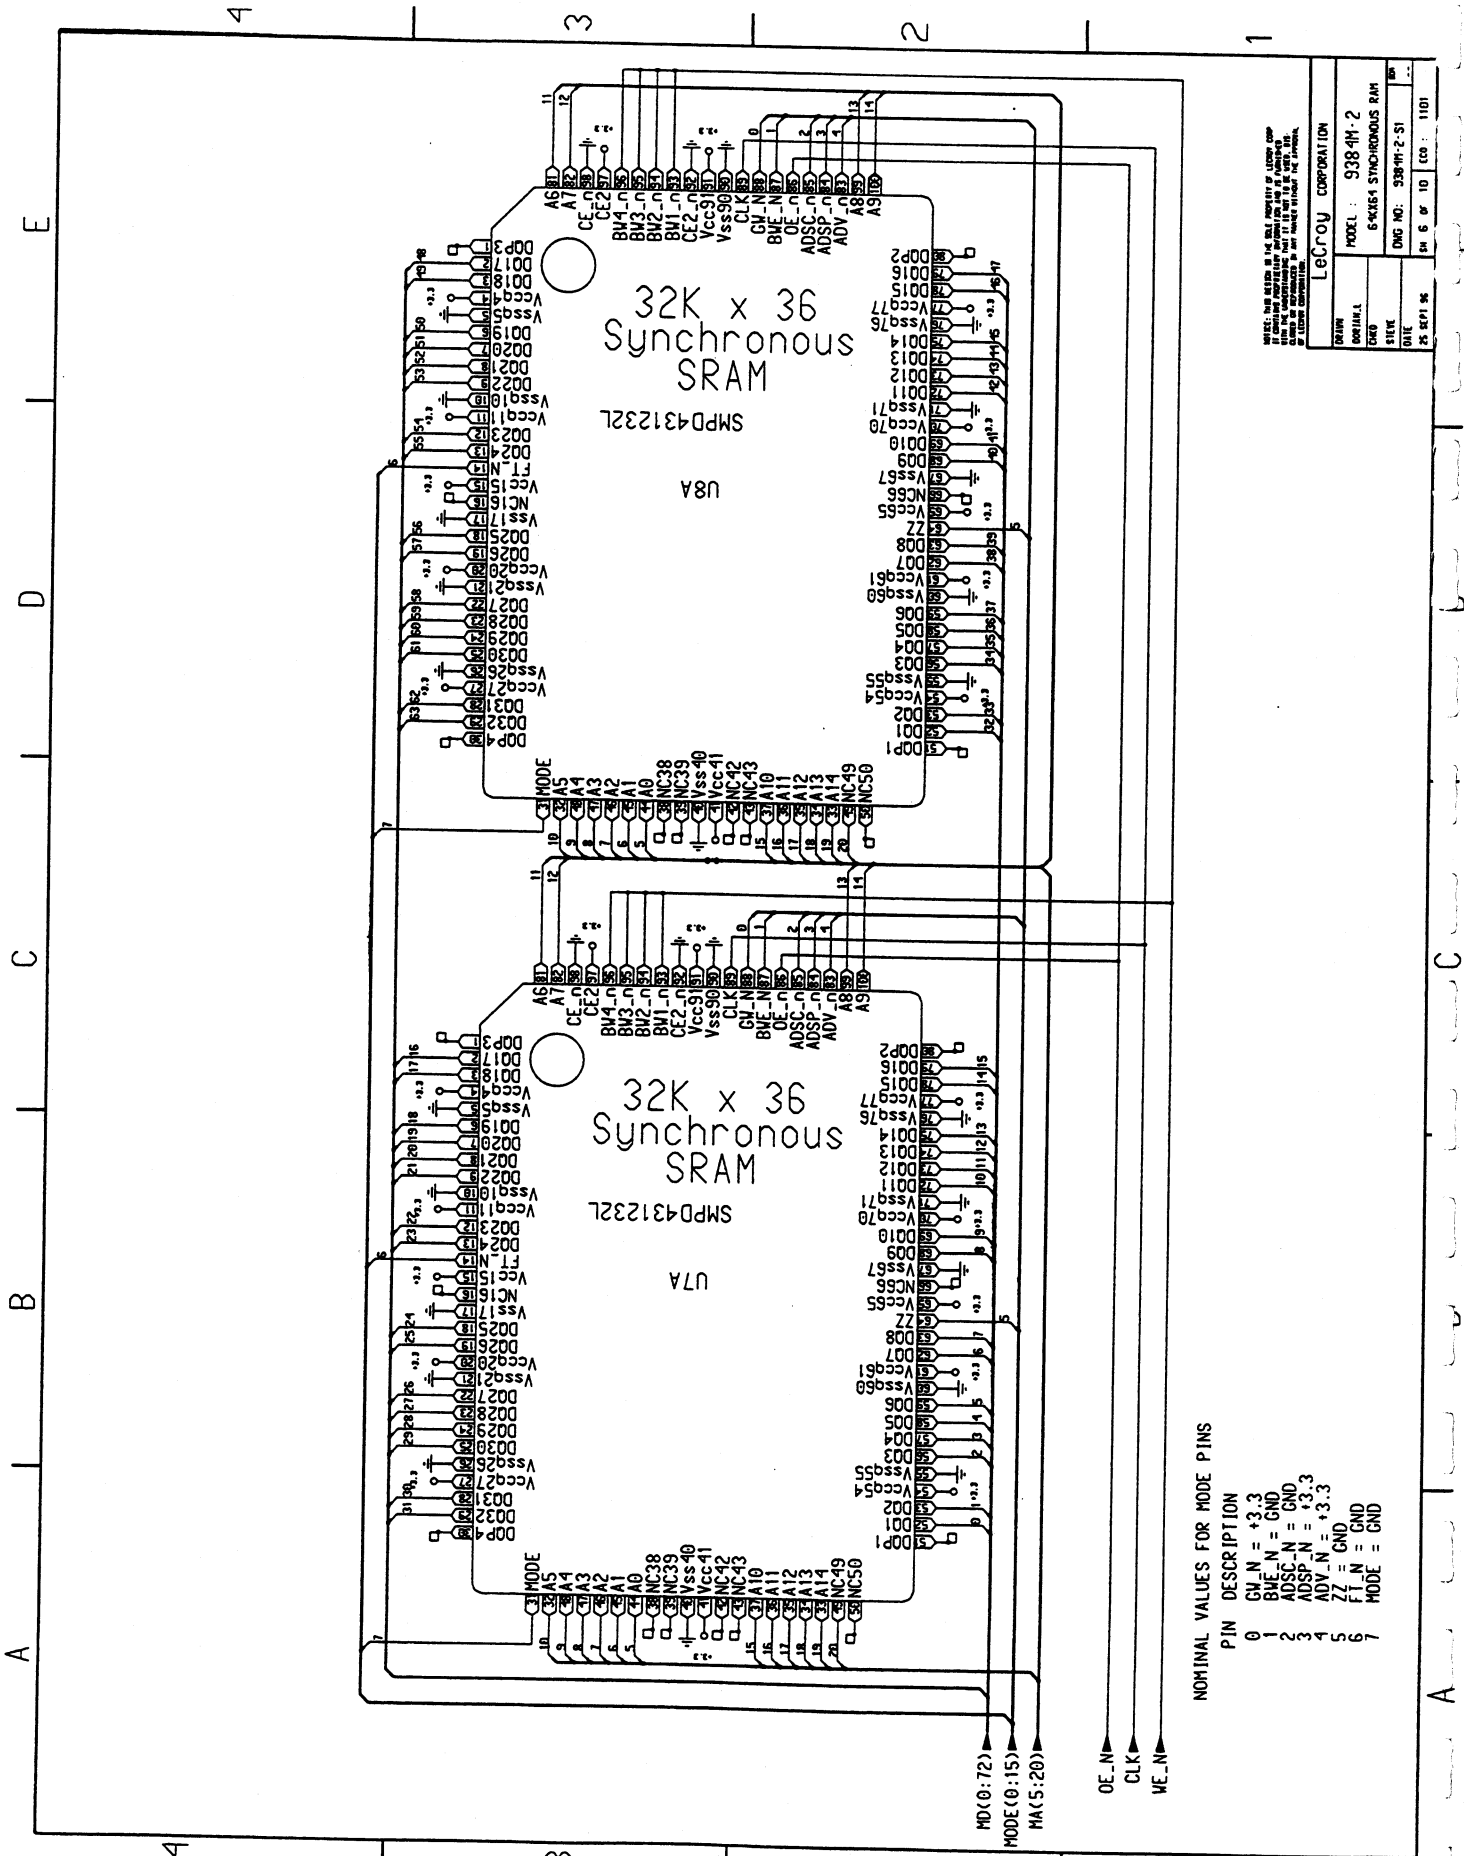


LECROY CORPORATION

DATE	MODEL	938-4H-2
DESCRIPTION	6-KX151 SYNCHRONOUS RAM	
REV	QMG NO.	538-4H-2-51
DATE	BY	25 SEP 74
DRN	ENGR	1101

THIS DRAWING IS THE PROPERTY OF LECROY CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF LECROY CORPORATION.

NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GN = +3.3
1	BVE = GND
2	ADSC = GND
3	ADSP = +3.3
4	ADV = +3.3
5	ZZ = GND
6	FT = GND
7	MODE = GND

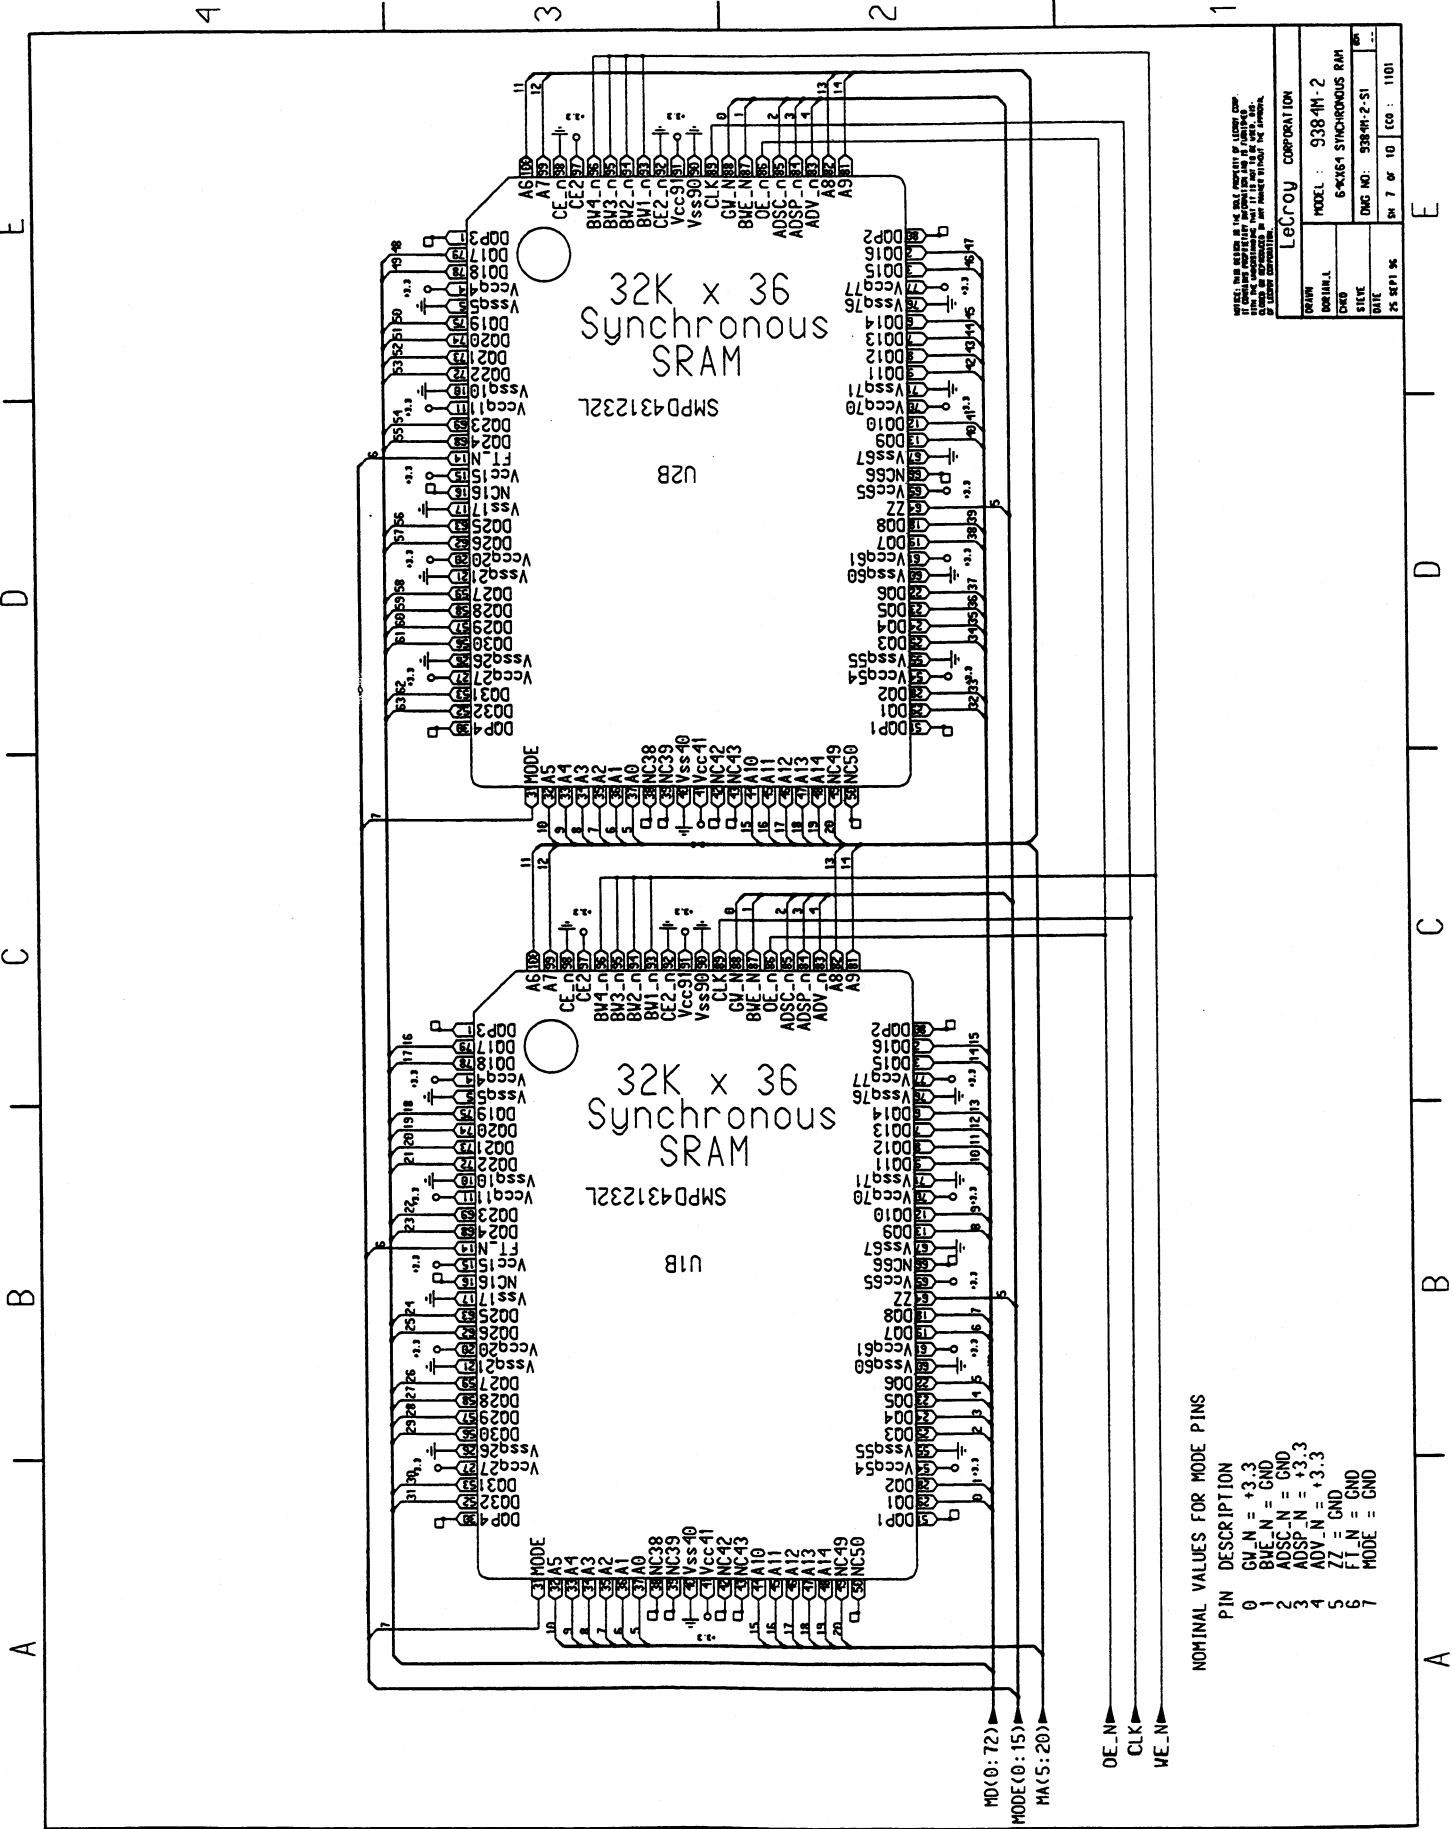


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GN_N = +3.3
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = +3.3
4	ADV_N = +3.3
5	ZZ = GND
6	FT_N = GND
7	MODE = GND

WEIPEC, THIS DRAWING IS THE PROPERTY OF LUCENT TECHNOLOGIES CORPORATION. IT IS TO BE USED ONLY FOR THE PROJECT AND FOR WHICH IT IS SPECIFICALLY PREPARED. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LUCENT CORPORATION	
MODEL:	9384M-2
DESCRIPTION:	6-Kbit Synchronous SRAM
DATE:	5/28/91-2-S1
REV:	25 SEP 91
BY:	7 of 10
ECO:	1101

Schematics, Layouts

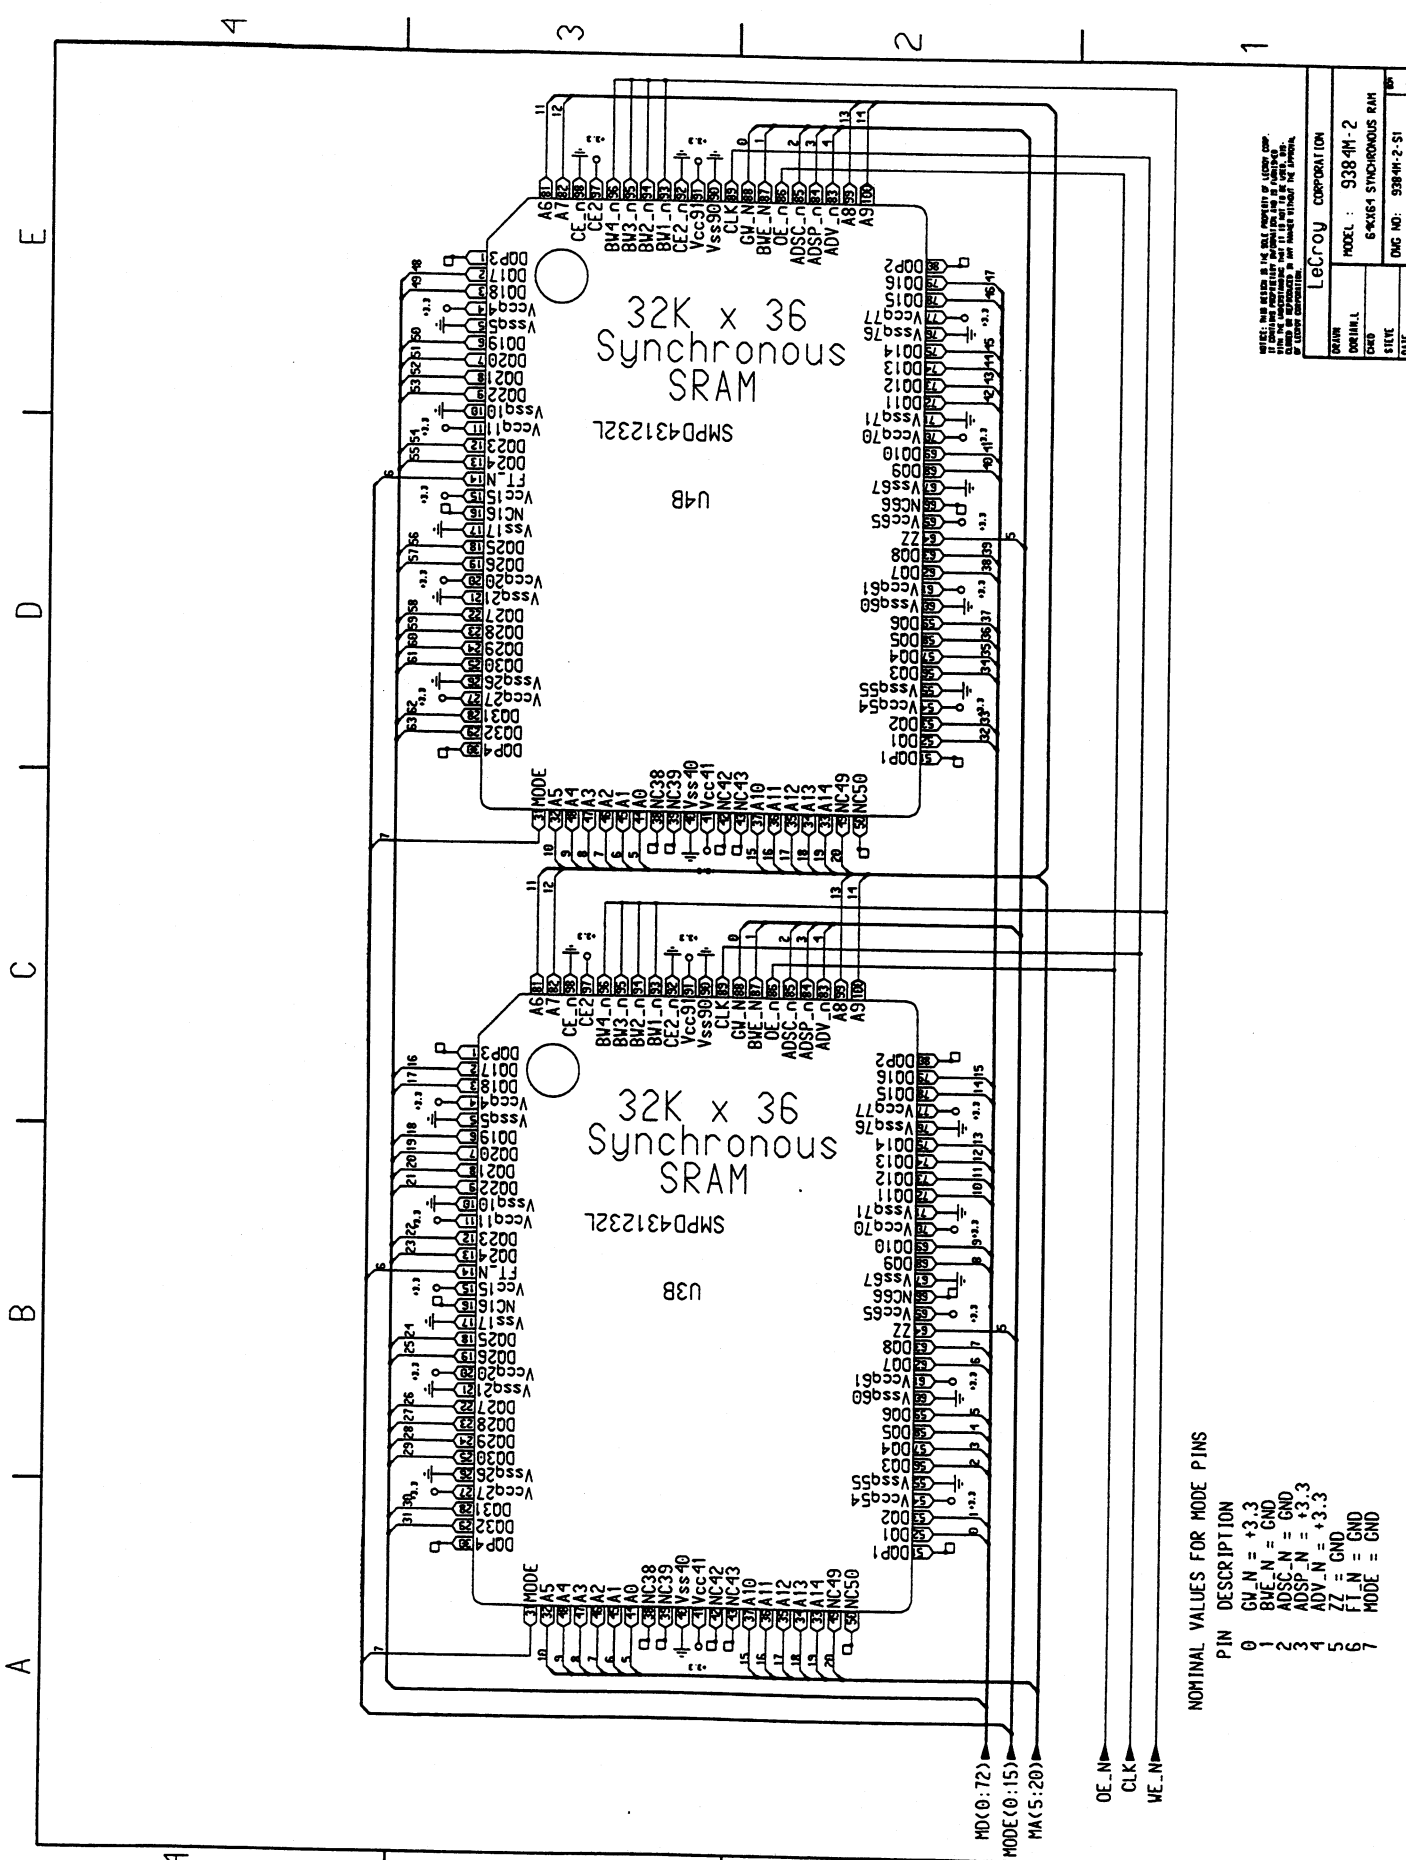

PLEASE SEE NOTE 10 IN ALL MEMORIES OF ALL TYPES.
 IT SHALL BE THE USER'S RESPONSIBILITY TO VERIFY THAT THE MEMORY IS OPERATING CORRECTLY.
 FAILURE TO DO SO MAY BE THE CAUSE OF SYSTEM MALFUNCTIONS.
 FAILURE TO FOLLOW THE RECOMMENDED OPERATING CONDITIONS MAY BE THE CAUSE OF PERMANENT DAMAGE TO THE MEMORY.
 FAILURE TO FOLLOW THE RECOMMENDED OPERATING CONDITIONS MAY BE THE CAUSE OF PERMANENT DAMAGE TO THE MEMORY.
 FAILURE TO FOLLOW THE RECOMMENDED OPERATING CONDITIONS MAY BE THE CAUSE OF PERMANENT DAMAGE TO THE MEMORY.

LeCroy CORPORATION


DATE	REV	BY	OF	TO	NO.
01/11/88	10	LEO			1101

MODEL : 938-4M-2
 64KX36 SYNCHRONOUS RAM
 DMC NO: 938-4M-2-51

NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GM_N = +3.3
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = +3.3
4	ADV_N = +3.3
5	ZZ = GND
6	FT_N = GND
7	MODE = GND

Schematics, Layouts

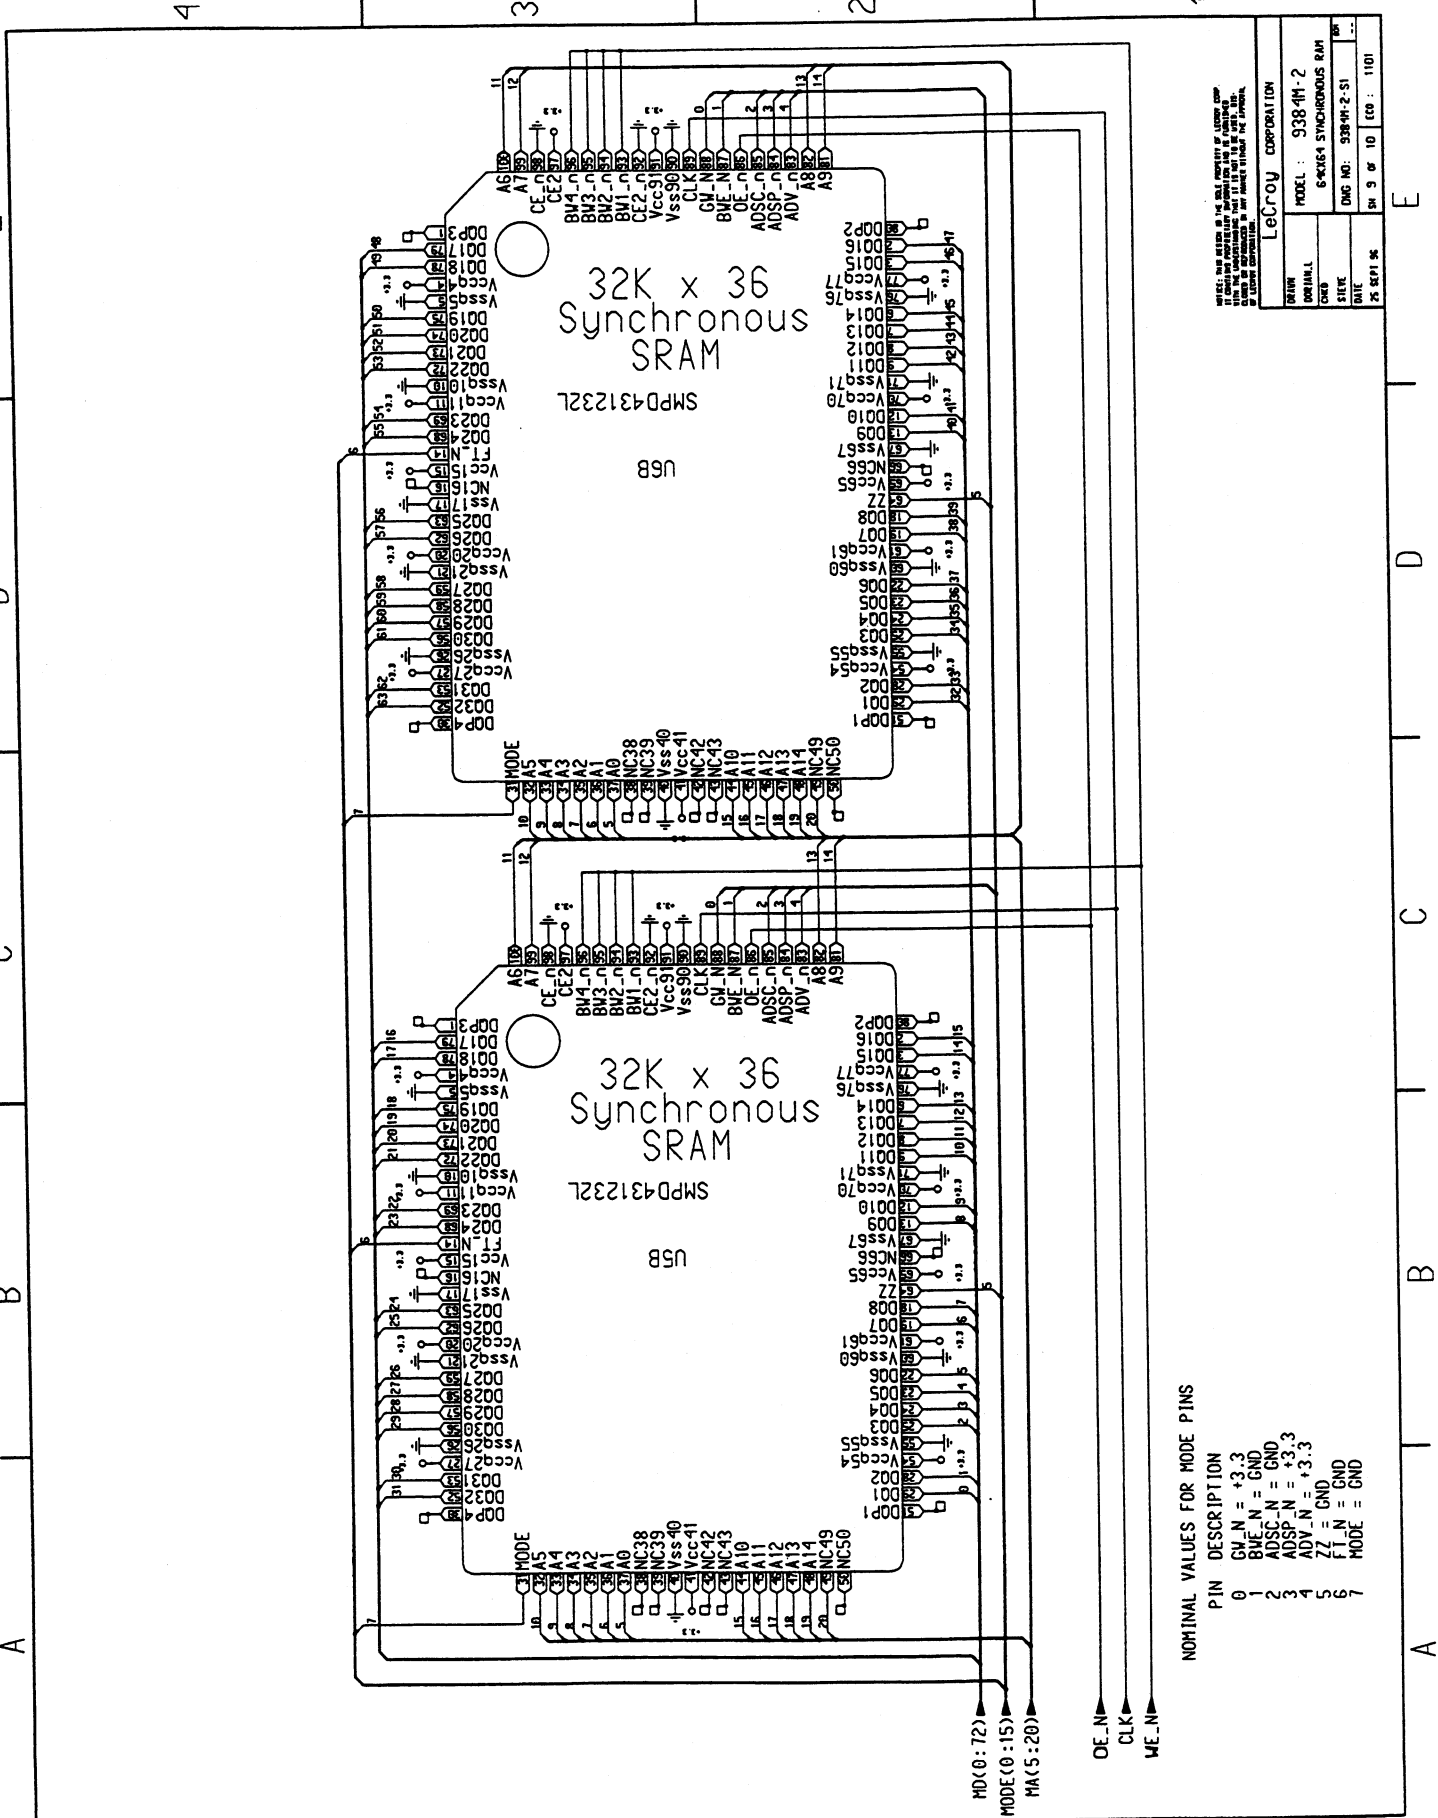

NOMINAL VALUES FOR MODE PINS


PIN	DESCRIPTION
0	GM_N = +3.3
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = +3.3
4	ADV_N = +3.3
5	ZZ = GND
6	FT_N = GND
7	MODE = GND

WE WILL NOT BE RESPONSIBLE FOR THE LOSS OF DATA OR INFORMATION IF THE USER DOES NOT TAKE THE NECESSARY PRECAUTIONS TO PROTECT THE INFORMATION FROM LOSS OR DESTRUCTION.

LeCroy CORPORATION

MODEL	9384H-2
DESCRIPTION	6-Kbit Synchronous SRAM
DATE	DWG NO. 9384H-2-S1
REV	REV. 9 OF 10. ECO : 1101

Schematics, Layouts

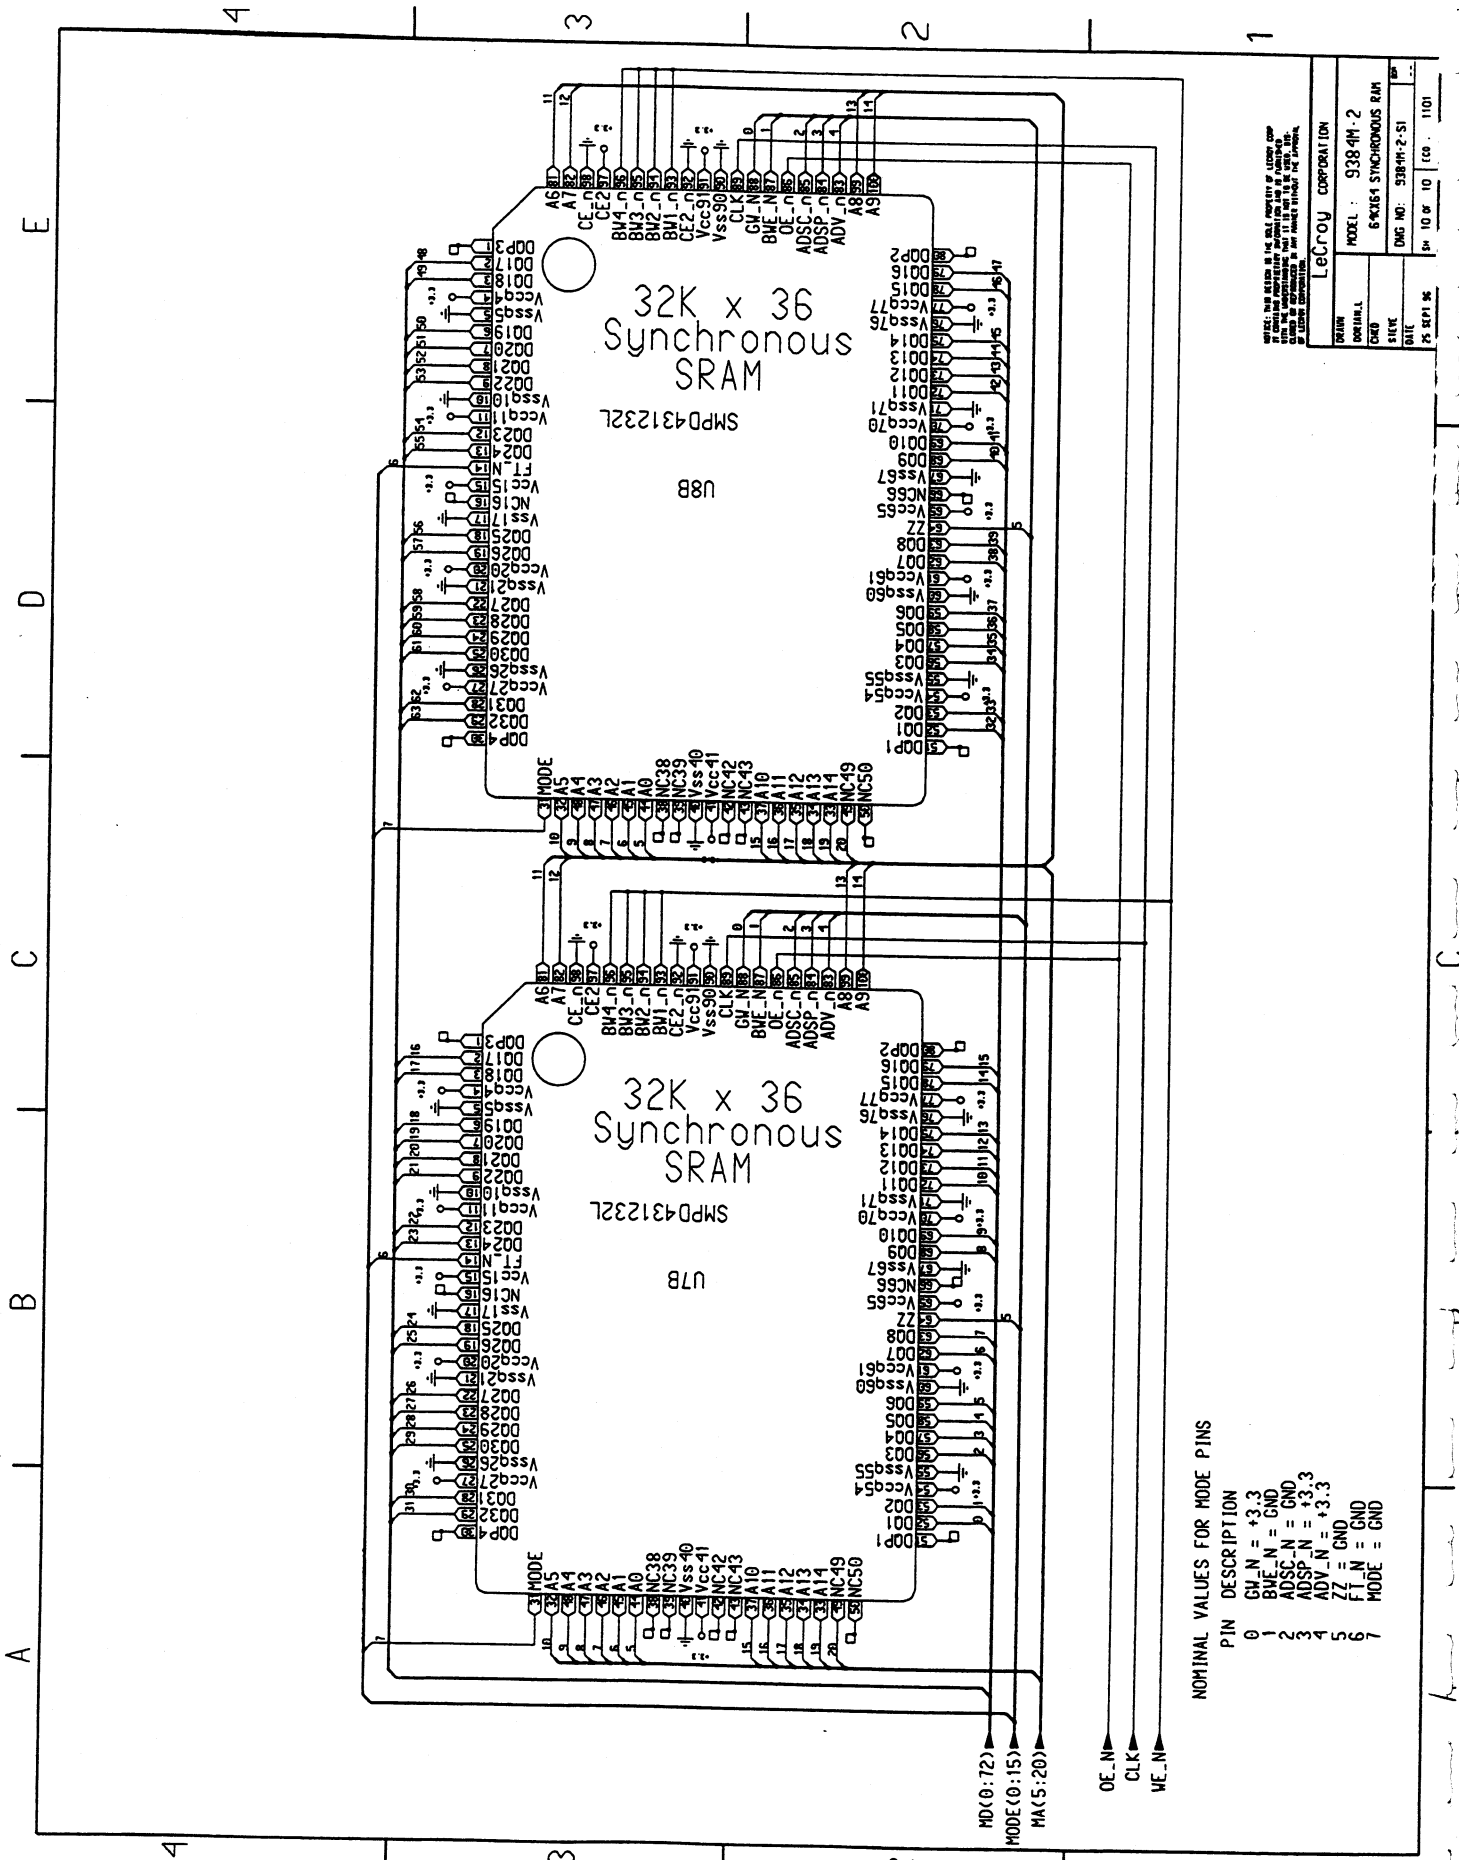


NOTE: THE DESIGN OF THE CELL CAPABILITY OF ACCESS, READ AND WRITE IS LIMITED BY THE MODE PIN CONNECTIONS. MODE PIN CONNECTIONS SHOULD BE REFERENCED TO THE MODE PIN CONNECTIONS OF THE DEVICE.

LeCroy CORPORATION


MODEL :	938-4M-2
DATE :	6-8-81
REV :	2-51
QTY :	1101

9384M-2 Rev B Side 1

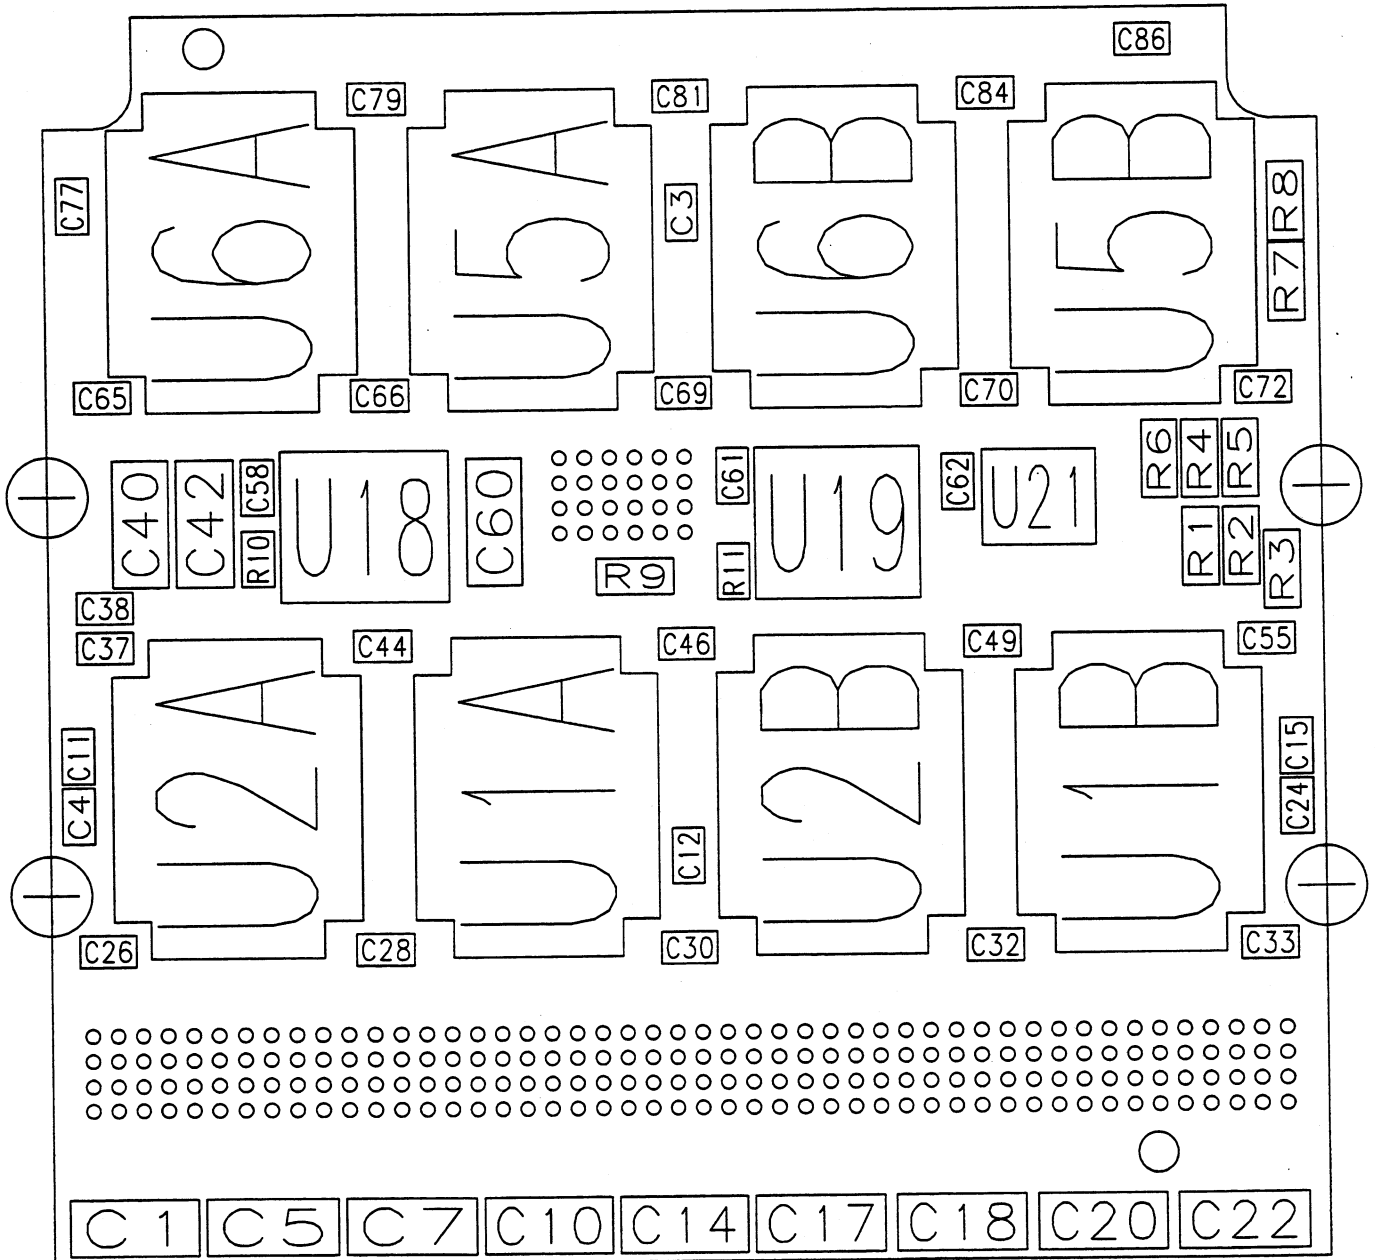


Schematics, Layouts

9384M-2 Rev B Side 1

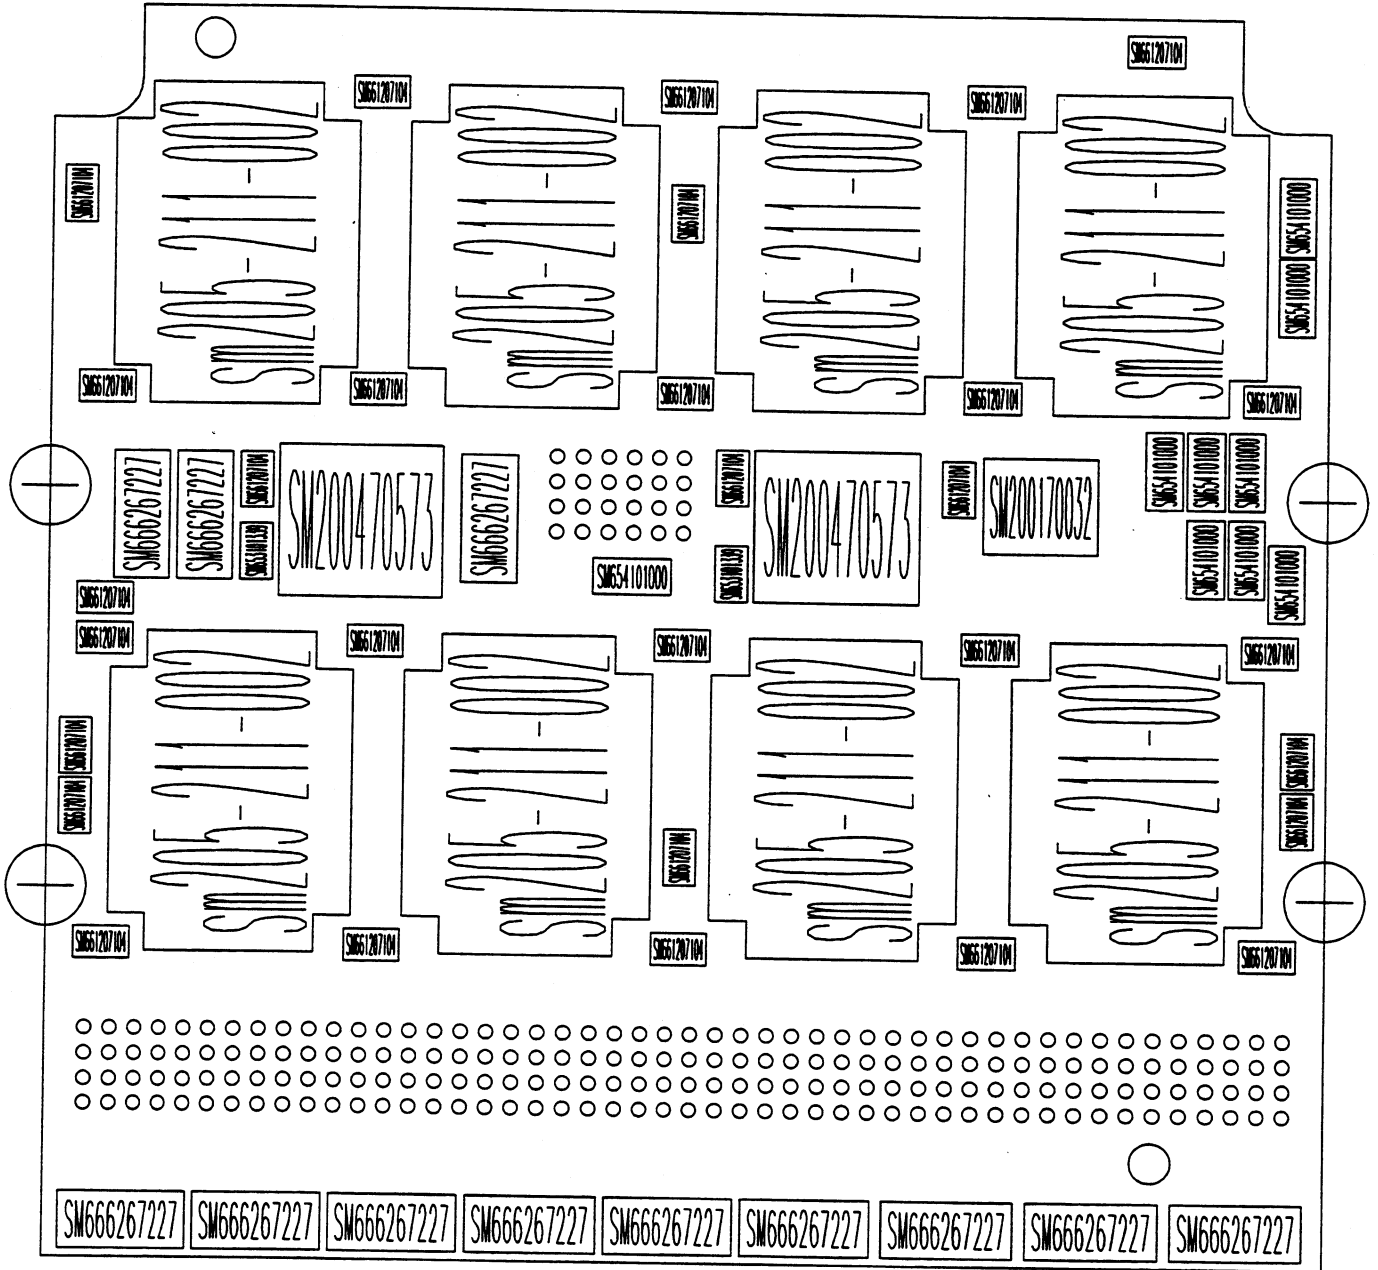


9384M-2 Rev B Side 1

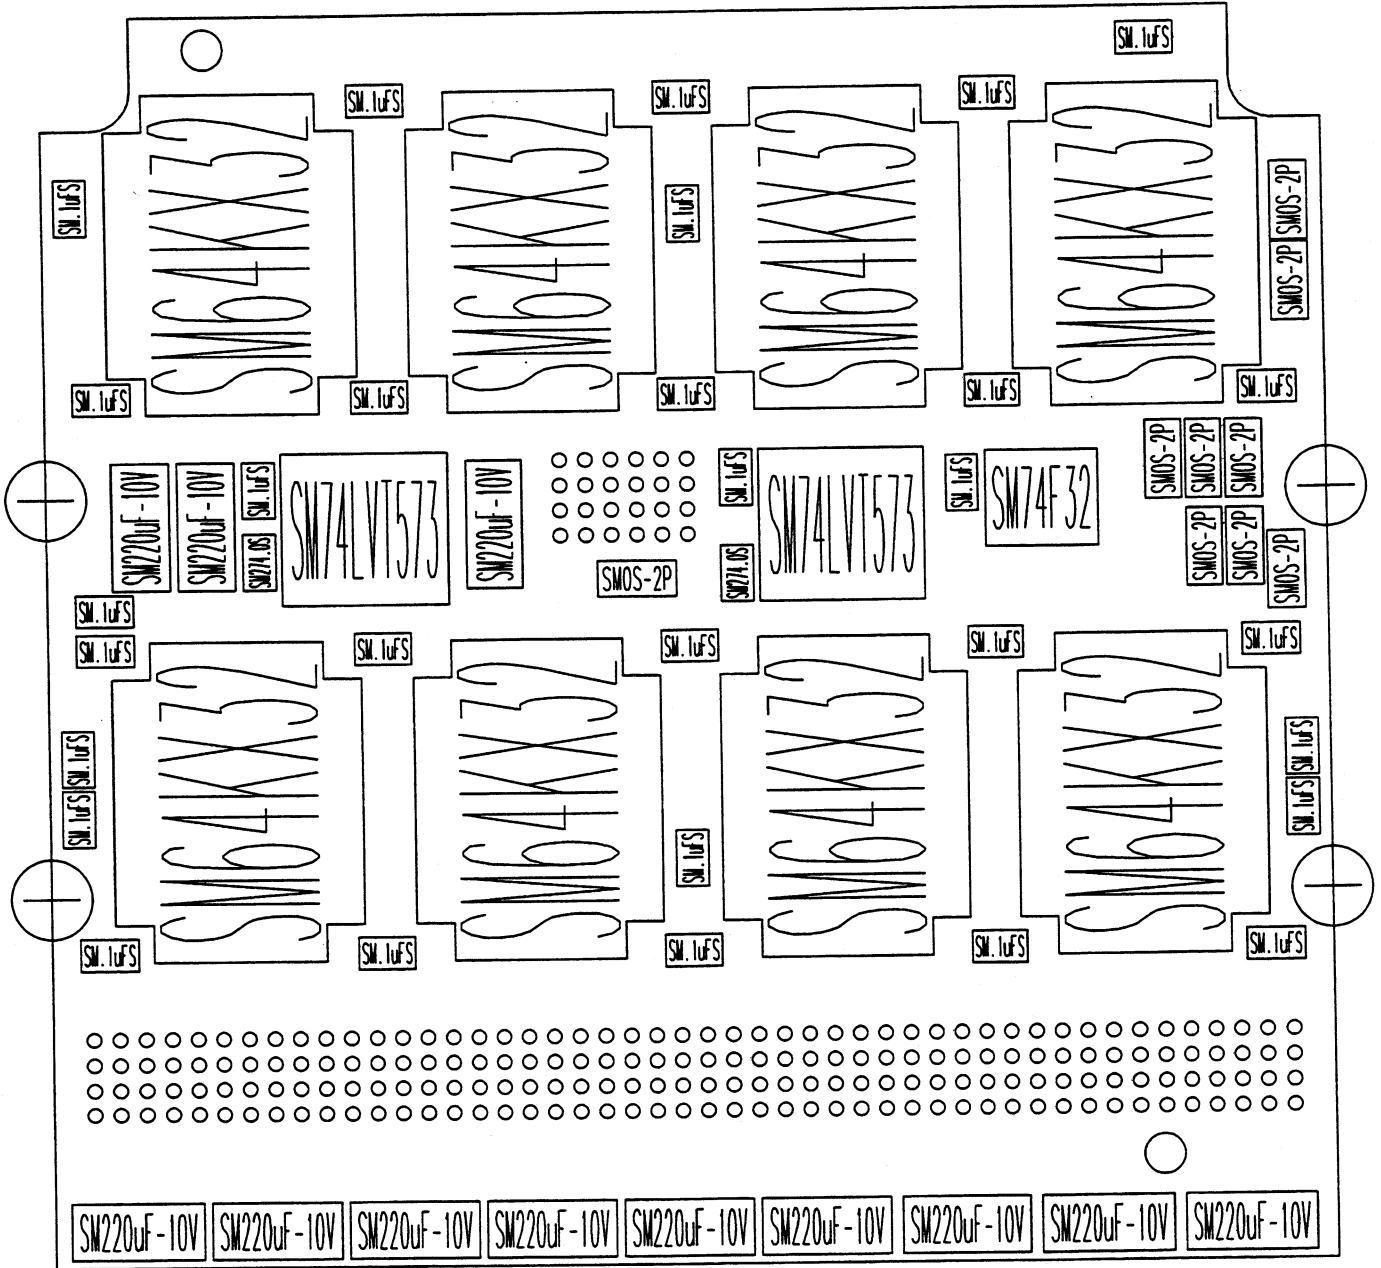


Schematics, Layouts

9384M-2 Rev B Side 2

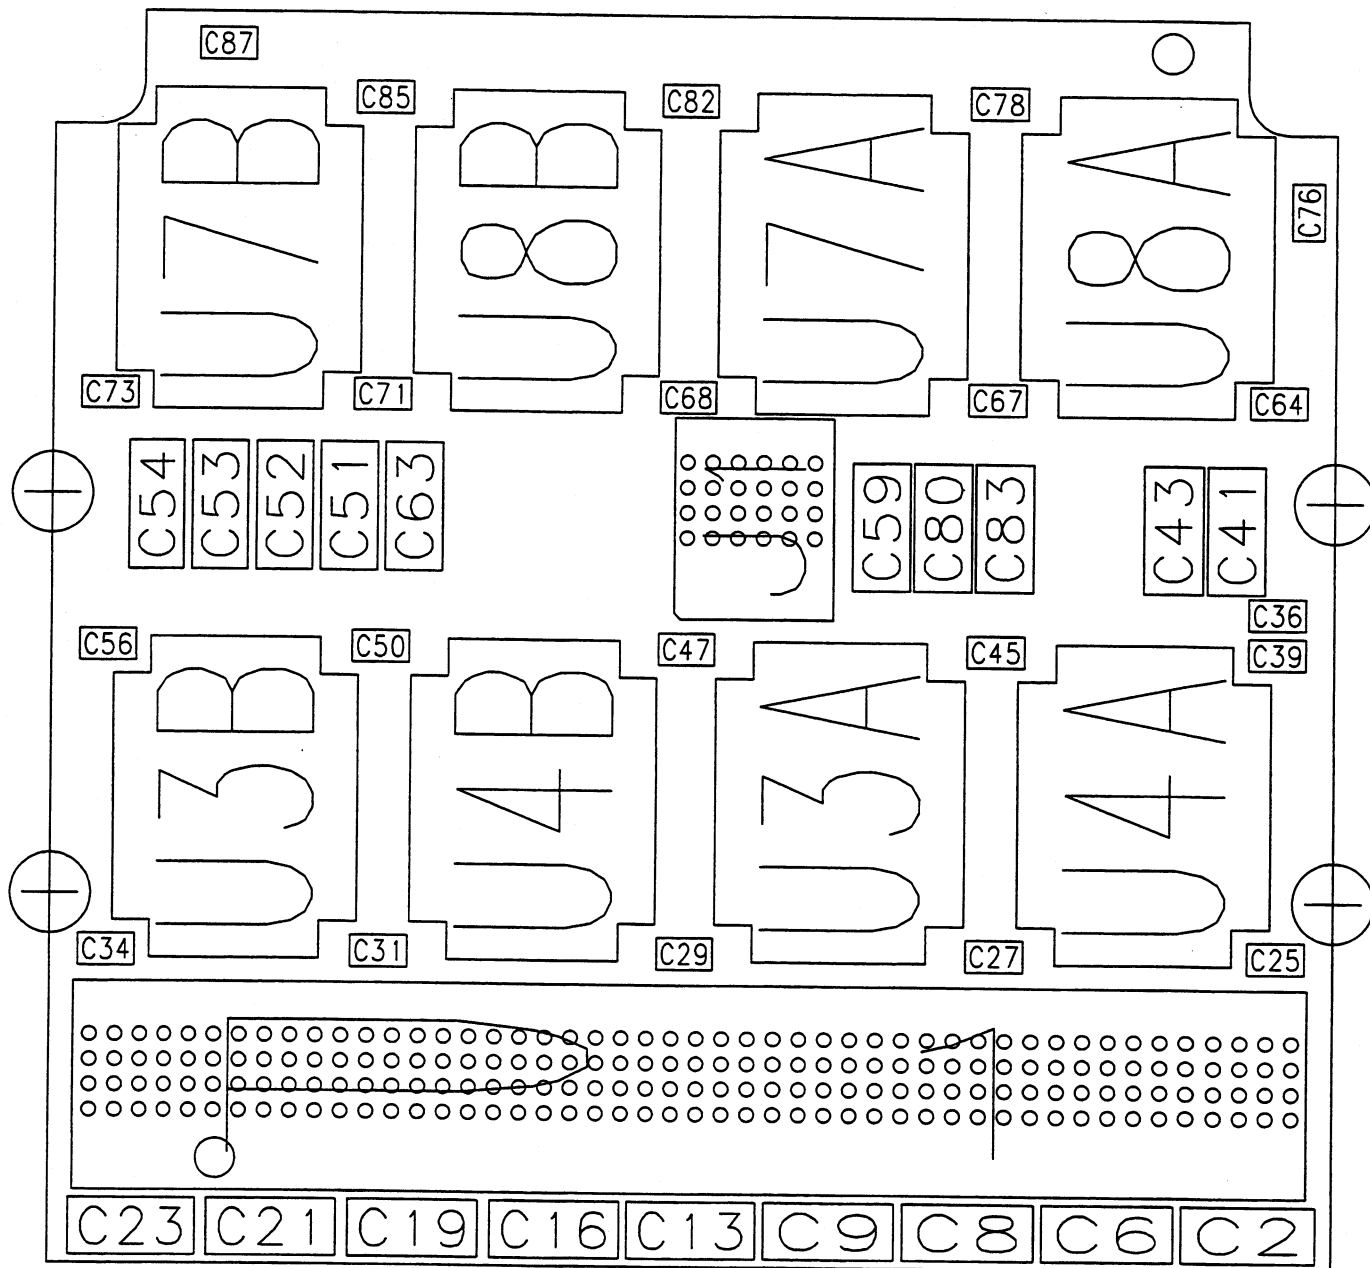


9384M-2 Rev B Side 2

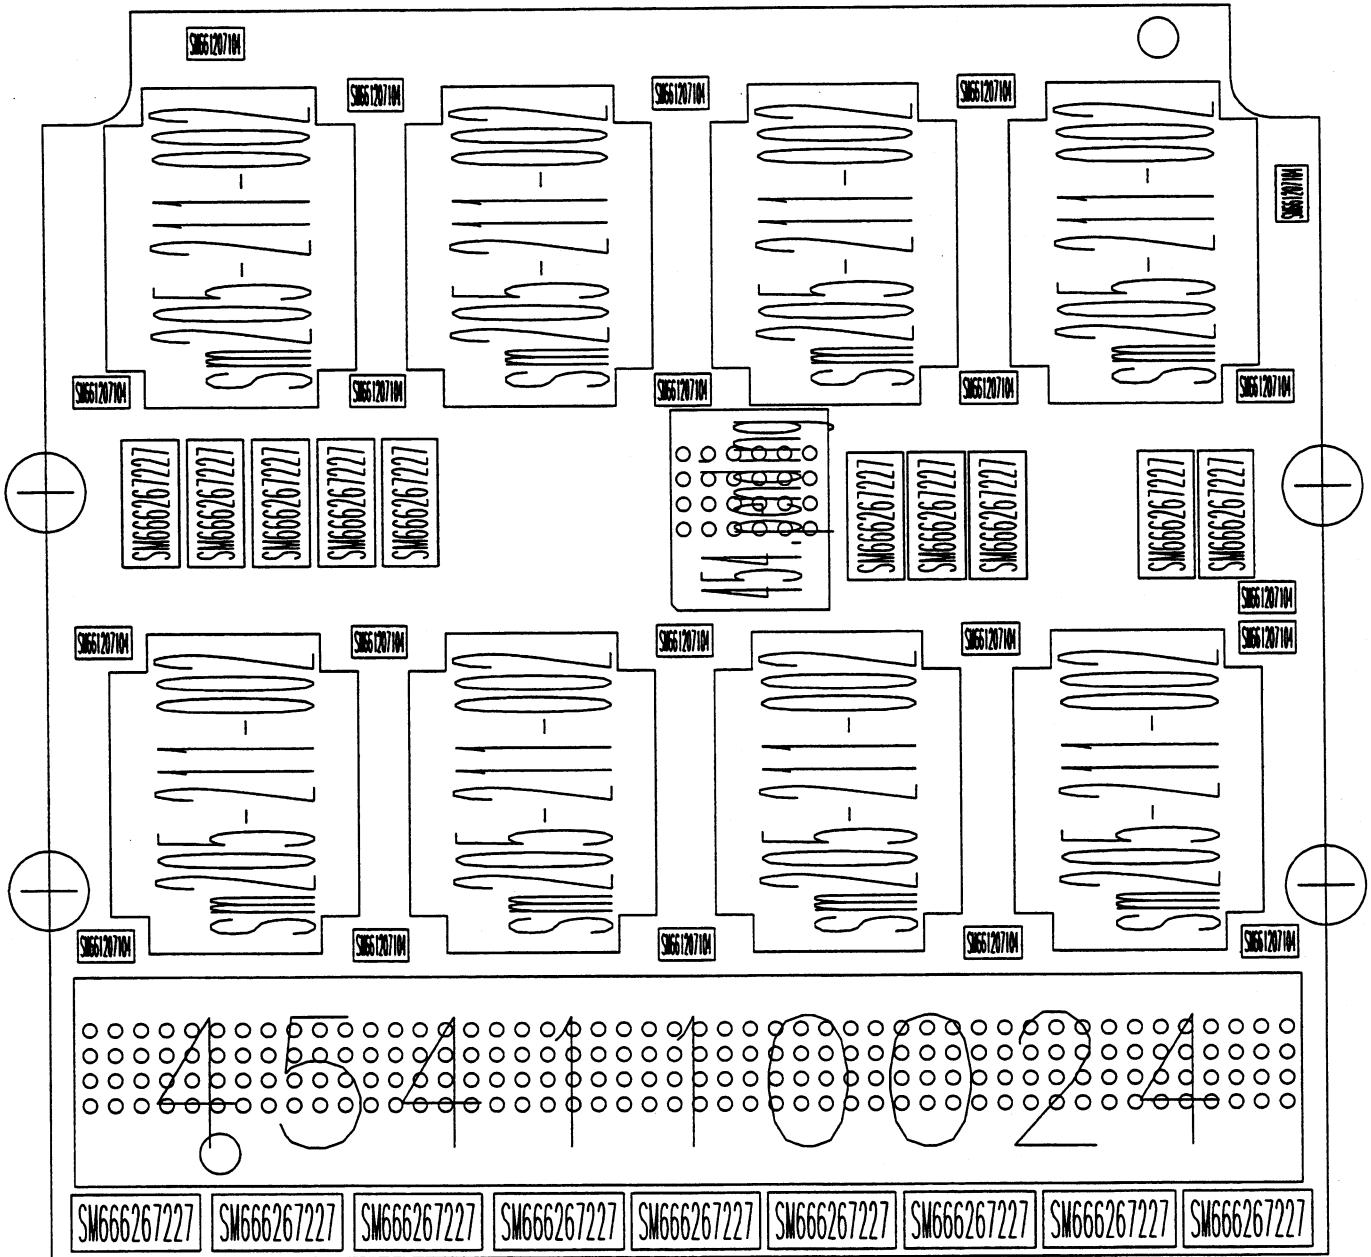

Schematics, Layouts

9384M-2 Rev B Side 2

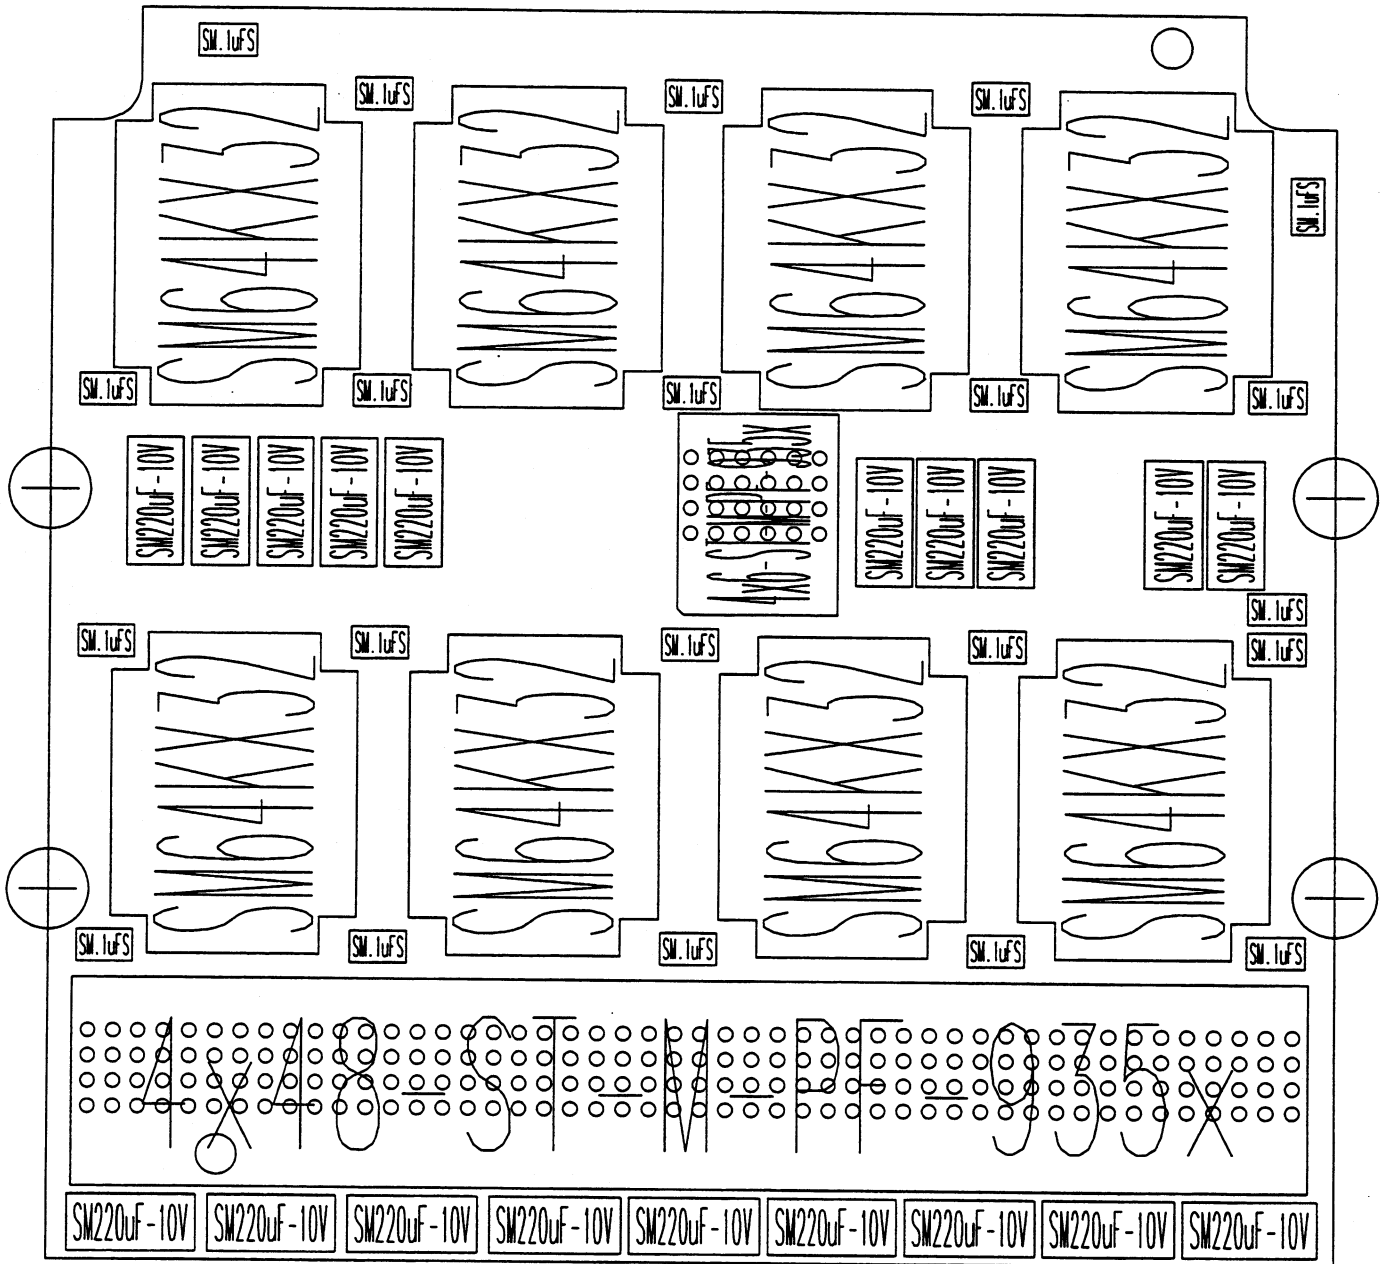

Schematics, Layouts

PART: 9384M-2

DESC : Acquisition Memory Card with 2 X 500K


Location	Part Number	Description	Location	Part Number	Description
C1	SM666267227	SM220UF	C44	SM661207104	SM.1UF
C2	SM666267227	SM220UF	C45	SM661207104	SM.1UF
C3	SM661207104	SM.1UF	C46	SM661207104	SM.1UF
C4	SM661207104	SM.1UF	C47	SM661207104	SM.1UF
C5	SM666267227	SM220UF	C48	SM666267227	SM220UF
C6	SM666267227	SM220UF	C49	SM661207104	SM.1UF
C7	SM666267227	SM220UF	C50	SM661207104	SM.1UF
C8	SM666267227	SM220UF	C51	SM666267227	SM220UF
C9	SM666267227	SM220UF	C52	SM666267227	SM220UF
C10	SM666267227	SM220UF	C53	SM666267227	SM220UF
C11	SM661207104	SM.1UF	C54	SM666267227	SM220UF
C12	SM661207104	SM.1UF	C55	SM661207104	SM.1UF
C13	SM666267227	SM220UF	C56	SM661207104	SM.1UF
C14	SM666267227	SM220UF	C57	SM666267227	SM220UF
C15	SM661207104	SM.1UF	C58	SM661207104	SM.1UF
C16	SM666267227	SM220UF	C59	SM666267227	SM220UF
C17	SM666267227	SM220UF	C60	SM666267227	SM220UF
C18	SM666267227	SM220UF	C61	SM661207104	SM.1UF
C19	SM666267227	SM220UF	C62	SM661207104	SM.1UF
C20	SM666267227	SM220UF	C63	SM666267227	SM220UF
C21	SM666267227	SM220UF	C64	SM661207104	SM.1UF
C22	SM666267227	SM220UF	C65	SM661207104	SM.1UF
C23	SM666267227	SM220UF	C66	SM661207104	SM.1UF
C24	SM661207104	SM.1UF	C67	SM661207104	SM.1UF
C25	SM661207104	SM.1UF	C68	SM661207104	SM.1UF
C26	SM661207104	SM.1UF	C69	SM661207104	SM.1UF
C27	SM661207104	SM.1UF	C70	SM661207104	SM.1UF
C28	SM661207104	SM.1UF	C71	SM661207104	SM.1UF
C29	SM661207104	SM.1UF	C72	SM661207104	SM.1UF
C30	SM661207104	SM.1UF	C73	SM661207104	SM.1UF
C31	SM661207104	SM.1UF	C74	SM661207104	SM.1UF
C32	SM661207104	SM.1UF	C75	SM661207104	SM.1UF
C33	SM661207104	SM.1UF	C76	SM661207104	SM.1UF
C34	SM661207104	SM.1UF	C77	SM661207104	SM.1UF
C35	SM666267227	SM220UF	C78	SM661207104	SM.1UF
C36	SM661207104	SM.1UF	C79	SM661207104	SM.1UF
C37	SM661207104	SM.1UF	C80	SM666267227	SM220UF
C38	SM661207104	SM.1UF	C81	SM661207104	SM.1UF
C39	SM661207104	SM.1UF	C82	SM661207104	SM.1UF
C40	SM666267227	SM220UF	C83	SM666267227	SM220UF
C41	SM666267227	SM220UF	C84	SM661207104	SM.1UF
C42	SM666267227	SM220UF	C85	SM661207104	SM.1UF
C43	SM666267227	SM220UF	C86	SM661207104	SM.1UF

Schematics, Layouts

PART: 9384M-2


DESC : Acquisiton Memory Card with 2 X 500K

Location	Part Number	Description	Location	Part Number	Description
C87	SM661207104	SM.1UF	U5	SM191160750	SM75OHMRC
J1	454110024	2MM HDR	U5A	SM205211001	SM32K SRAM
P1	454110024	2MM HDR	U5B	SM205211001	SM32K SRAM
R1	SM654101000	SMZEROOHM	U6	SM191160750	SM75OHMRC
R2	SM654101000	SMZEROOHM	U6A	SM205211001	SM32K SRAM
R3	SM654101000	SMZEROOHM	U6B	SM205211001	SM32K SRAM
R4	SM654101000	SMZEROOHM	U7	SM191160750	SM75OHMRC
R5	SM654101000	SMZEROOHM	U7A	SM205211001	SM32K SRAM
R6	SM654101000	SMZEROOHM	U7B	SM205211001	SM32K SRAM
R7	SM654101000	SMZEROOHM	U8	SM191160750	SM75OHMRC
R8	SM654101000	SMZEROOHM	U8A	SM205211001	SM32K SRAM
R9	SM652101750	SM75.0OHM	U8B	SM205211001	SM32K SRAM
R10	SM652101750	SM75.0OHM	U9	SM191160750	SM75OHMRC
U1	SM191160750	SM75OHMRC	U10	SM191160750	SM75OHMRC
U1A	SM205211001	SM32K SRAM	U11	SM191160750	SM75OHMRC
U1B	SM205211001	SM32K SRAM	U12	SM191160750	SM75OHMRC
U2	SM191160750	SM75OHMRC	U13	SM191160750	SM75OHMRC
U2A	SM205211001	SM32K SRAM	U14	SM191160750	SM75OHMRC
U2B	SM205211001	SM32K SRAM	U15	SM191160750	SM75OHMRC
U3	SM191160750	SM75OHMRC	U16	SM191160750	SM75OHMRC
U3A	SM205211001	SM32K SRAM	U17	SM191160750	SM75OHMRC
U3B	SM205211001	SM32K SRAM	U18	SM200479573	SM74ABT573
U4	SM191160750	SM75OHMRC	U19	SM200479573	SM74ABT573
U4A	SM205211001	SM32K SRAM	U20	SM191160750	SM75OHMRC
U4B	SM205211001	SM32K SRAM	U21	SM200170032	SM74F32

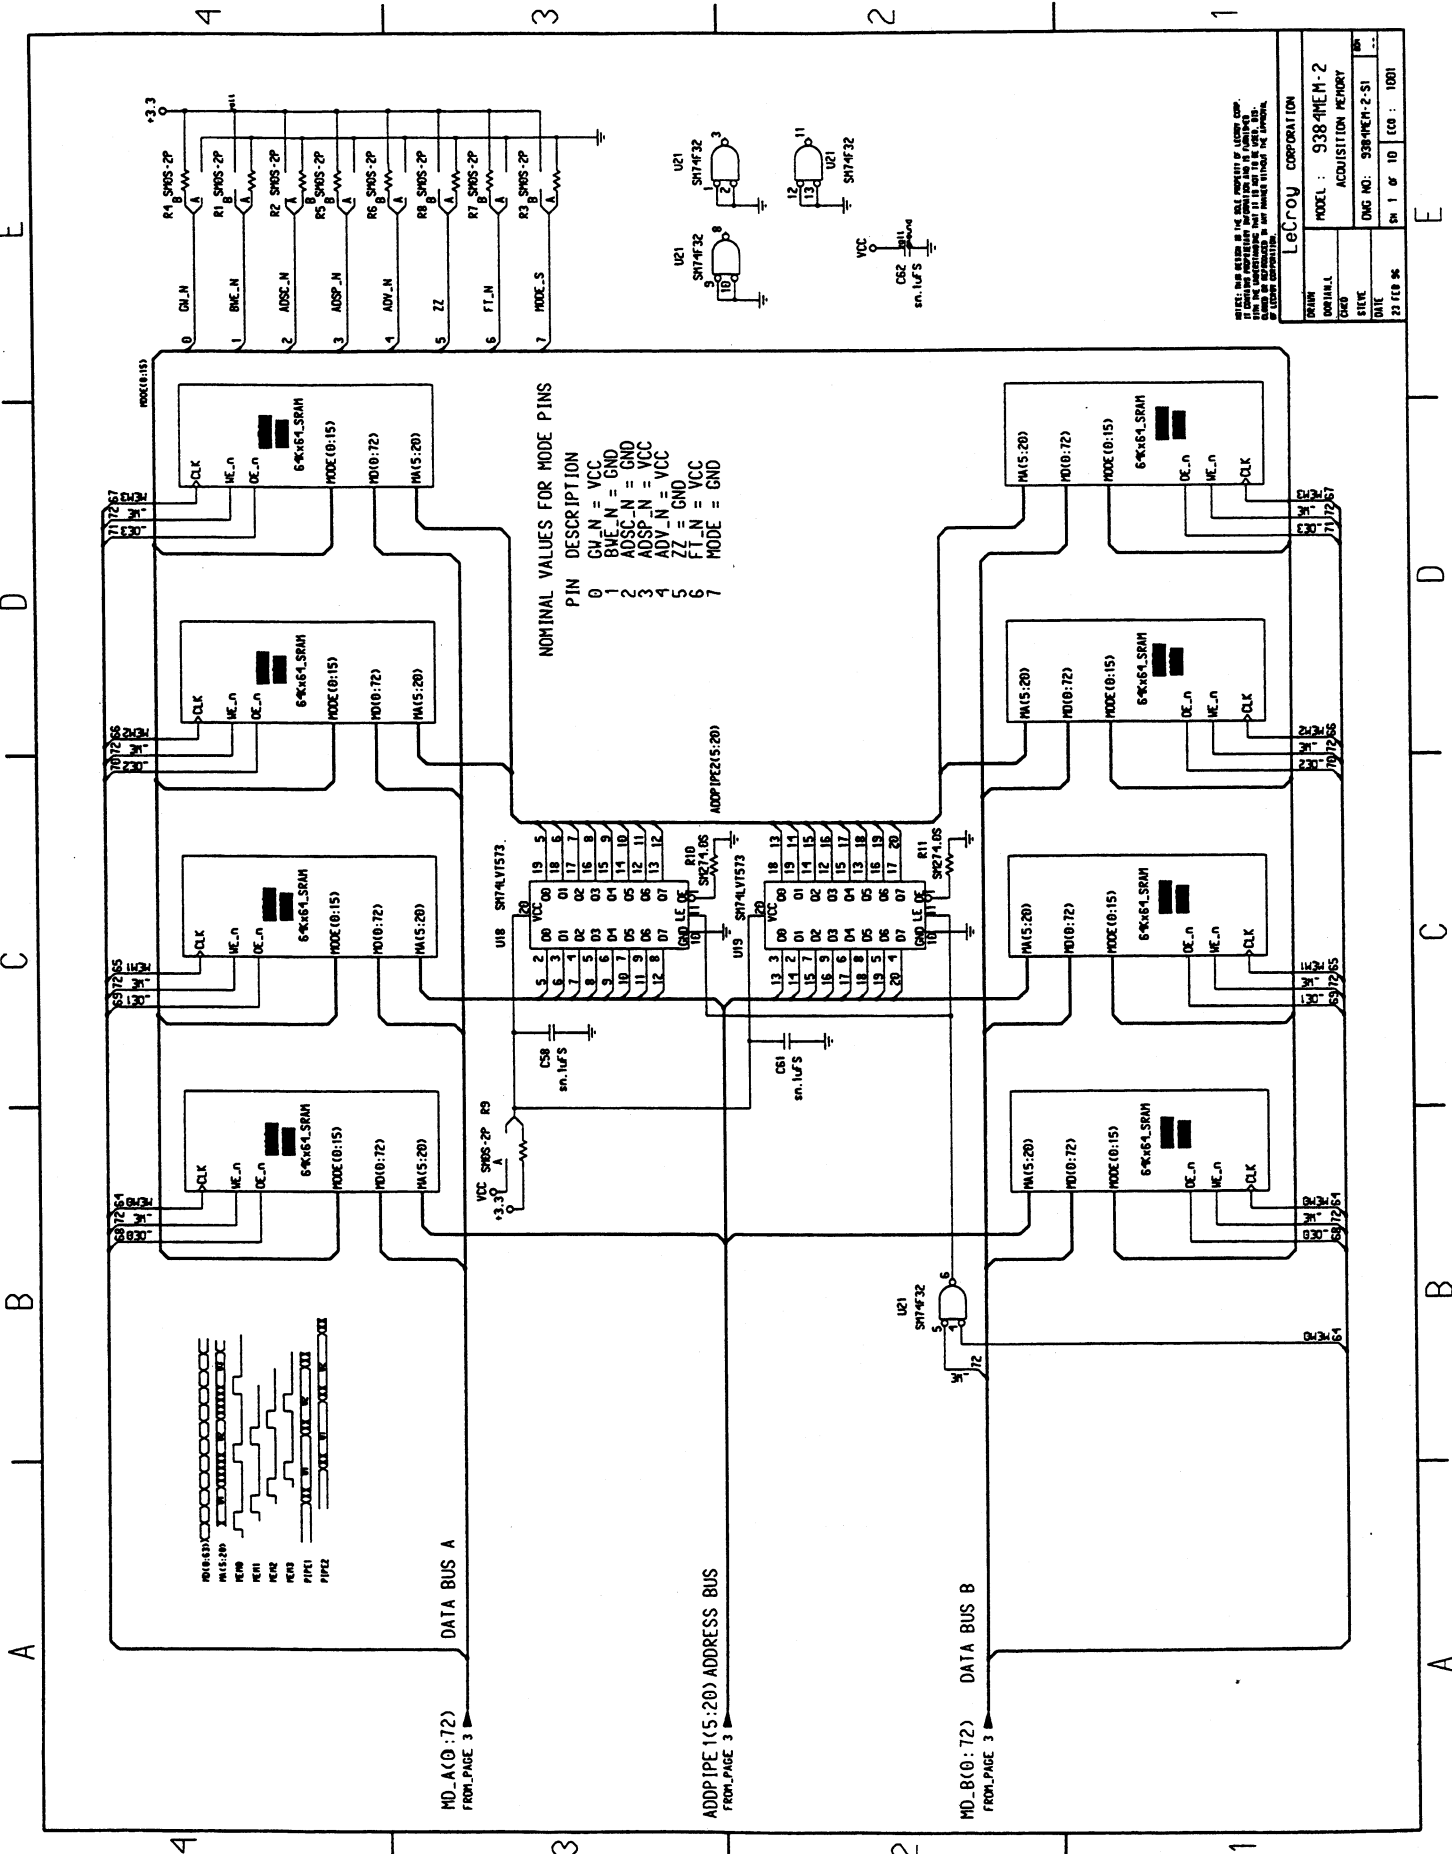


LECROY CORPORATION
 MODEL: 938-4HEM-2
 ACQUISITION MEMORY
 DATE: 23 FEB 96
 SN 1 OF 10 ECO: 1001

Schematics, Layouts

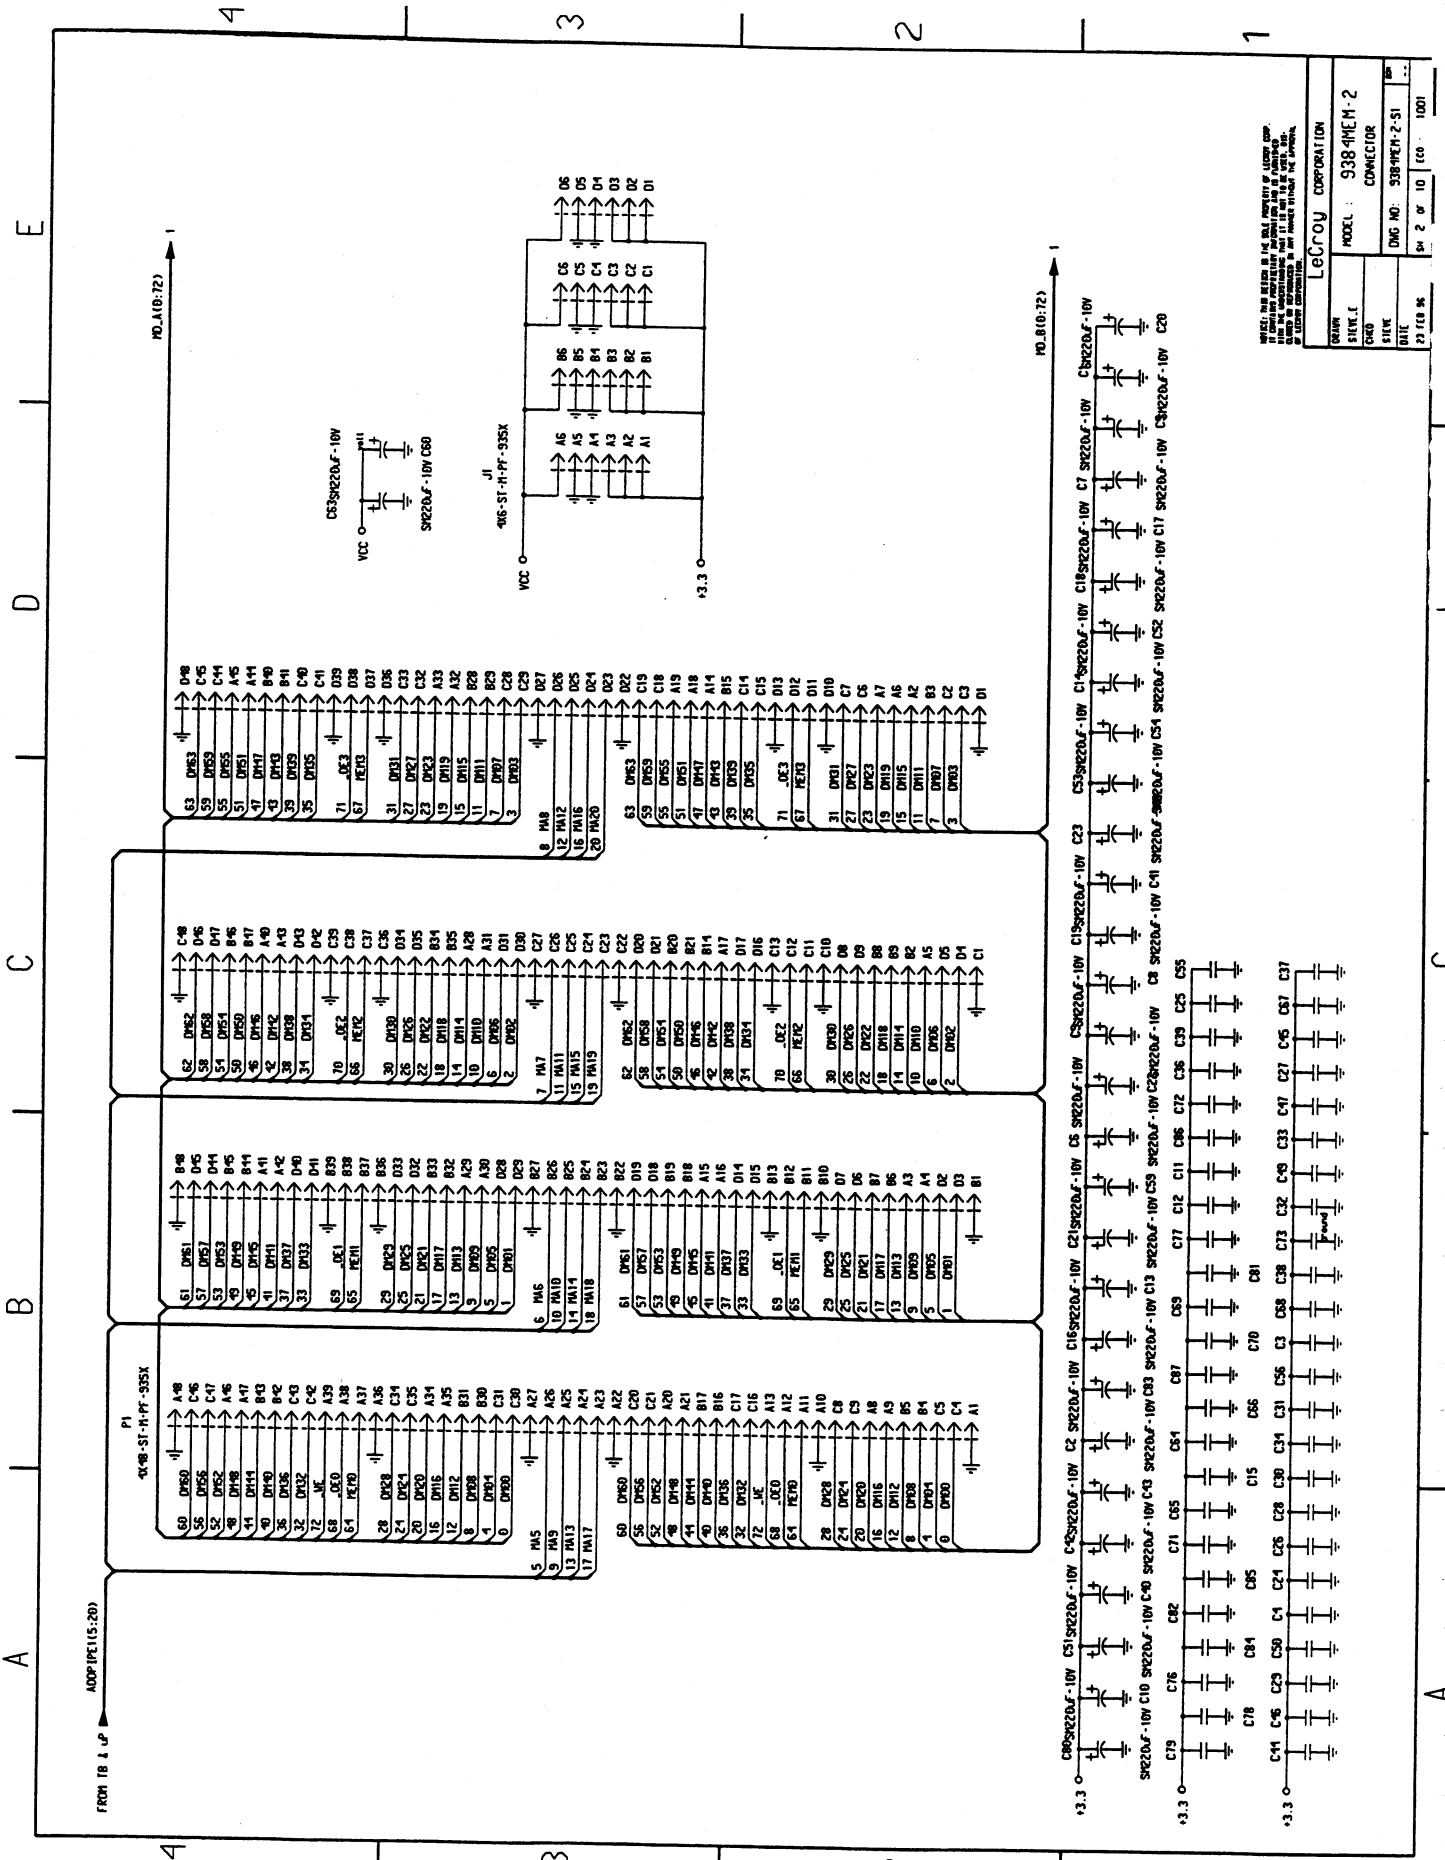

NOTES: THIS PART IS THE PROPERTY OF LECROU CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE DRAWING. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT PERMISSION IN WRITING FROM LECROU CORPORATION.

REV. 1
 DATE: 11/10/84
 DRAWN: J. L. HARRIS
 CHECKED: J. L. HARRIS
 MODEL: 938-4HEM-2
 CONECTOR
 DWG NO: 938-4HEM-2-S1
 SHEET NO: 1001

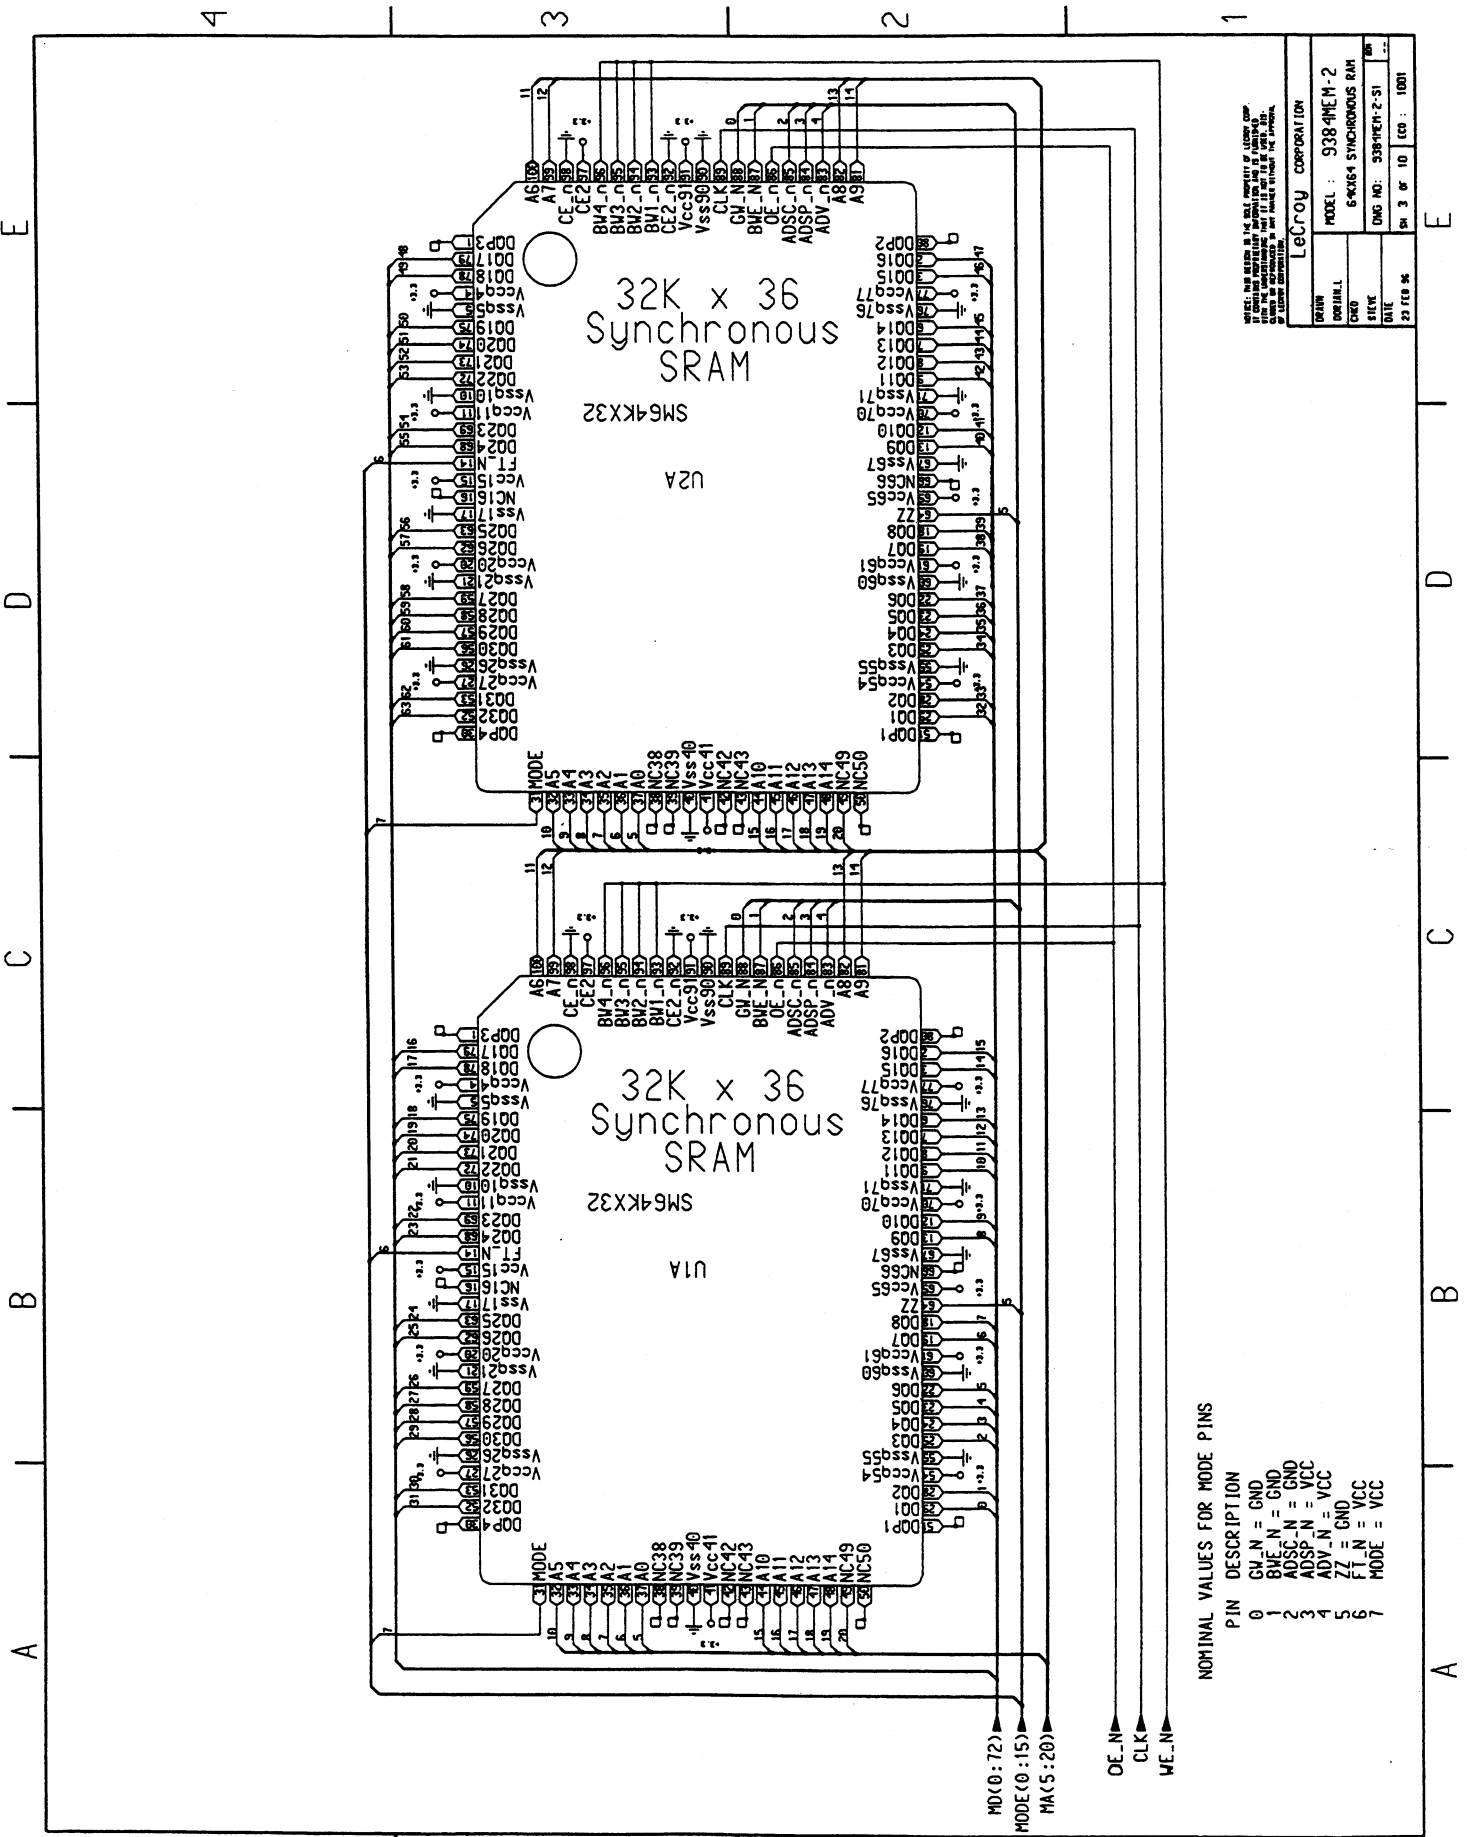


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GM.N = GND
1	BHE.N = GND
2	ADSC.N = GND
3	ADSP.N = VCC
4	ADV.N = VCC
5	ZZ = GND
6	FT.N = VCC
7	MODE = VCC

NOTE: THE DESIGN IS THE PROPERTY OF LECROU CORPORATION. THE INFORMATION IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.


LECROU CORPORATION	
MODEL :	938-4MEM-2
PARTIAL :	64KX36 SYNCHRONOUS RAM
DWG NO. :	938-4MEM-2-S1
DATE :	23 FEB 84
REV :	3 OF 10
ECO :	1001

Schematics, Layouts

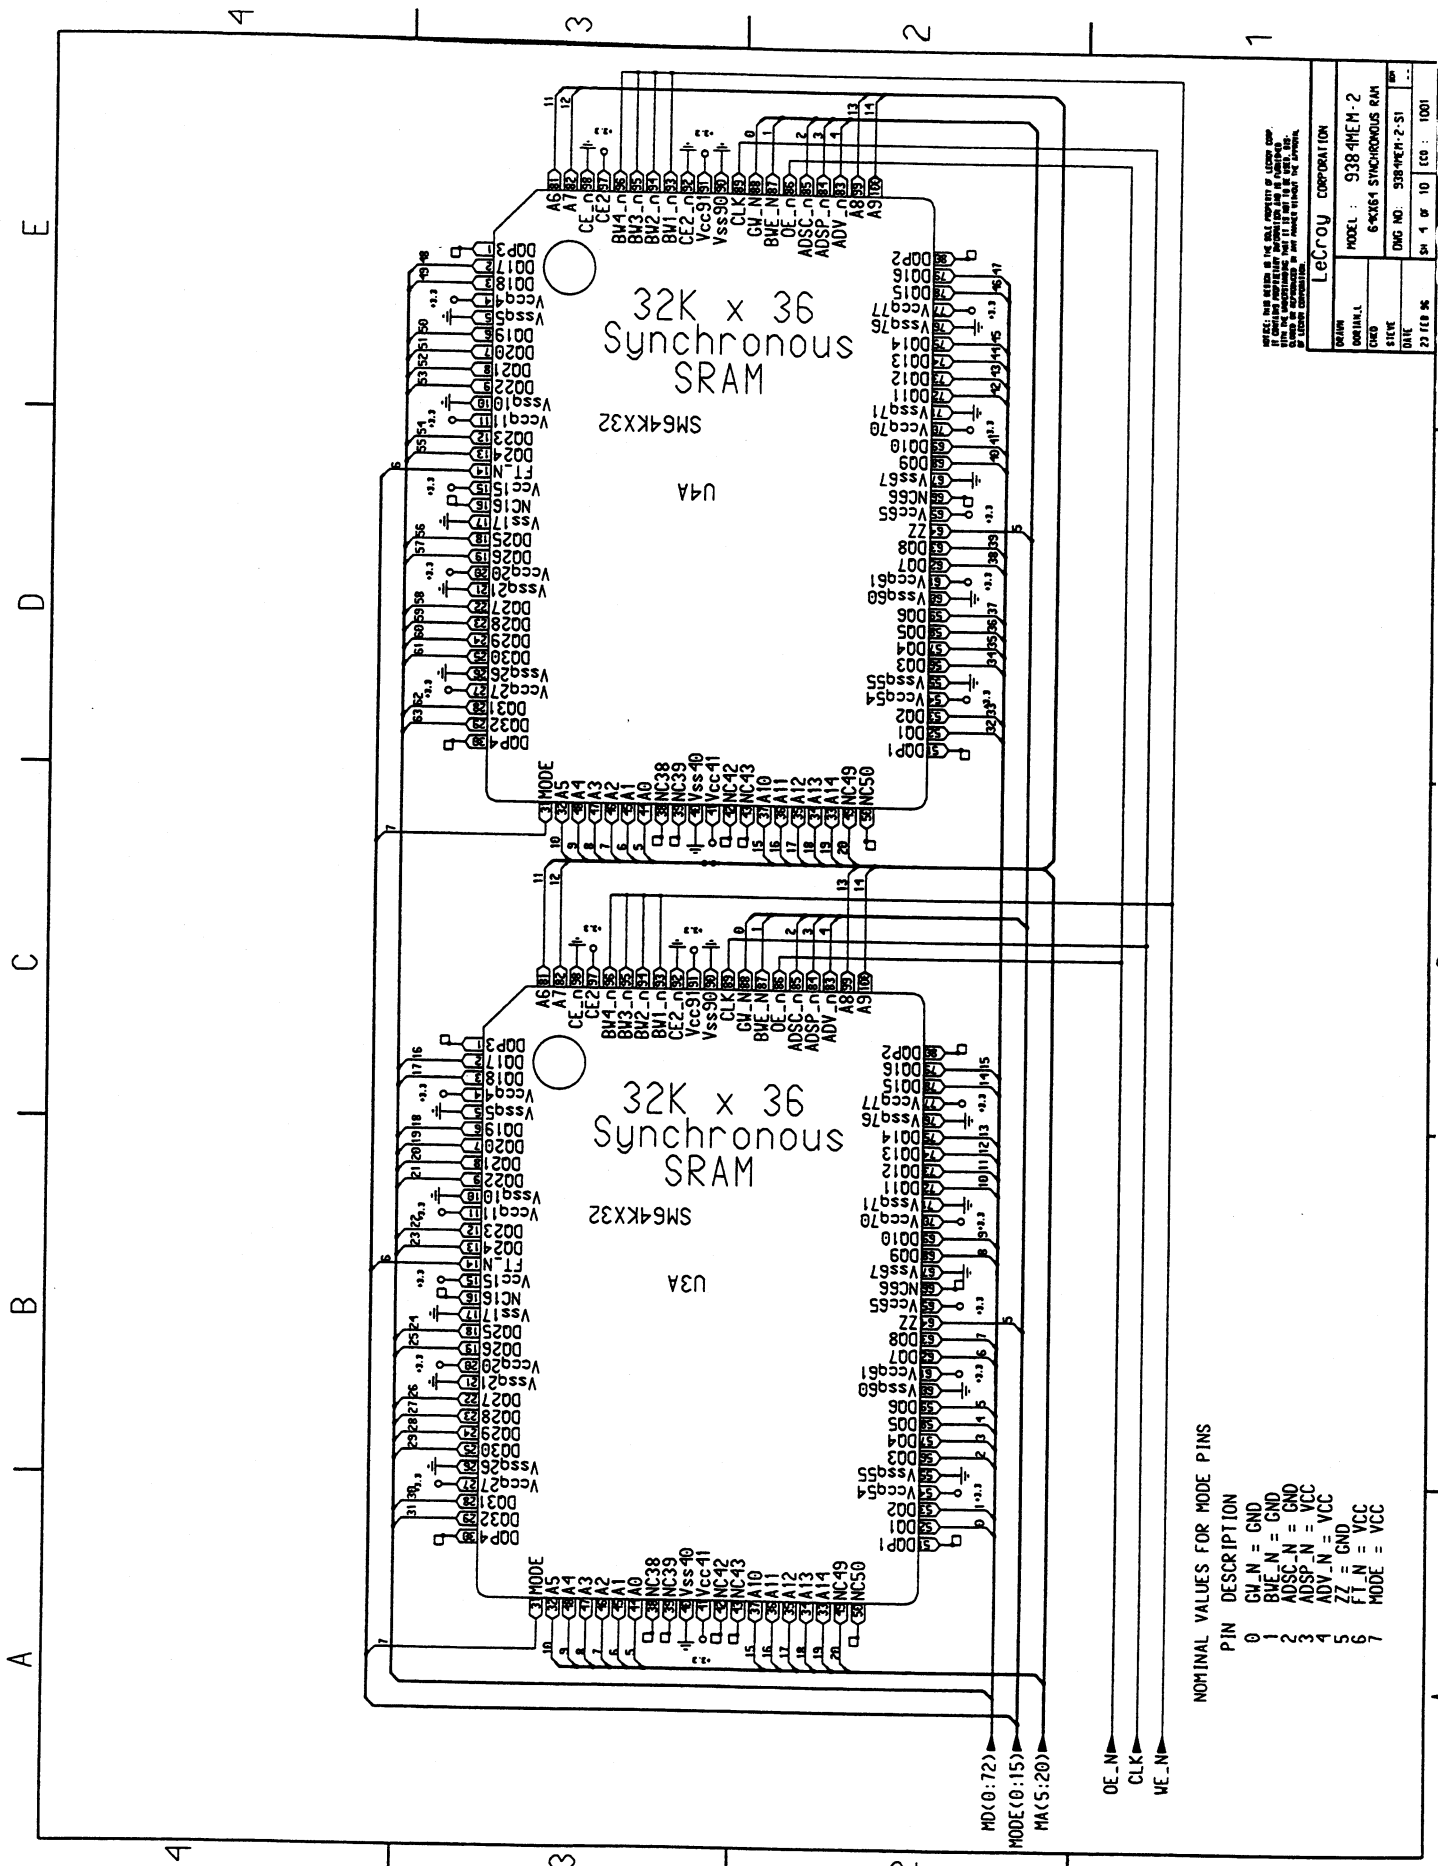

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP. IT IS THE PROPERTY OF LECROY CORP. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM LECROY CORPORATION.

LeCroy CORPORATION	
DATE	MODEL : 9384MEM-2
DRAWN BY	64KX36 SYNCHRONOUS RAM
CHKD	ENG NO. 598-MEM-2-S1
ETEC	SN 1 OF 100
DATE	23 FEB 96
ECO	001

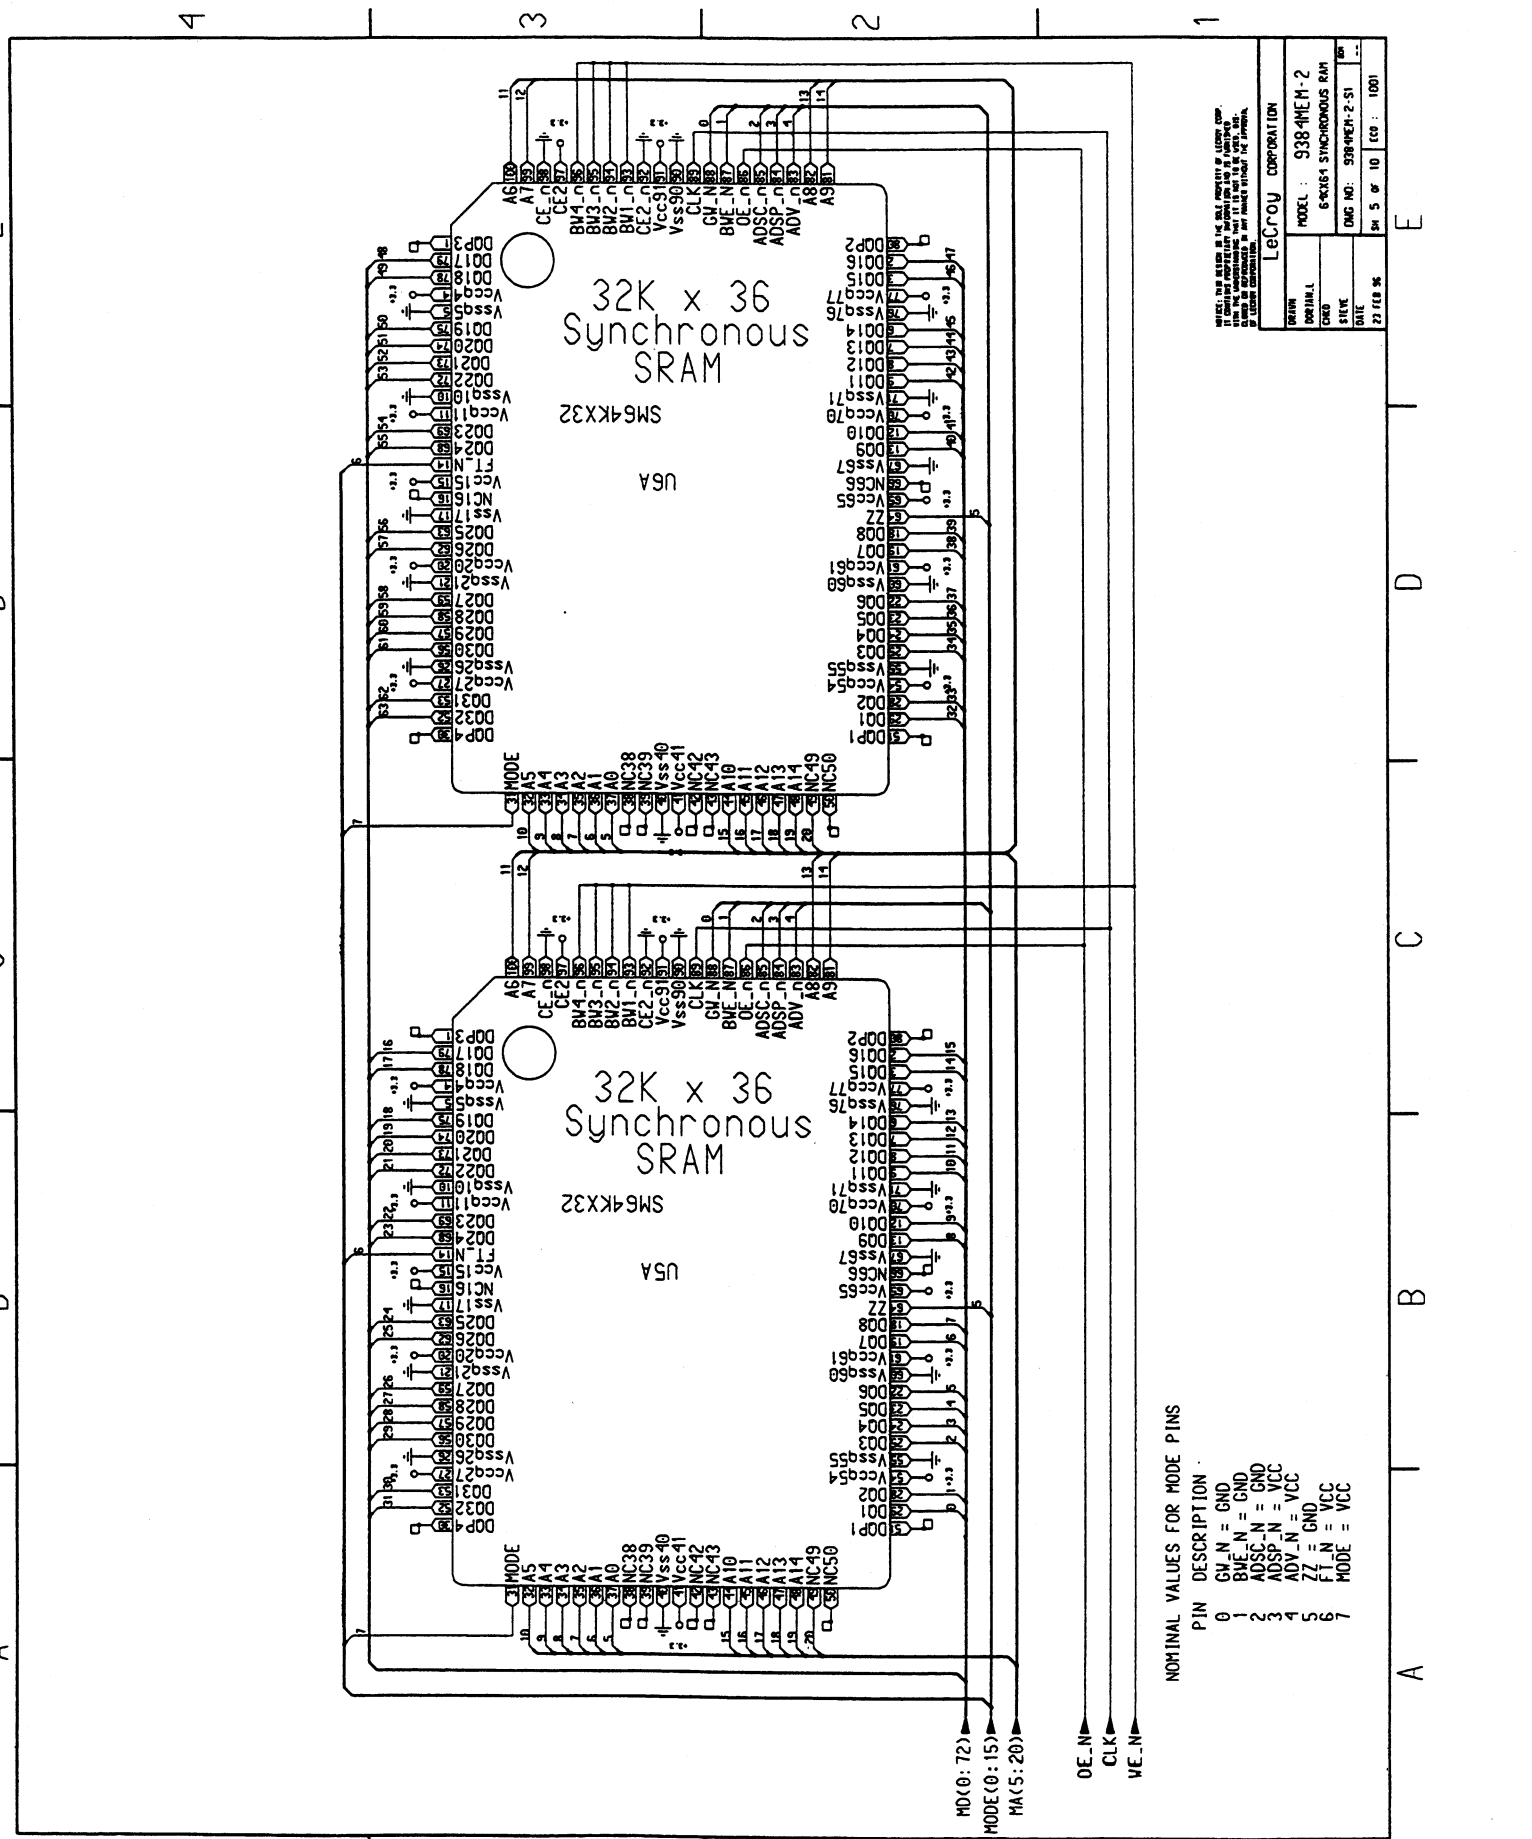


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GN_N = GND
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = VCC
4	ADV_N = VCC
5	ZZ = GND
6	MODE = VCC

WEIGHT THIS MODEL IN THE SAME MANNER AS A LAYOUT COPY. THIS MODEL IS NOT TO BE USED FOR FABRICATION. THE MODEL IS FOR DESIGN AND DOCUMENTATION PURPOSES ONLY.

LeCroy CORPORATION	
MODEL:	9384M-H-2
DATE:	6-8-84
REV:	2-51
DATE:	5-10
REV:	1001

Schematics, Layouts

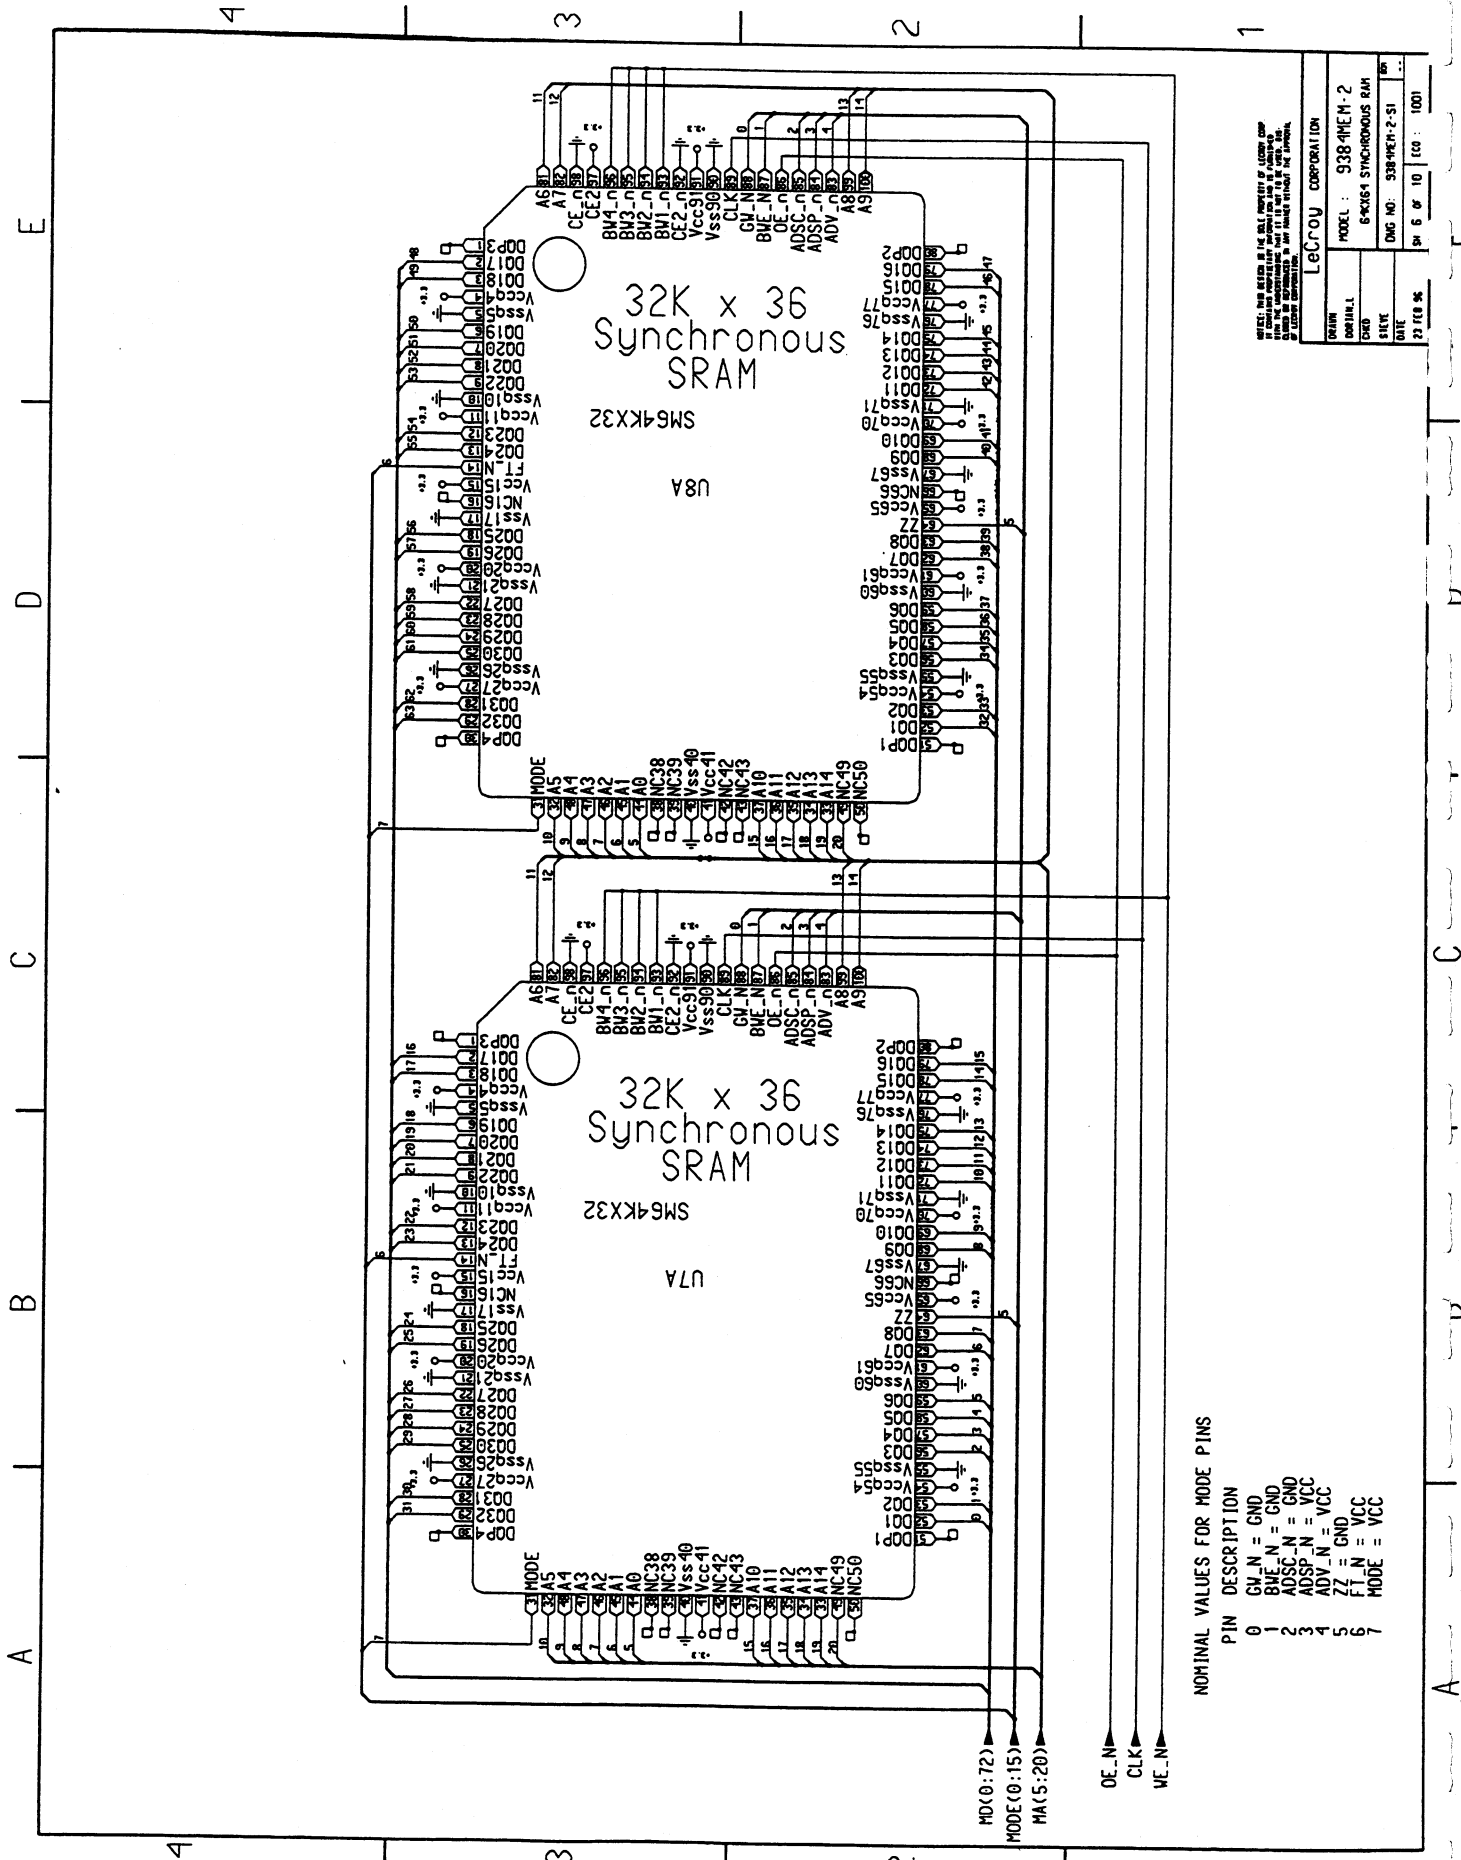


NOTES: THIS DEVICE IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY IN THE MANNER AND FOR THE PURPOSES SPECIFIED IN THE DATA SHEET. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF LECROY CORPORATION.

LeCroy CORPORATION
MODEL: 938-MEM-2
6-KX36 SYNCHRONOUS RAM
DWG NO: 938-MEM-2-S1
DATE: 22 FEB 96
REV: 6 OF 10
ECO: 1001

NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GV_N = GND
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = VCC
4	ADV_N = VCC
5	ZZ = GND
6	FTLN = VCC
7	MODE = VCC

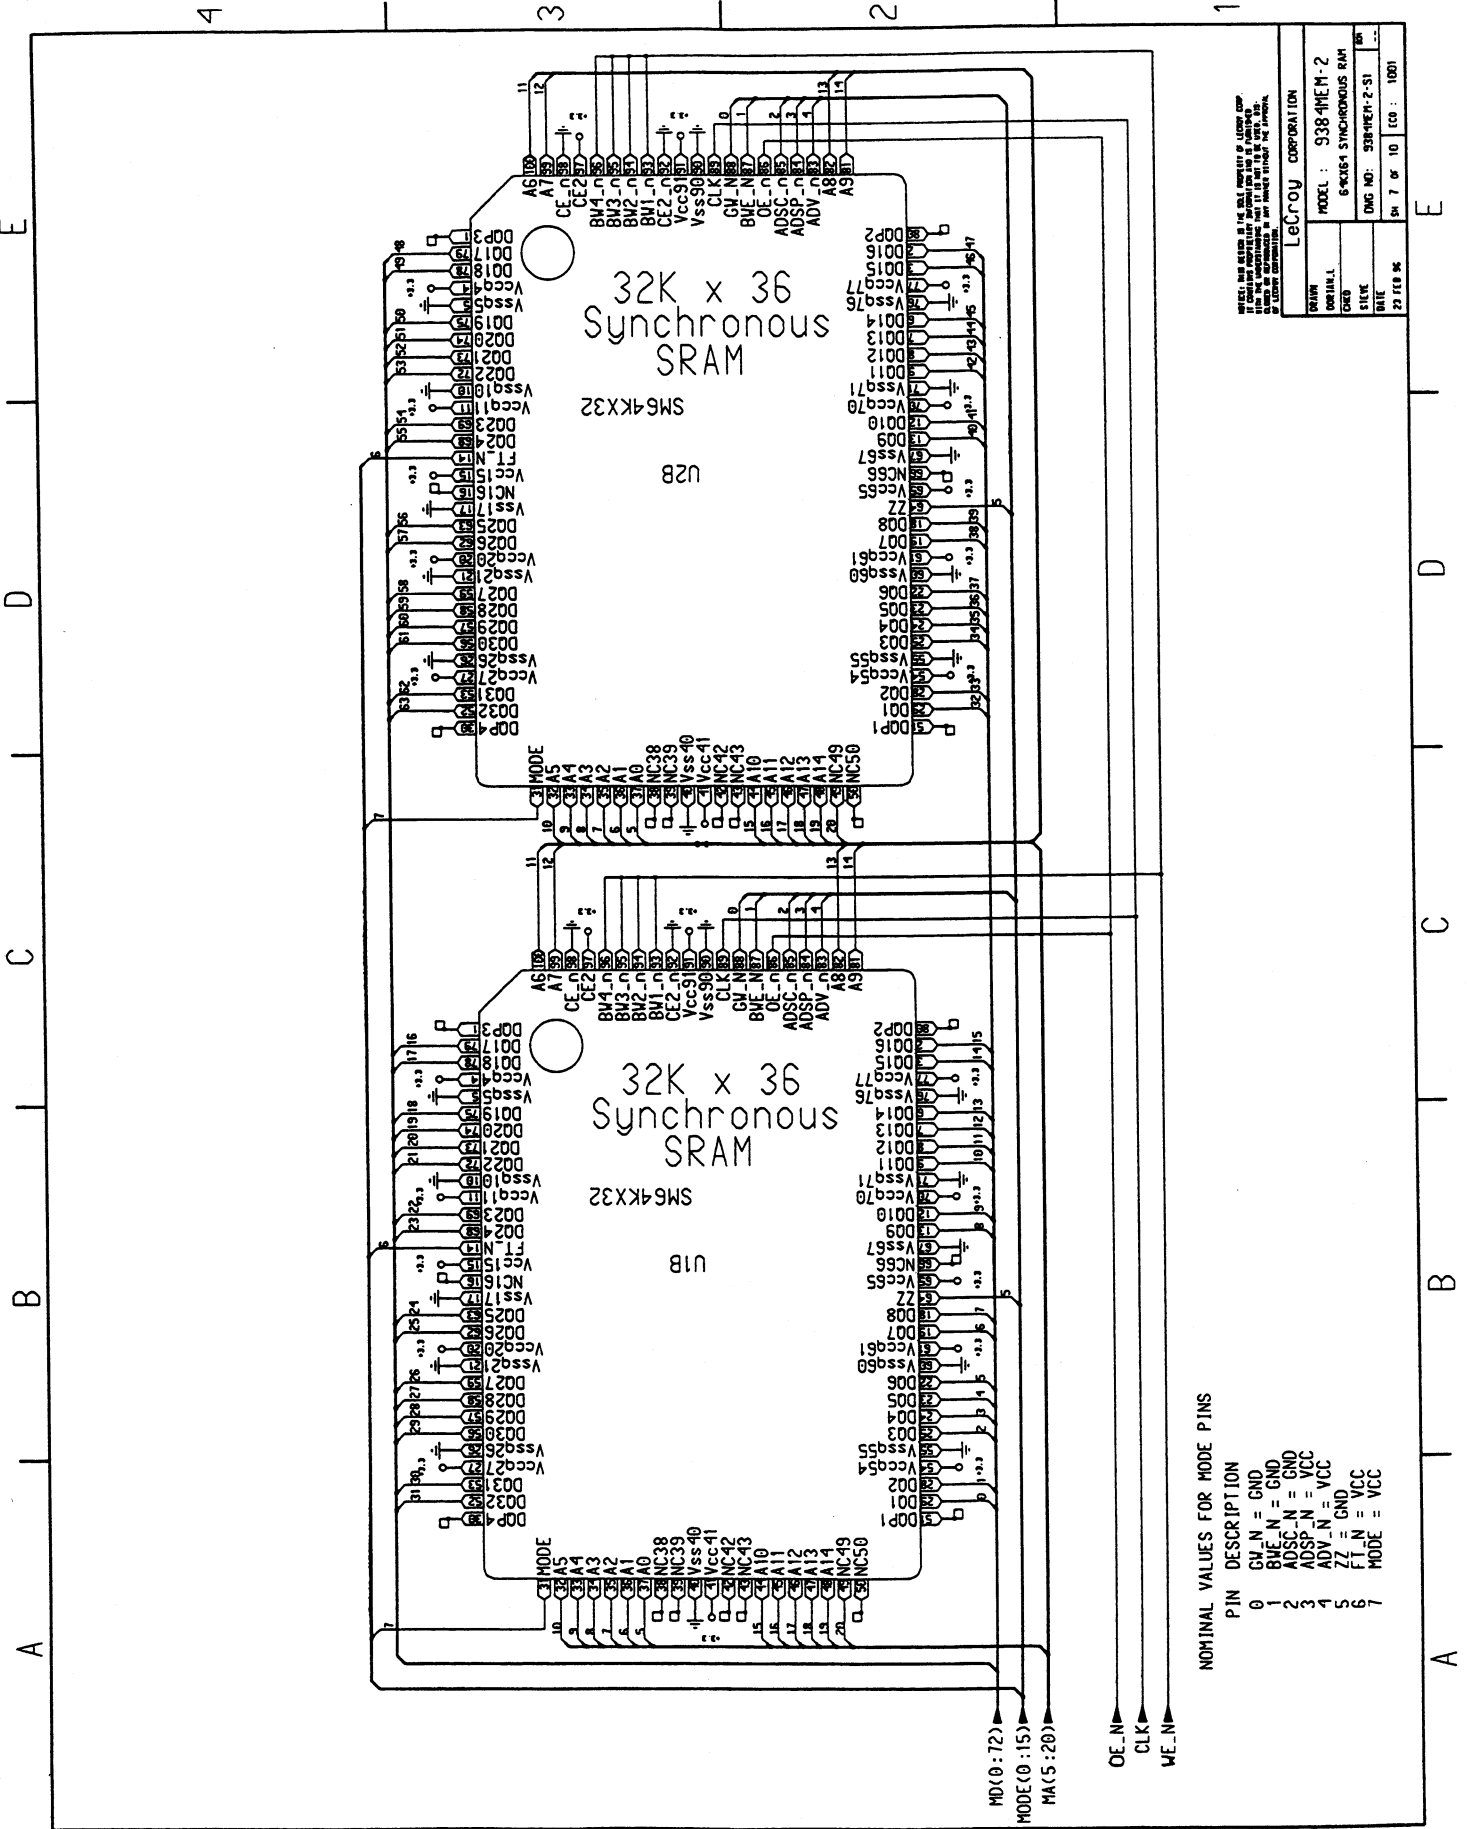


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GM_N = GND
1	BUE_N = GND
2	ADSC_N = GND
3	ADSP_N = VCC
4	ADV_N = VCC
5	ZZ = GND
6	FT_N = VCC
7	MODE = VCC

WEISS, AND OTHERS IN THE SOLE POSSESSION OF LUCAS CORP.
IT IS HEREBY CERTIFIED THAT THE INFORMATION CONTAINED
HEREIN IS TRUE AND CORRECT TO THE BEST OF OUR KNOWLEDGE
AND BELIEF AND IS NOT SUBJECT TO PATENT PROTECTION.

Lectro Corporation	
MODEL :	9384MEM-2
DATE :	6-19-81
REV :	2-51
DATE :	23 FEB 86
SH 7 OF 10	ECO : 1001

Schematics, Layouts

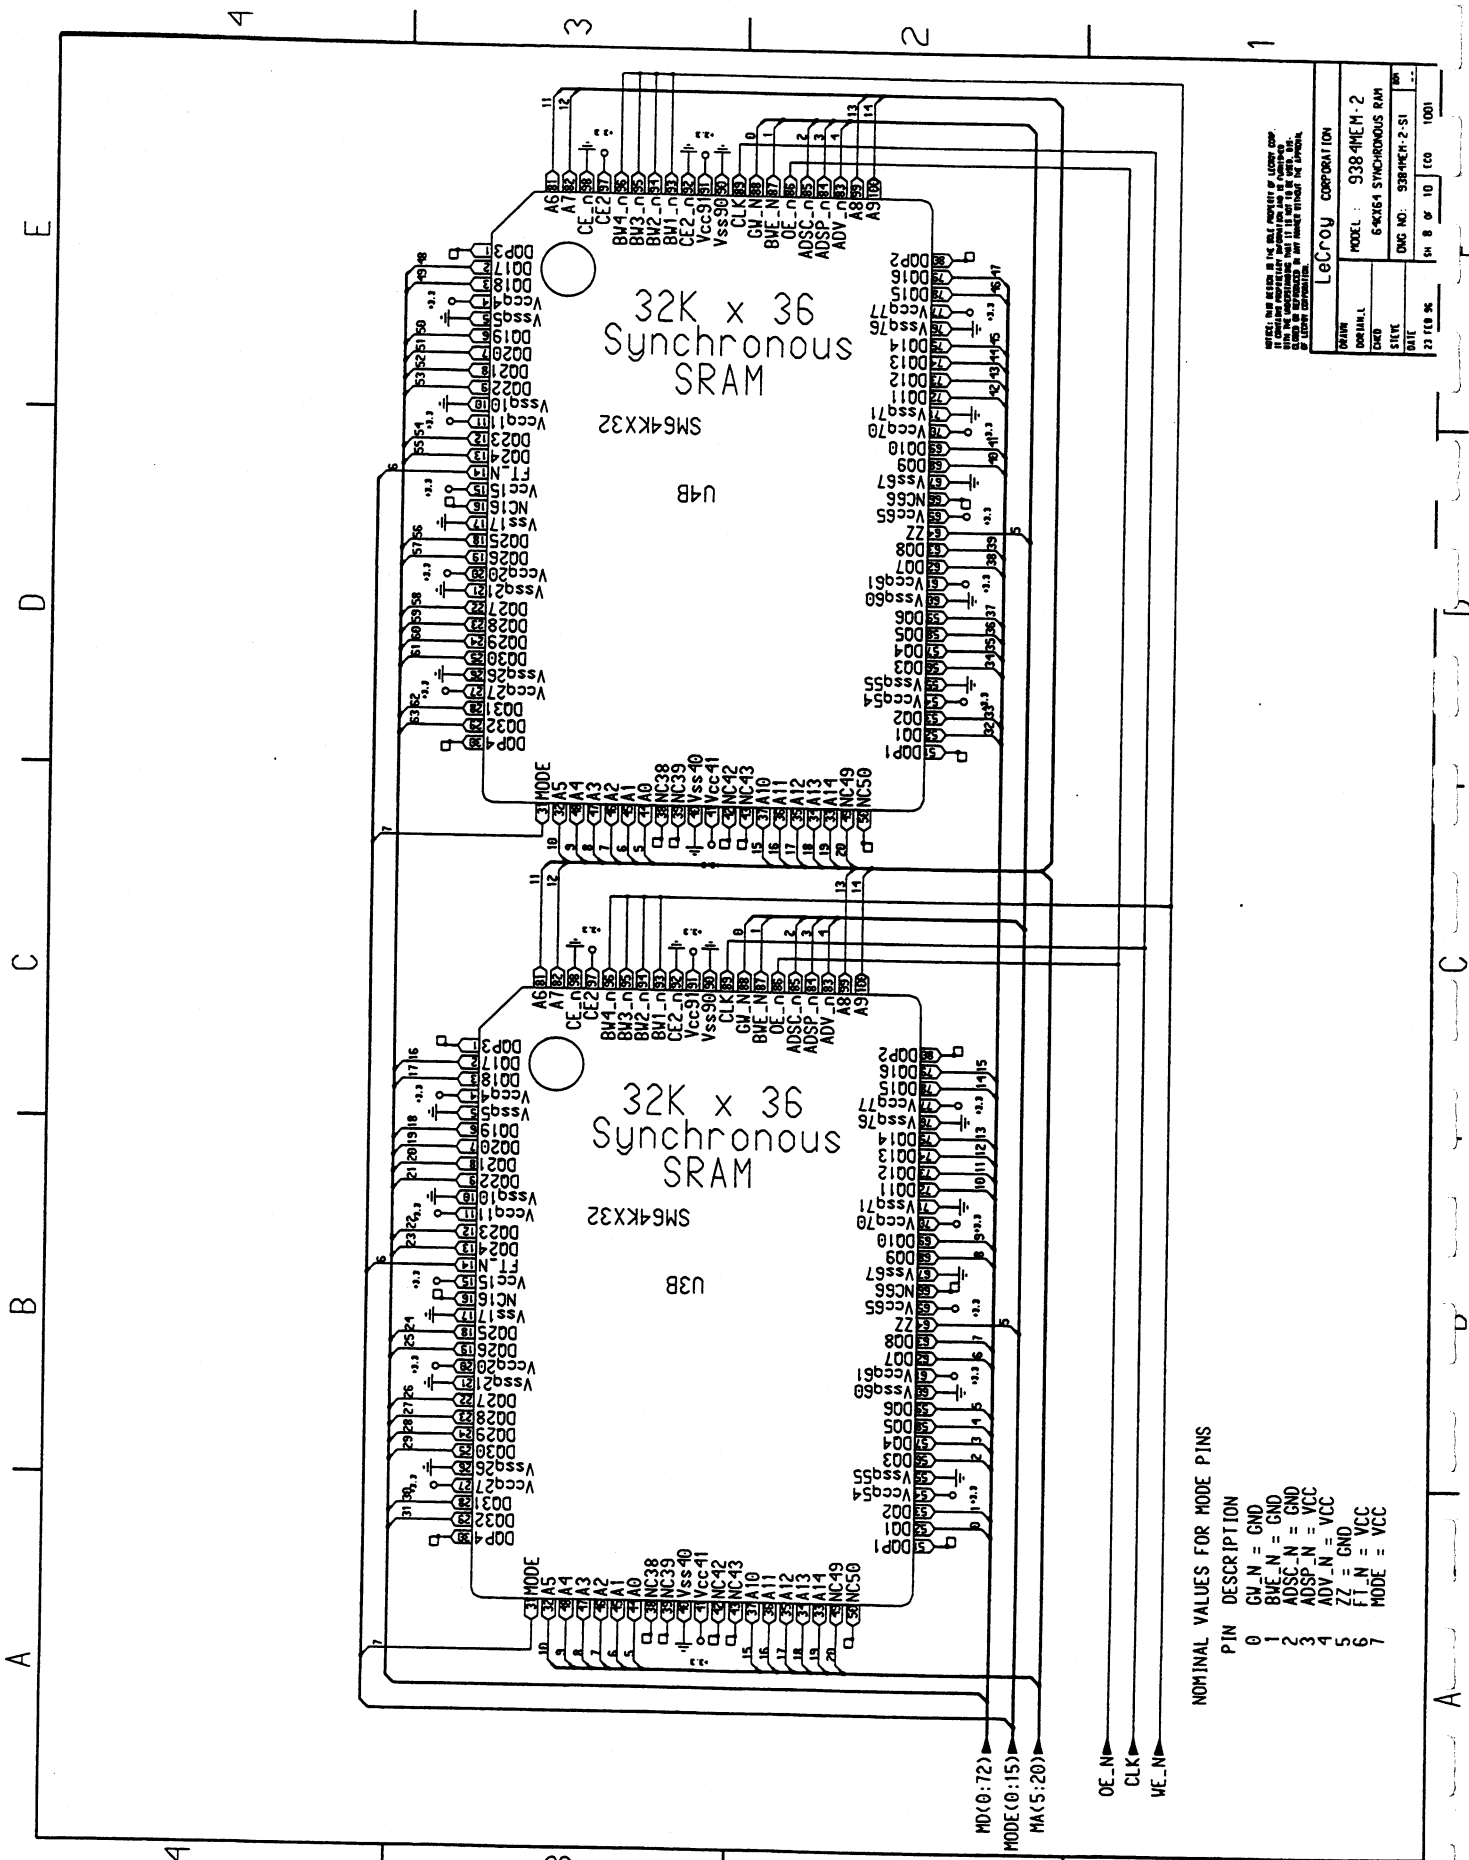


NOMINAL VALUES FOR MODE PINS

PIN	DESCRIPTION
0	GN_N = GND
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = VCC
4	ADV_N = VCC
5	FT_N = GND
6	FT_N = VCC
7	MODE = VCC

THESE PARTS ARE IN THE PUBLIC DOMAIN OF LEADERSHIP. IT IS THE POLICY OF LEADERSHIP TO MAKE THESE PARTS AVAILABLE TO ALL. LEADERSHIP WILL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THESE PARTS. LEADERSHIP WILL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THESE PARTS. LEADERSHIP WILL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THESE PARTS.

LeCroy CORPORATION
 MODEL: 9384MEM-2
 6-KC164 SYNCHRONOUS RAM
 DNG NO: 9384MEM-2-S1
 JAN 8 OF 10 COO 1001
 21 FEB 94

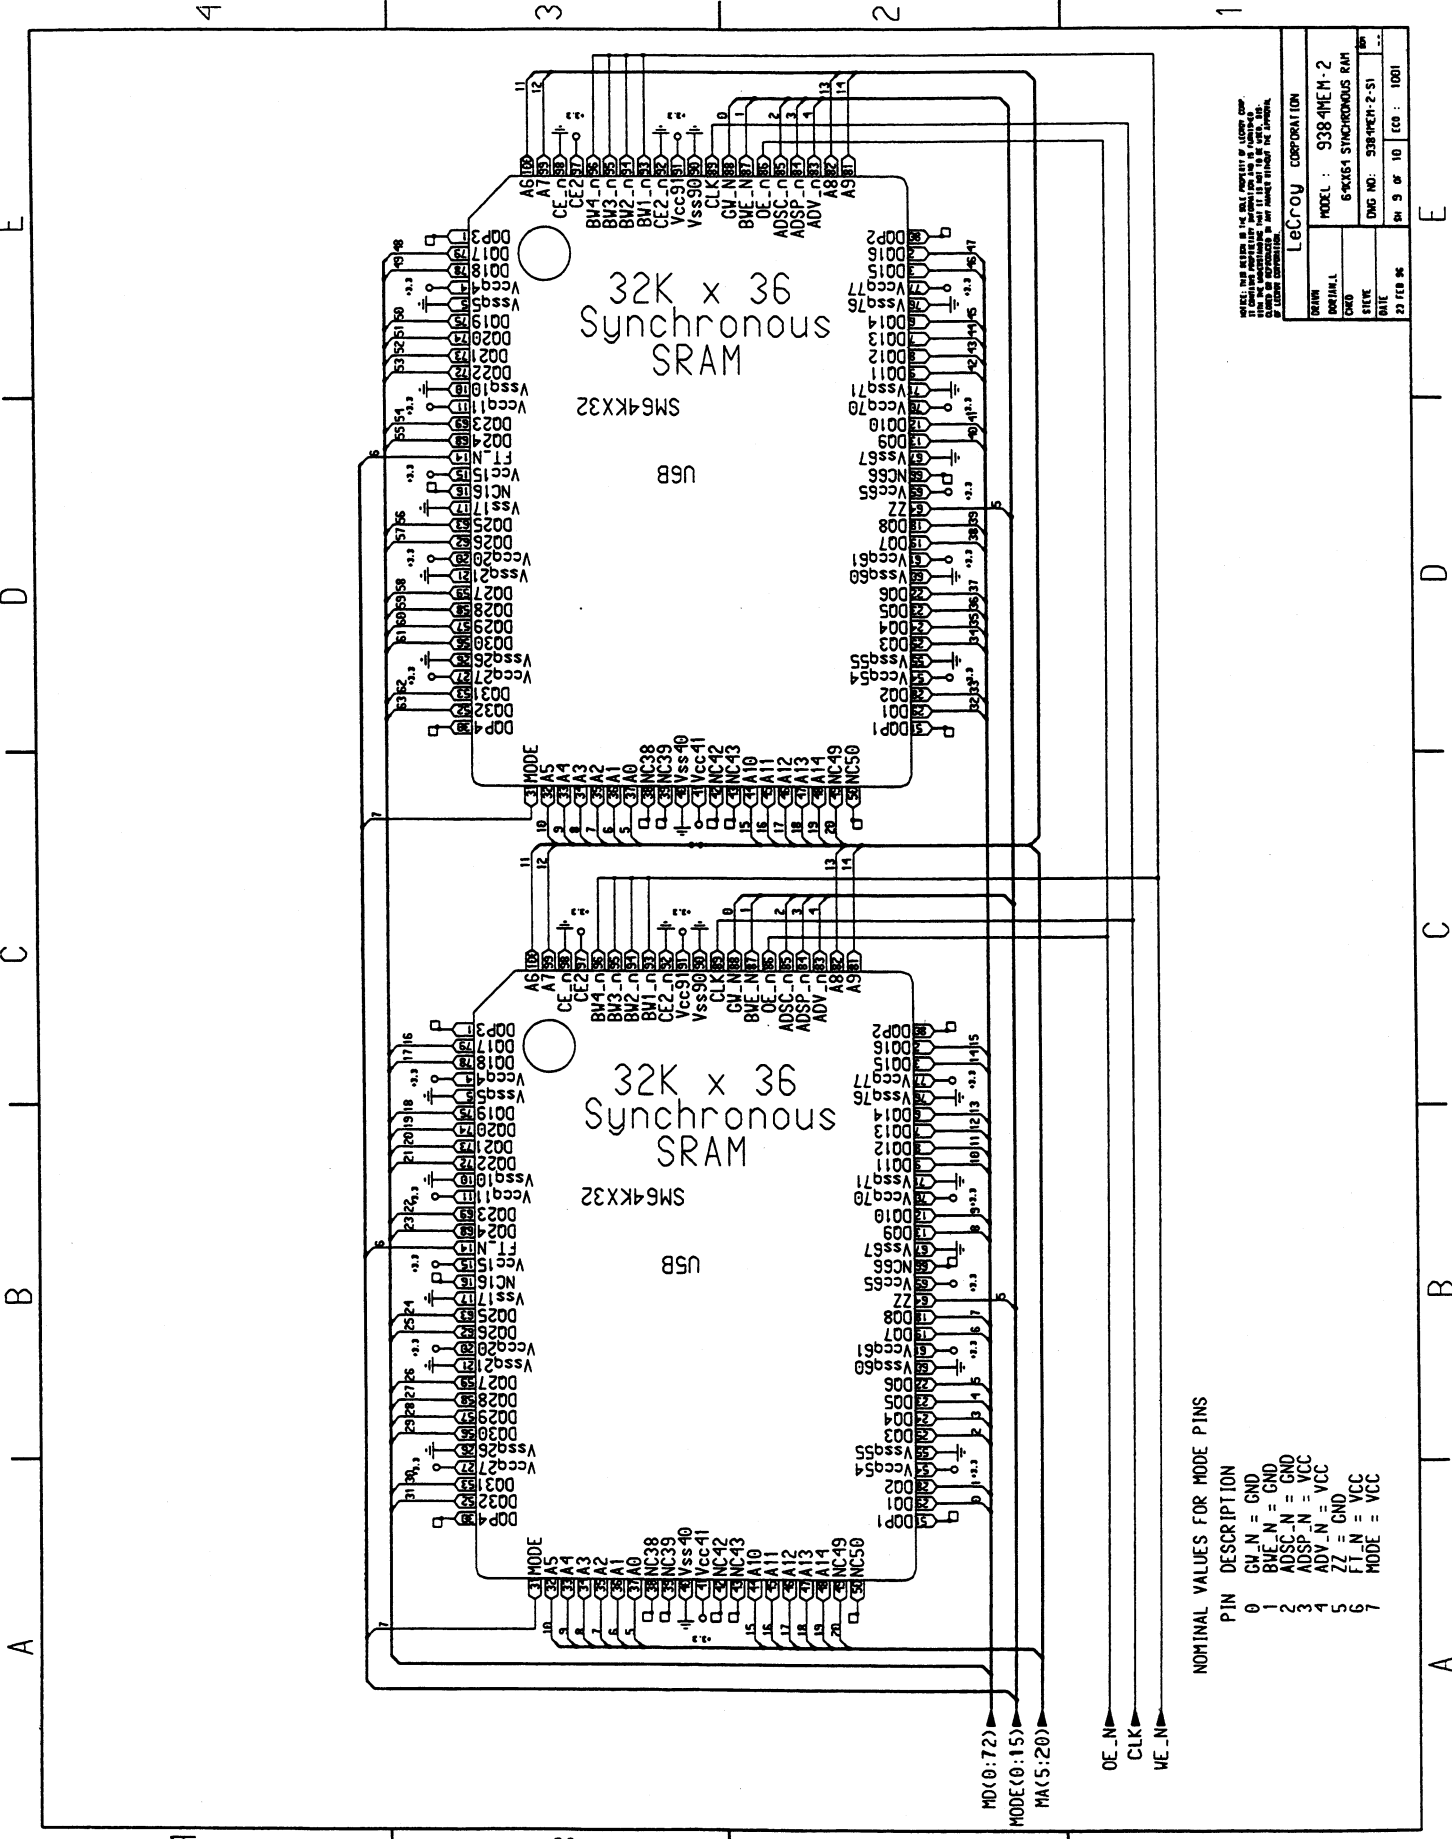

NOMINAL VALUES FOR MODE PINS


PIN	DESCRIPTION
0	GV_N = GND
1	BVE_N = GND
3	ADSC_N = GND
4	ADSP_N = VCC
5	ADV_N = VCC
6	ZZ = GND
7	MODE = VCC

THIS IC HAS BEEN DESIGNED BY THE ONLY MANUFACTURER OF LOGIC COMP. TO OBTAIN THE MOST RELIABLE AND ROBUST IC'S AVAILABLE. THE QUALITY OF THE IC'S IS GUARANTEED BY THE MANUFACTURER'S QUALITY CONTROL PROGRAM. THE QUALITY OF THE IC'S IS NOT GUARANTEED BY THE USER'S QUALITY CONTROL PROGRAM.

LeCroy CORPORATION

MODEL :	938-4HEM-2
PARTIAL :	6"X161 SYNCHRONOUS RAM
DATE :	23 FEB 86
REV :	9 OF 10
ECO :	1001

Schematics, Layouts

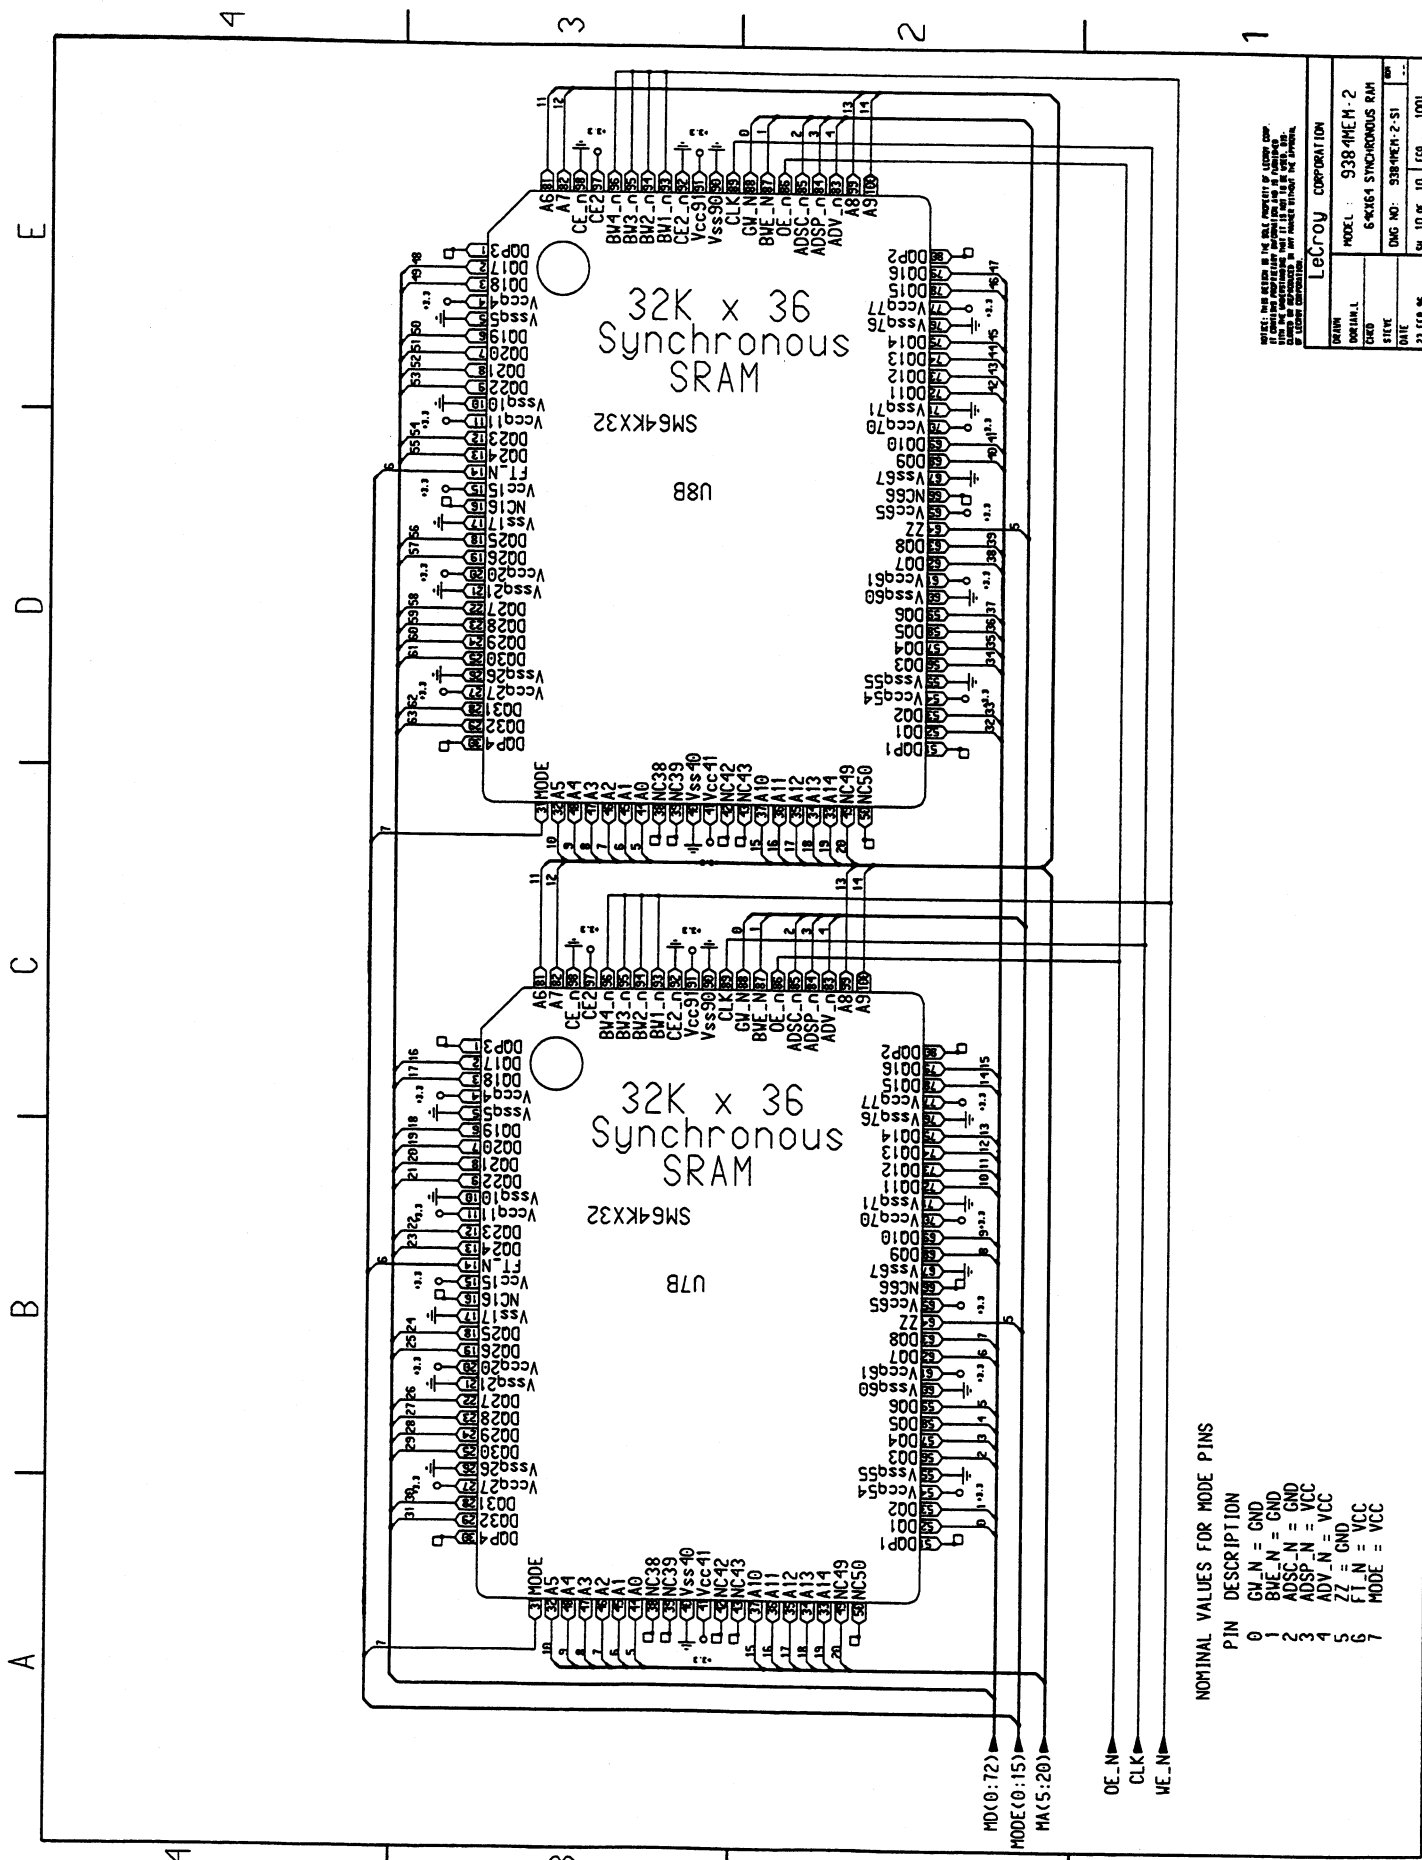

NOMINAL VALUES FOR MODE PINS


PIN	DESCRIPTION
0	GV_N = GND
1	BVE_N = GND
2	ADSC_N = GND
3	ADSP_N = VCC
4	ADV_N = VCC
5	ZZ = GND
6	FI_N = VCC
7	MODE = VCC

NOTICE: This drawing is the property of LeCroy Corporation. It contains information that is confidential to LeCroy Corporation. It is to be used only for the purposes intended by LeCroy Corporation.

LeCroy CORPORATION


REV#	MODEL	938-4HEM-2
ORIG#	64KX36 SYNCHRONOUS RAM	
DATE	DWG NO.	338-4HEM-2-S1
12 FEB 86	FW 10 OF 10	1001

9384MEM-2 Rev B Side 1

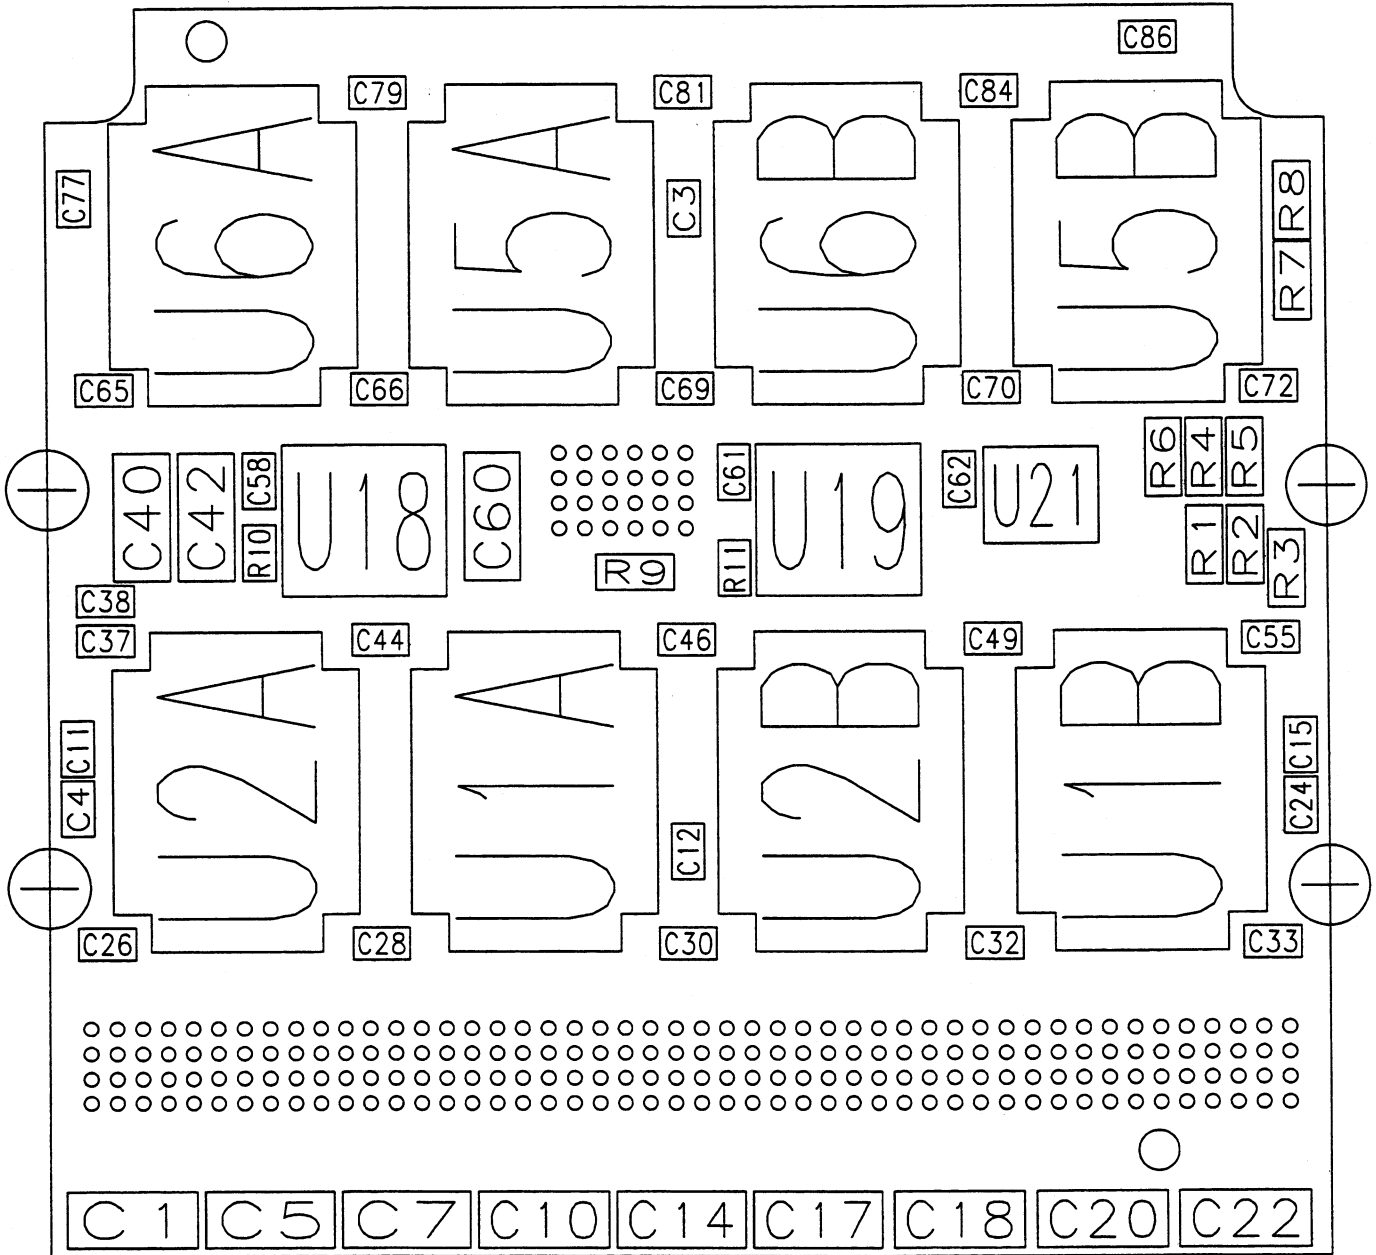


Schematics, Layouts

9384MEM-2 Rev B Side 1

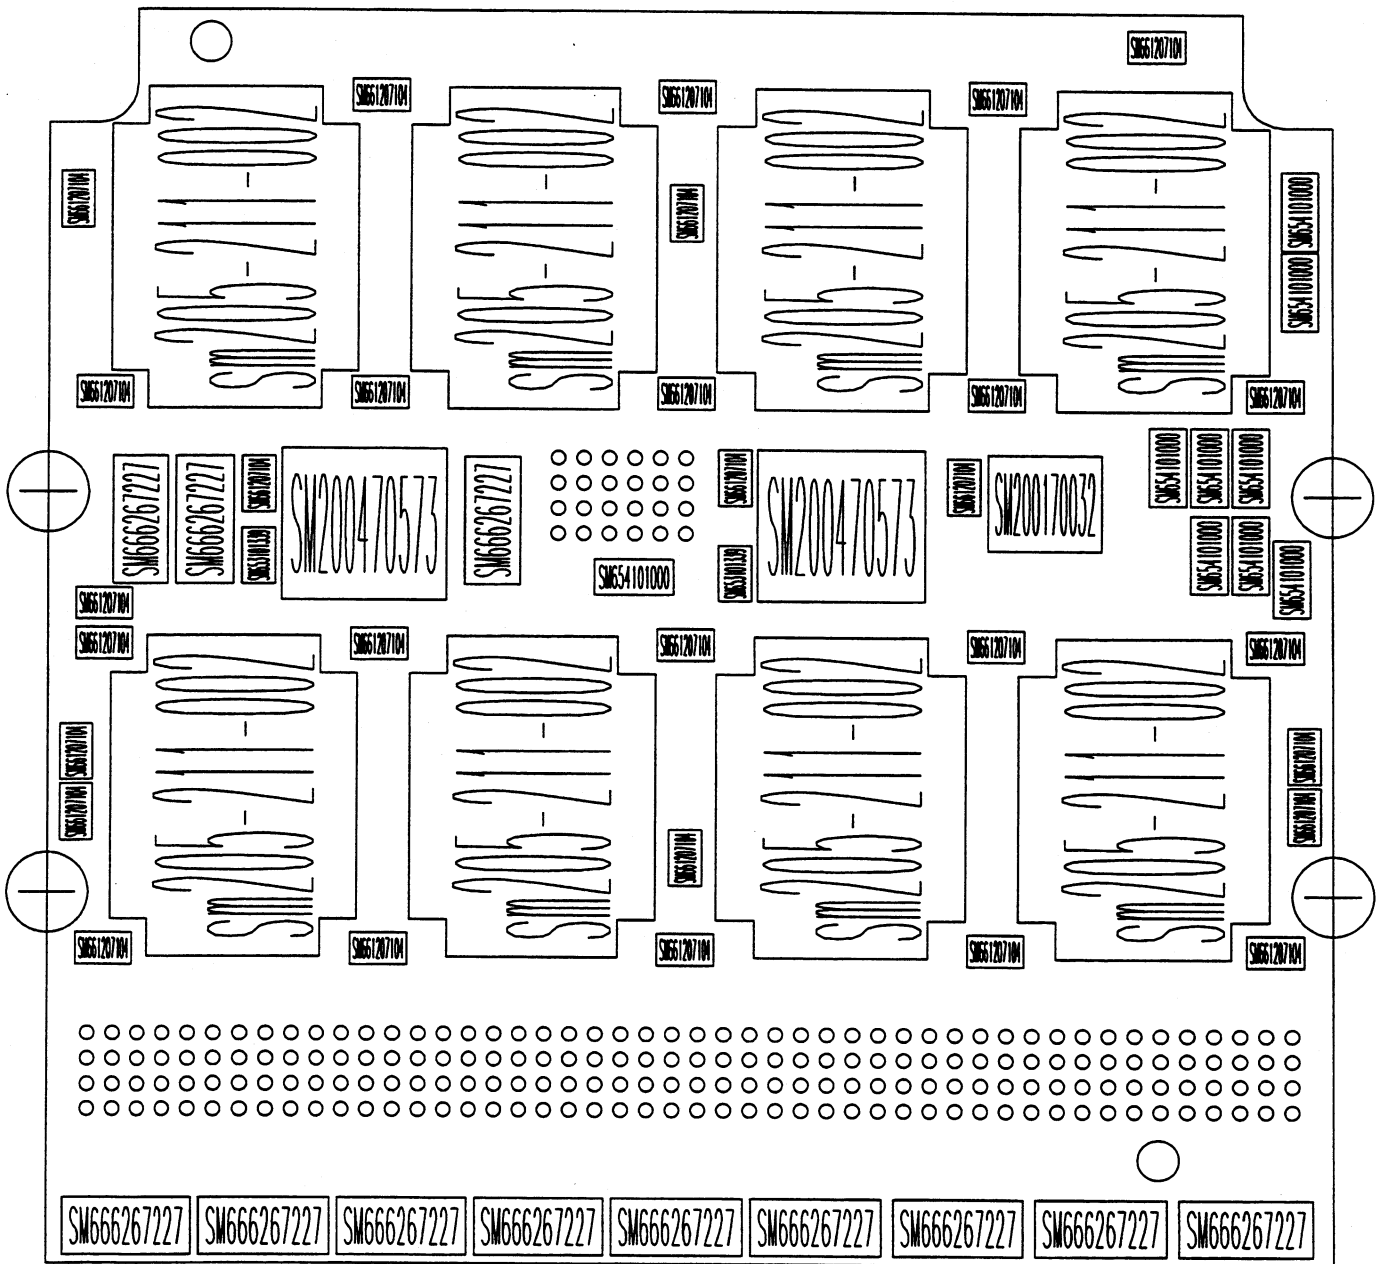


9384MEM-2 Rev B Side 1

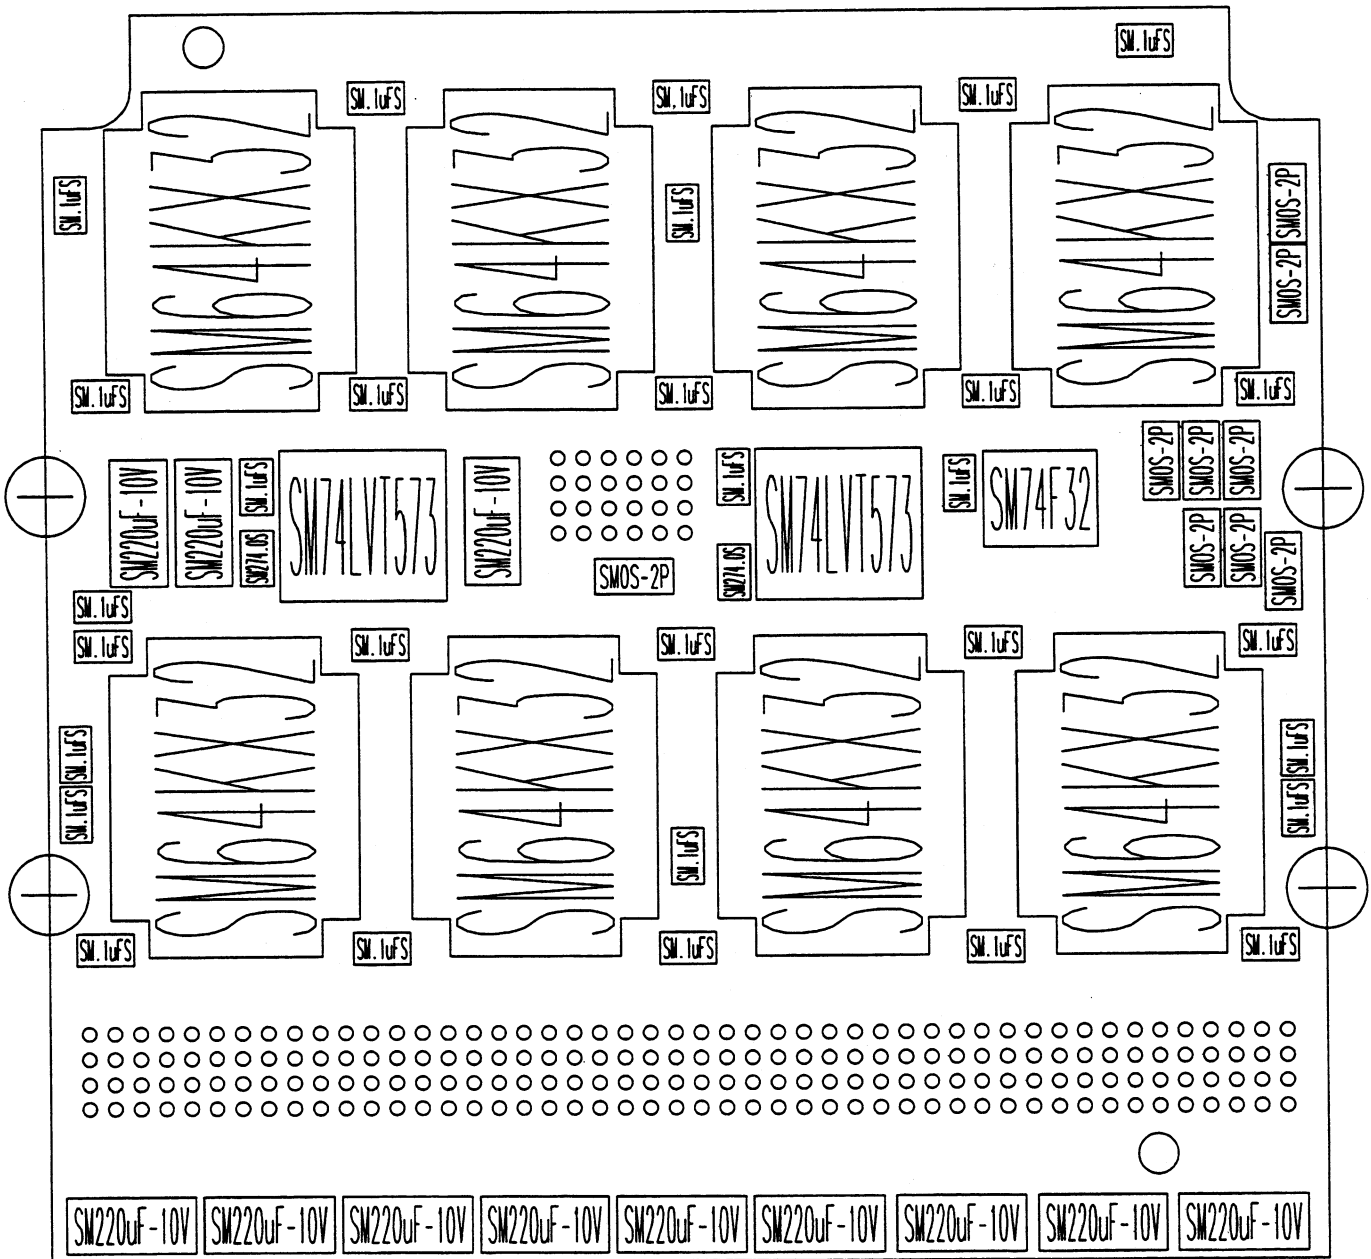


Schematics, Layouts

9384MEM-2 Rev B Side 2

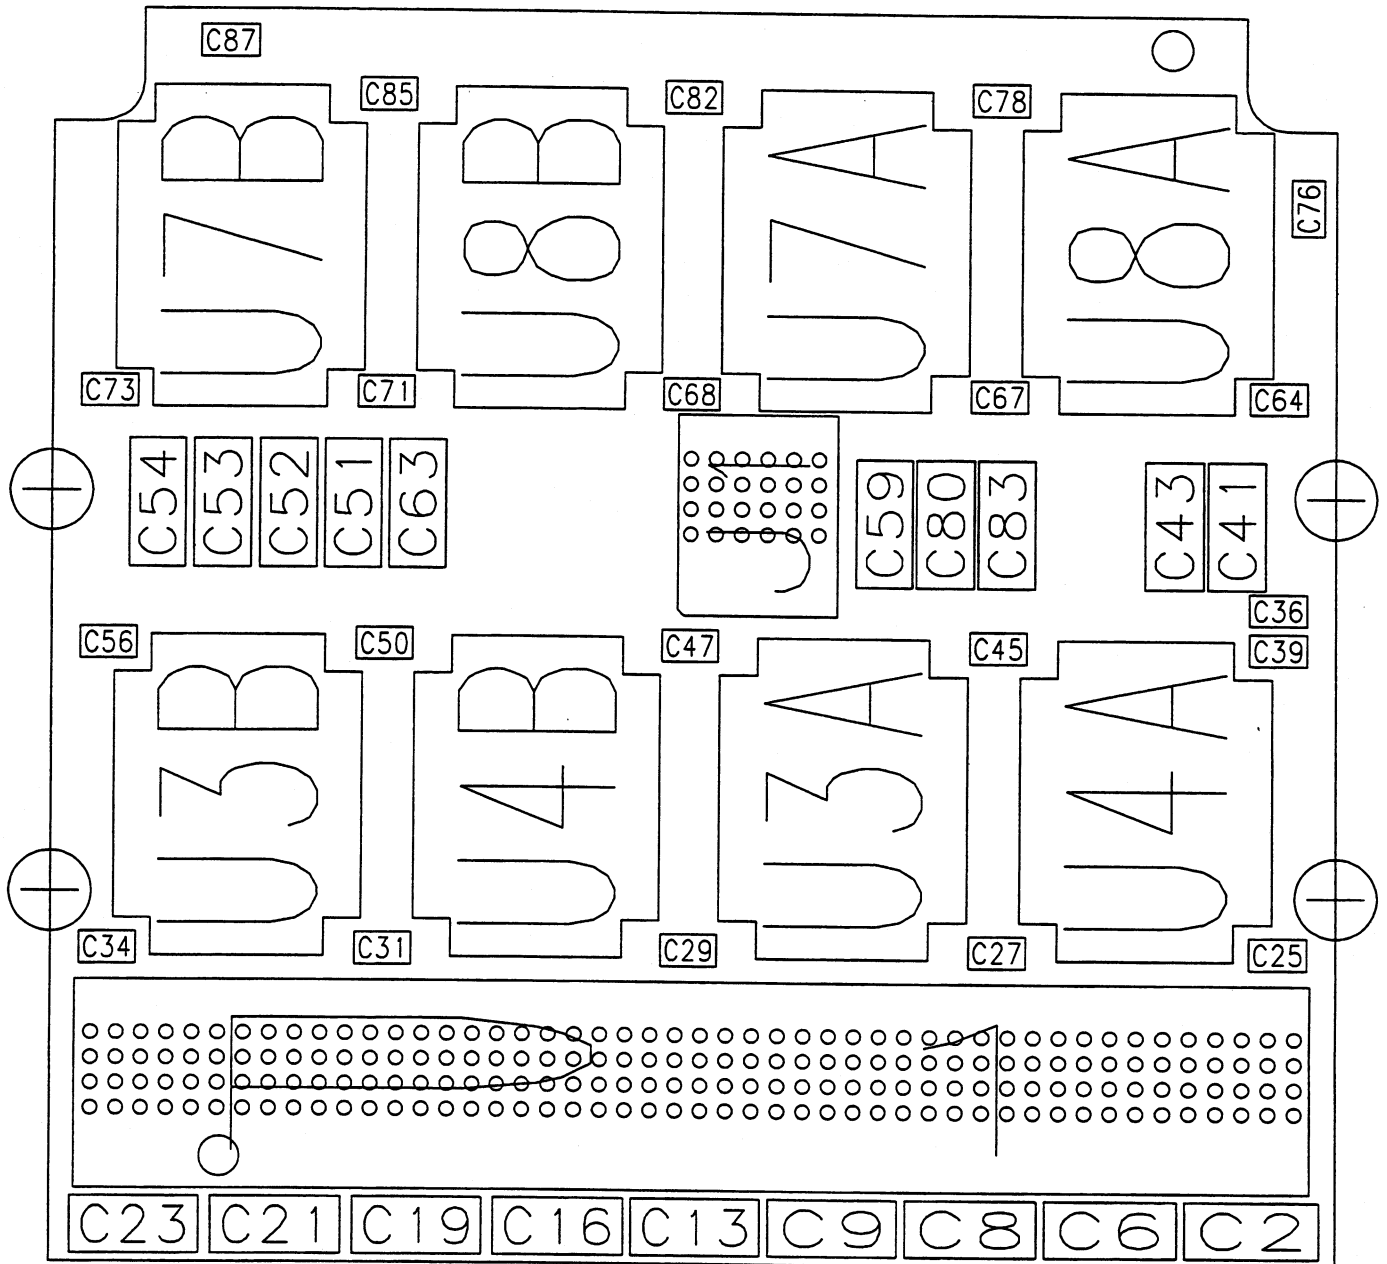


9384MEM-2 Rev B Side 2

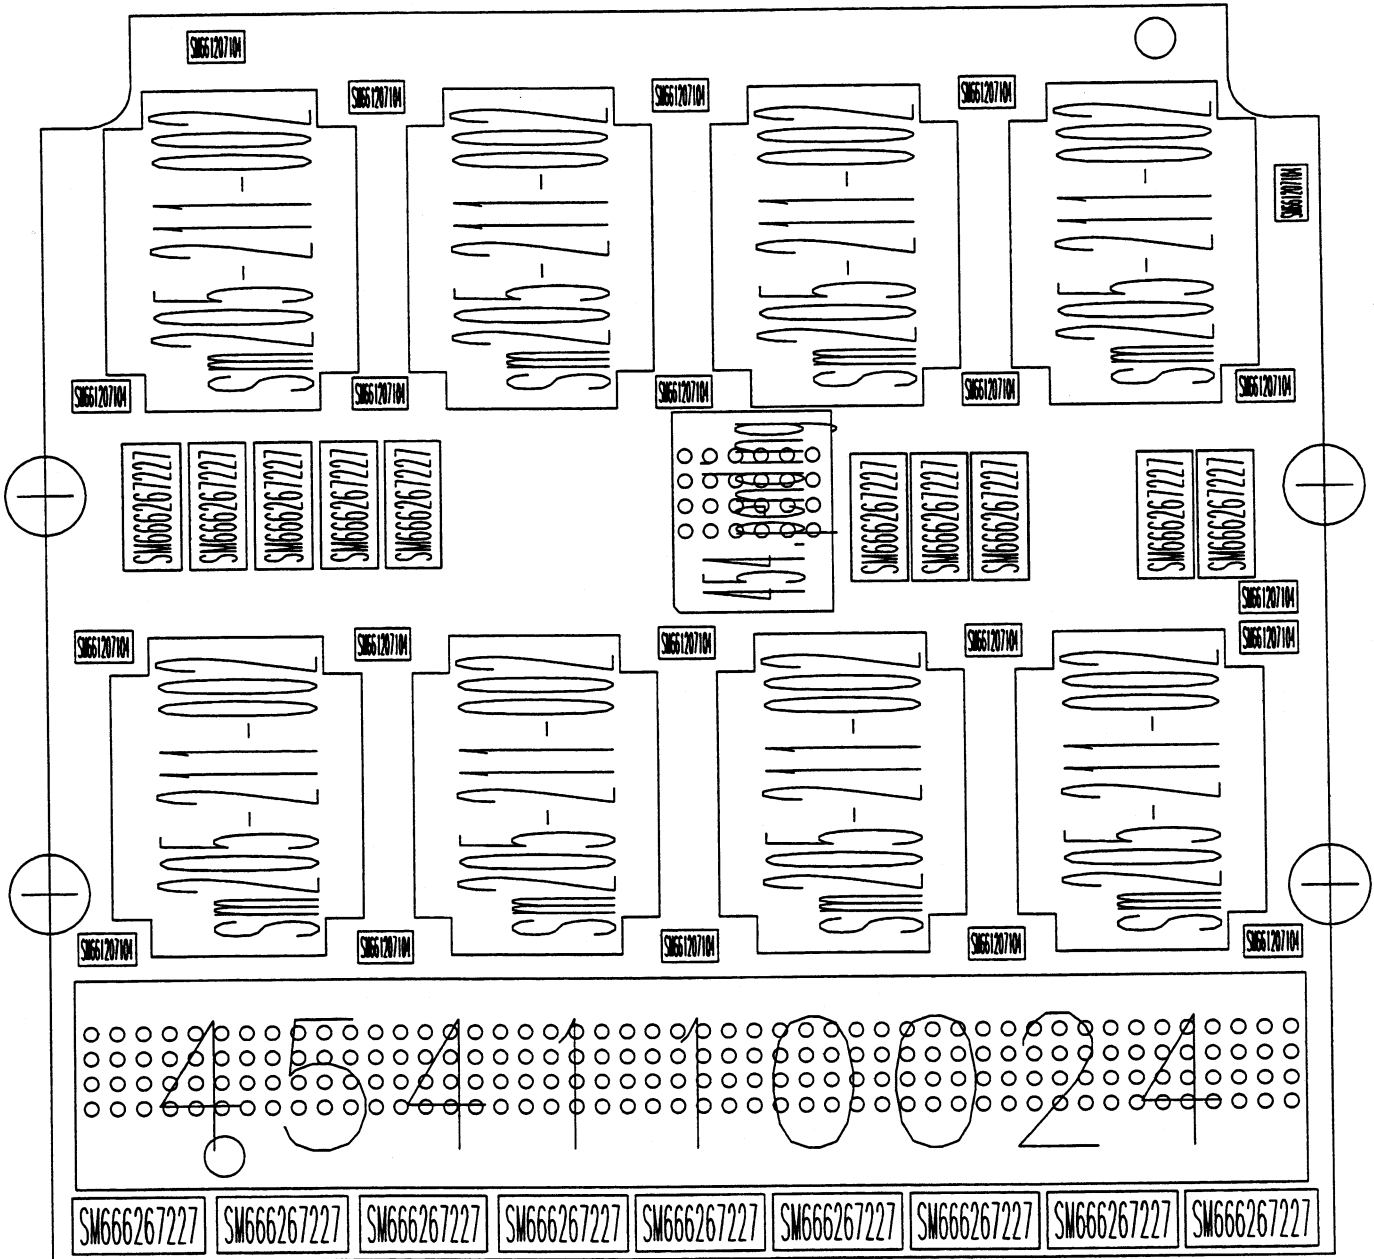

Schematics, Layouts

9384MEM-2 Rev B Side 2

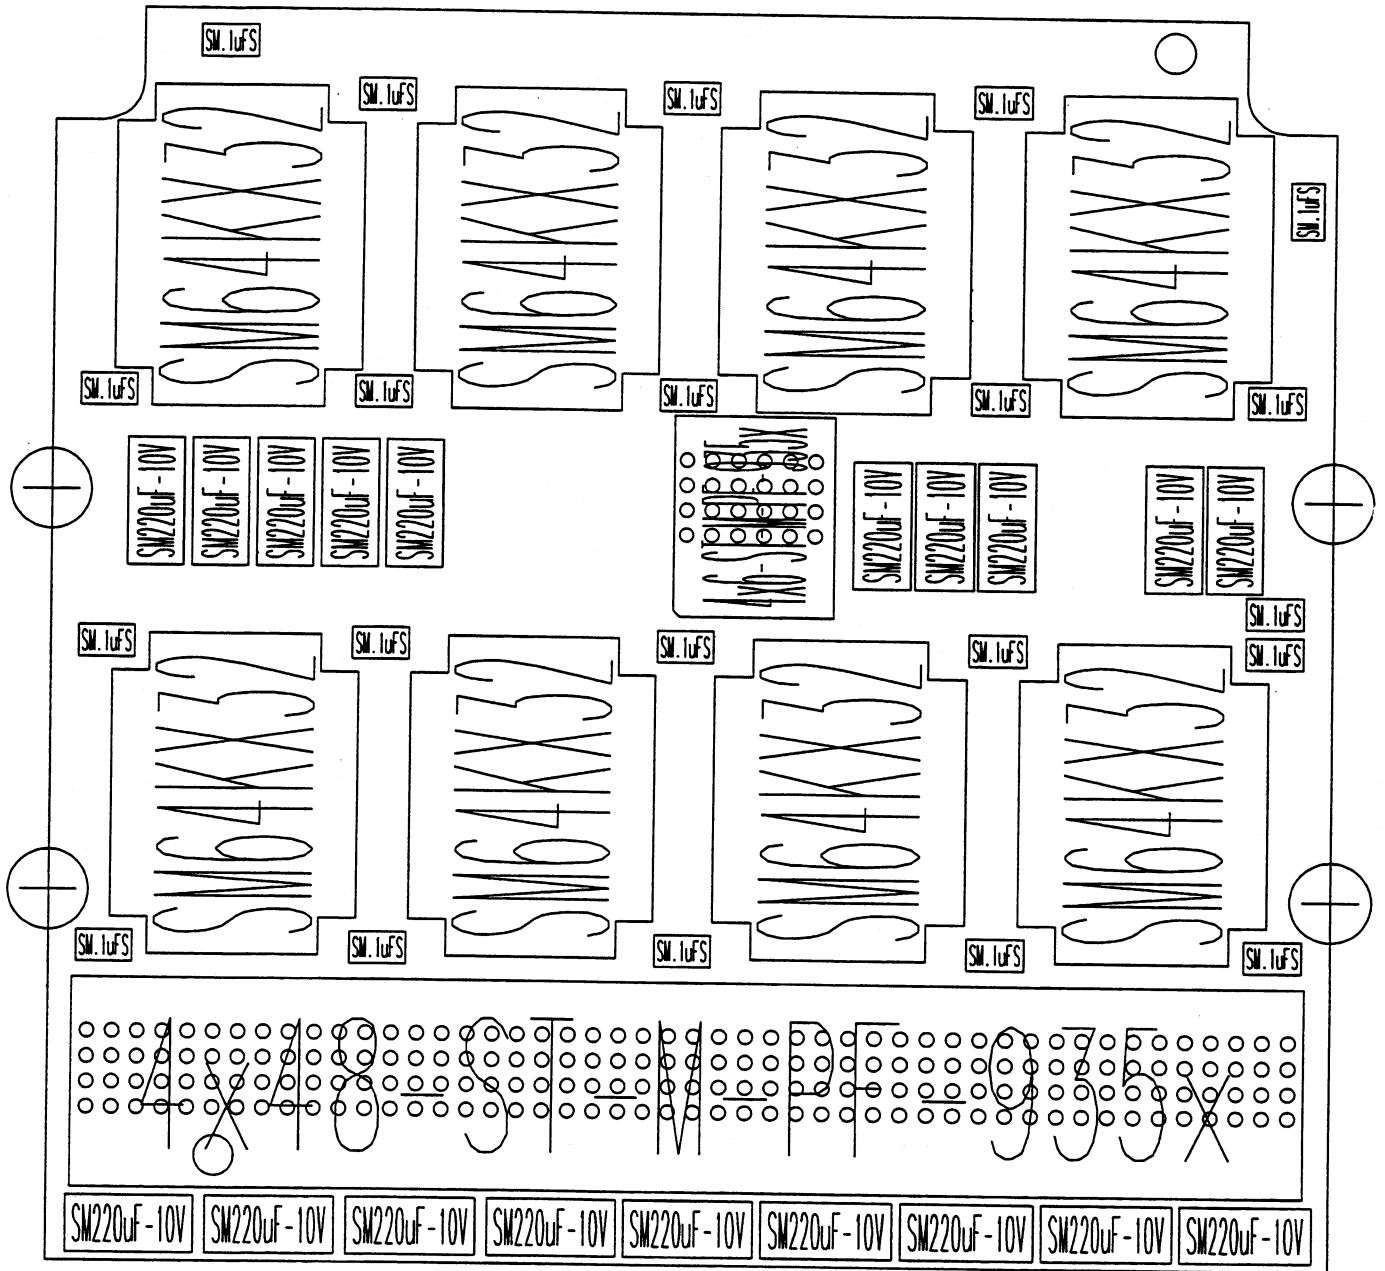

Schematics, Layouts


PART: 9384MEM-2 DESC : Acquisition Memory Card with 2 X 2M

Location	Part Number	Description	Location	Part Number	Description
C1	SM666267227	SM220uF-10V	C46	SM661207104	SM.1uFS
C2	SM666267227	SM220uF-10V	C47	SM661207104	SM.1uFS
C3	SM661207104	SM.1uFS	C49	SM661207104	SM.1uFS
C4	SM661207104	SM.1uFS	C50	SM661207104	SM.1uFS
C5	SM666267227	SM220uF-10V	C51	SM666267227	SM220uF-10V
C6	SM666267227	SM220uF-10V	C52	SM666267227	SM220uF-10V
C7	SM666267227	SM220uF-10V	C53	SM666267227	SM220uF-10V
C8	SM666267227	SM220uF-10V	C54	SM666267227	SM220uF-10V
C9	SM666267227	SM220uF-10V	C55	SM661207104	SM.1uFS
C10	SM666267227	SM220uF-10V	C56	SM661207104	SM.1uFS
C11	SM661207104	SM.1uFS	C58	SM661207104	SM.1uFS
C12	SM661207104	SM.1uFS	C59	SM666267227	SM220uF-10V
C13	SM666267227	SM220uF-10V	C60	SM666267227	SM220uF-10V
C14	SM666267227	SM220uF-10V	C61	SM661207104	SM.1uFS
C15	SM661207104	SM.1uFS	C62	SM661207104	SM.1uFS
C16	SM666267227	SM220uF-10V	C63	SM666267227	SM220uF-10V
C17	SM666267227	SM220uF-10V	C64	SM661207104	SM.1uFS
C18	SM666267227	SM220uF-10V	C65	SM661207104	SM.1uFS
C19	SM666267227	SM220uF-10V	C66	SM661207104	SM.1uFS
C20	SM666267227	SM220uF-10V	C67	SM661207104	SM.1uFS
C21	SM666267227	SM220uF-10V	C68	SM661207104	SM.1uFS
C22	SM666267227	SM220uF-10V	C69	SM661207104	SM.1uFS
C23	SM666267227	SM220uF-10V	C70	SM661207104	SM.1uFS
C24	SM661207104	SM.1uFS	C71	SM661207104	SM.1uFS
C25	SM661207104	SM.1uFS	C72	SM661207104	SM.1uFS
C26	SM661207104	SM.1uFS	C73	SM661207104	SM.1uFS
C27	SM661207104	SM.1uFS	C76	SM661207104	SM.1uFS
C28	SM661207104	SM.1uFS	C77	SM661207104	SM.1uFS
C29	SM661207104	SM.1uFS	C78	SM661207104	SM.1uFS
C30	SM661207104	SM.1uFS	C79	SM661207104	SM.1uFS
C31	SM661207104	SM.1uFS	C80	SM666267227	SM220uF-10V
C32	SM661207104	SM.1uFS	C81	SM661207104	SM.1uFS
C33	SM661207104	SM.1uFS	C82	SM661207104	SM.1uFS
C34	SM661207104	SM.1uFS	C83	SM666267227	SM220uF-10V
C36	SM661207104	SM.1uFS	C84	SM661207104	SM.1uFS
C37	SM661207104	SM.1uFS	C85	SM661207104	SM.1uFS
C38	SM661207104	SM.1uFS	C86	SM661207104	SM.1uFS
C39	SM661207104	SM.1uFS	C87	SM661207104	SM.1uFS
C40	SM666267227	SM220uF-10V	J1	454110024	4x6-ST-M-PF-935x
C41	SM666267227	SM220uF-10V	P1	454110024	4x6-ST-M-PF-935x
C42	SM666267227	SM220uF-10V	R1	SM654101000	SM0S-2P
C43	SM666267227	SM220uF-10V	R2	SM654101000	SM0S-2P
C44	SM661207104	SM.1uFS	R3	SM654101000	SM0S-2P
C45	SM661207104	SM.1uFS	R4	SM654101000	SM0S-2P

Schematics, Layouts


PART: 9384MEM-2 **DESC : Acquisiton Memory Card with 2 X 2M**
Location Part Number **Description**

R5	SM654101000	SM0S-2P
R6	SM654101000	SM0S-2P
R7	SM654101000	SM0S-2P
R8	SM654101000	SM0S-2P
R9	SM654101000	SM0S-2P
R10	SM653101339	SM274.0S
R11	SM653101339	SM274.0S
U18	SM200470573	SM74LVT573
U19	SM200470573	SM74LVT573
U1A	sm205-211-002	SM64KX32
U1B	sm205-211-002	SM64KX32
U21	SM200170032	SM74F32
U2A	sm205-211-002	SM64KX32
U2B	sm205-211-002	SM64KX32
U3A	sm205-211-002	SM64KX32
U3B	sm205-211-002	SM64KX32
U4A	sm205-211-002	SM64KX32
U4B	sm205-211-002	SM64KX32
U5A	sm205-211-002	SM64KX32
U5B	sm205-211-002	SM64KX32
U6A	sm205-211-002	SM64KX32
U6B	sm205-211-002	SM64KX32
U7A	sm205-211-002	SM64KX32
U7B	sm205-211-002	SM64KX32
U8A	sm205-211-002	SM64KX32
U8B	sm205-211-002	SM64KX32

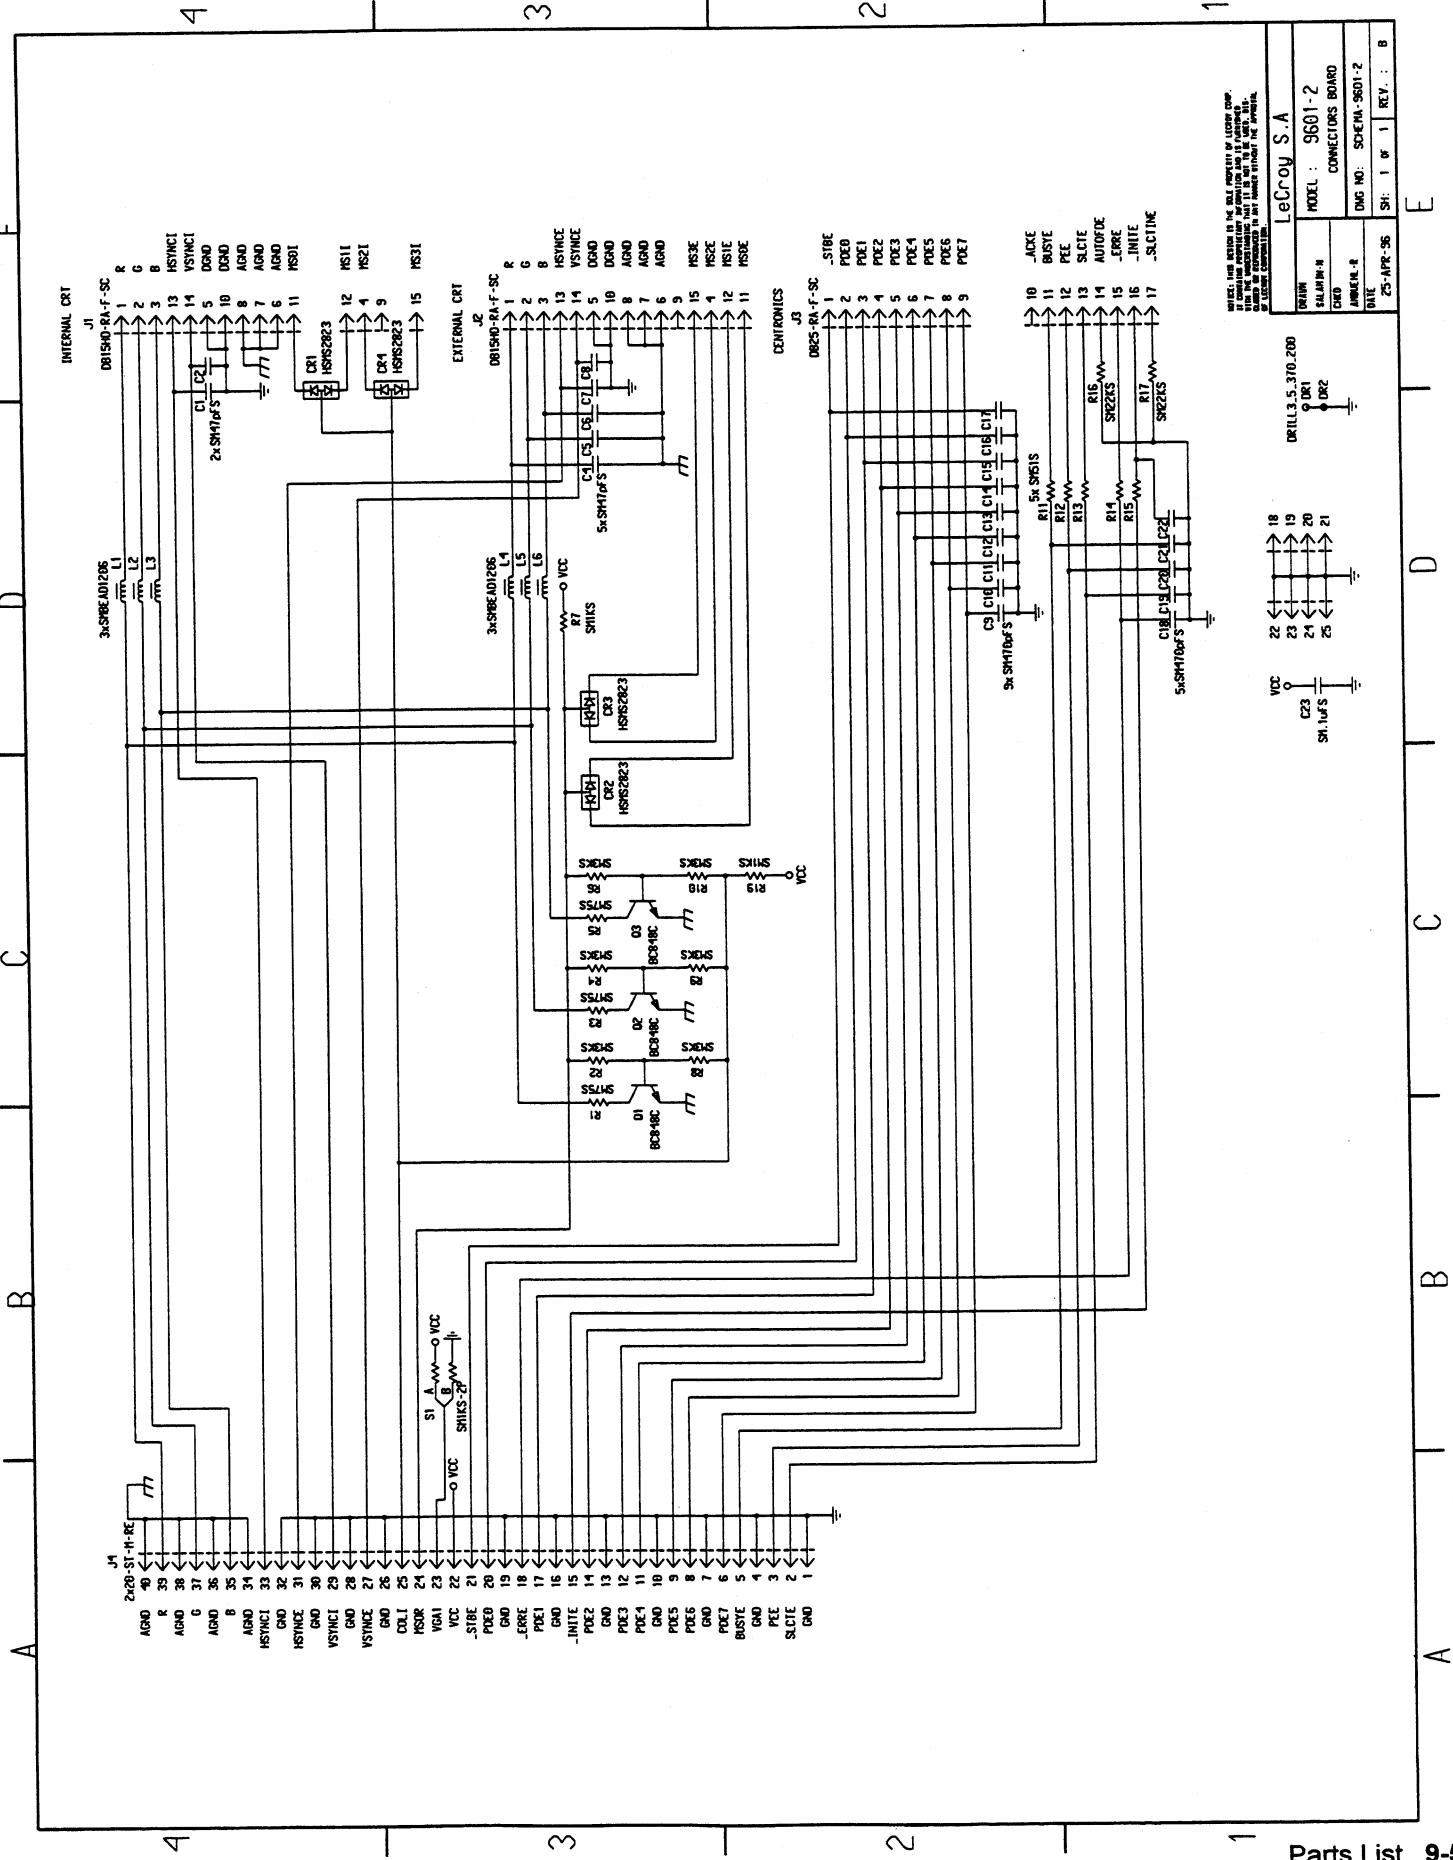

LeCroy S.A.	
REV.:	MODEL : 9601-2
SALARY N:	CONNECTORS BOARD
CHD:	ENG NO: SCHEM-9601-2
DATE:	SH: 1 OF 1 REV: B
25-APR-56	

NOTES: THIS DESIGN IS THE PROPERTY OF LEUCROY S.A. IT IS TO BE KEPT CONFIDENTIAL. ANY REPRODUCTION OR TRANSMISSION OF THIS INFORMATION TO ANY OTHER PERSON WITHOUT THE APPROVAL OF LEUCROY S.A. IS PROHIBITED.




A B C D E


1 2 3 4

Schematics, Layouts

F9601-2 Rev B

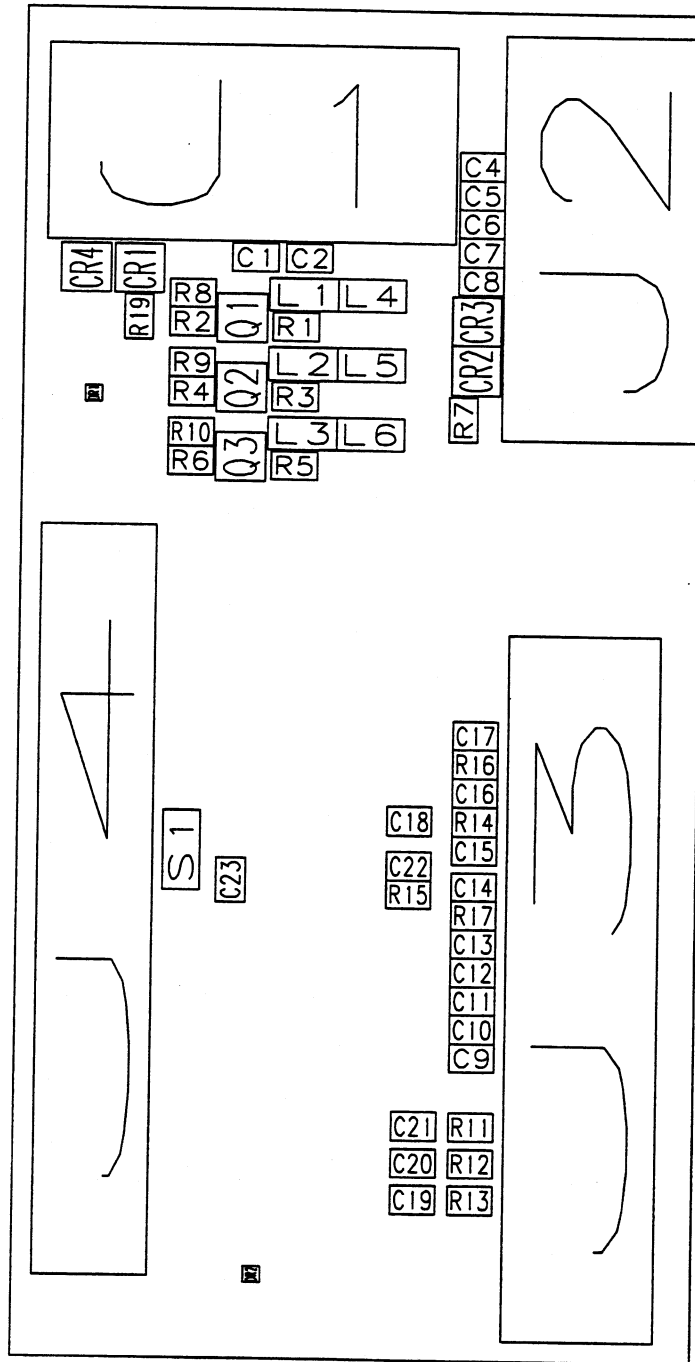


F9601-2 Rev B

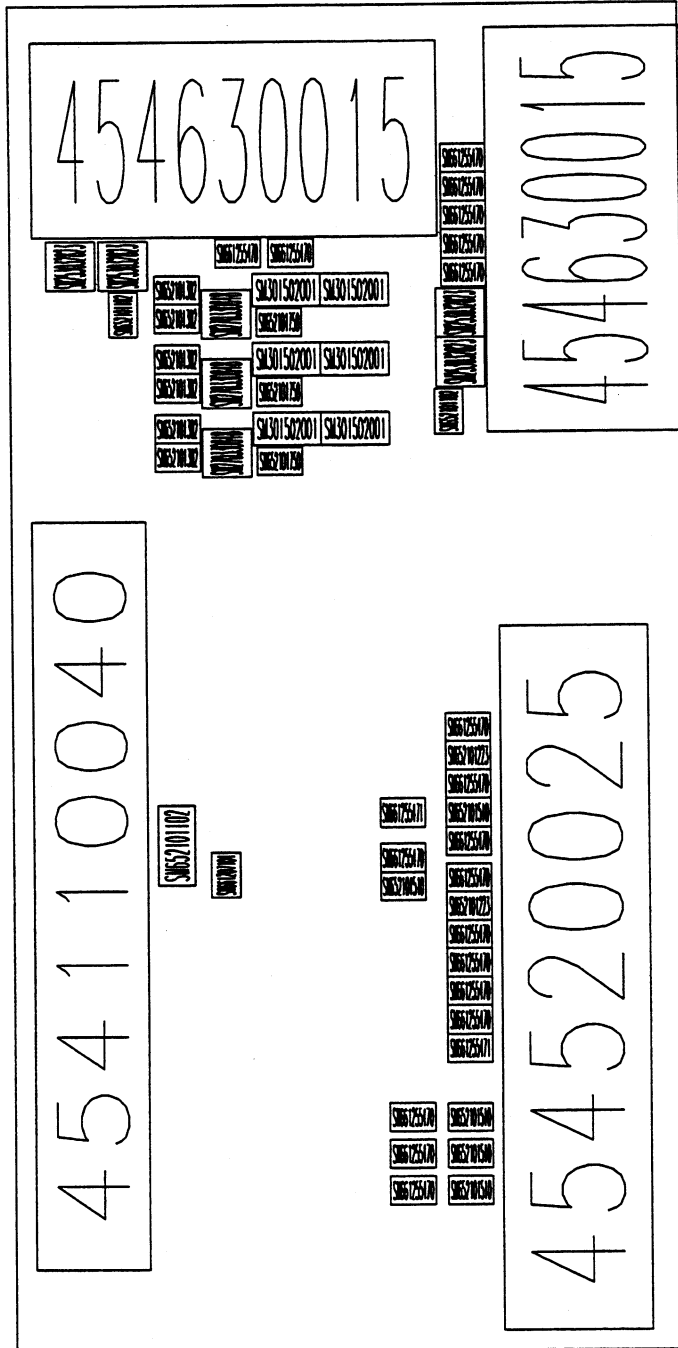

Schematics, Layouts

F9601-2 Rev B

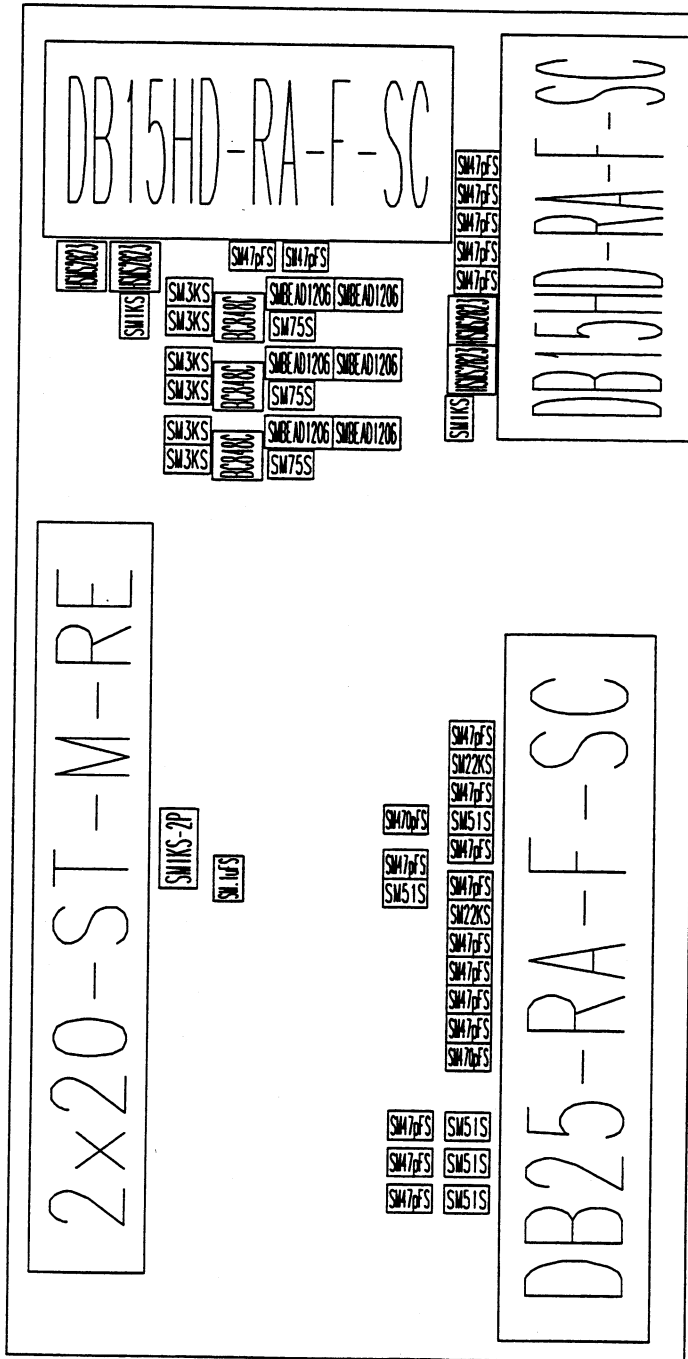


Schematics, Layouts

PART: F9601-2

DESC : Centronics & VGA Interface


Location	Part Number	Description	Location	Part Number	Description
C1	SM661255470	SM47pFS	J4	454110040	2x20-ST-M-RE
C2	SM661255470	SM47pFS	L1	SM301502001	SMBEAD1206
C4	SM661255470	SM47pFS	L2	SM301502001	SMBEAD1206
C5	SM661255470	SM47pFS	L3	SM301502001	SMBEAD1206
C6	SM661255470	SM47pFS	L4	SM301502001	SMBEAD1206
C7	SM661255470	SM47pFS	L5	SM301502001	SMBEAD1206
C8	SM661255470	SM47pFS	L6	SM301502001	SMBEAD1206
C9	SM661255471	SM470pFS	Q1	SM270330848	BC848C
C10	SM661255470	SM47pFS	Q2	SM270330848	BC848C
C11	SM661255470	SM47pFS	Q3	SM270330848	BC848C
C12	SM661255470	SM47pFS	R1	SM652101750	SM75S
C13	SM661255470	SM47pFS	R2	SM652101302	SM3KS
C14	SM661255470	SM47pFS	R3	SM652101750	SM75S
C15	SM661255470	SM47pFS	R4	SM652101302	SM3KS
C16	SM661255470	SM47pFS	R5	SM652101750	SM75S
C17	SM661255470	SM47pFS	R6	SM652101302	SM3KS
C18	SM661255471	SM470pFS	R7	SM652101102	SM1KS
C19	SM661255470	SM47pFS	R8	SM652101302	SM3KS
C20	SM661255470	SM47pFS	R9	SM652101302	SM3KS
C21	SM661255470	SM47pFS	R10	SM652101302	SM3KS
C22	SM661255470	SM47pFS	R11	SM652101510	SM51S
C23	SM661207104	SM.1uFS	R12	SM652101510	SM51S
CR1	SM253032823	HSMS2823	R13	SM652101510	SM51S
CR2	SM253032823	HSMS2823	R14	SM652101510	SM51S
CR3	SM253032823	HSMS2823	R15	SM652101510	SM51S
CR4	SM253032823	HSMS2823	R16	SM652101223	SM22KS
J1	454630015	DB15HD-	R17	SM652101223	SM22KS
J2	454630015	DB15HD	R19	SM652101102	SM1KS
J3	454520025	DB25-RA	S1	SM652101102	SM1KS-2P

Schematics, Layouts

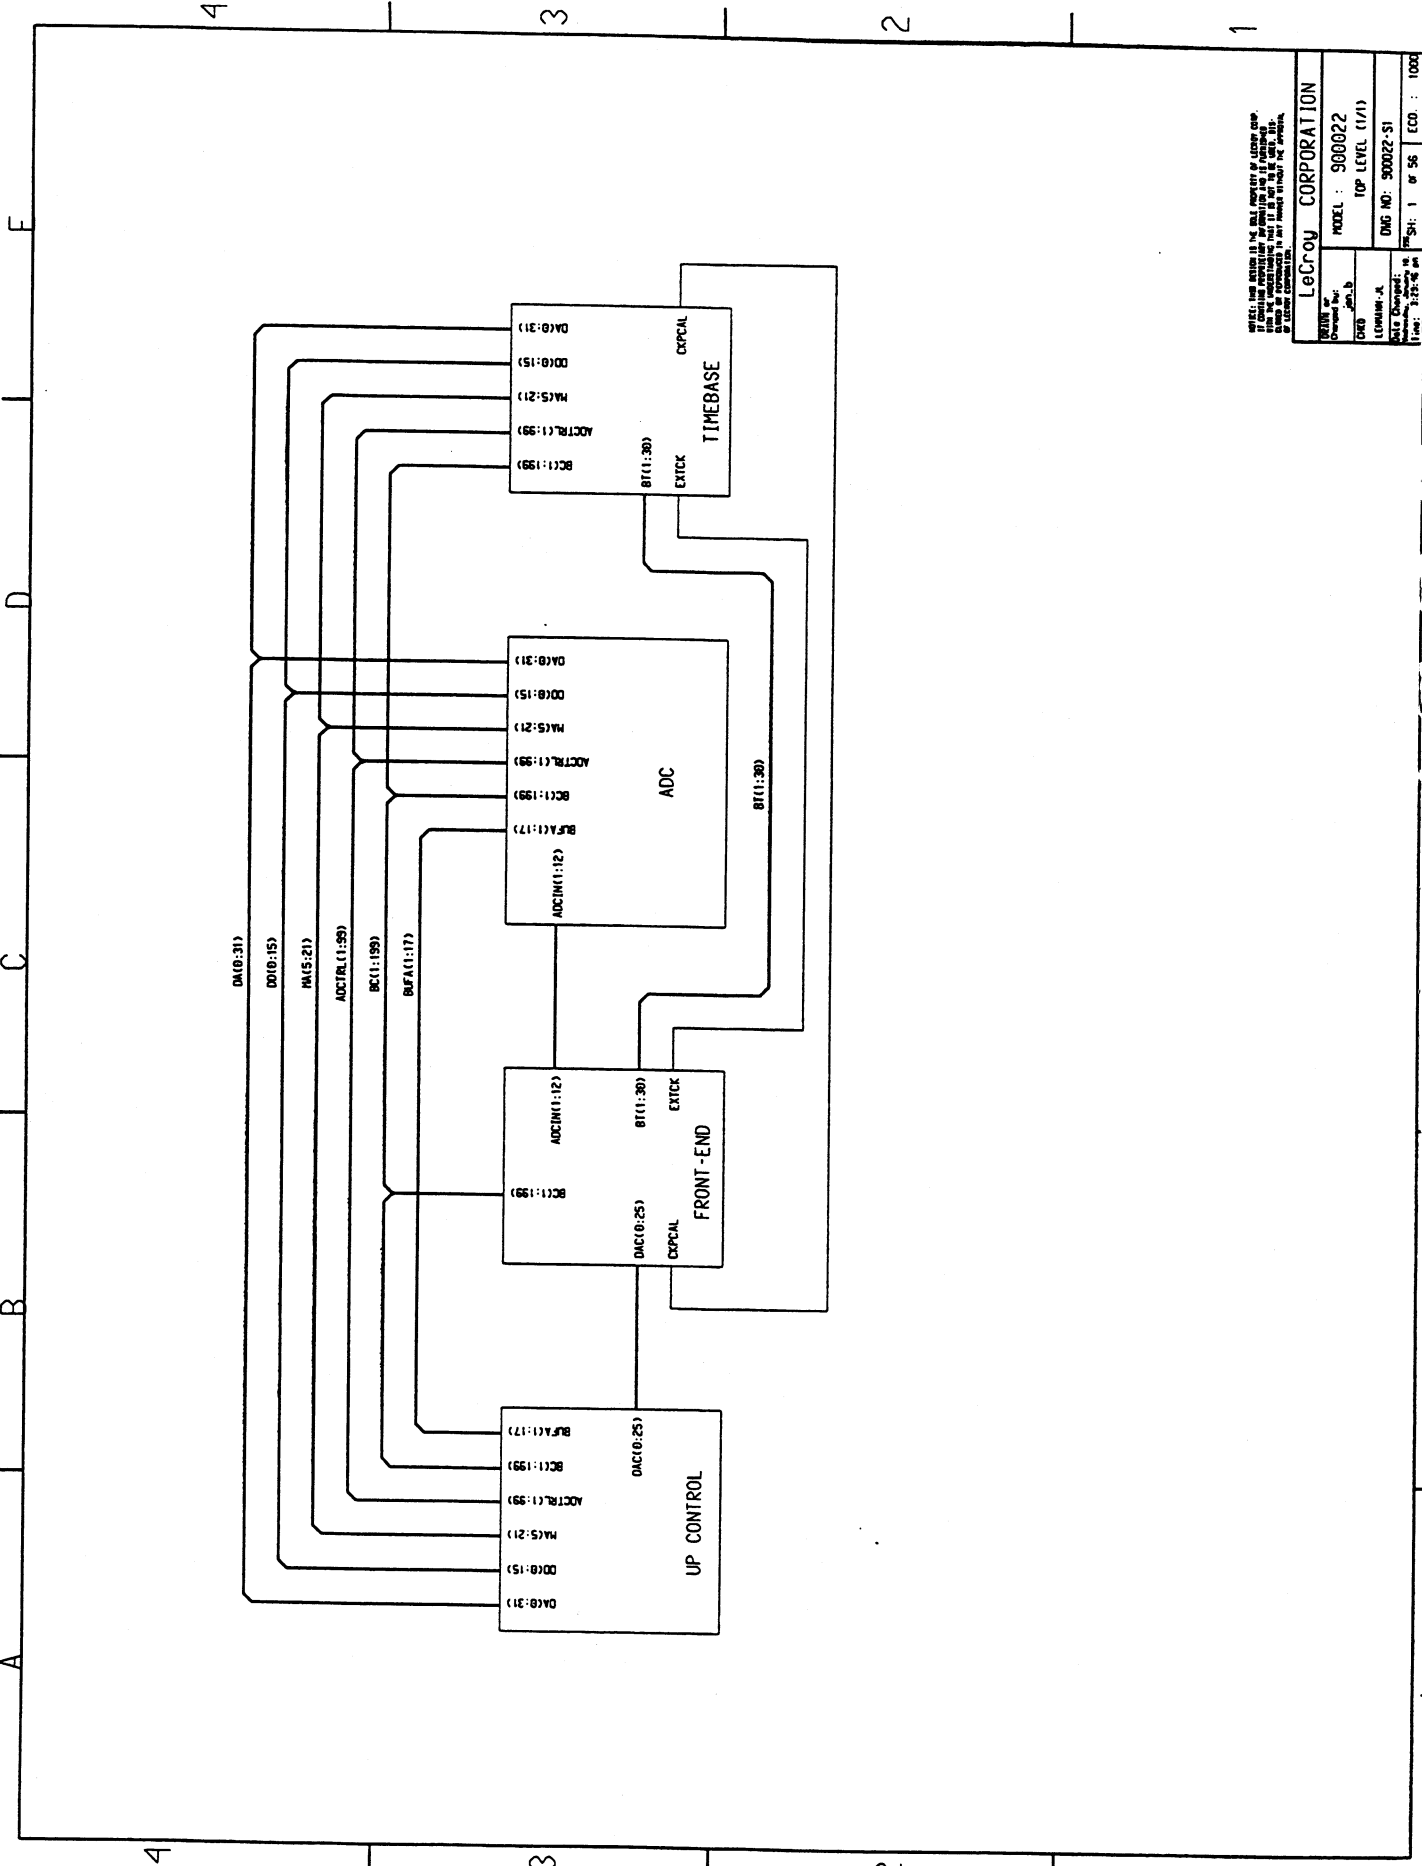

NOTE: THIS DESIGN IS THE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE MANNER SPECIFIED IN THIS DOCUMENT. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM LECROY CORPORATION.


LeCroy CORPORATION	
Model No.	900022
Design No.	TOP LEVEL (1/1)
Location	LECOMB, N.Y.
Part No.	900022-S1
Rev.	1 of 56
ECO.	1000

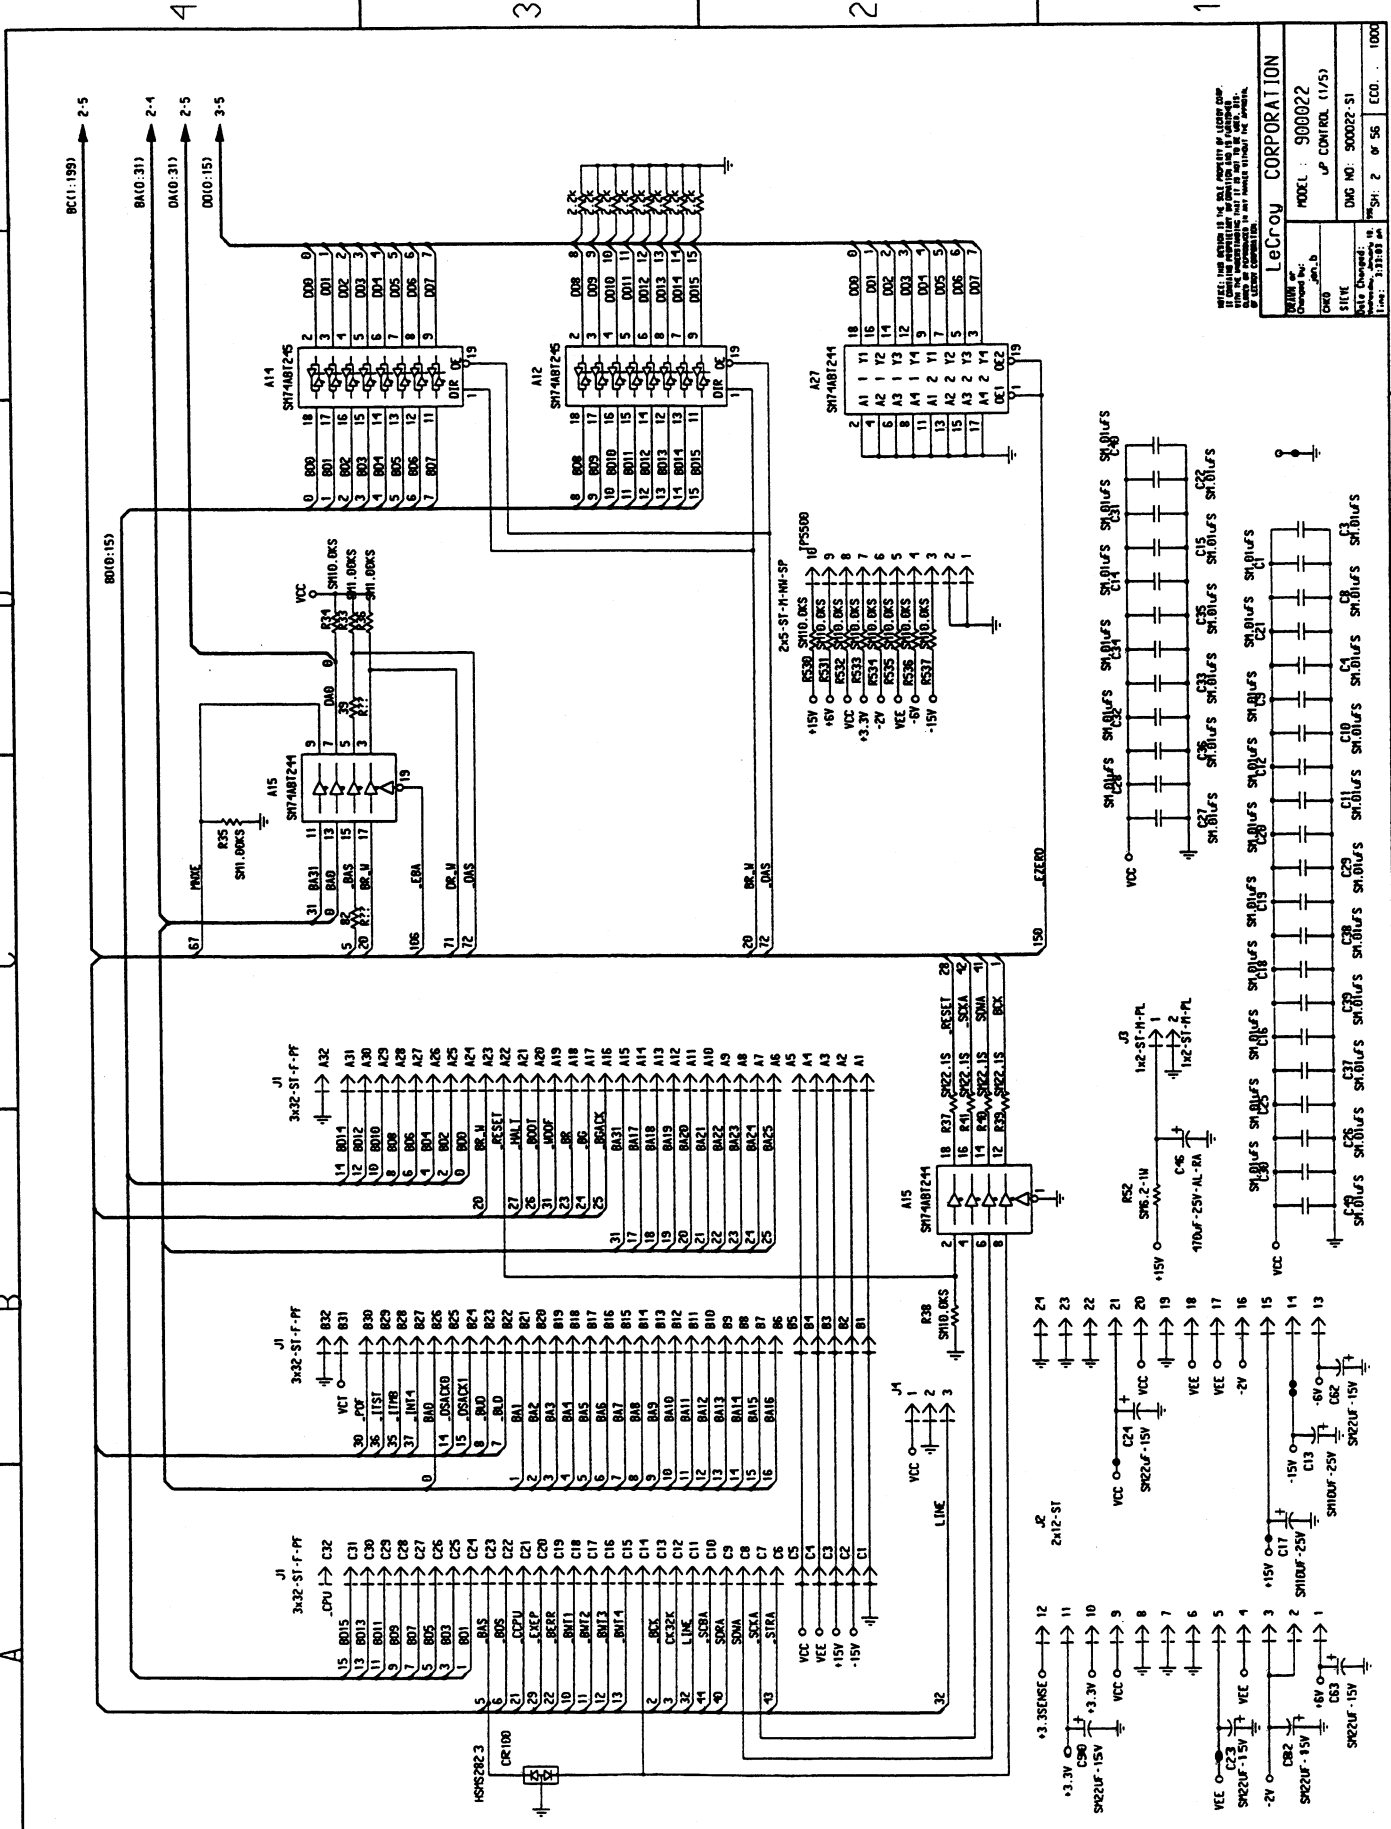


NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LEADERSHIP ELECTRONICS, INC. NO PART OF THIS DESIGN IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LeCroy CORPORATION	
Model No.	900022
Part No.	UP CONTROL (1/75)
File No.	DWG NO. 900022-31
Sheet No.	2 of 56
Scale	1:1
Date	11/18/75
Drawn By	...
Checked By	...
Approved By	...

Schematics, Layouts

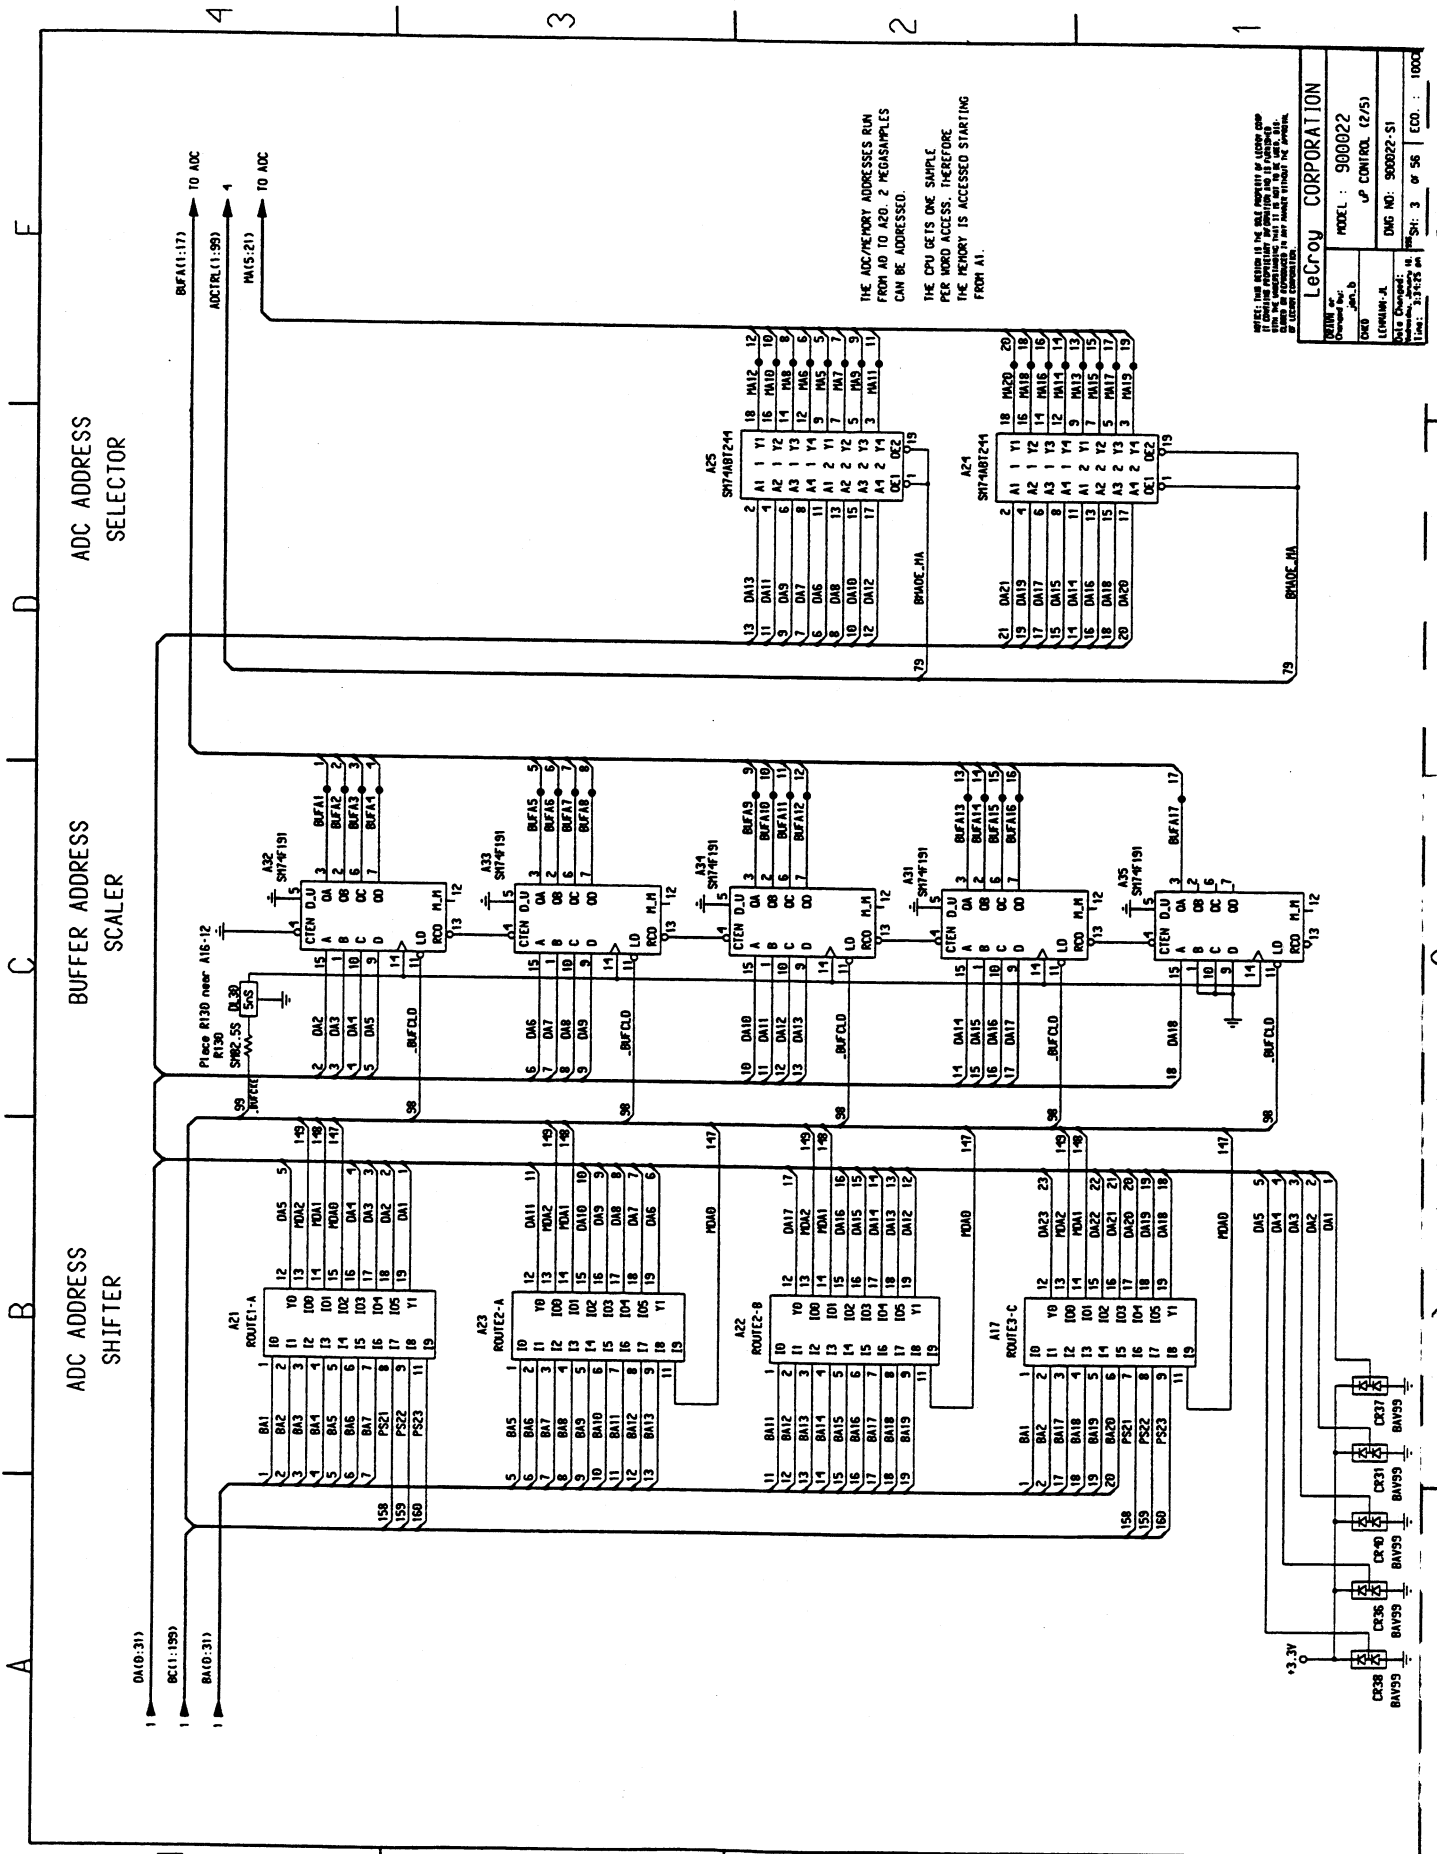


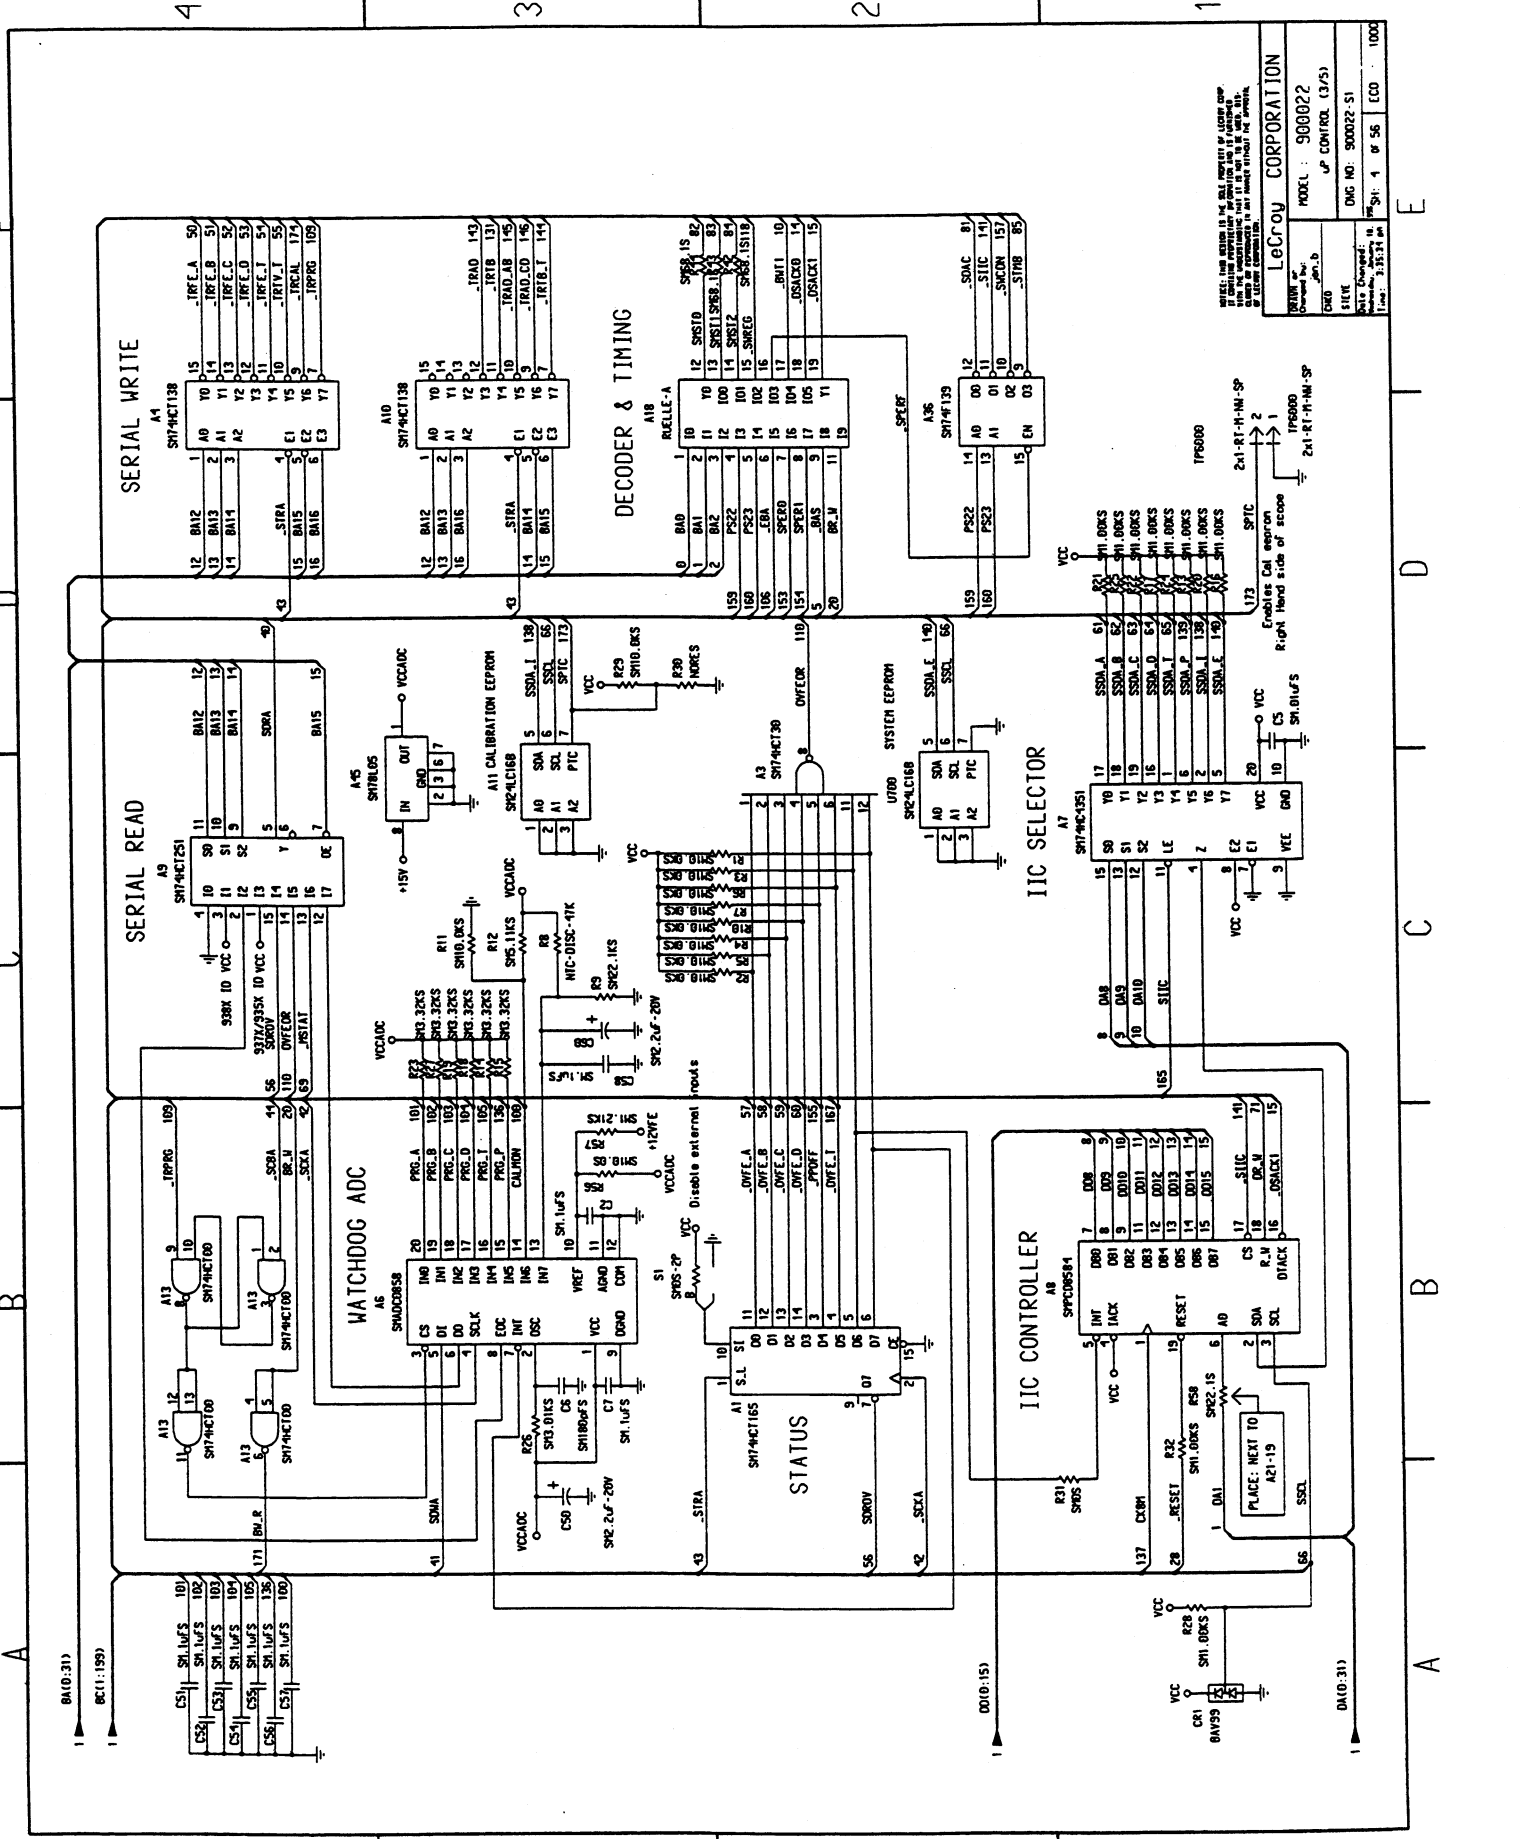

REVISE THIS DESIGN IN THE FULL PROPERTY OF LECROY CORP.
WITH THE UNDERSTANDING THAT IT IS NOT TO BE USED,
REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER WITHOUT THE APPROVAL
OF THE ORIGINAL DESIGNER.


MODEL: 900022
UP CONTROL (3/25)
DWG NO: 900022-S1
DATE: 10/18/93
DESIGNED BY: J. B. WOOD
DRAWN BY: J. B. WOOD
DATE: 10/18/93
SCALE: 1:1
ECO: 1000

Schematics, Layouts

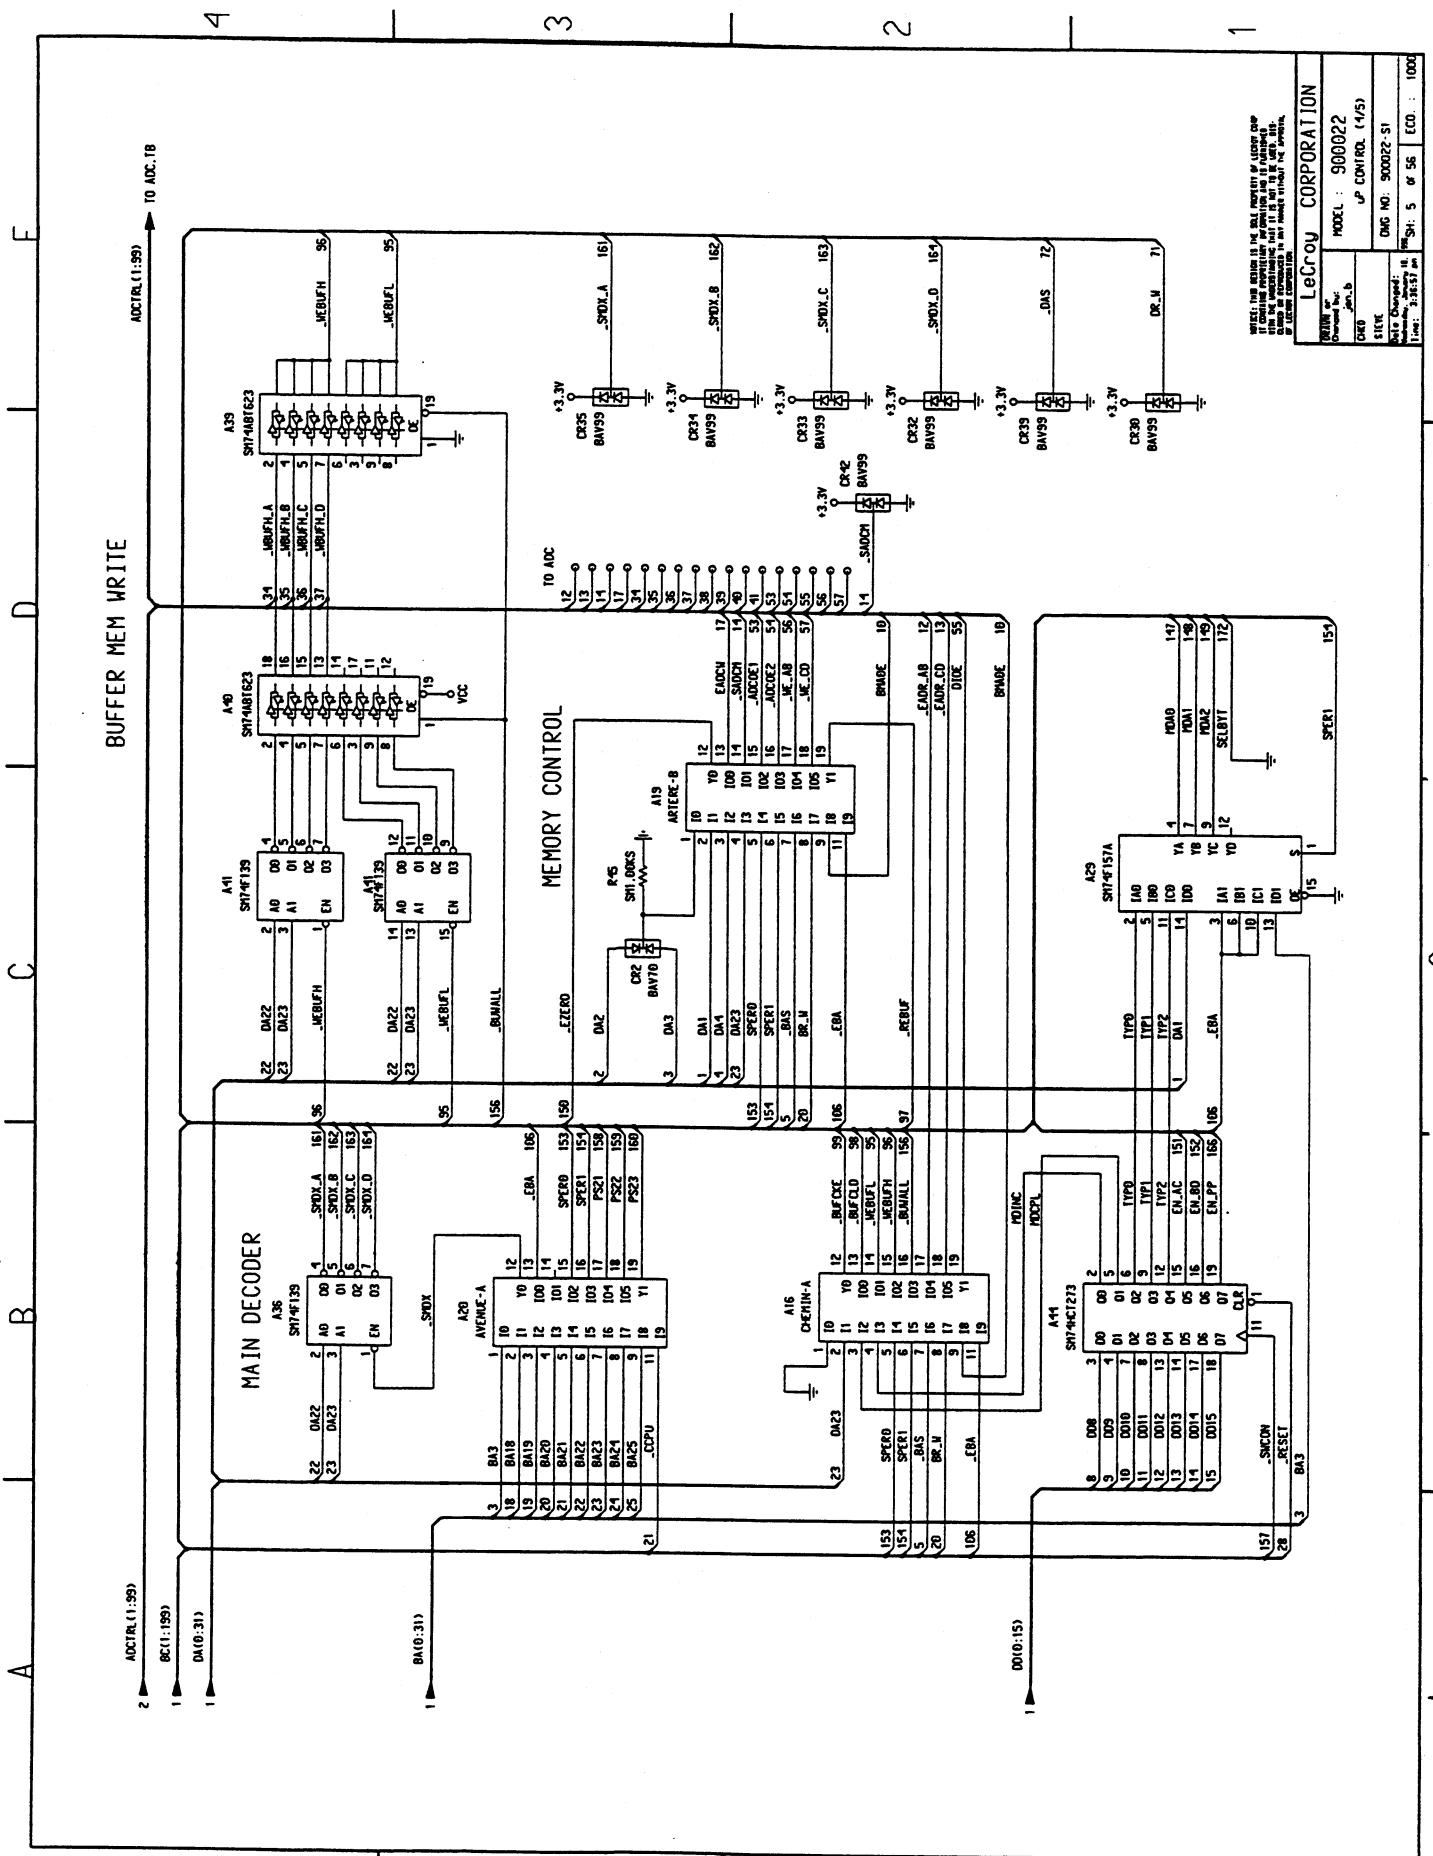

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LEICROY CORPORATION. IT IS THE PROPERTY OF LEICROY CORPORATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LeCroy CORPORATION
 MODEL: 900022
 UP CONTROL (1/81)
 Dwg No: 900022-S1
 Date Changed: 11/81
 Time: 3:18:57 PM
 Sh: 5 of 56 [CO: 1000

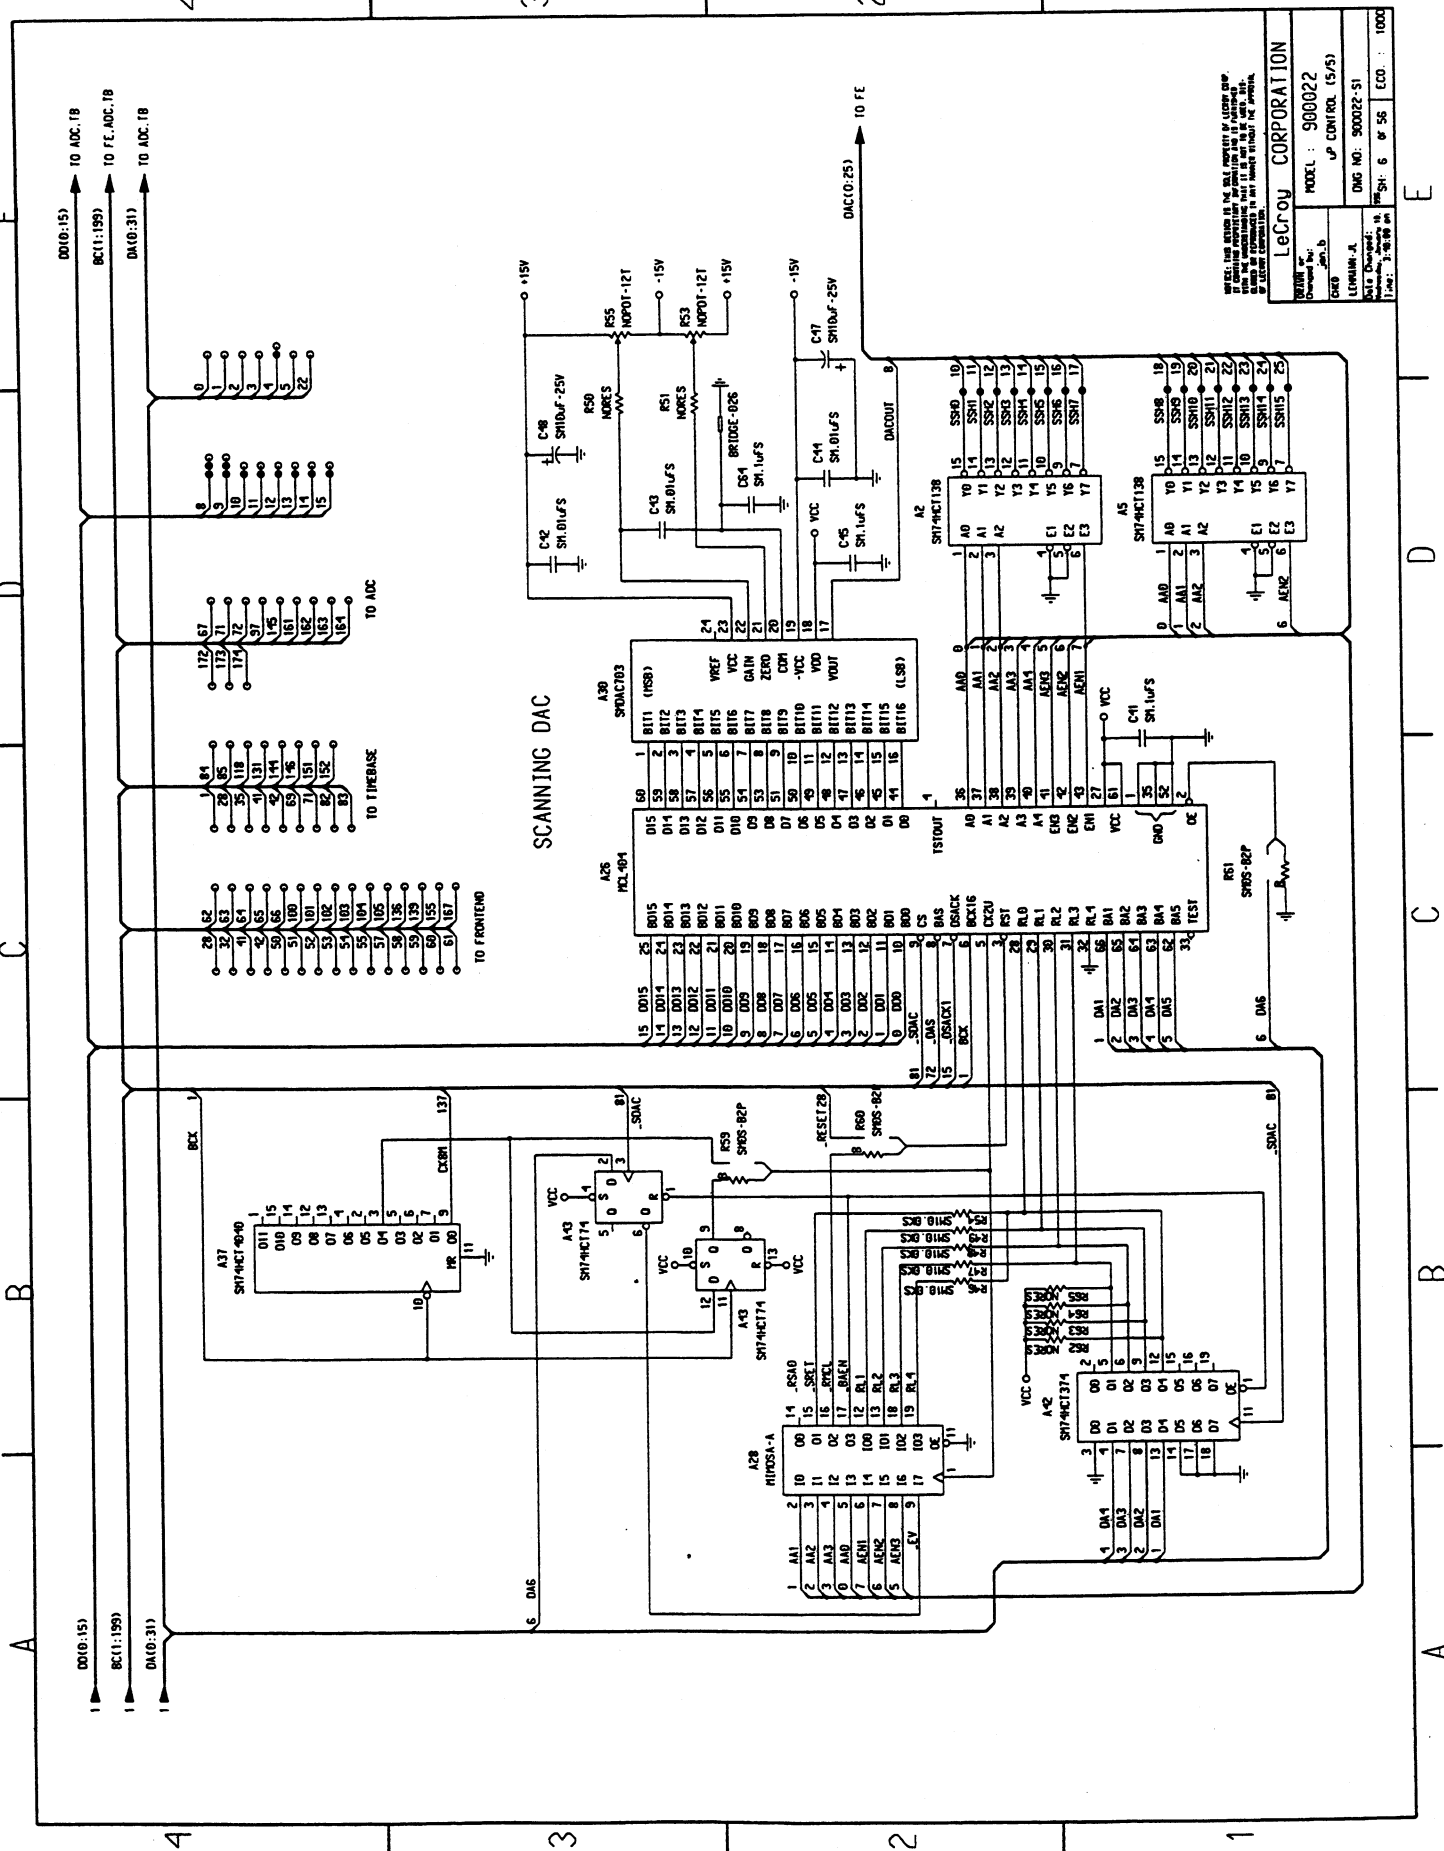


NOTICE: THIS DRAWING IS THE SOLE PROPERTY OF LEADCO CORP. IT IS THE PROPERTY OF LEADCO CORP. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM LEADCO CORP.

LeCroy CORPORATION

MODEL: 980022
 PART NO.: 980022-51
 REV. 6 OF 58
 ECO.: 1000


Schematics, Layouts

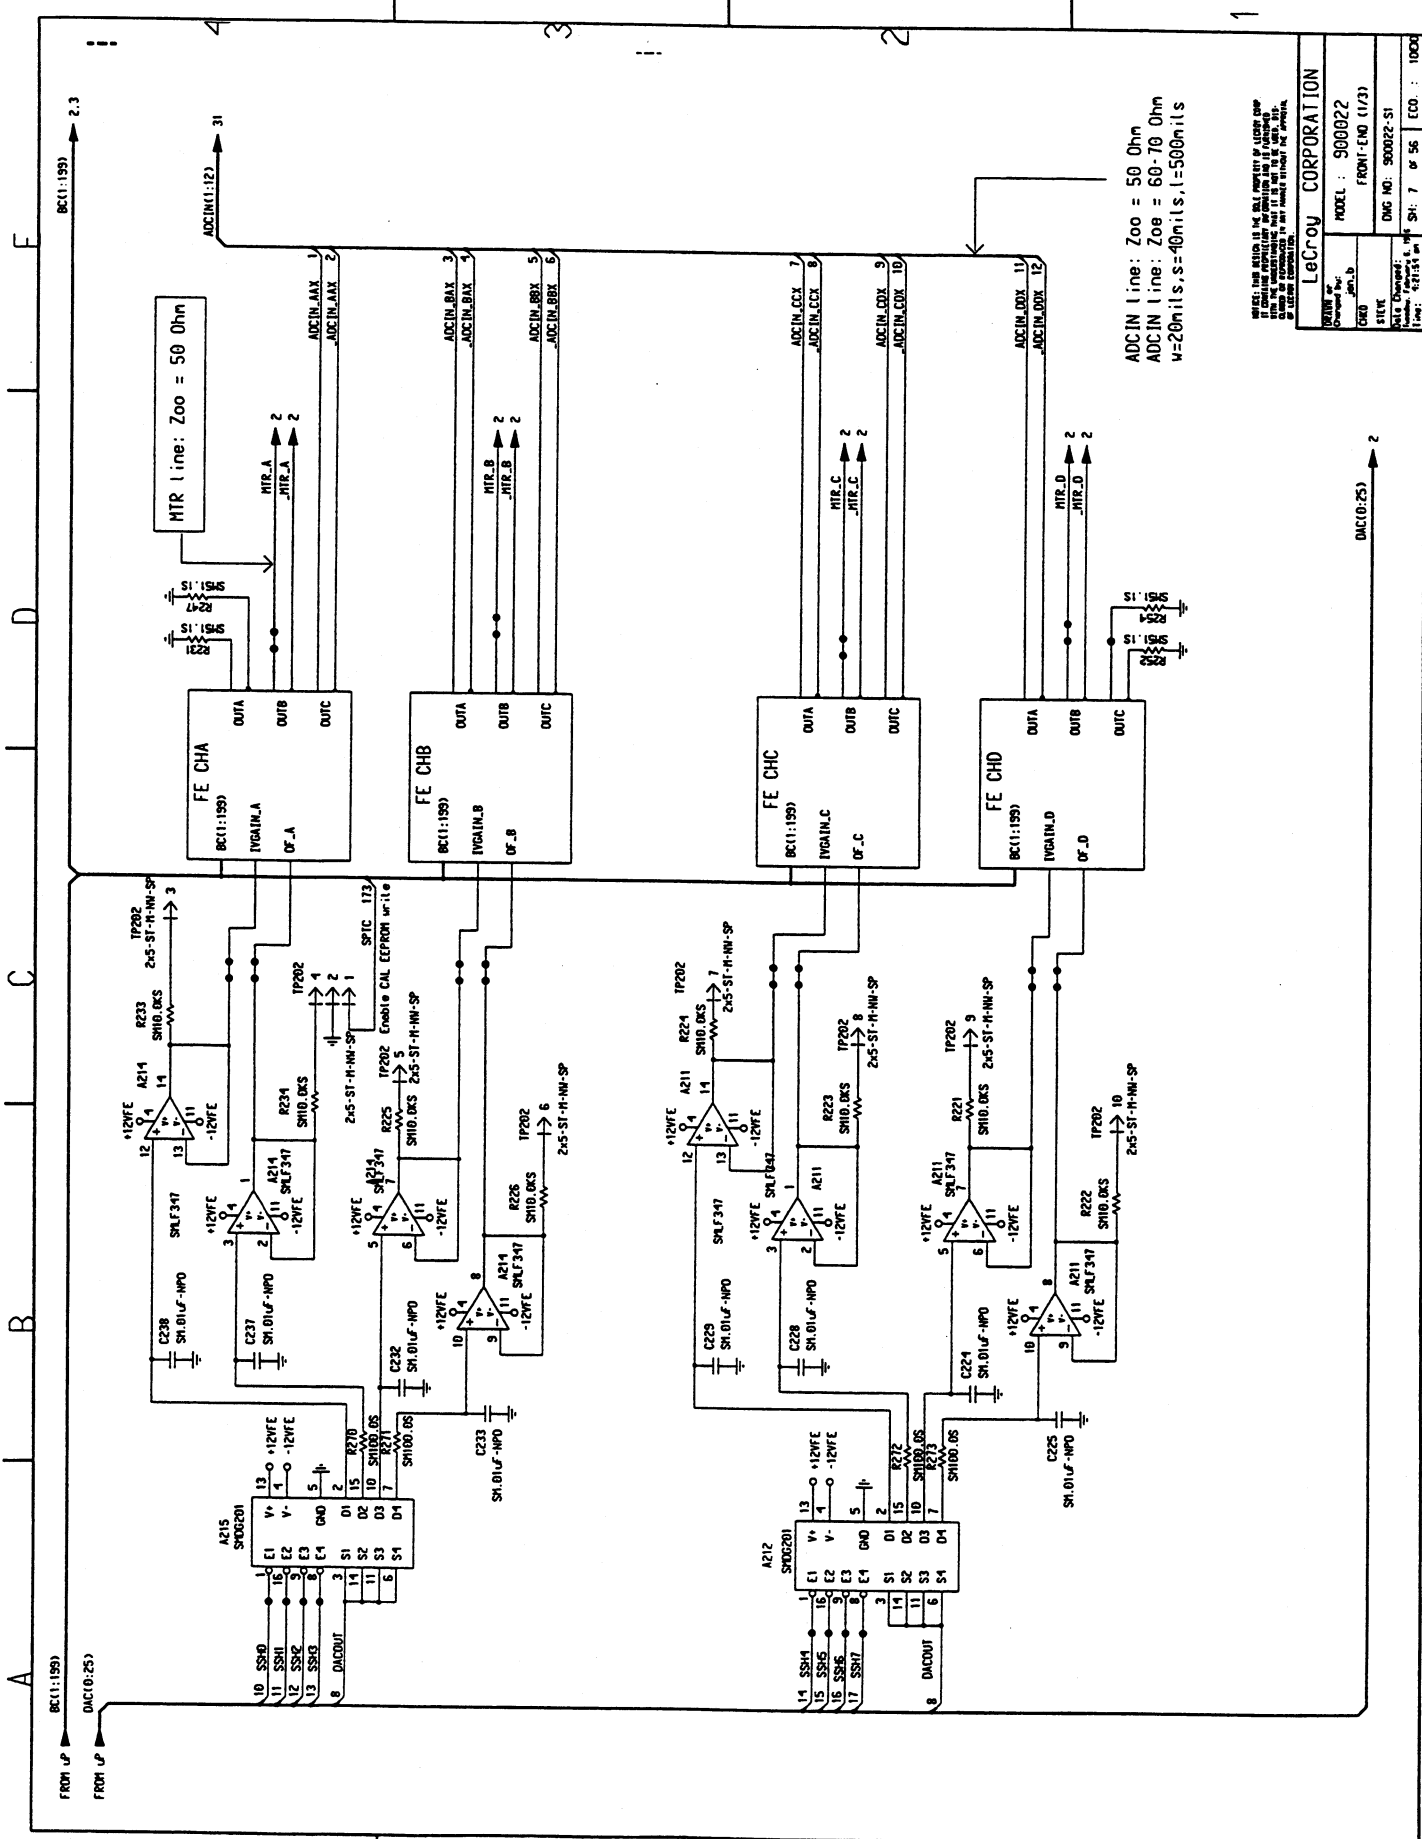

ADC IN line: Z₀₀ = 50 Ohm
 ADC IN line: Z₀₀ = 60-70 Ohm
 w=20mils, s=40mils, l=500mils

NOTE: THIS DRAWING IS THE SOLE PROPERTY OF LEICROY CORP.
 IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFIC TO WHICH IT WAS DRAWN.
 IT IS TO BE KEPT IN CONFIDENTIALITY AND NOT TO BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF LEICROY CORP.
 DATE DRAWN: 11/21/83
 DRAWN BY: J. B. BERRY
 CHECKED BY: J. B. BERRY
 MODEL: 900022
 FRONT-END (1/23)
 DWG NO. 900022-S1
 SHEET 7 OF 56
 ECO: 1000


LeCroy CORPORATION	
Model No.	900022
Front-End (1/23)	
DWG No.	900022-S1
Sheet	7 of 56
ECO	1000

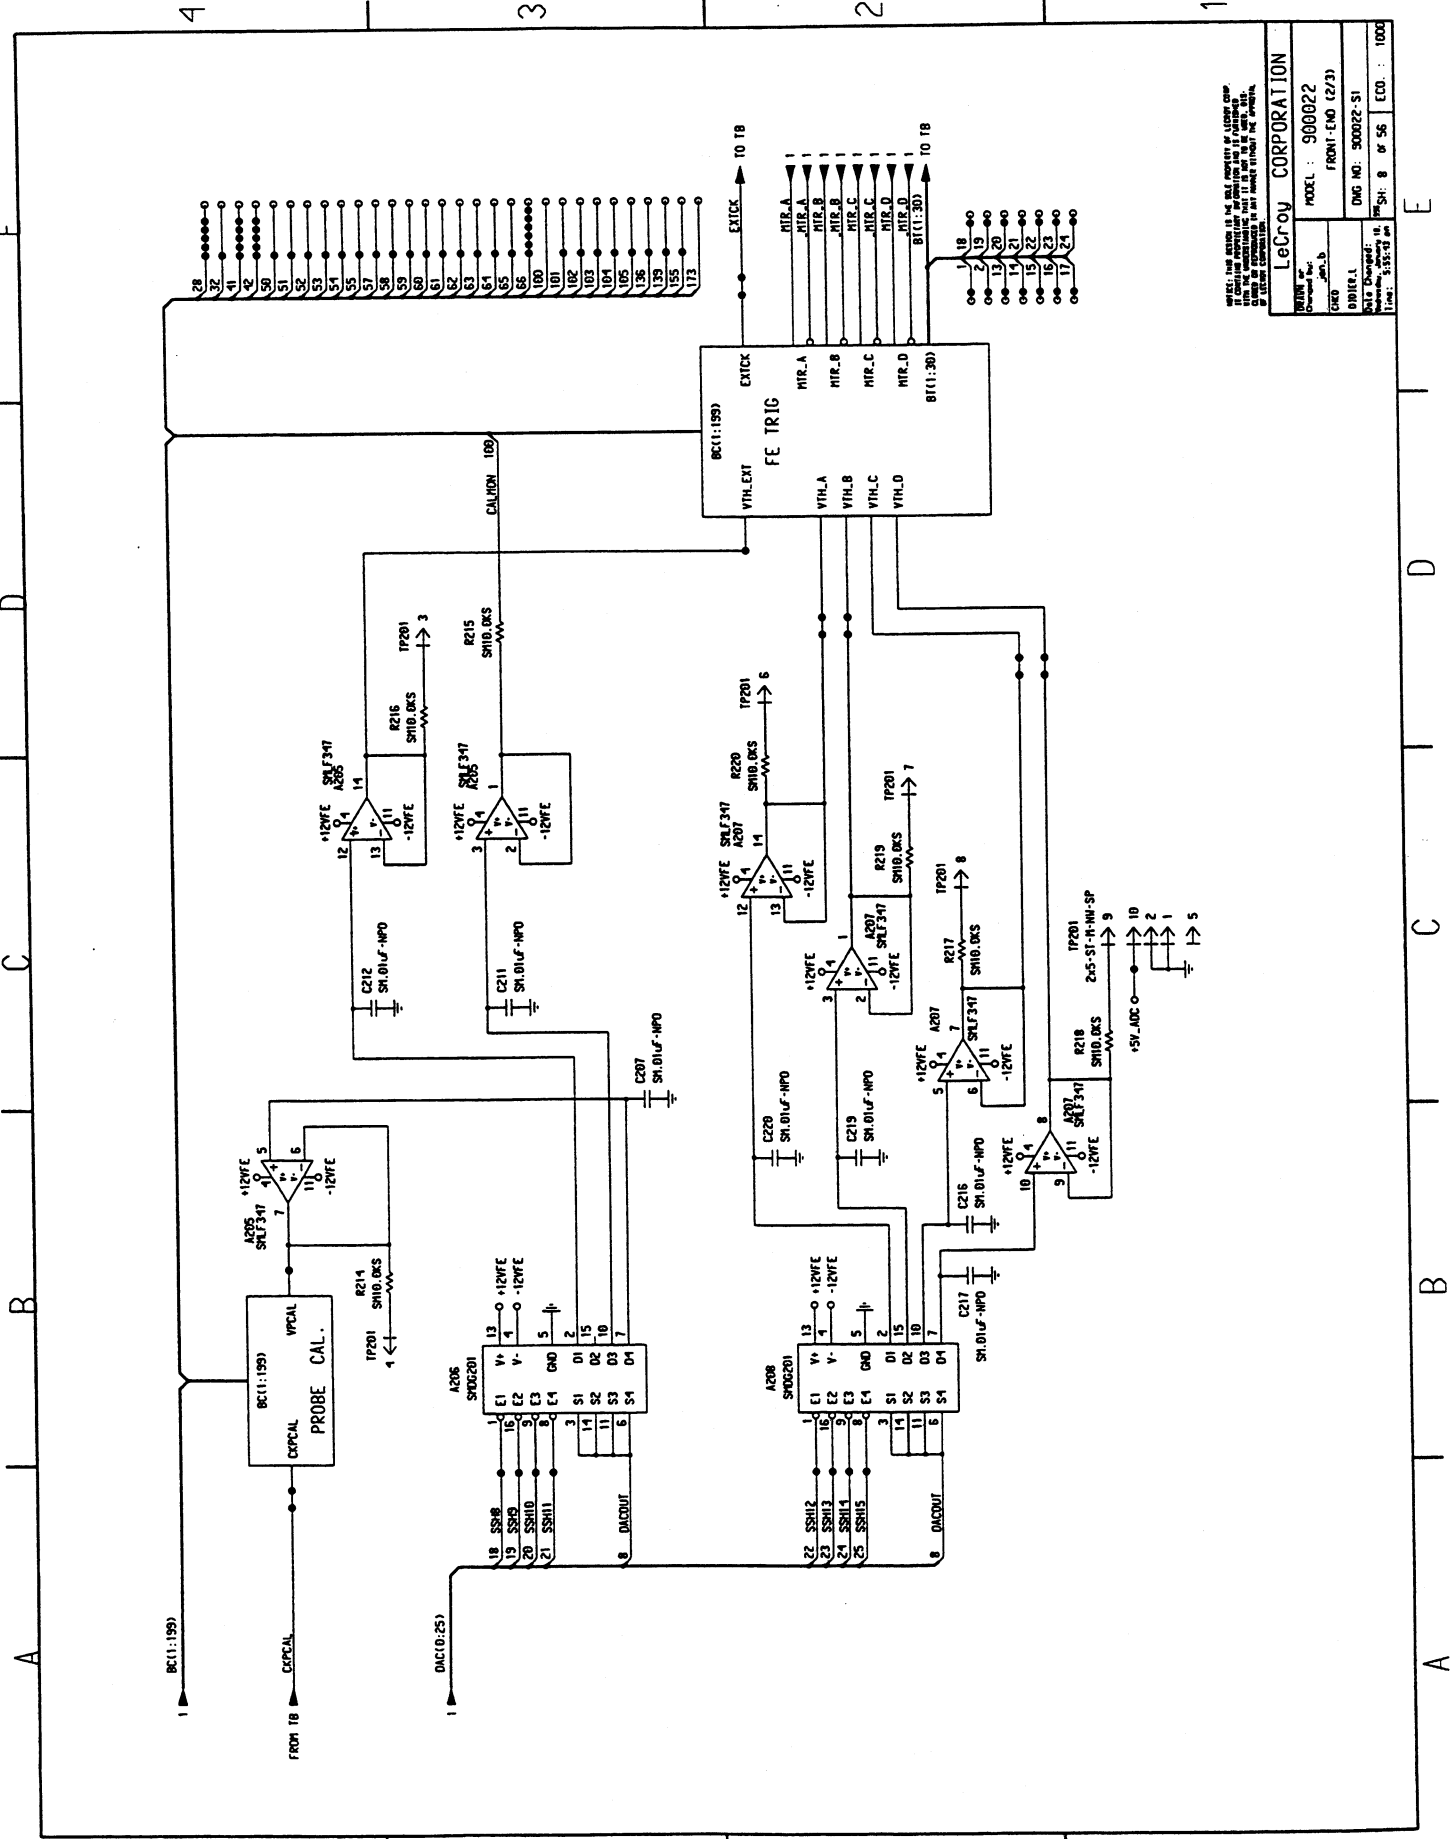

THIS UNIT SHOULD BE USED ONLY AS PART OF THE COMPLETE SYSTEM. IT IS NOT TO BE USED IN ISOLATION. THE USER IS RESPONSIBLE FOR THE PROPER CONNECTION OF ALL TEST POINTS AND THE USE OF THE APPROPRIATE TEST EQUIPMENT.


LECROY CORPORATION	
Model No.	900022
Part No.	900022-01
Rev. No.	1
Doc No.	900022-01
Issue	8 of 56
ECCO	1000

Schematics, Layouts

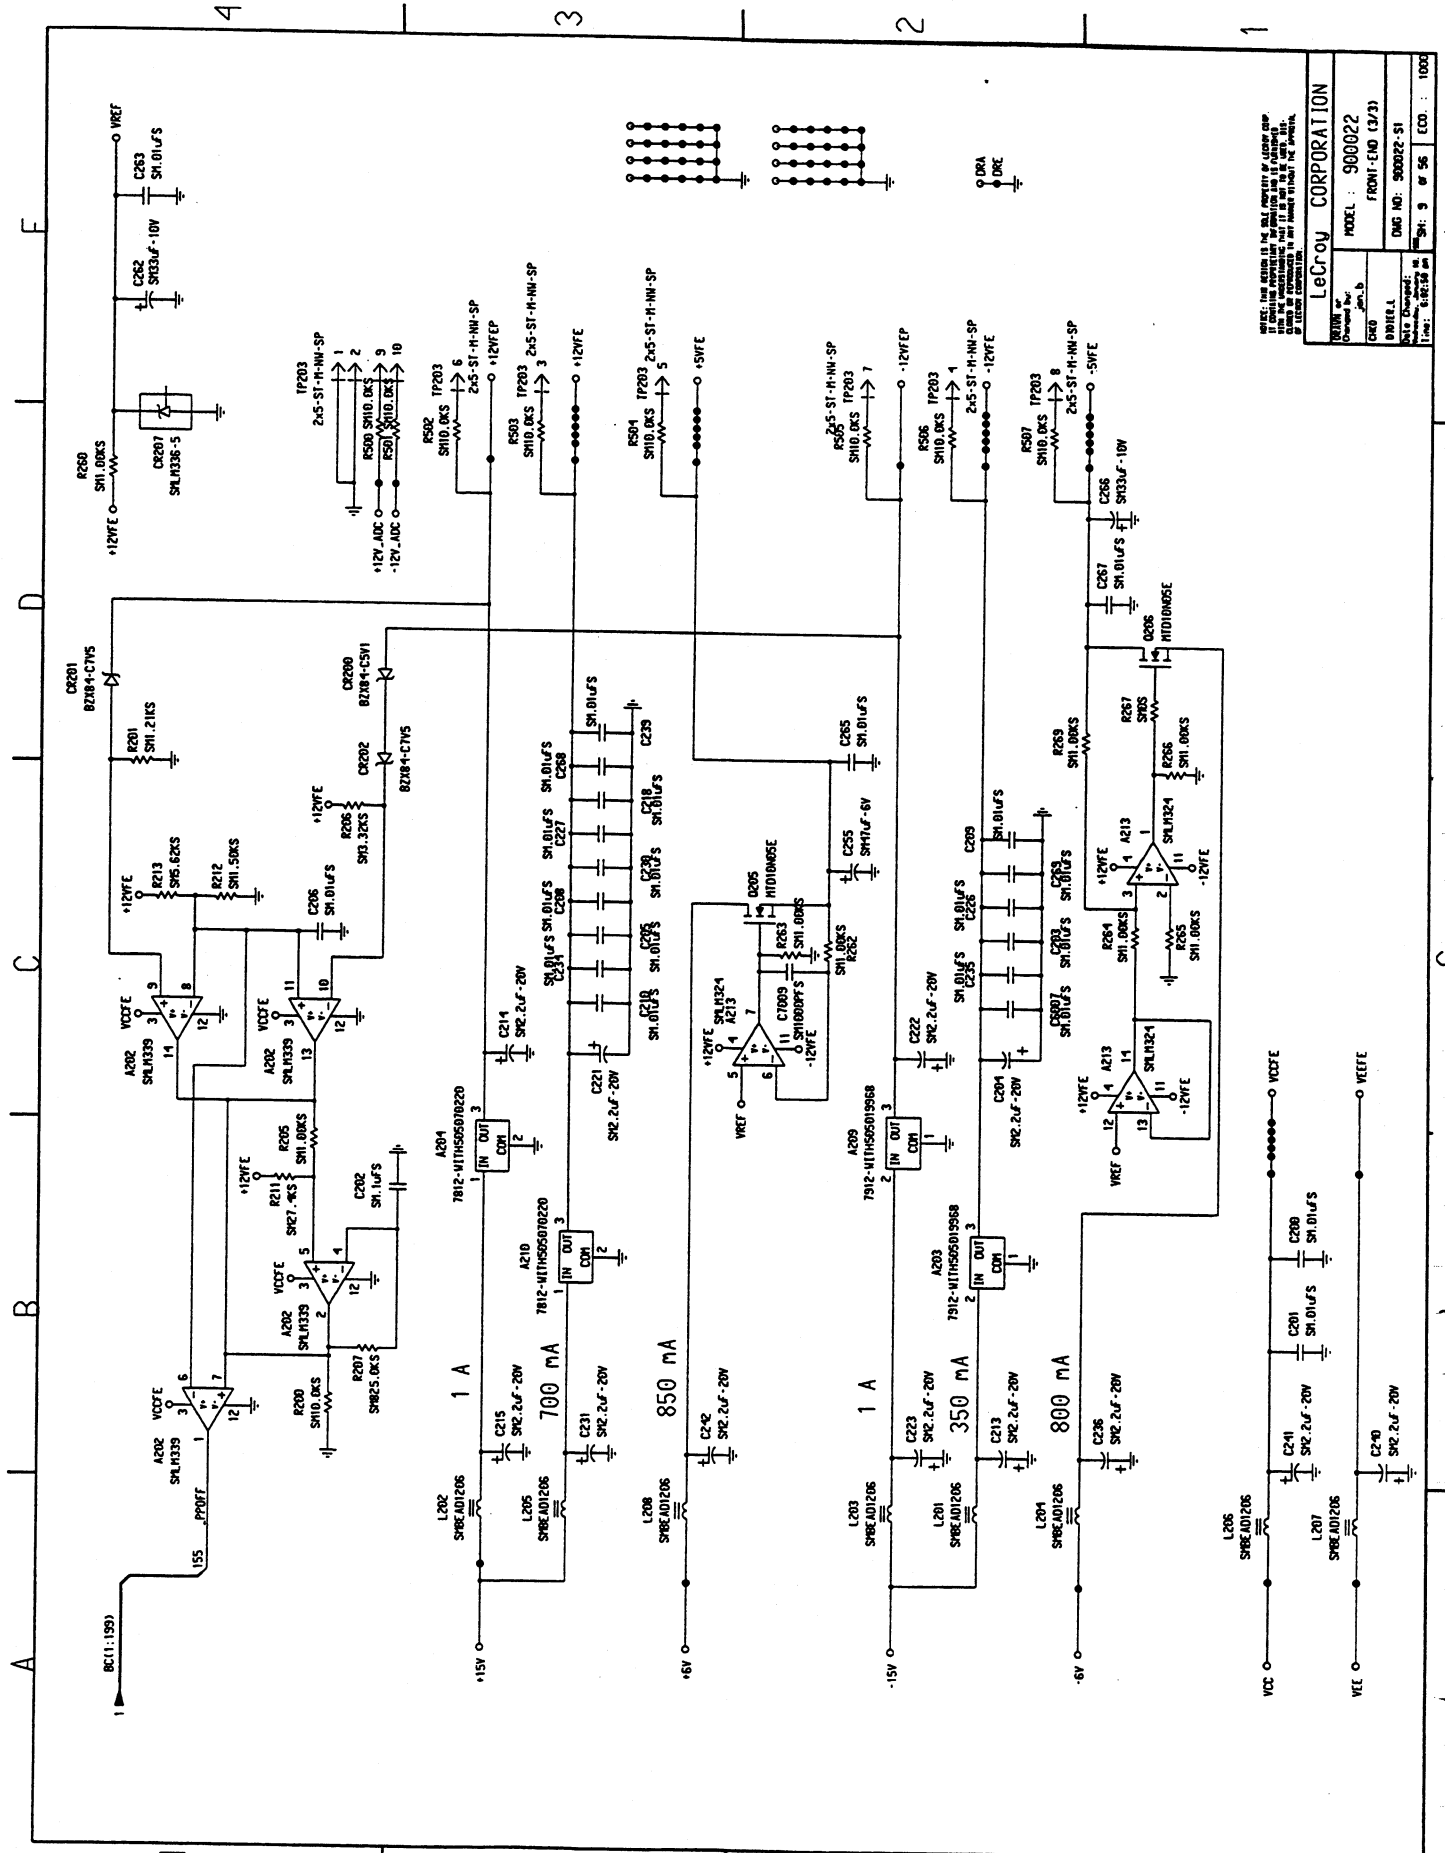

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORPORATION. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM LECROY CORPORATION.


LeCroy CORPORATION			
QUANTITY	DATE	MODEL	900022
REV. NO.	REV. NO.	FRONT-END	(3/73)
DESIGNER	DATE	DWG. NO.	900022-01
CHECKED	DATE	SCALE	AS SHOWN
DATE	DATE	BY	9 OF 56
DATE	DATE	CO.	1000

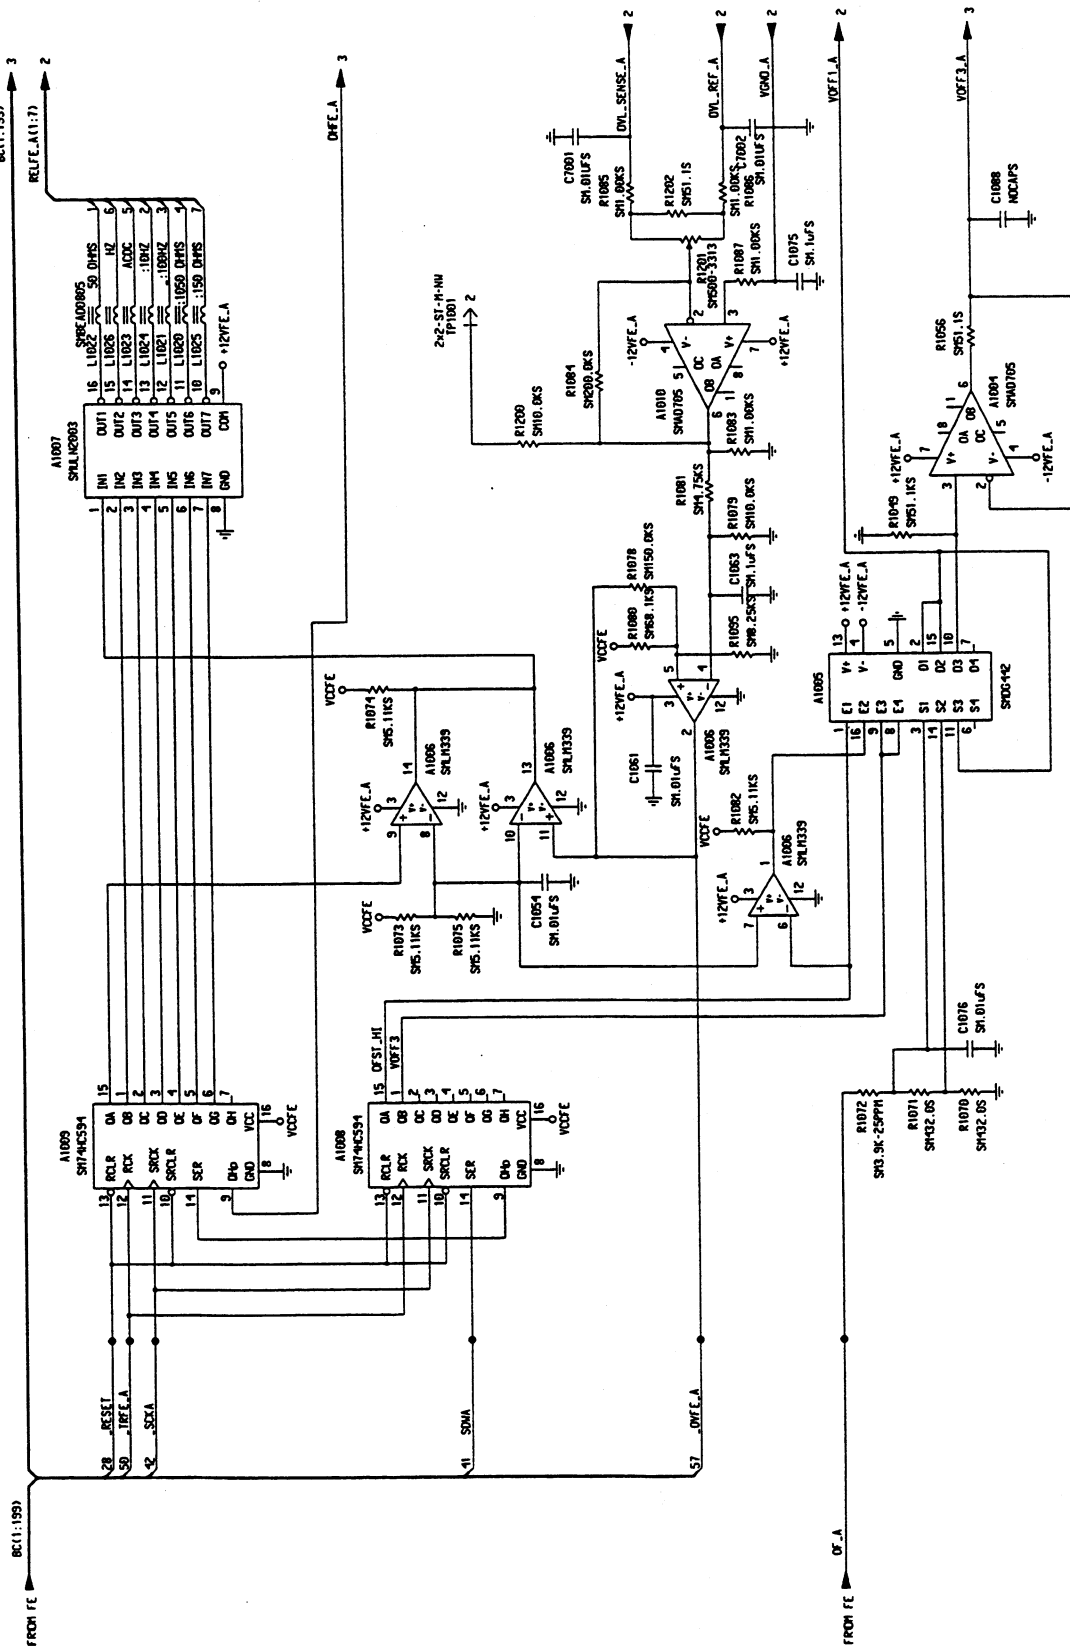

NOTE: THE ACTION IS THE SOLE PROPERTY OF ANALOG DEVICES. THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED, BUT THE INFORMATION IS NOT TO BE RELEASED TO THE PUBLIC WITHOUT THE WRITTEN PERMISSION OF ANALOG DEVICES.


LeCroy CORPORATION	
Model No.	900022
Part No.	FROM: END CHANNEL A (1/4)
Unit No.	ONE NO: 900022-S1
Rev. No.	REV. 10 OF 56
Doc. No.	ECO: 1000

Schematics, Layouts

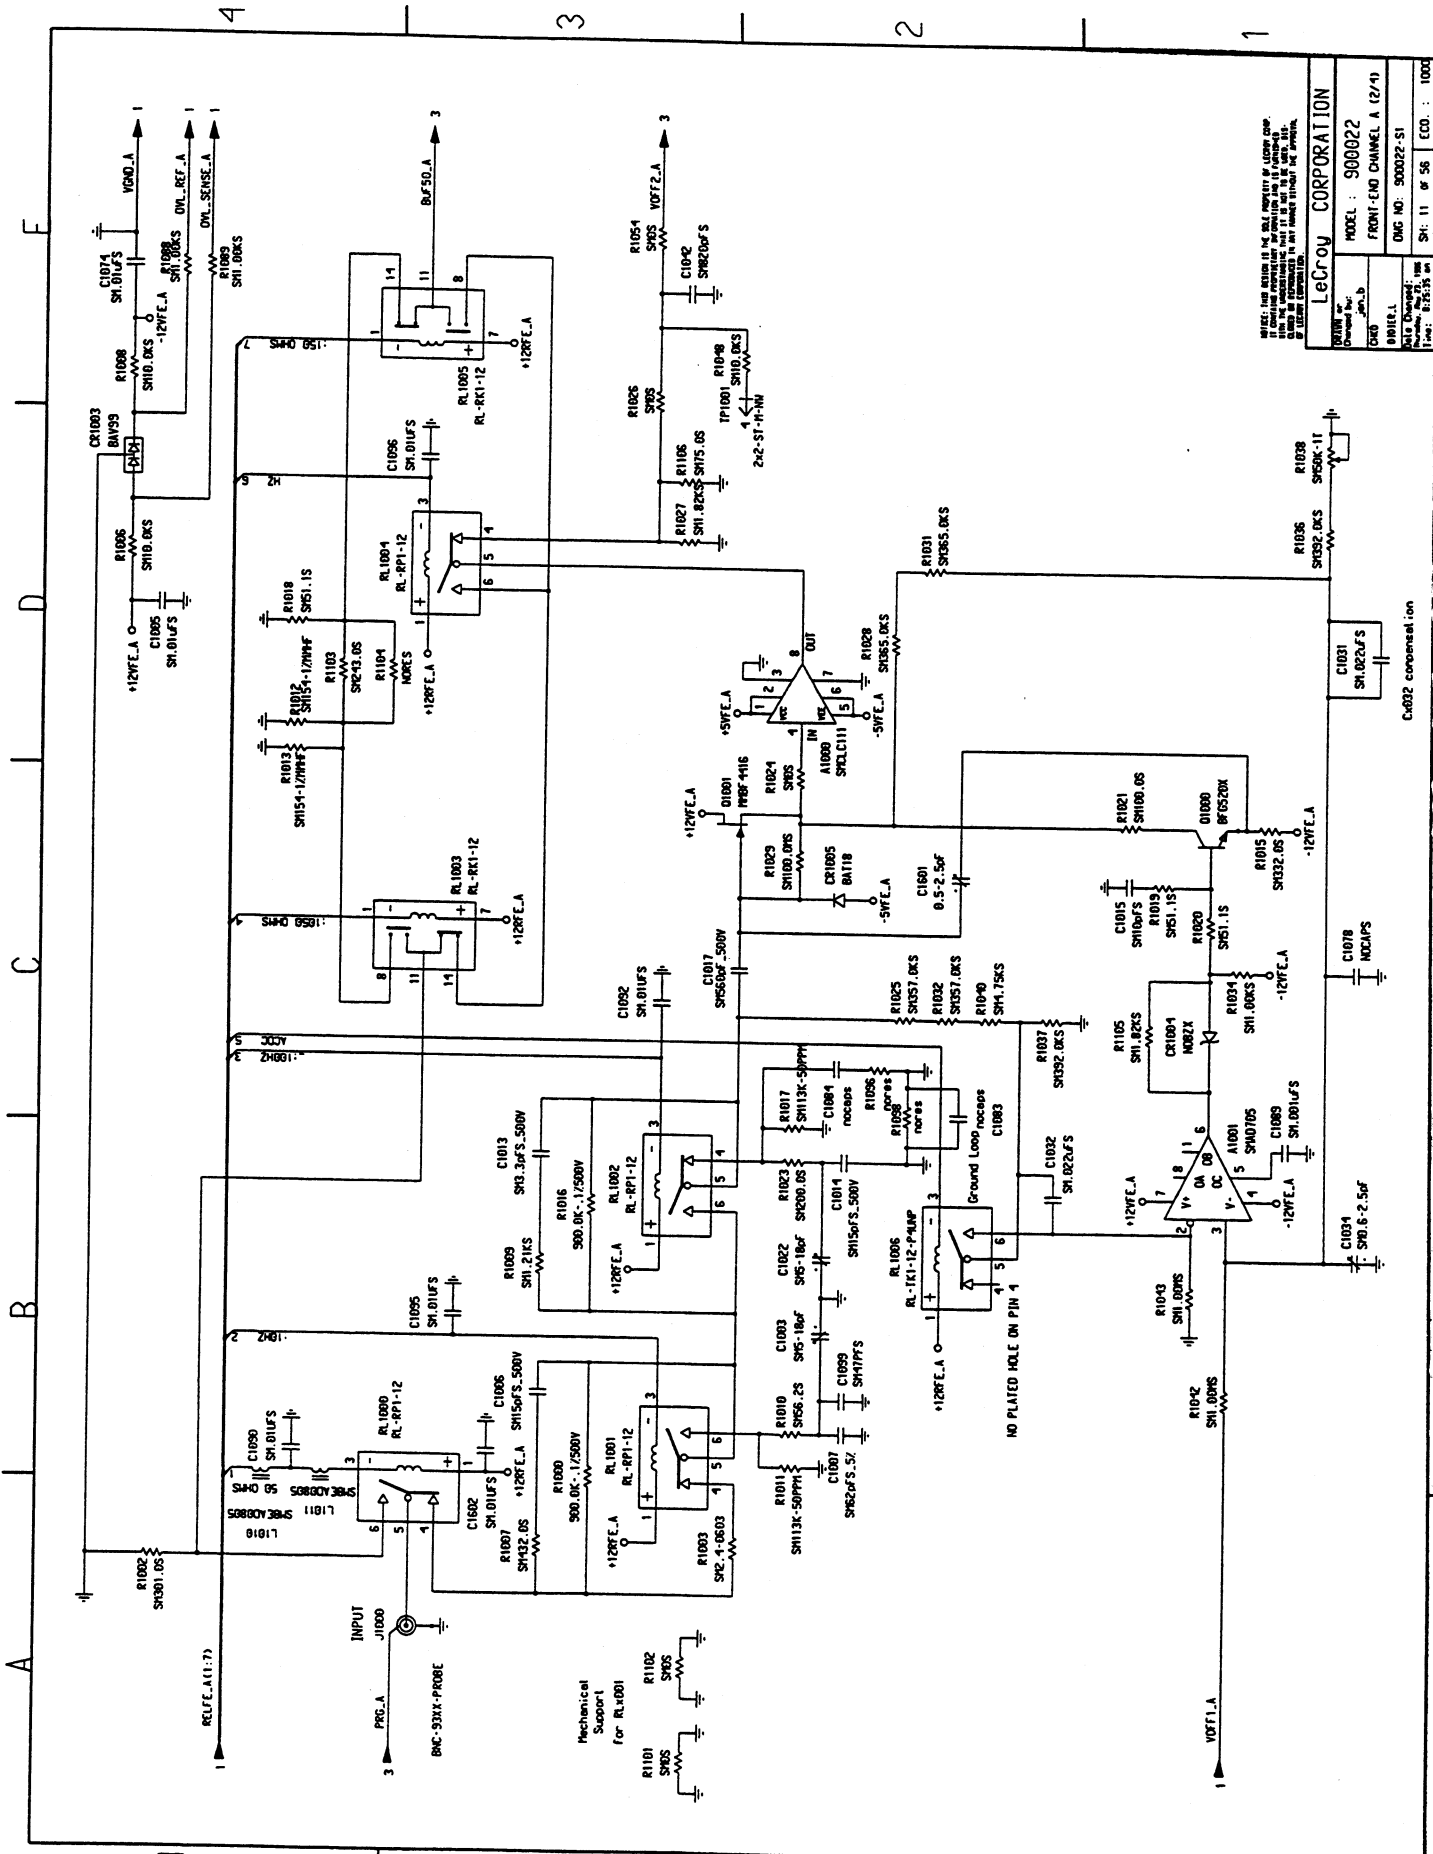

LeCroy CORPORATION
 MODEL : 900022
 FRONT-END CHANNEL A (2/4)
 Dwg No. 900022-51
 SH. 11 of 56 CO. : 1000


NOTE: THIS DRAWING IS THE PROPERTY OF LECROY CORP.
 IT CONVEYS NO INFORMATION OR KNOWLEDGE TO ANY OTHER PARTY.
 IT IS TO BE USED ONLY FOR THE PURPOSES INTENDED BY LECROY CORP.
 IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS
 WITHOUT THE EXPRESS PERMISSION OF LECROY CORPORATION.

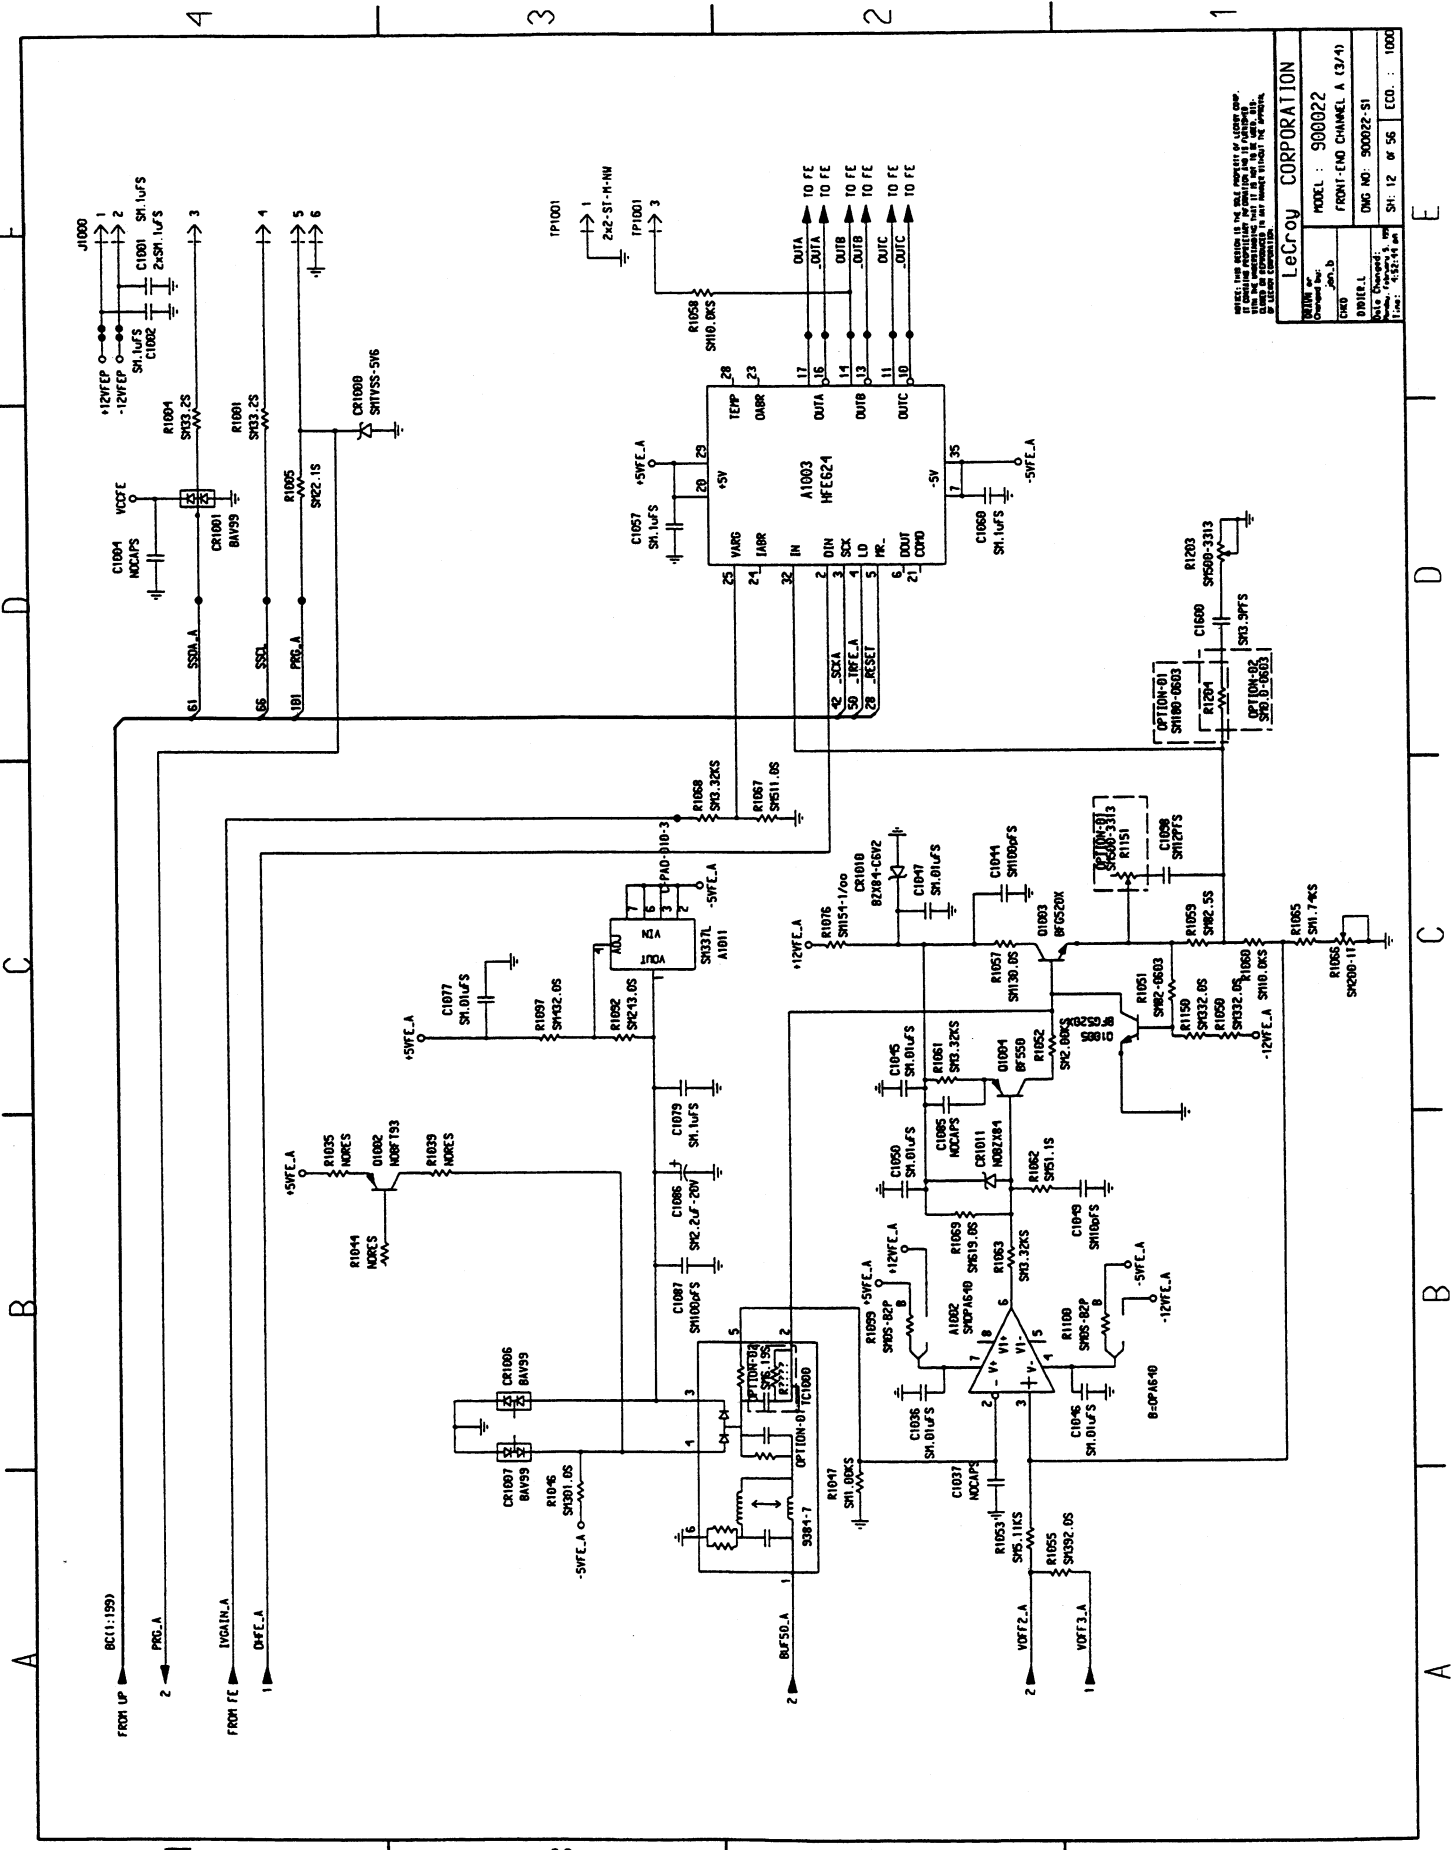

REPLACE THIS SECTION IN THE CHANNEL A (3/4) BOARD WITH THE CHANNEL A (3/4) BOARD FROM THE CHANNEL A (3/4) BOARD. THE CHANNEL A (3/4) BOARD IS THE CHANNEL A (3/4) BOARD.


LeCroy CORPORATION	
Model No.	MODEL : 900022
Order No.	FROM: END CHANNEL A (3/4)
Part No.	DWG NO. 900022-S1
Sheet No.	SH. 12 of 56
Drawn By	DATE: 6-22-74
Checked By	ECO. : 1000

Schematics, Layouts

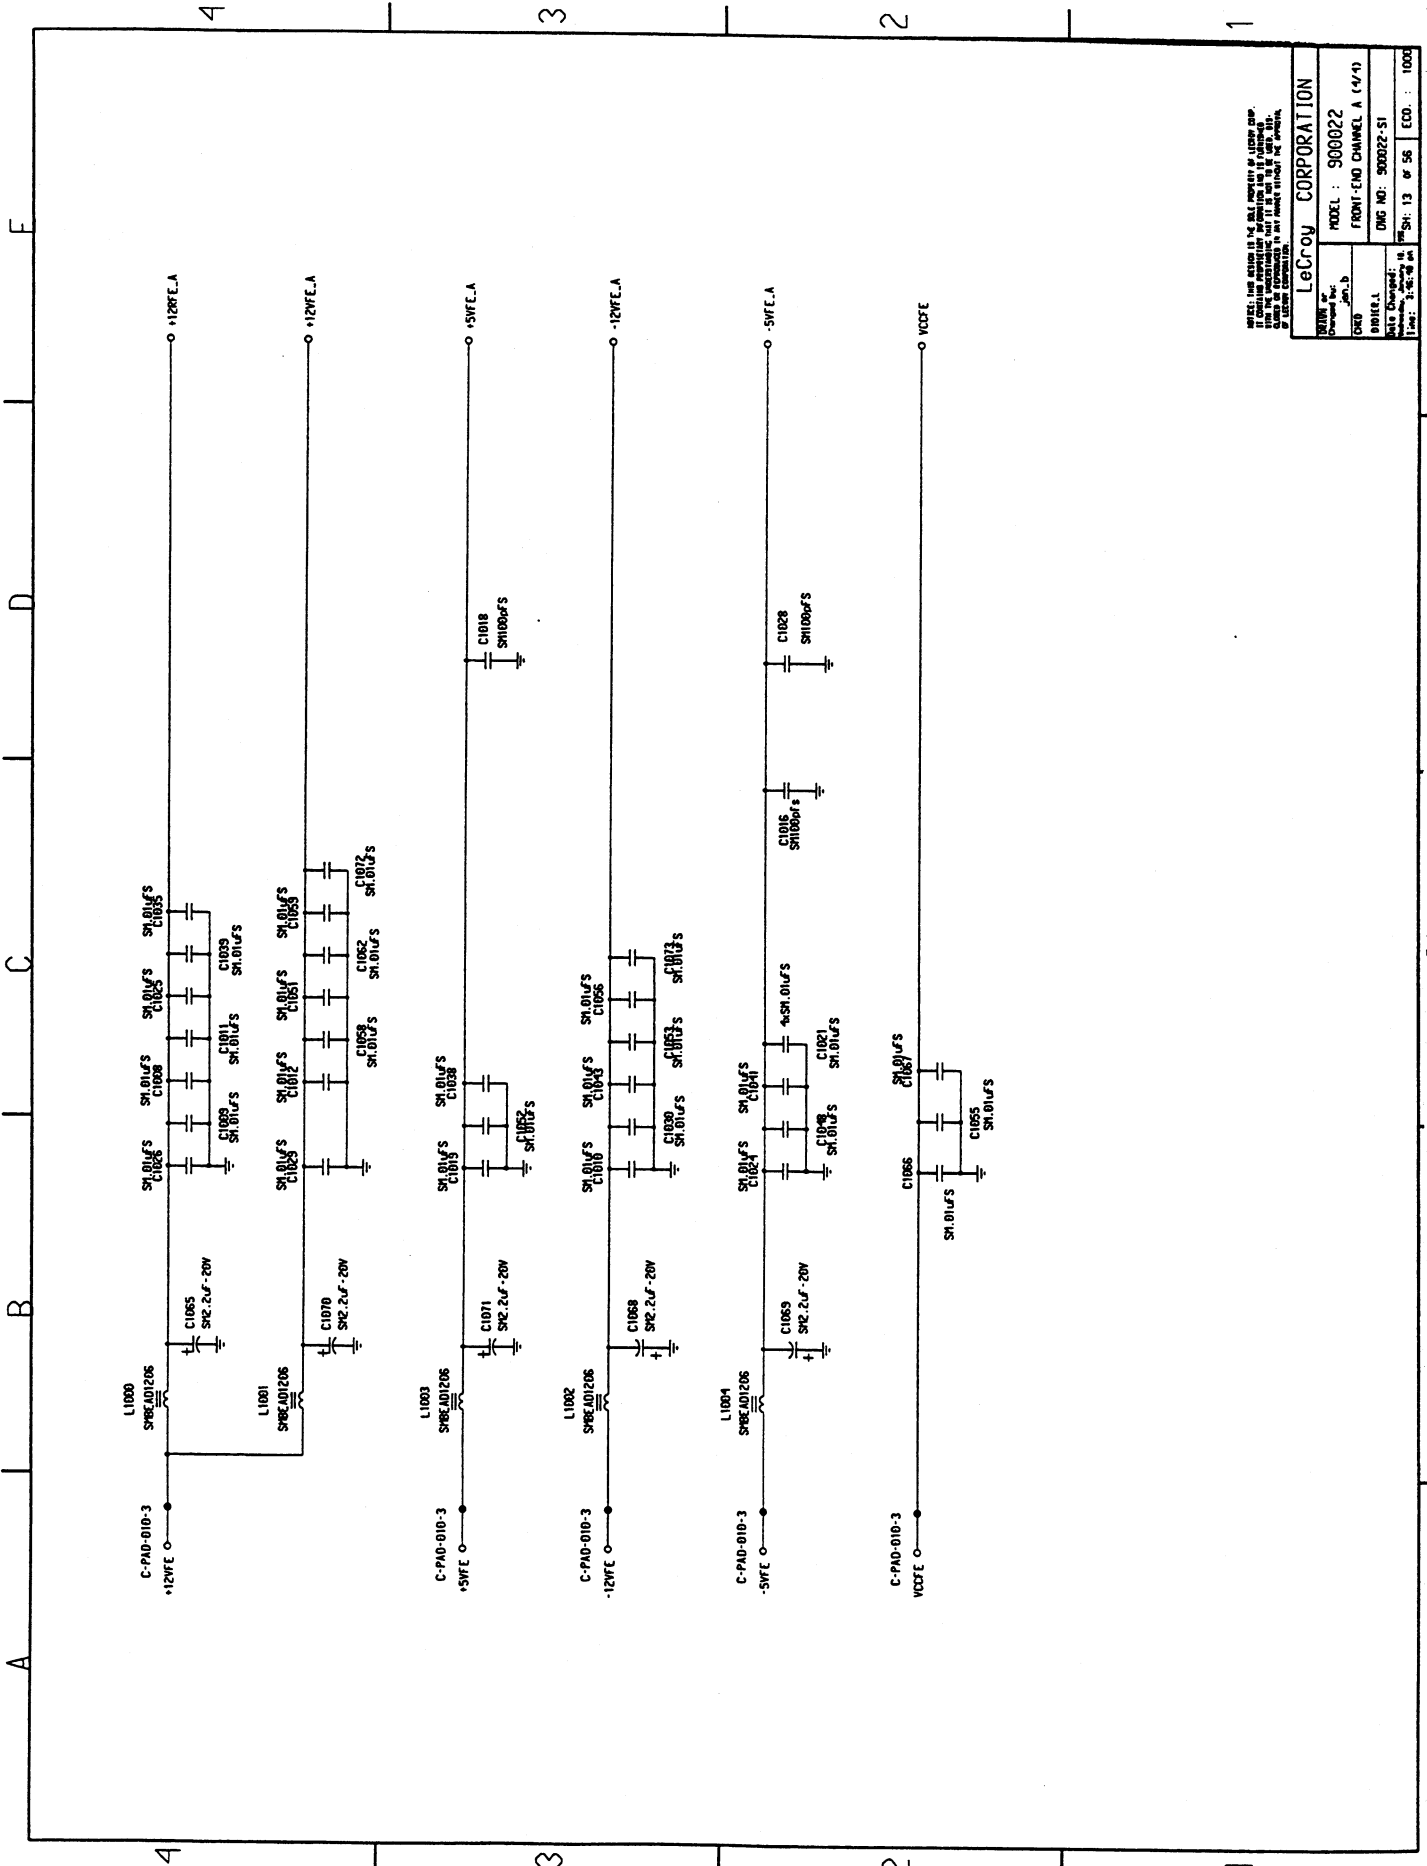

NOTES: THIS SCHEMATIC IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.


LeCroy CORPORATION MODEL : 900022 FROM: END CHANNEL A (4/4)	
Dwg No: 900022-S1 Date Changed: 11/84 Drawn: J. S. W.	SH: 13 of 56 ECD: 1000

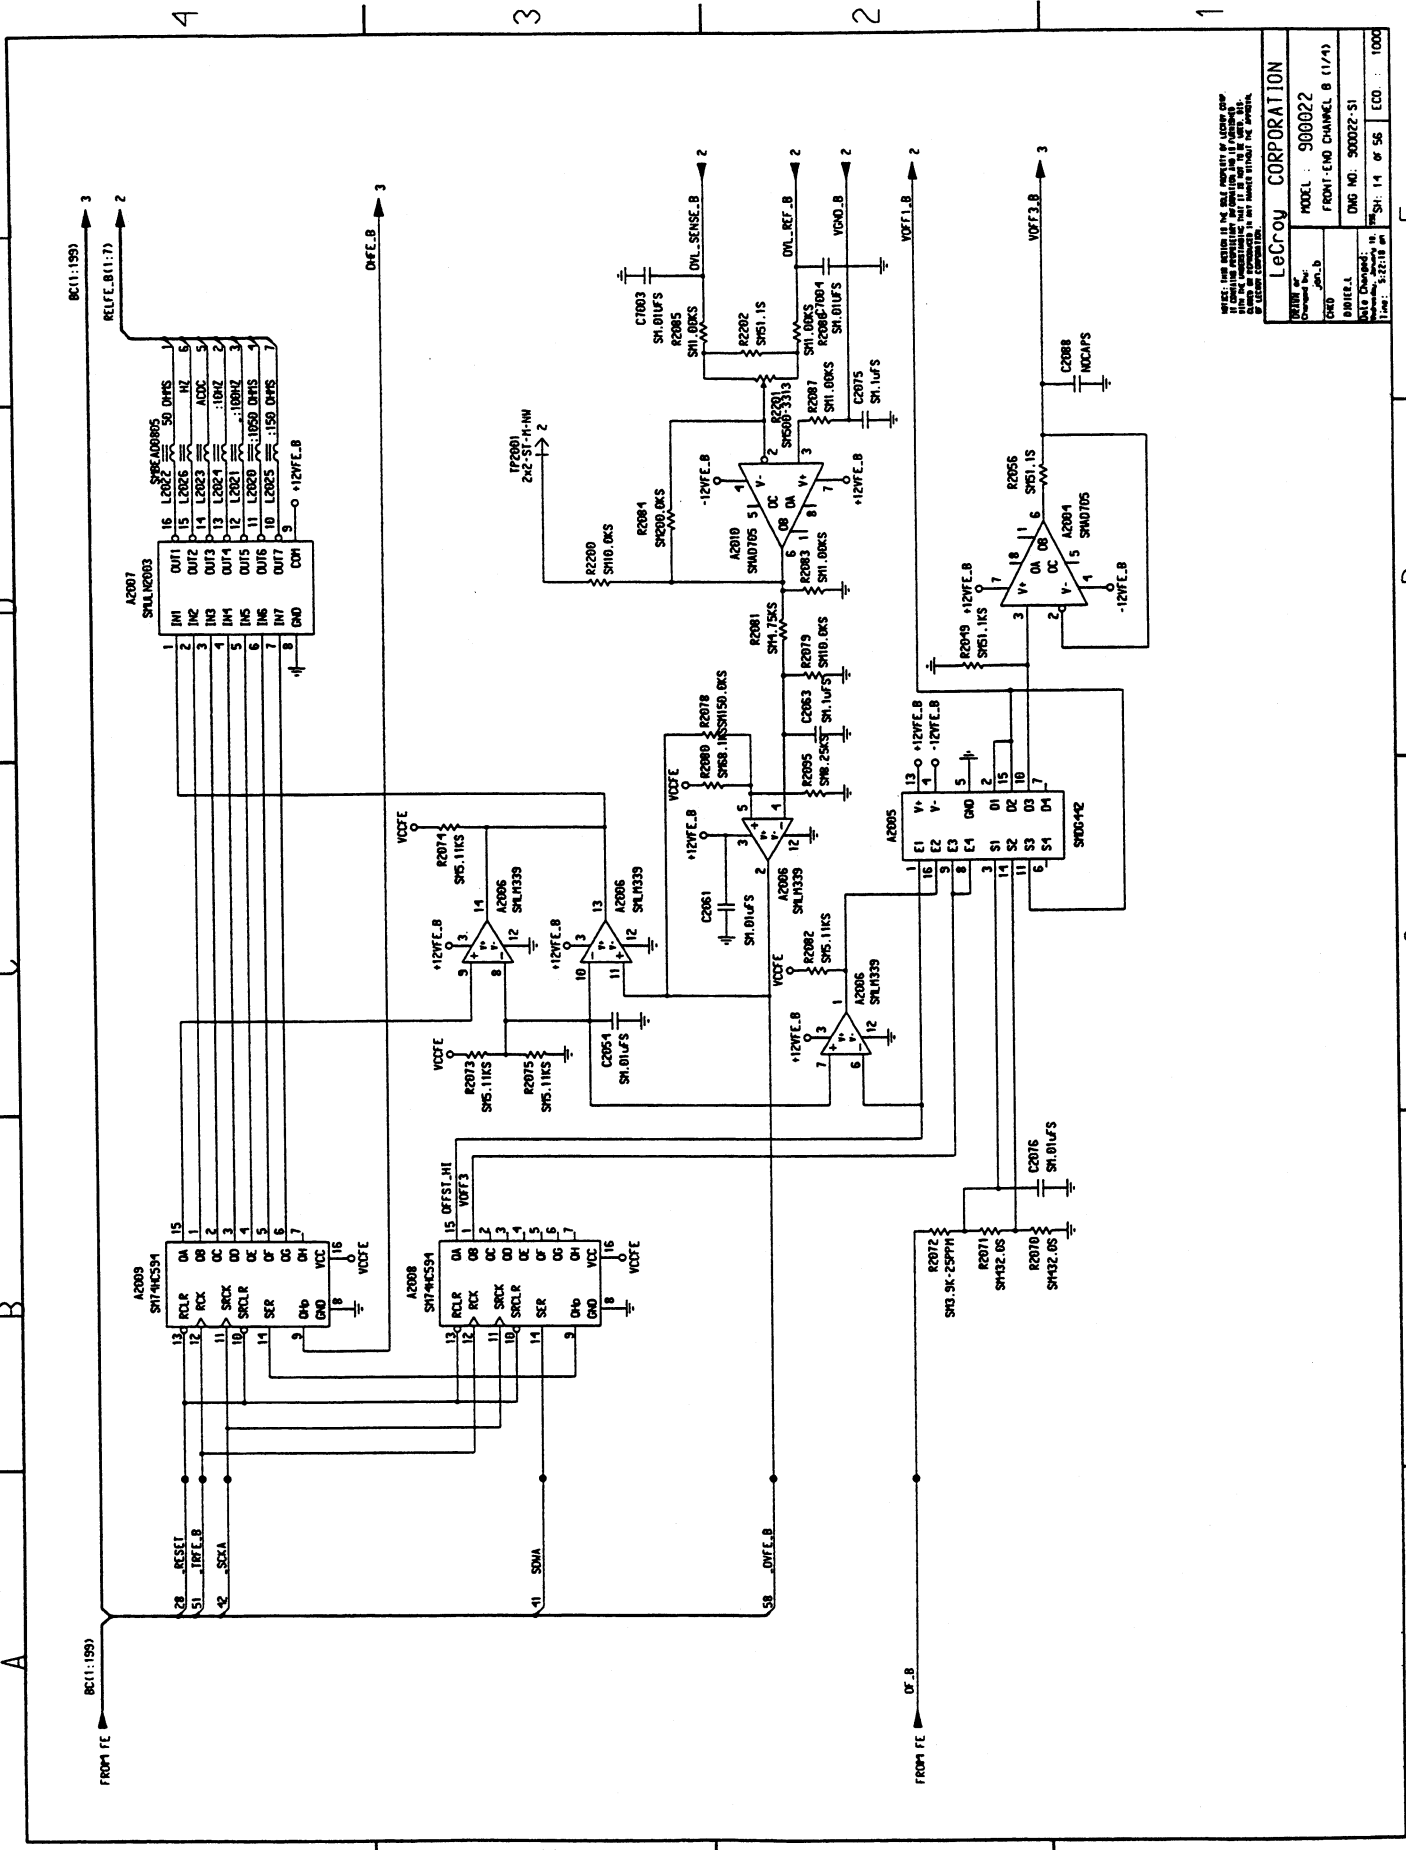

NOTES: THIS DRAWING IS THE SOLE PROPERTY OF LEADERSHIP CORPORATION. IT IS TO BE USED FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREIN. IT IS TO BE KEPT IN CONFIDENTIALITY AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF LEADERSHIP CORPORATION.


LeCroy CORPORATION	
MODEL: 900022	FRONT-END CHANNEL B (1/4)
DWG NO. 900022-S1	REV: 5.22.78
SHEET 14 OF 56	
ECC: 1000	

Schematics, Layouts

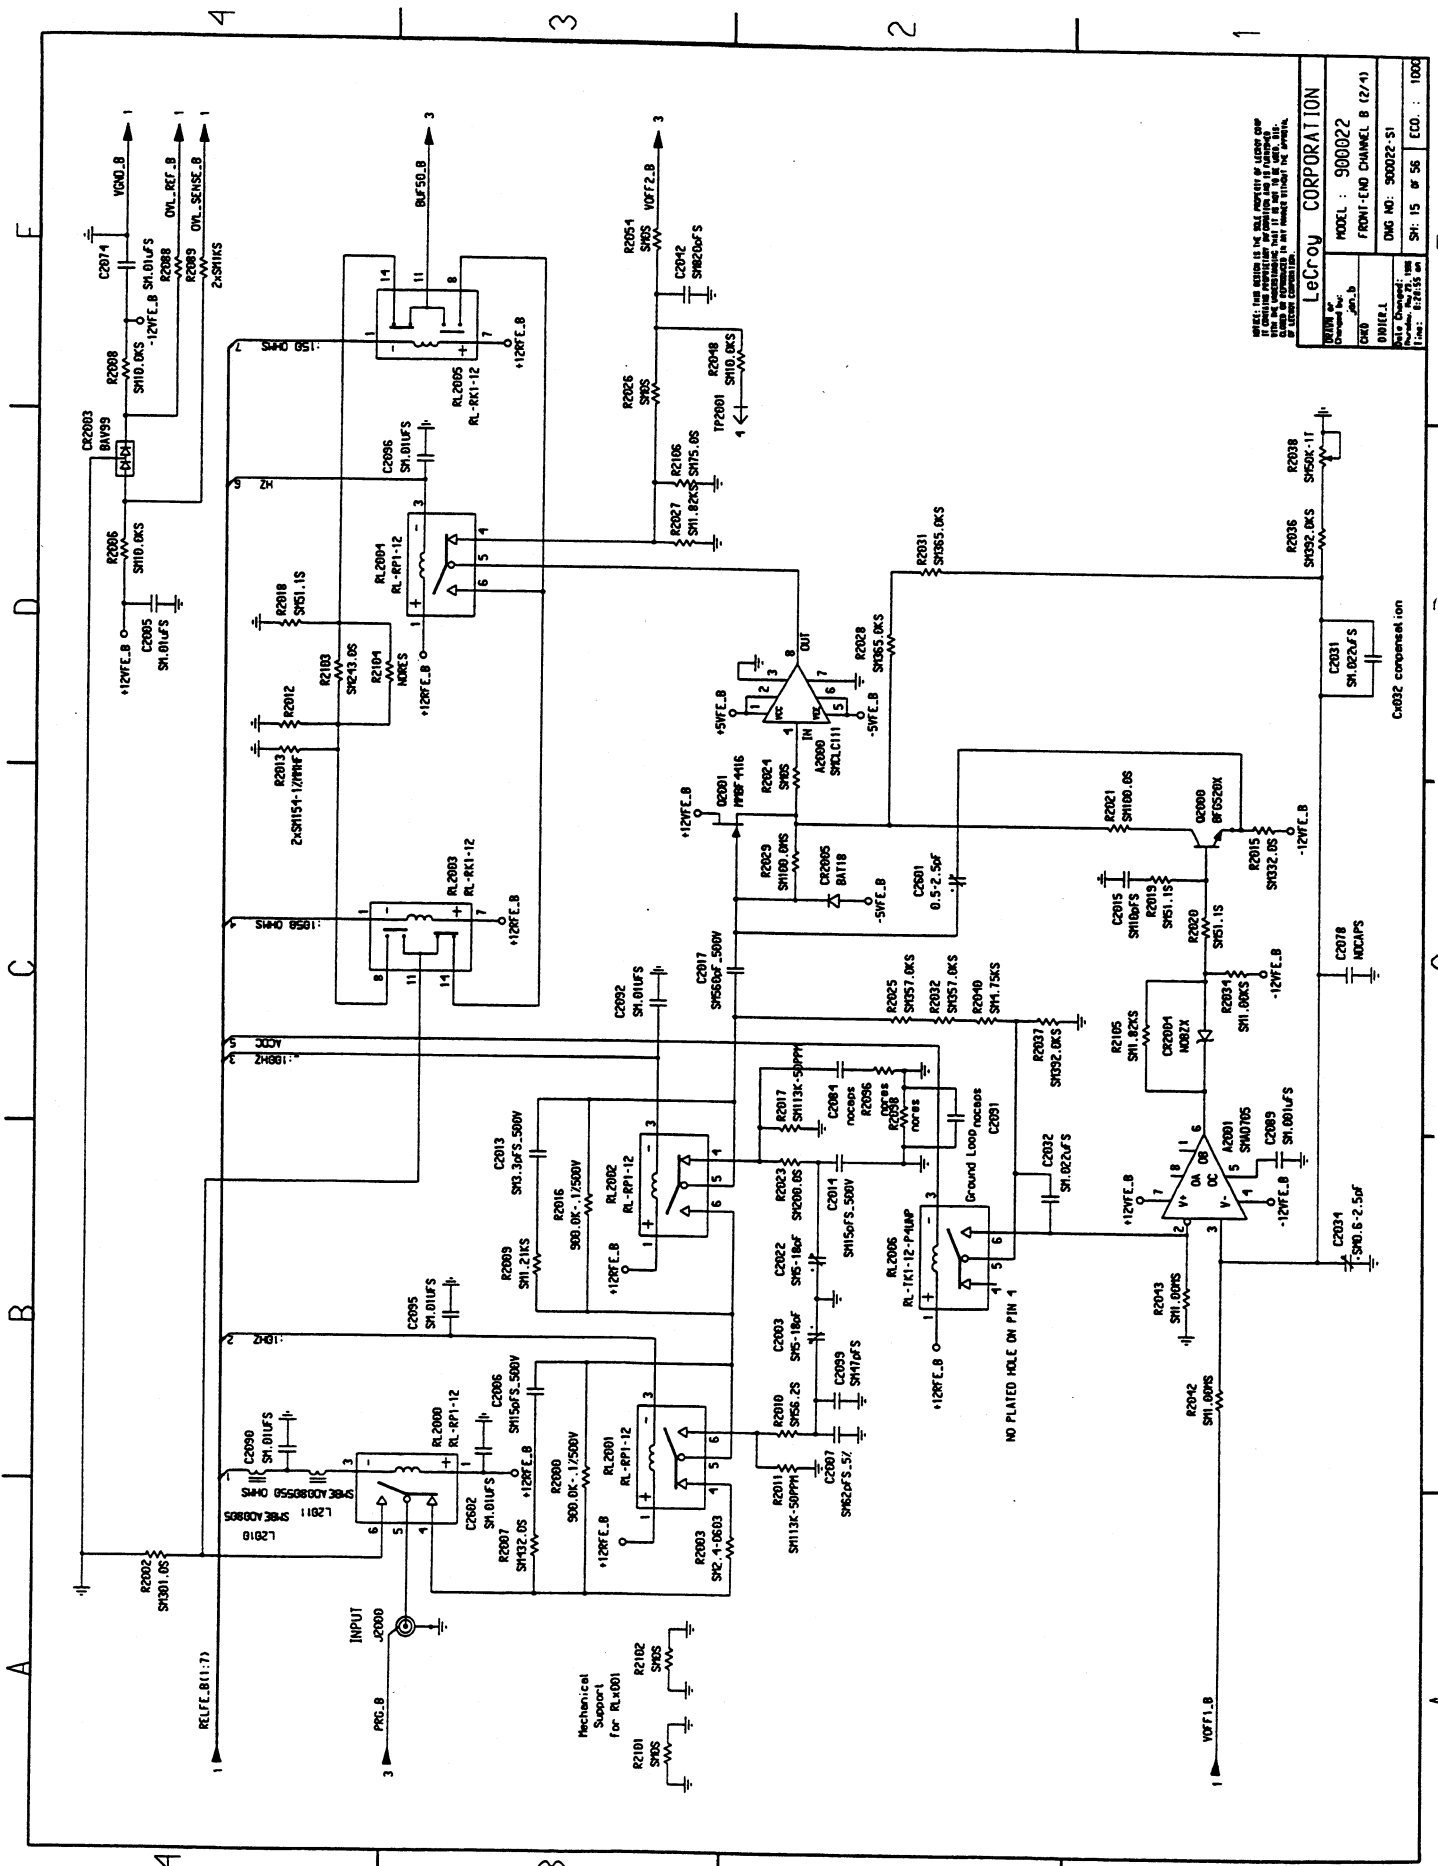

THIS IS THE ORIGINAL DRAWING FOR THE CHANNEL B (2/1) FRONT-END. IT IS THE PROPERTY OF LEACROY CORPORATION. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.


LeCroy CORPORATION	
Model No.	900022
Channel No.	FRONT-END CHANNEL B (2/1)
DATE	04/25/85
DRG NO.	900022-S1
Part No.	900022-S1
Rev.	1
Date	02/15/85
SH	15 of 56
ECO	1000

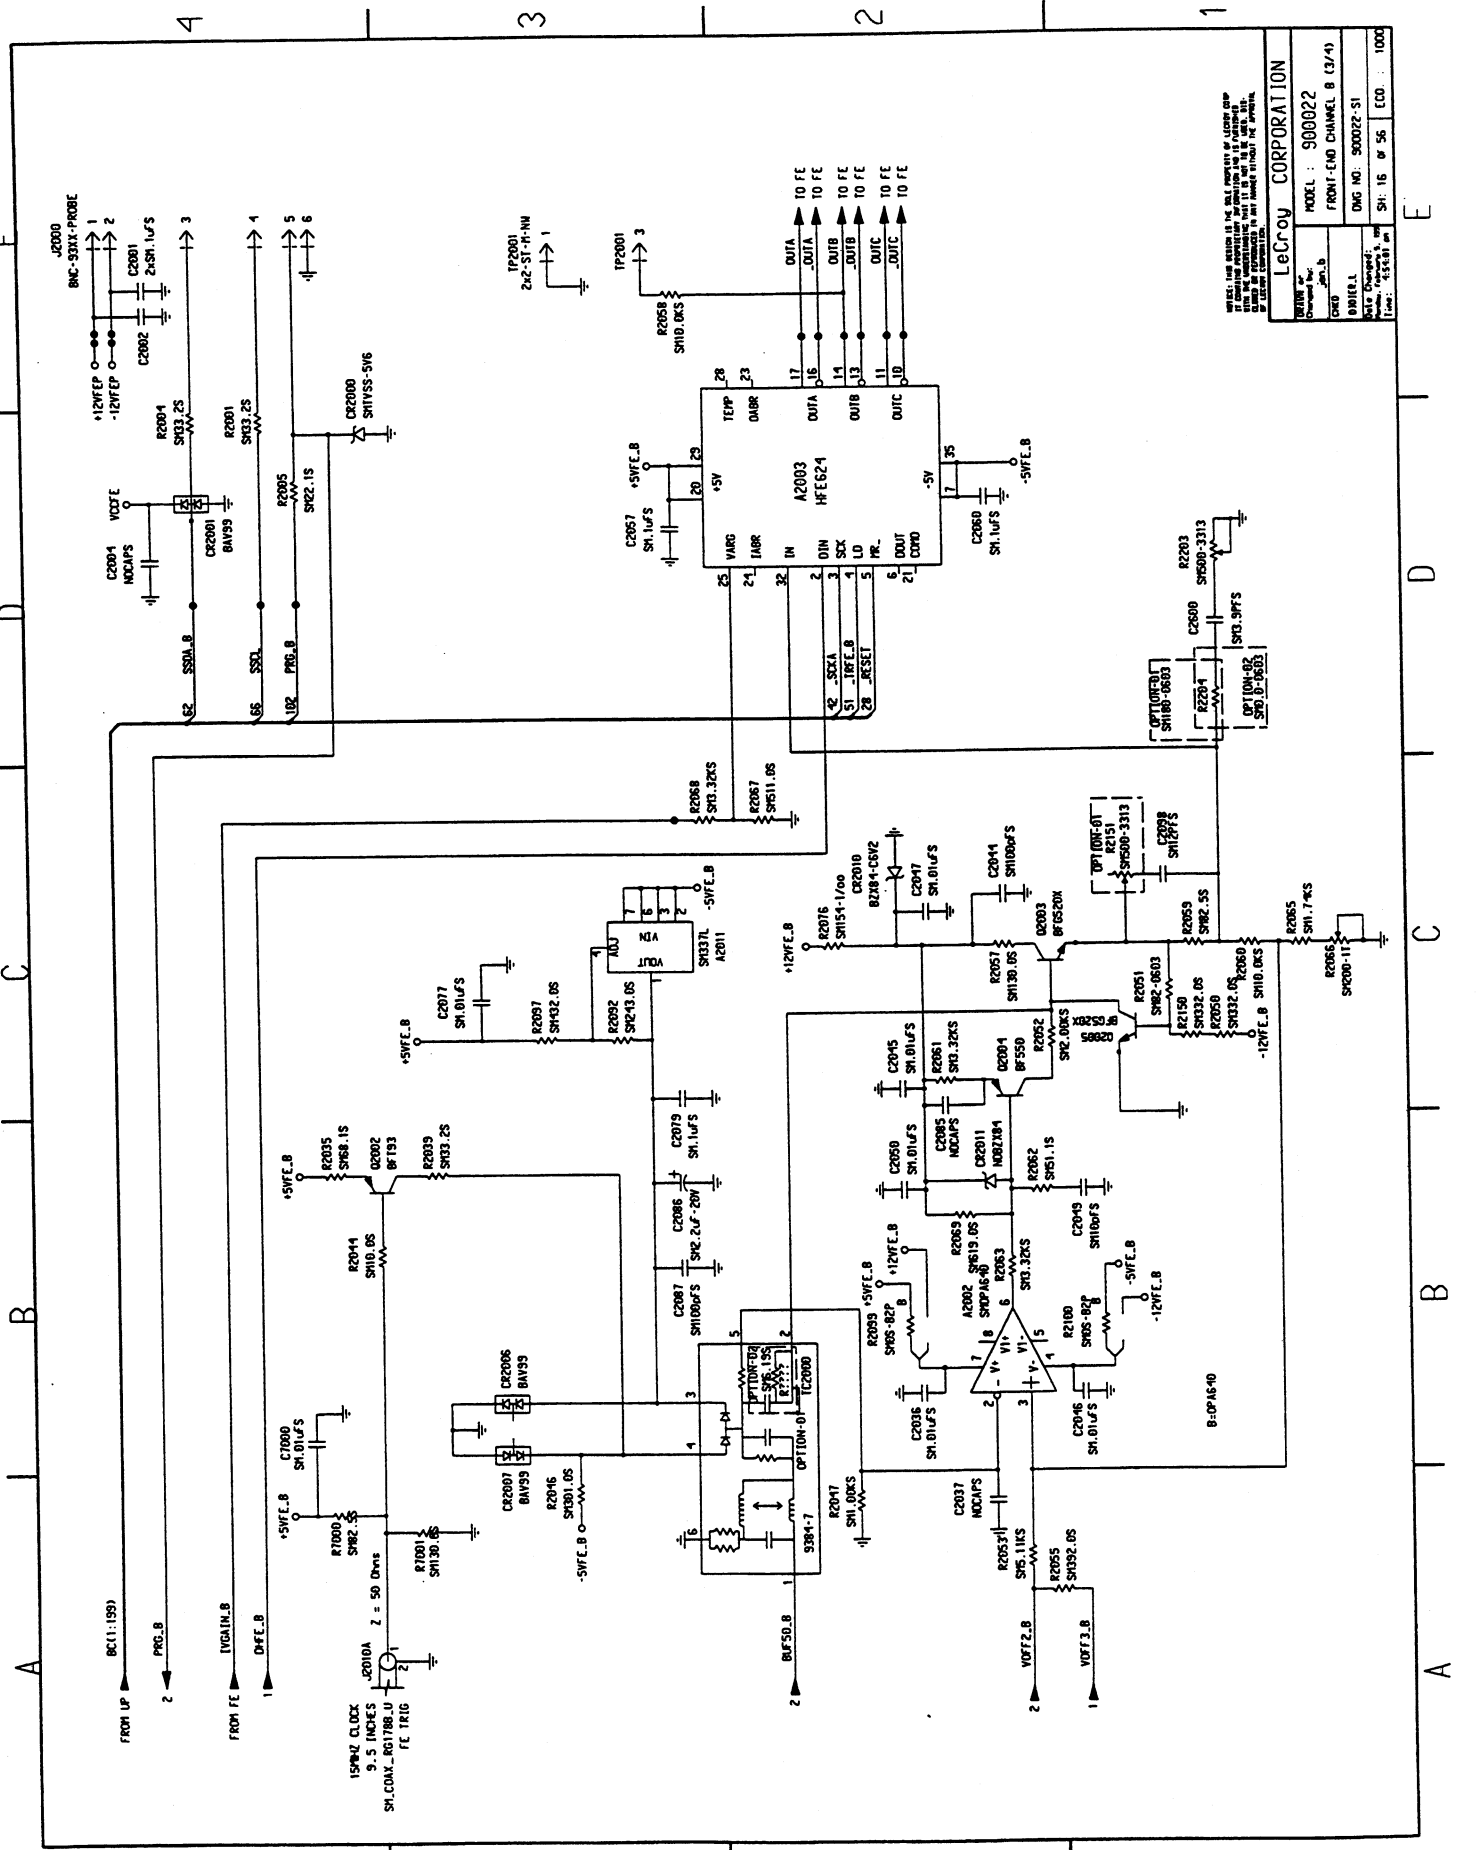

THIS DRAWING IS THE PROPERTY OF LEICROY CORPORATION
 IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE EQUIPMENT
 SPECIFICALLY IDENTIFIED THEREON. IT IS NOT TO BE REPRODUCED,
 COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS,
 ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING,
 OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM,
 WITHOUT THE WRITTEN PERMISSION OF LEICROY CORPORATION.

DATE	REV	DESCRIPTION
05/18/81	1	FRONT-END CHANNEL 8 (3/4)
05/18/81	1	FRONT-END CHANNEL 8 (3/4)
05/18/81	1	FRONT-END CHANNEL 8 (3/4)
05/18/81	1	FRONT-END CHANNEL 8 (3/4)


Schematics, Layouts

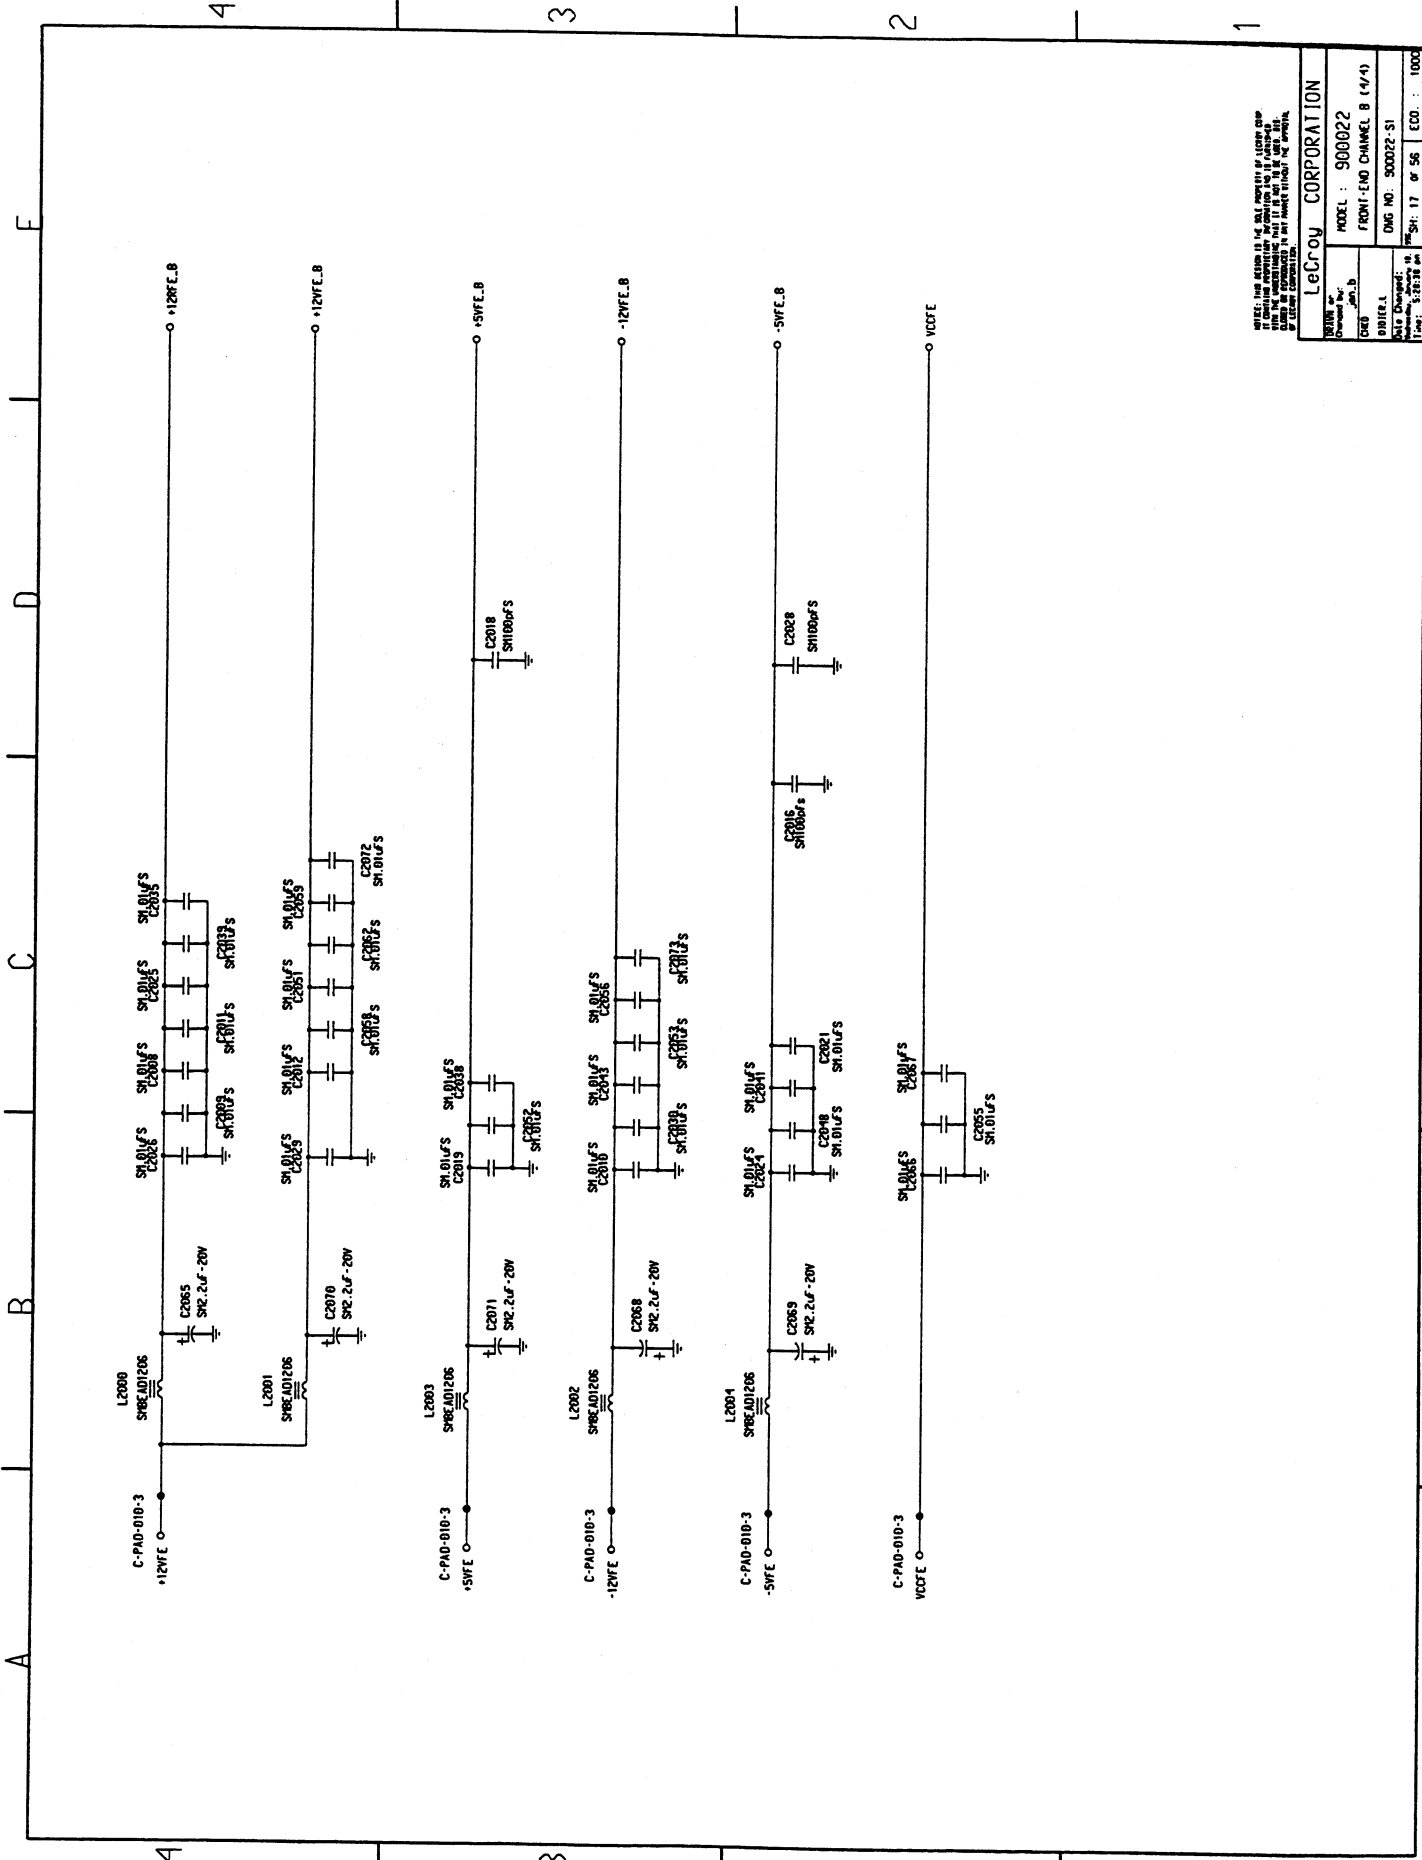

WIRE: THIS MODEL IS THE ONLY PROPERTY OF LEICROY CORP.
 IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS,
 ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.
 ALL RIGHTS RESERVED.

LeCroy CORPORATION	
MODEL :	900022
FRONT-END CHANNEL :	8 (1/1)
DWG NO. :	900022-01
DATE :	1983.03.23
REV. :	17 of 56
ECCO :	1000


Schematics, Layouts

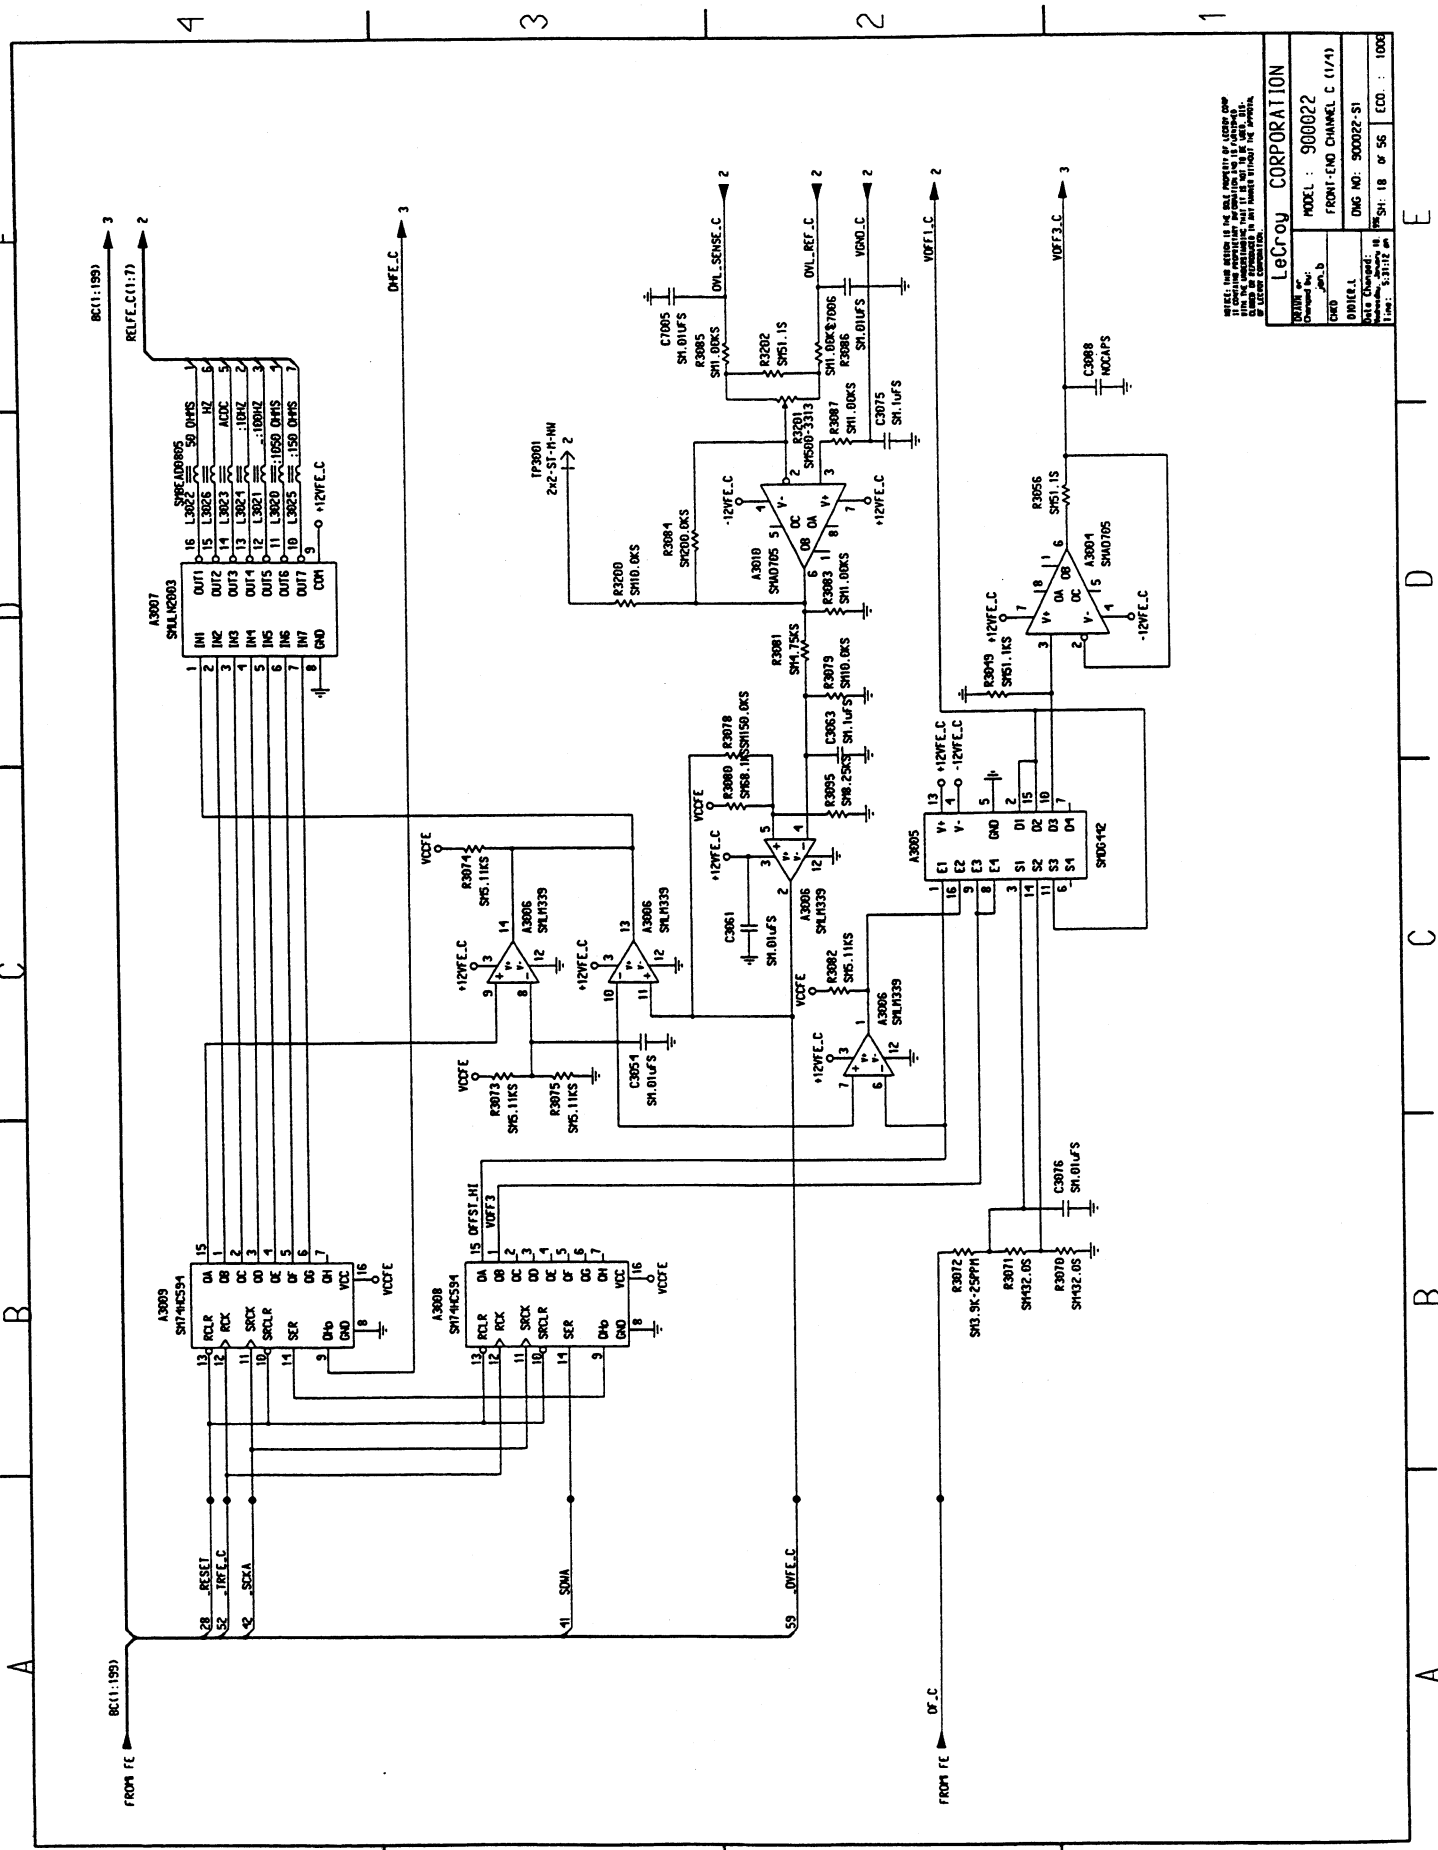

WIREL: THIS DRAWING IS THE SOLE PROPERTY OF LUCAS CORP. IT IS TO BE USED FOR THE PURPOSES SPECIFIED IN THE ORDER. NO OTHER REPRODUCTION OR TRANSMISSION IS TO BE MADE WITHOUT THE WRITTEN PERMISSION OF LUCAS CORP.

LECROY CORPORATION	
MODEL : 900022	FRONT-END CHANNEL C (1/4)
DWG NO: 900022-S1	REV: 18 OF 56
DATE: 11/18/83	ECO: 1008


Schematics, Layouts

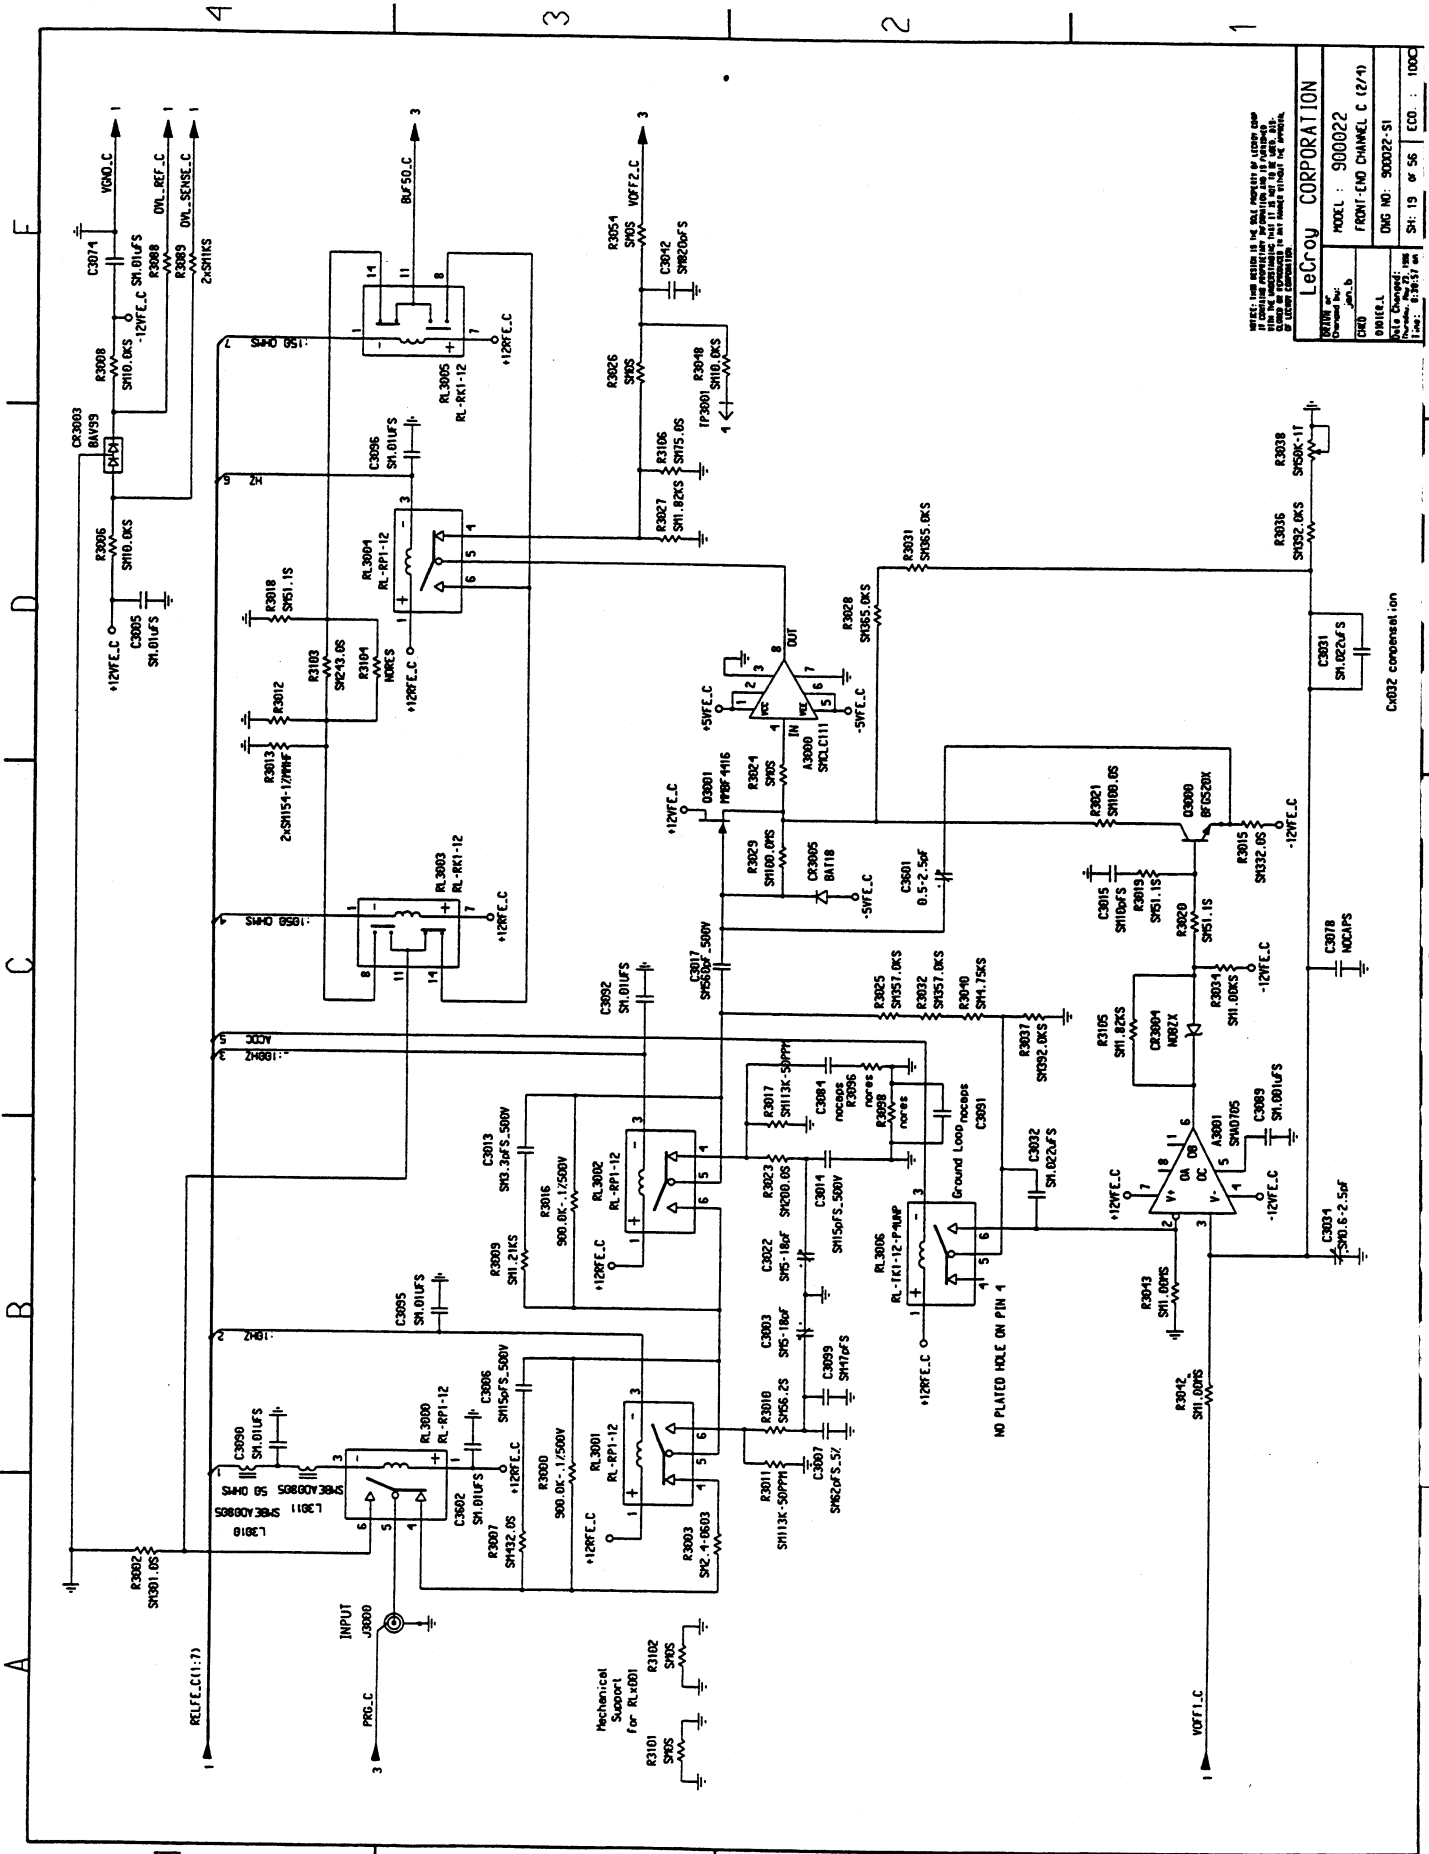

NOTE: THIS DRAWING IS THE PROPERTY OF LEGRON CORPORATION. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE FRONT-END CHANNEL C (27/1) AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LEGRON CORPORATION	
Model No.:	900022
Part No.:	FRONT-END CHANNEL C (27/1)
Rev. No.:	0101E.1
Drawn By:	W.L.T.
Checked By:	W.L.T.
Date:	8/16/57
Sheet No.:	19 of 56
ECO:	1000


Schematics, Layouts

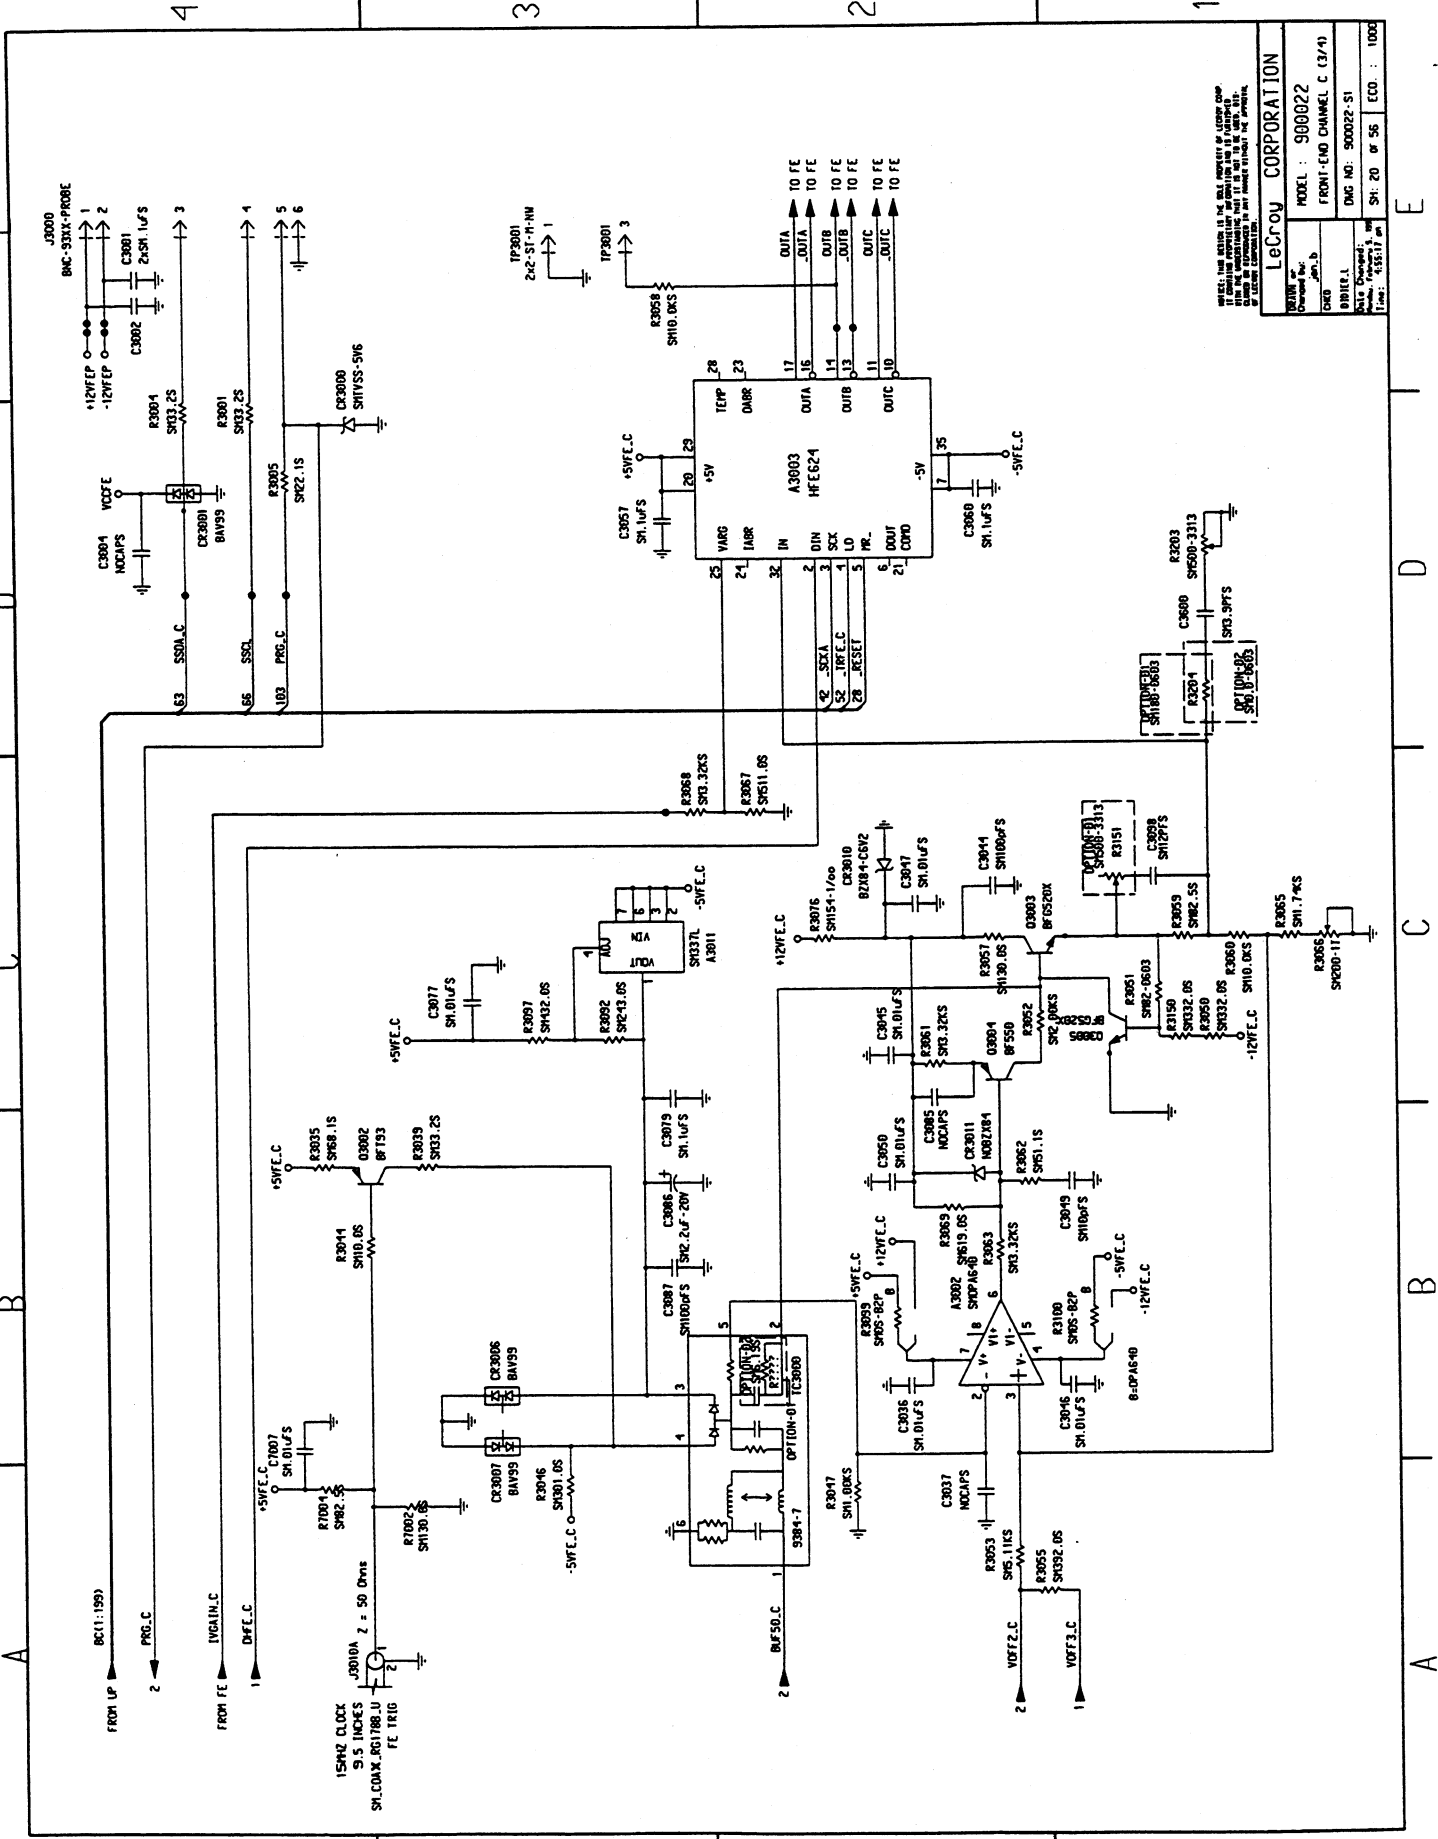


NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECOY CORP. IT IS TO BE USED ONLY FOR THE PURPOSES INTENDED BY LECOY CORP. ANY REPRODUCTION OR TRANSMISSION OF THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF LECOY CORP. IS PROHIBITED.

LeCroy CORPORATION	
Model No.:	900022
Front-End Channel C (3/74)	
Doc No.:	900022-51
Sheet:	20 of 56
ECO:	1000

Schematics, Layouts

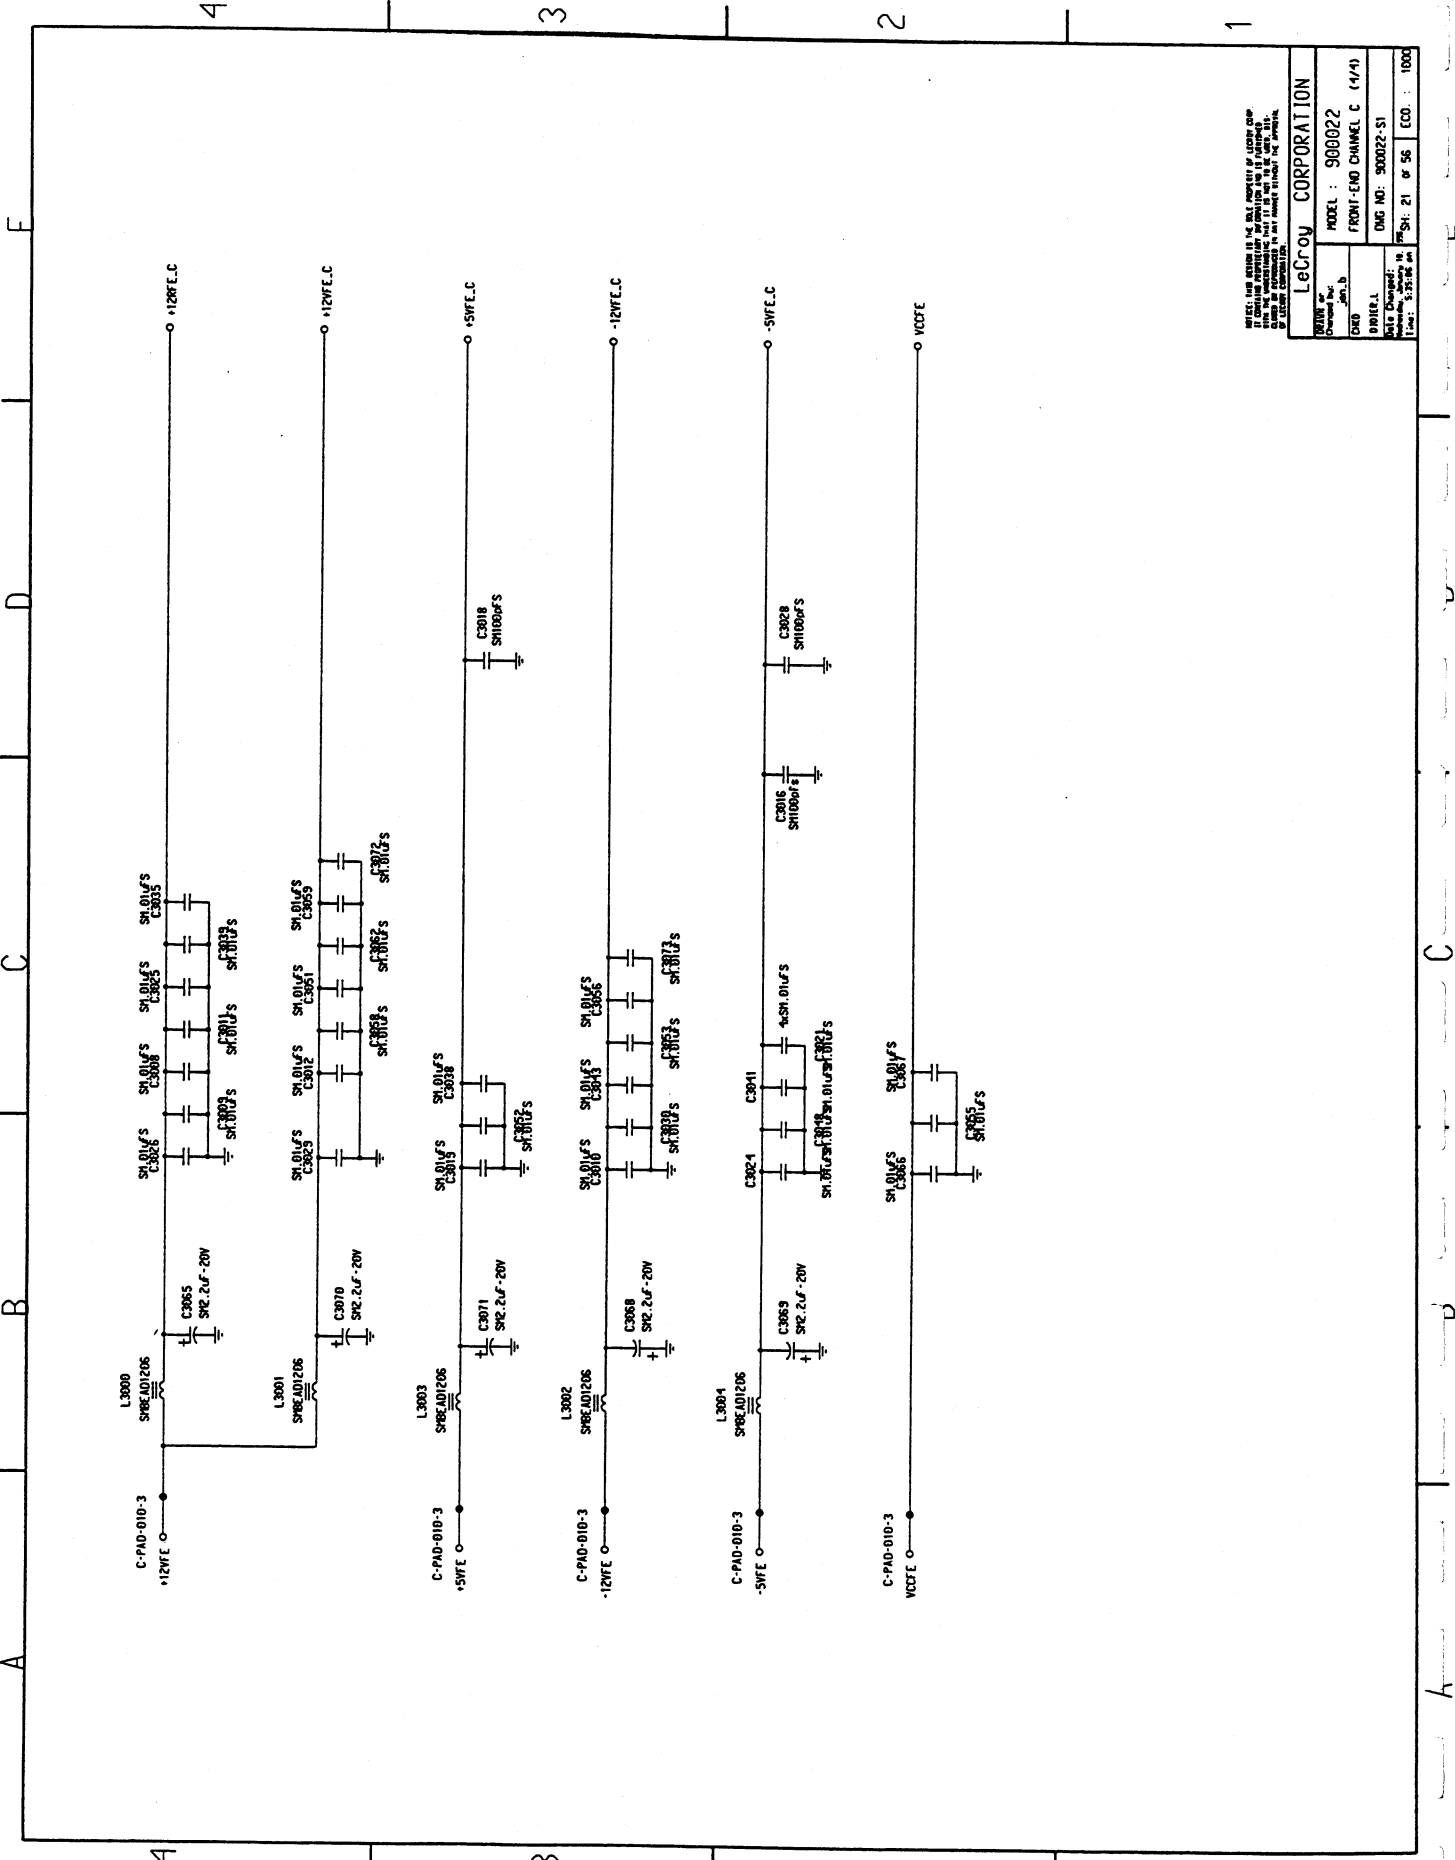


LeCroy CORPORATION MODEL : 900022 FRONT-END CHANNEL C (1/1)	
DATE : DESIGNED BY : DRAWN BY :	DATE CHANGED : DRAWN BY : DESIGNED BY :
SHEET NO. : 21 of 56 TOTAL SHEETS : 56	PROJECT NO. : 900022-S1 DATE :

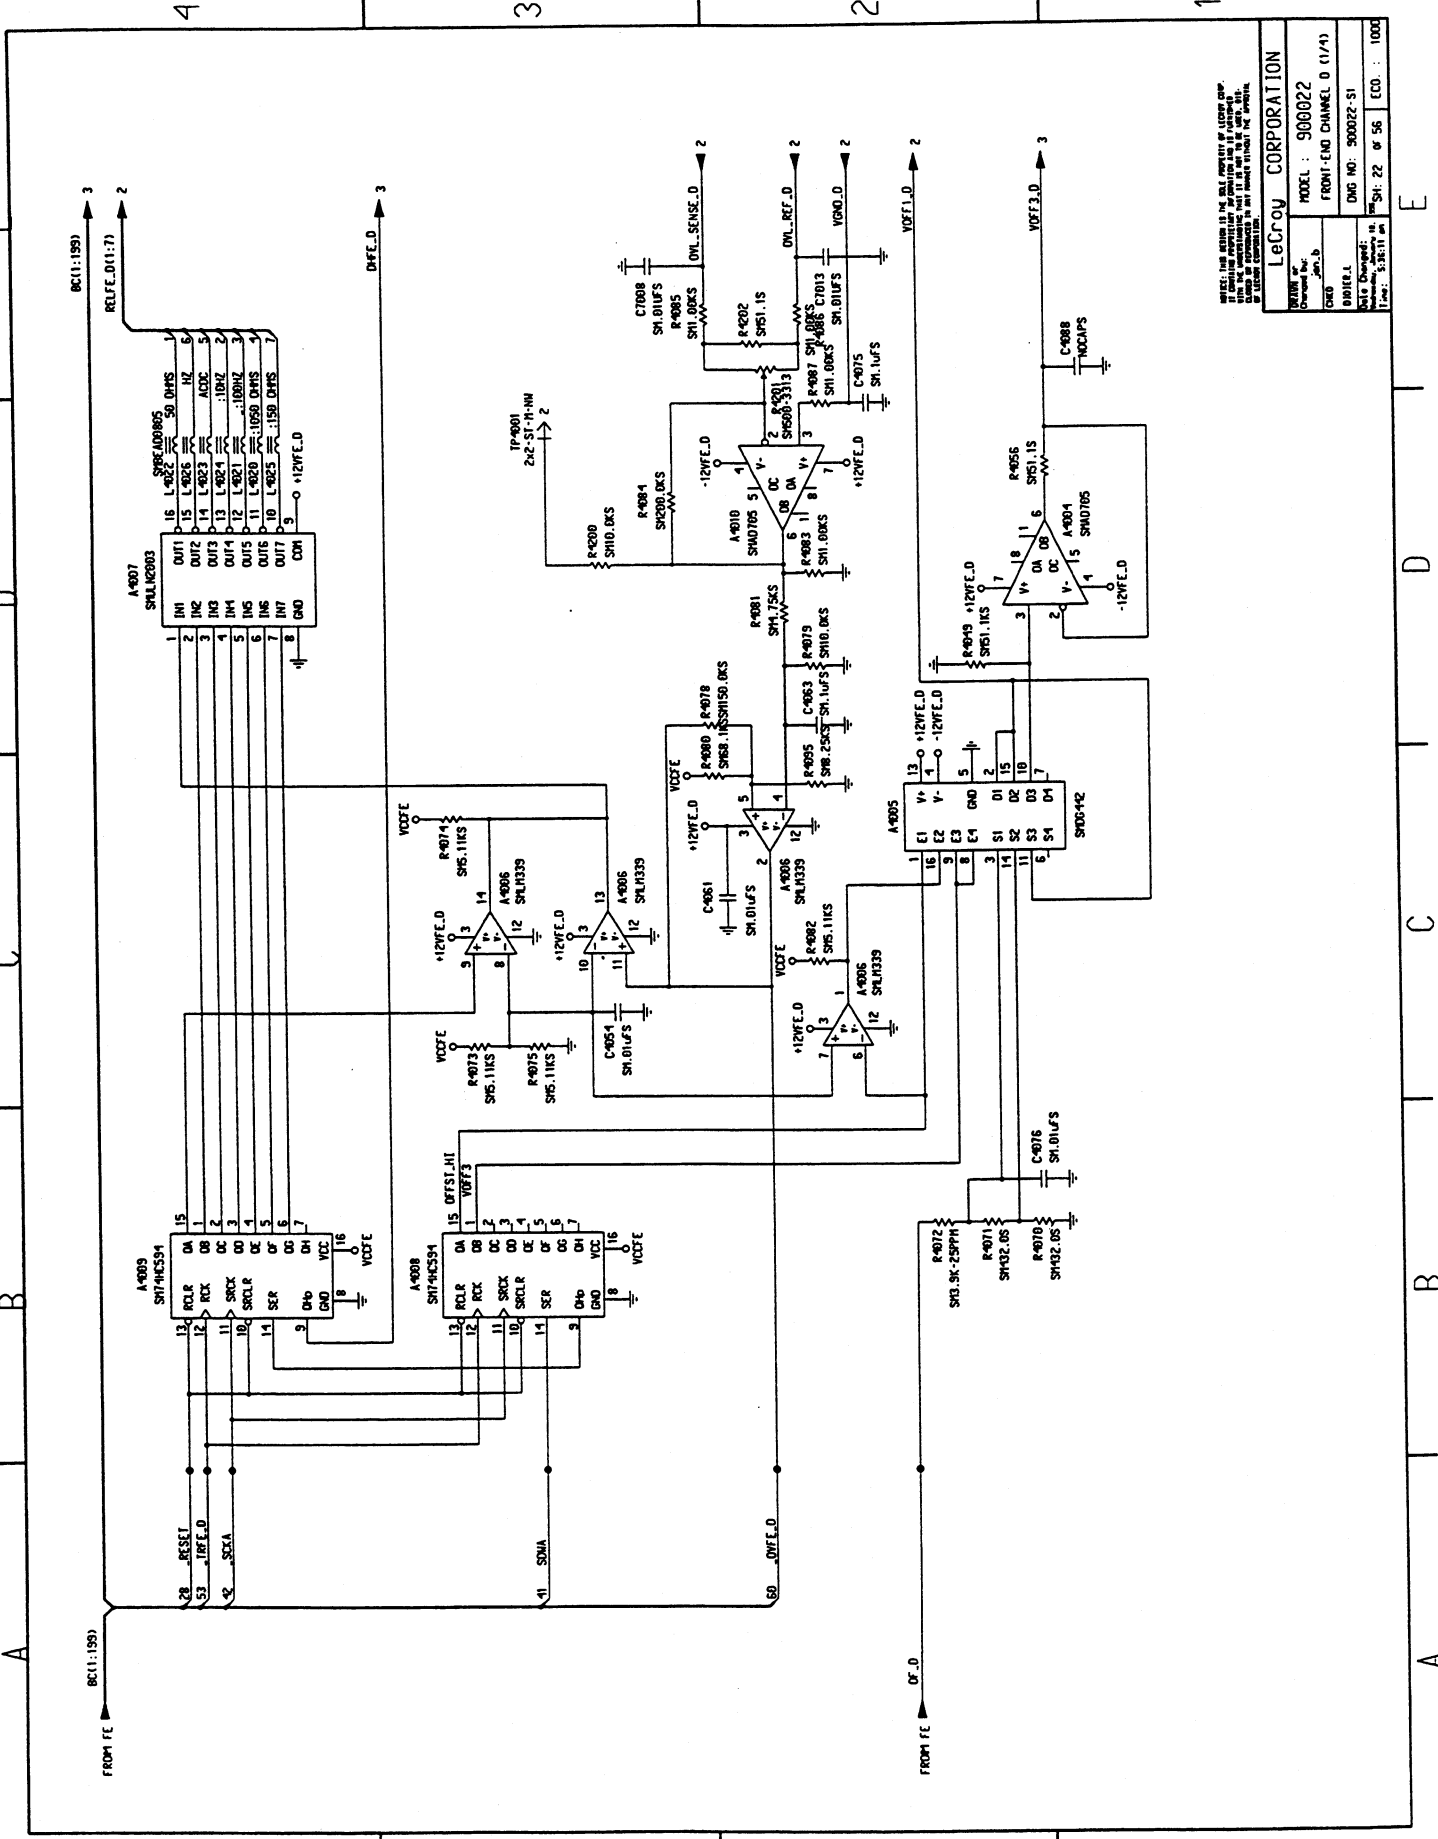

NOTE: THIS DRAWING IS THE SOLE PROPERTY OF LECROY CORP.
 IT IS TO BE USED ONLY FOR THE MANUFACTURING AND TESTING OF THE PRODUCTS
 OF LECROY CORPORATION.

LeCroy CORPORATION	
Model No.:	900022
Order No.:	900022
Part No.:	900022-S1
Rev.:	1
Date Changed:	5-28-71
By:	S. R. STANLEY
Sheet:	22 of 56
ECC:	1000


Schematics, Layouts

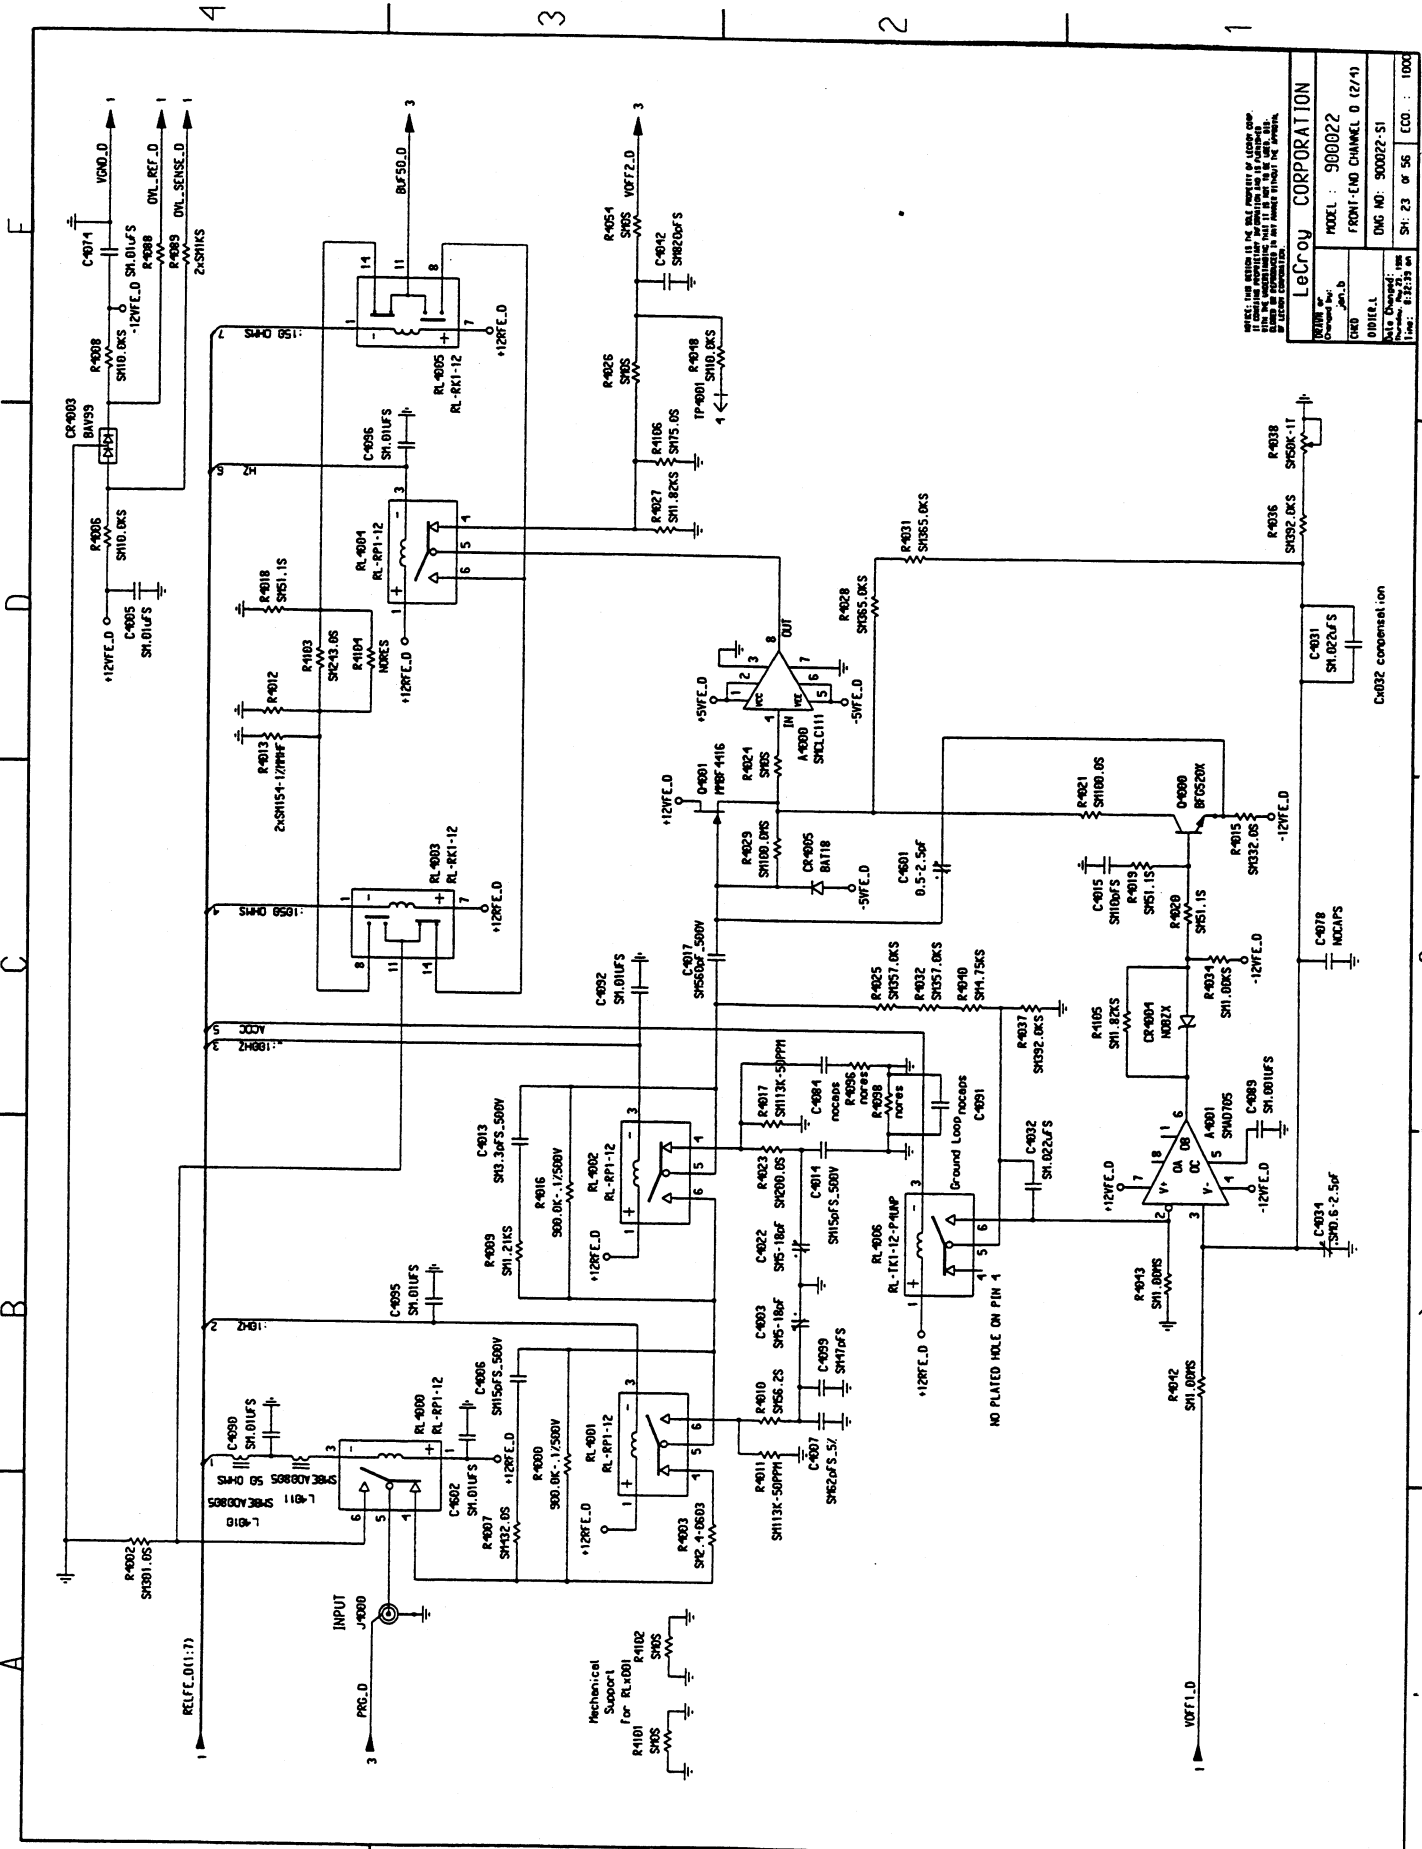

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LECROY CORPORATION
 MODEL : 900022
 FRONT-END CHANNEL D (27/1)
 DATE CHANGED :
 DRAWN BY :
 CHECKED BY :
 SHI : 23 OF 56 CO. : 1000


Schematics, Layouts

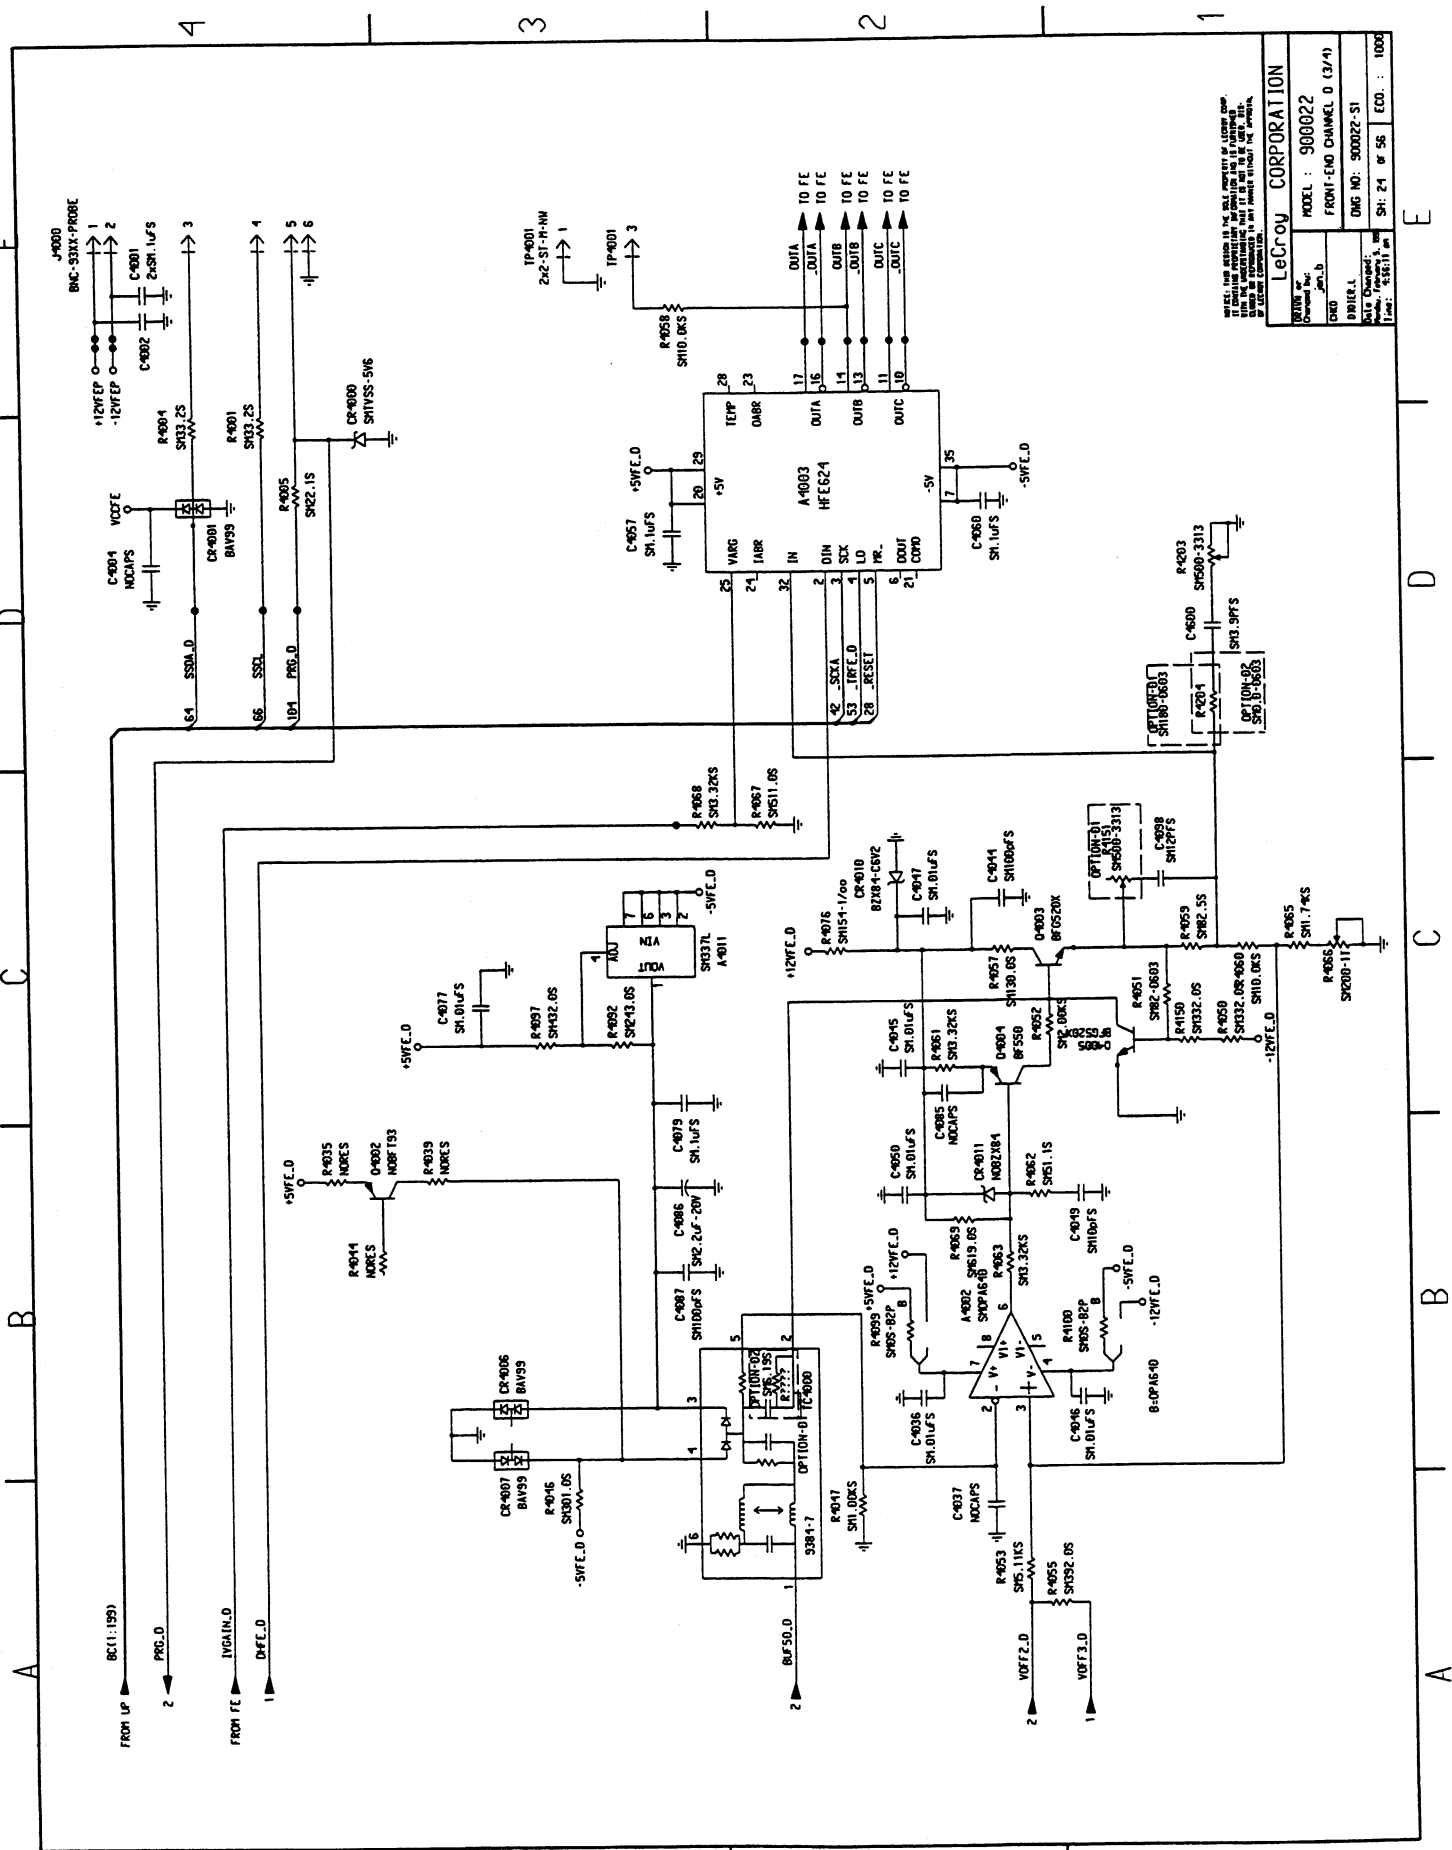

PLEASE NOTE: THIS BOARD IS THE SOLE PROPERTY OF LEICROY CORP. IT CONTAINS PROPRIETARY INFORMATION AND IS UNDESIRABLE TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF LEICROY CORPORATION.


LeCroy CORPORATION	
MODEL : 900022	FRONT-END CHANNEL 0 (3/4)
DATE CHANGED :	DATE : 08/22/81
DESIGNED BY :	SH : 21 or 56
ECN NO. :	900022-51
DATE :	08/21/81
ECO. :	1000

Schematics, Layouts

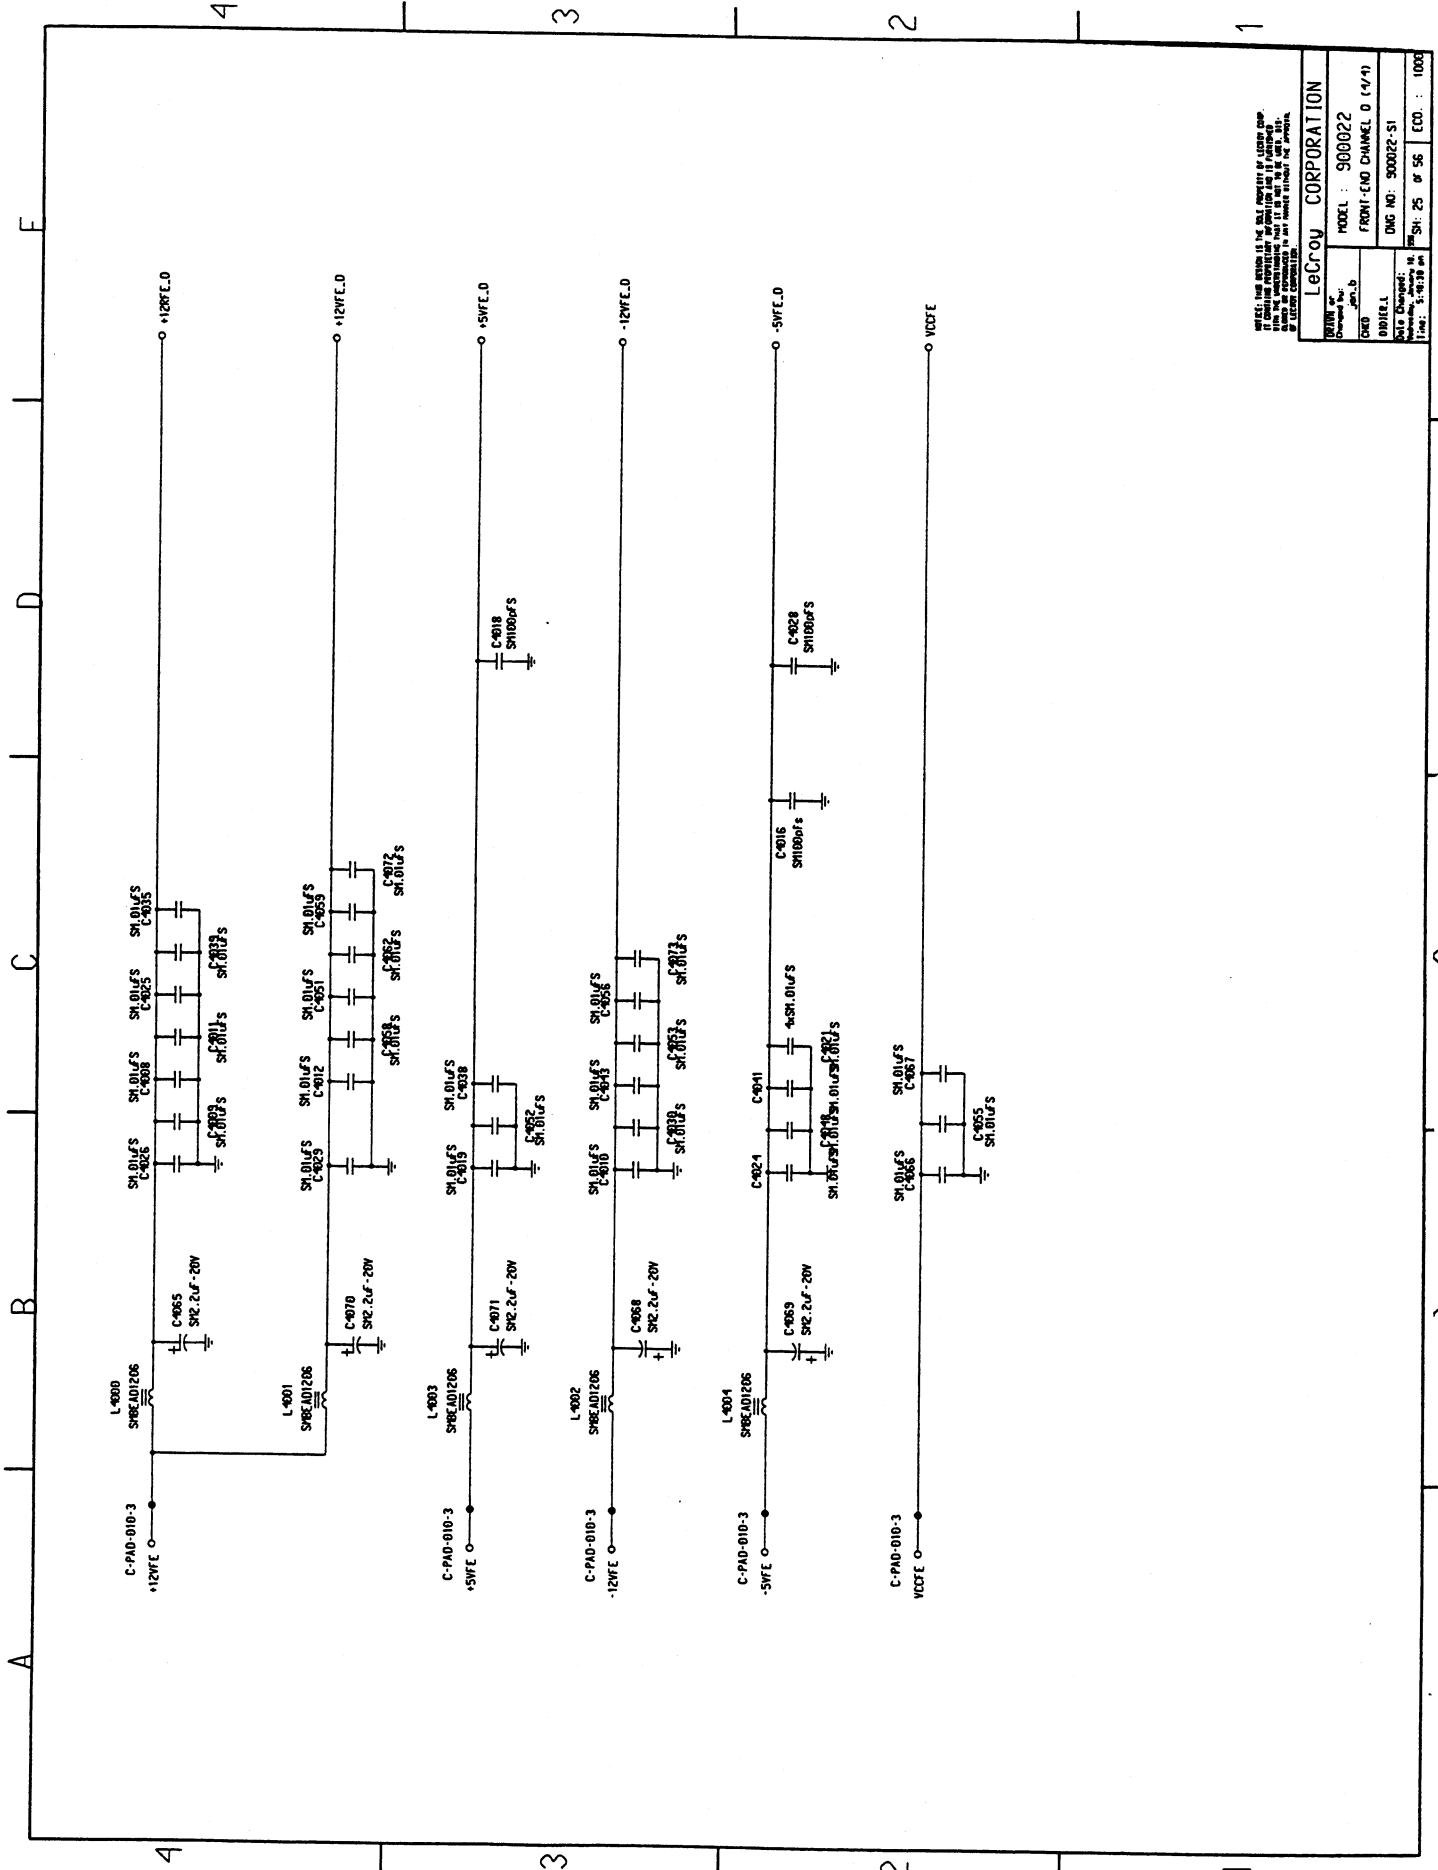


PLEASE REFER TO THE FULL SPECIFICATION OF LEADERSHIP GROUP.
 THE PARTS LIST IS THE PROPERTY OF LEADERSHIP GROUP.
 THIS DOCUMENT IS UNCLASSIFIED AND IS NOT TO BE RELEASED
 OUTSIDE THE COMPANY.

LeCroy CORPORATION	
REV: 1	Model: 900022
Drawn By: JLB	FORM-END CHANNEL 0 (4/74)
CHKD: JLB	DWG NO: 900022-51
DATE CHANGED: 11/14/83	SH: 25 OF 56 ECD: 1000

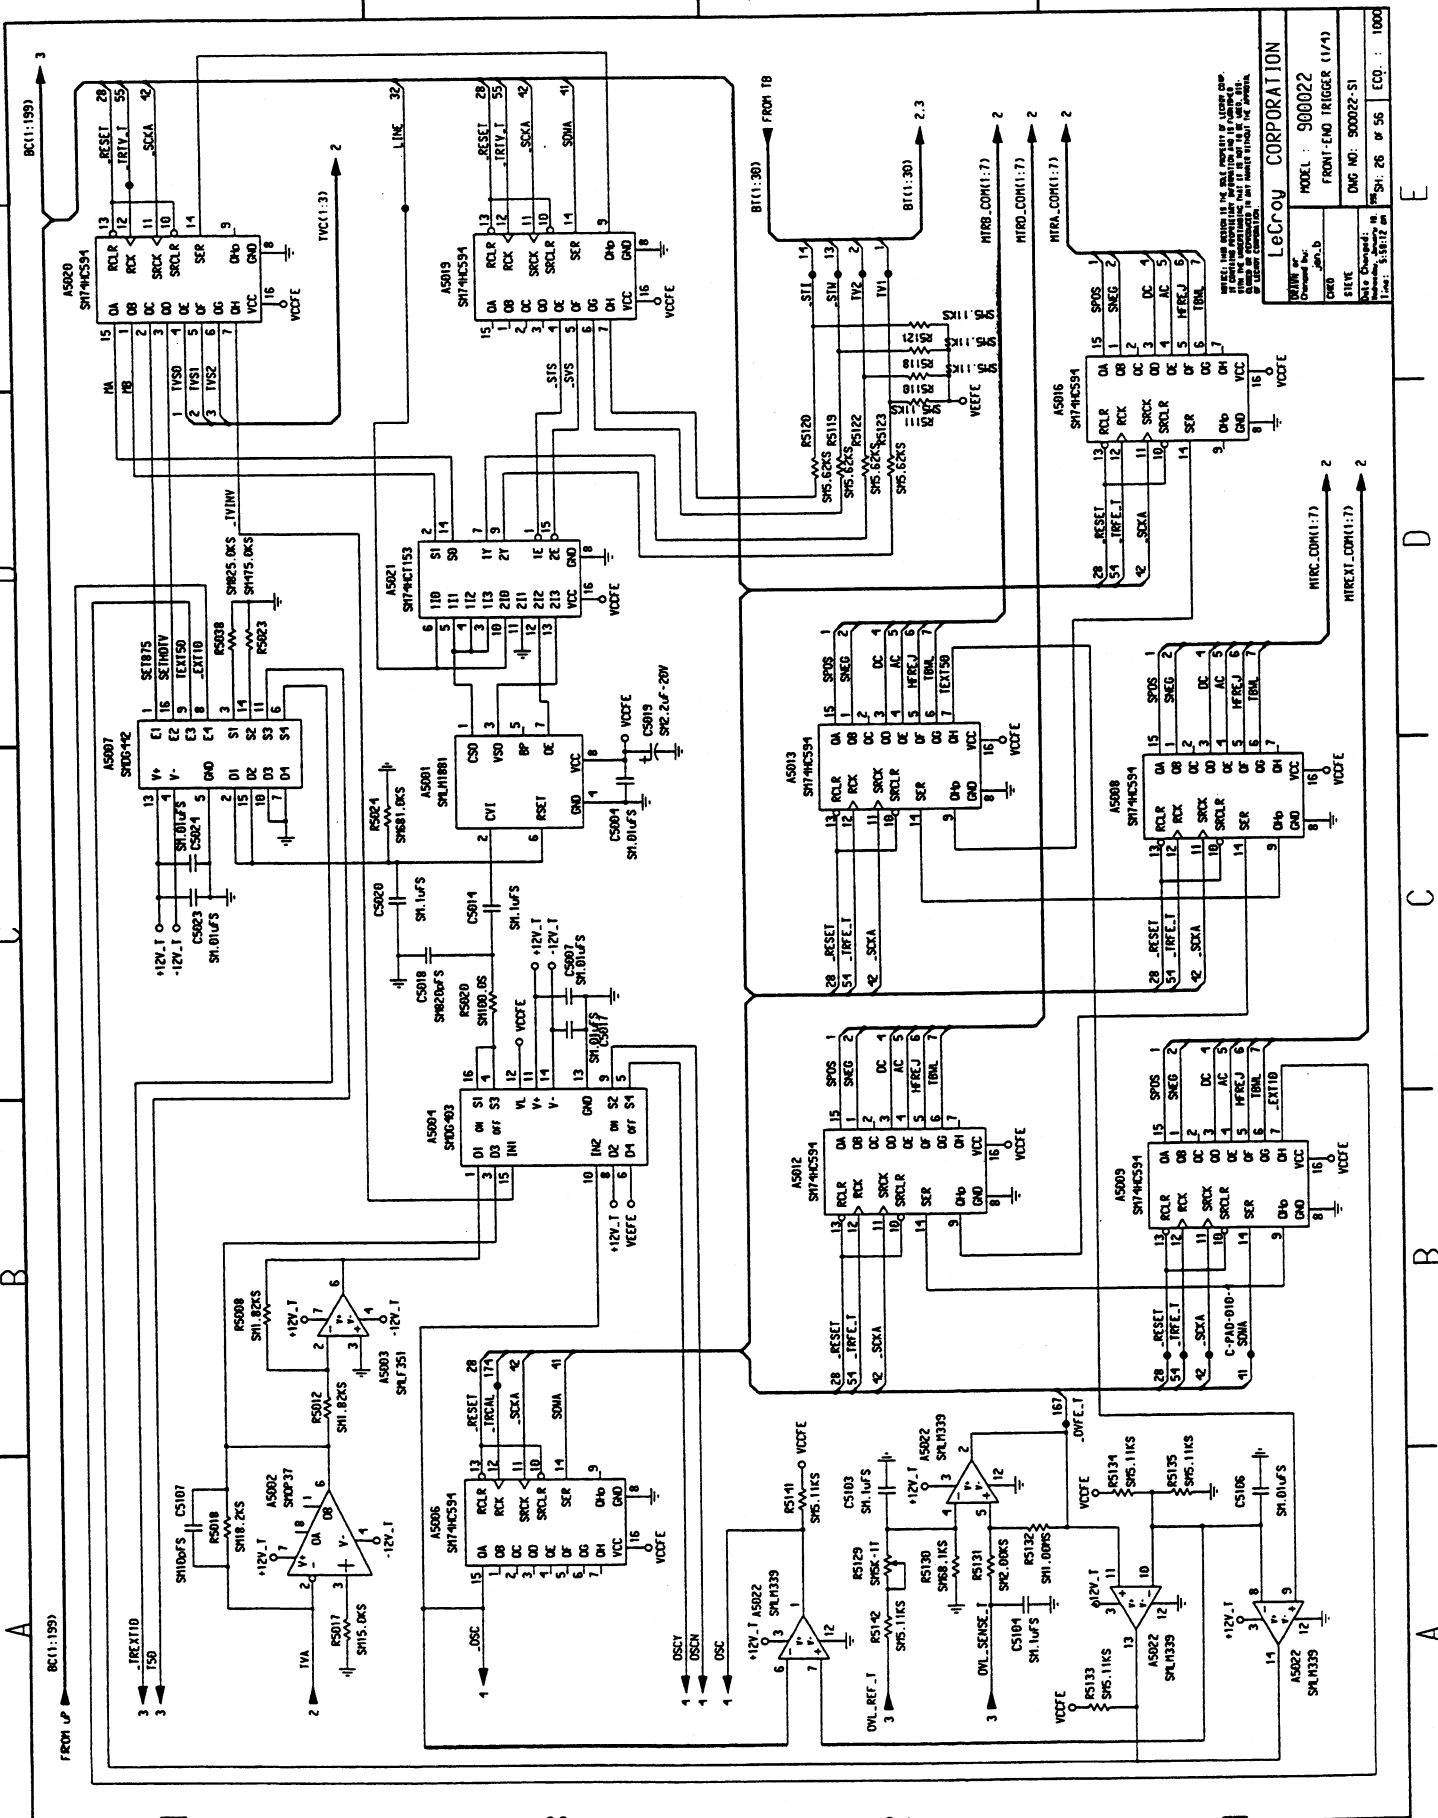


LeCroy CORPORATION
MODEL : 900022
FRONT-END TRIGGER (1/74)
DATE DRAWN :
DWG NO. : 900022-S1
REV :
BY :
CHKD :
INSTR. ENG. :
DATE CHECKED :
FILE :
PLOT :
SHEET NO. : 26 OF 56
ECO. : 1000

Schematics, Layouts

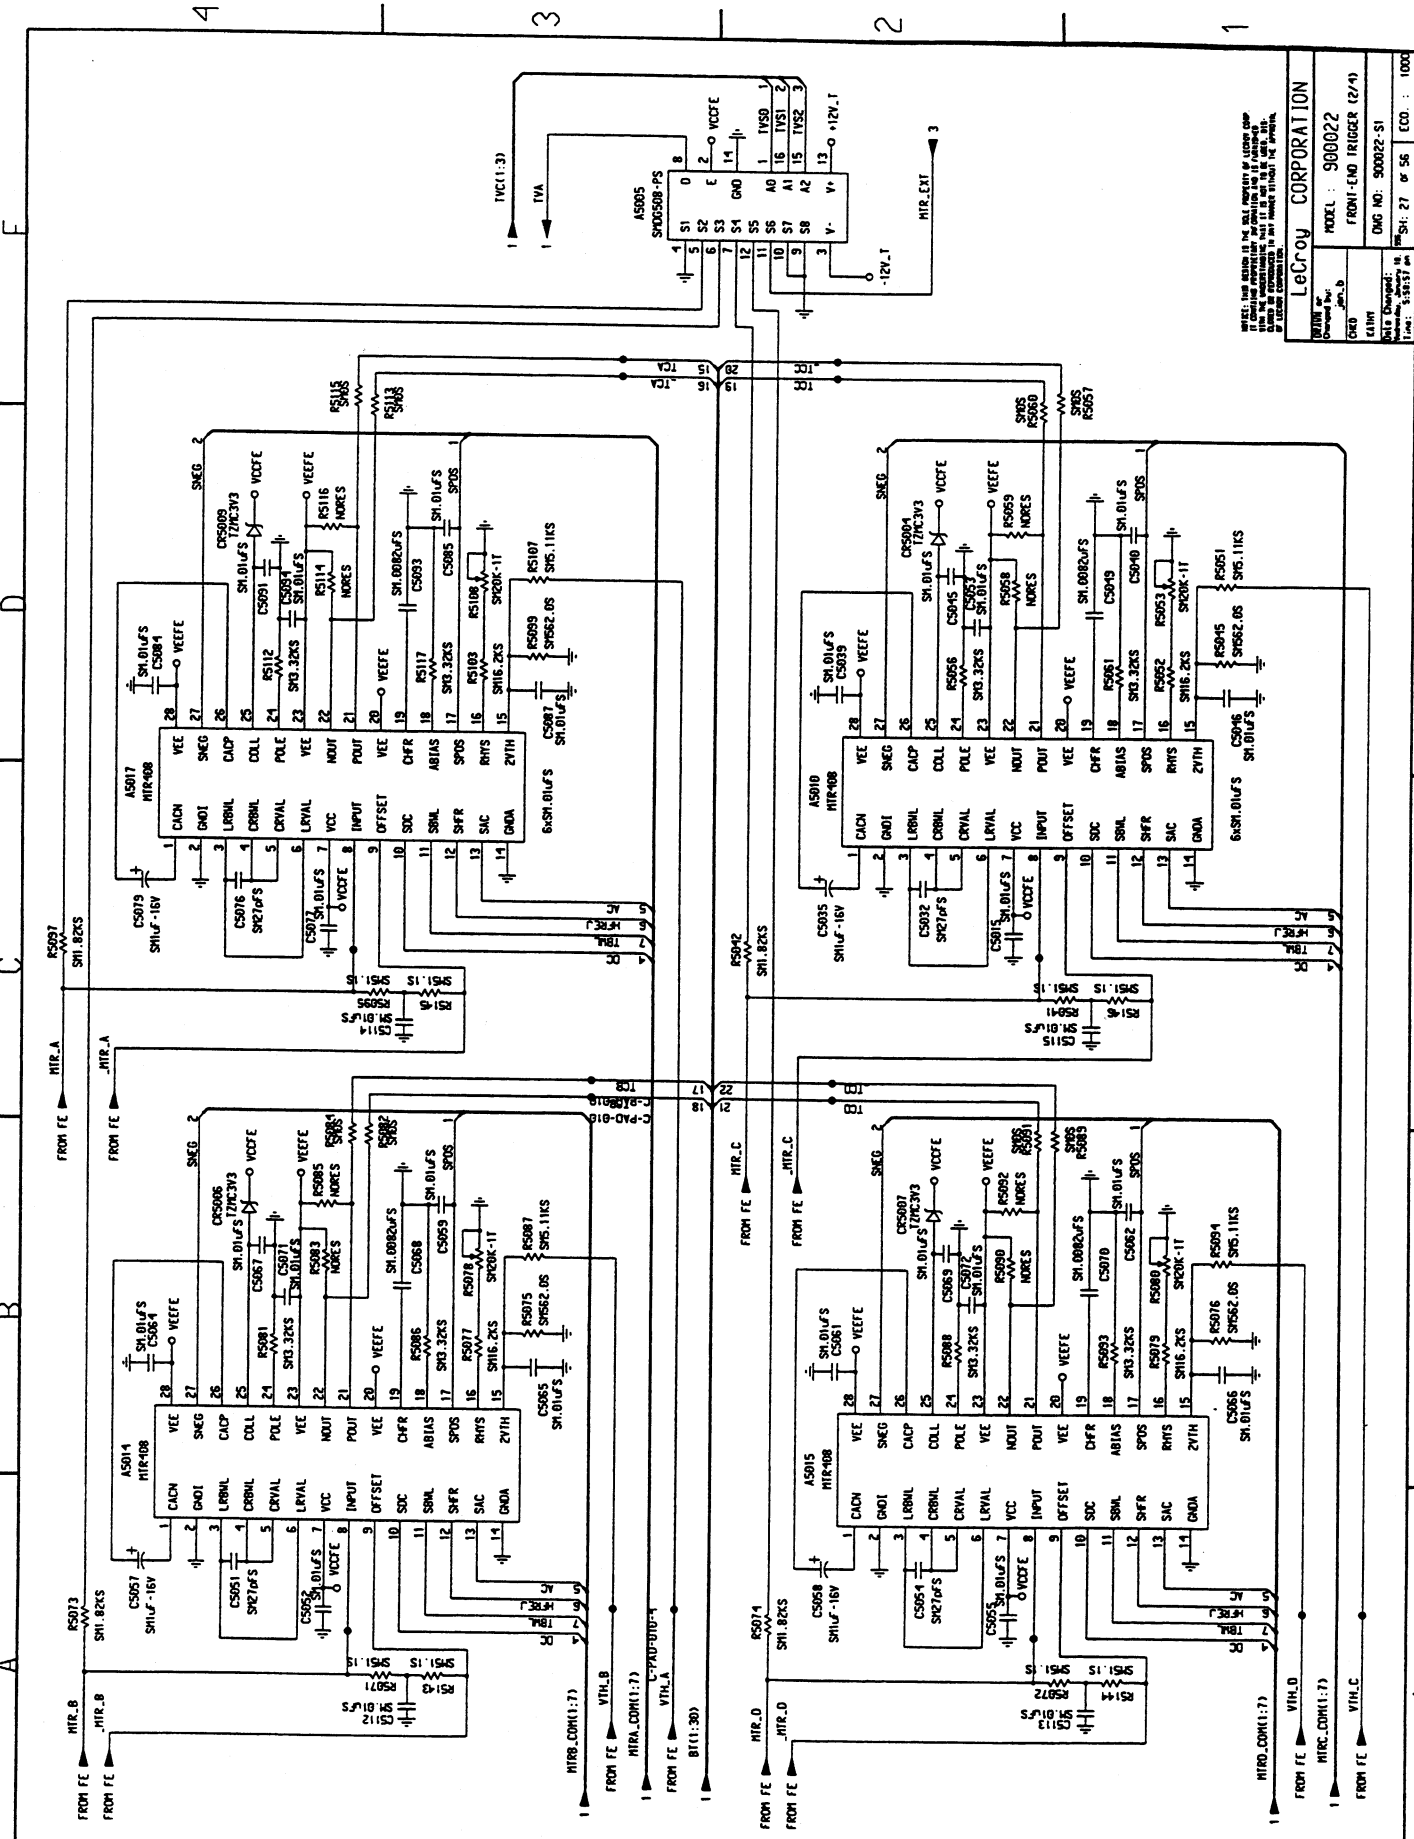


PLEASE REFER TO THE FULL SPECIFICATION OF LOGIC COMP
 AND TO THE MECHANICAL DRAWING FOR THE MOUNTING OF THE
 PACKS. THE PACKS SHOULD BE MOUNTED THROUGH THE BOARD.
 ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

LeCroy CORPORATION
 MODEL : 900022
 FRONT-END TRIGGER (2/4)
 Dwg No: 900022-S1
 DATE CHANGED: 11/80
 DRAWN BY: J.M.B.
 CHECKED BY: J.M.B.
 SH: 27 of 55 ECO: 1000

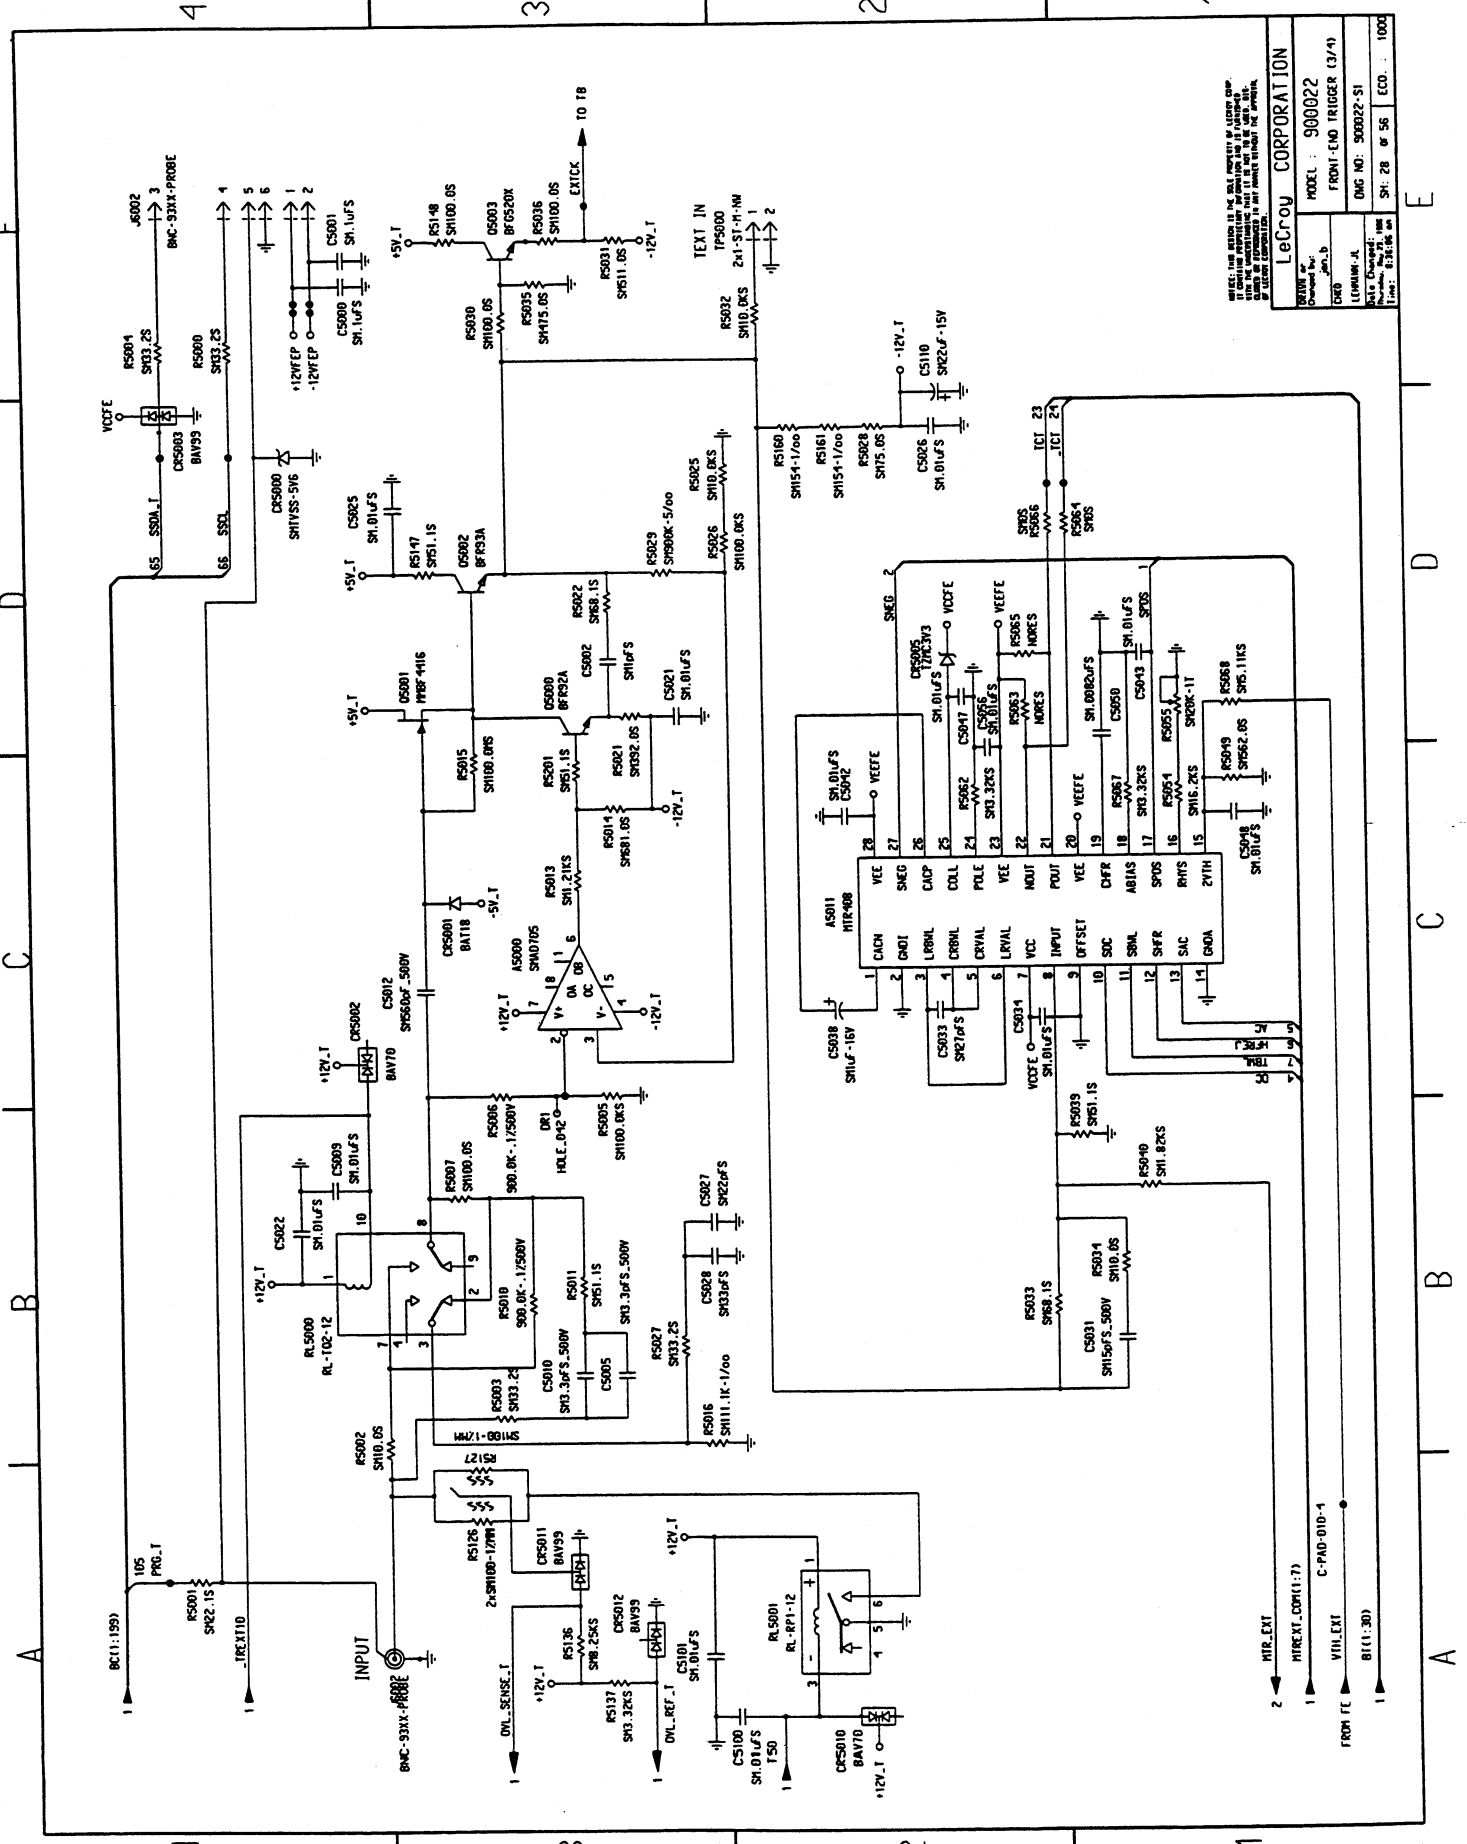

LeCroy CORPORATION
 MODEL : 900022
 FRONT-END TRIGGER (3/4)
 DNG NO: 900022-51
 SH: 28 OF 56 ECO: 1000
 DATE: 8/28/84
 DRAWN BY: [blank]
 CHECKED BY: [blank]
 APPROVED BY: [blank]


Schematics, Layouts

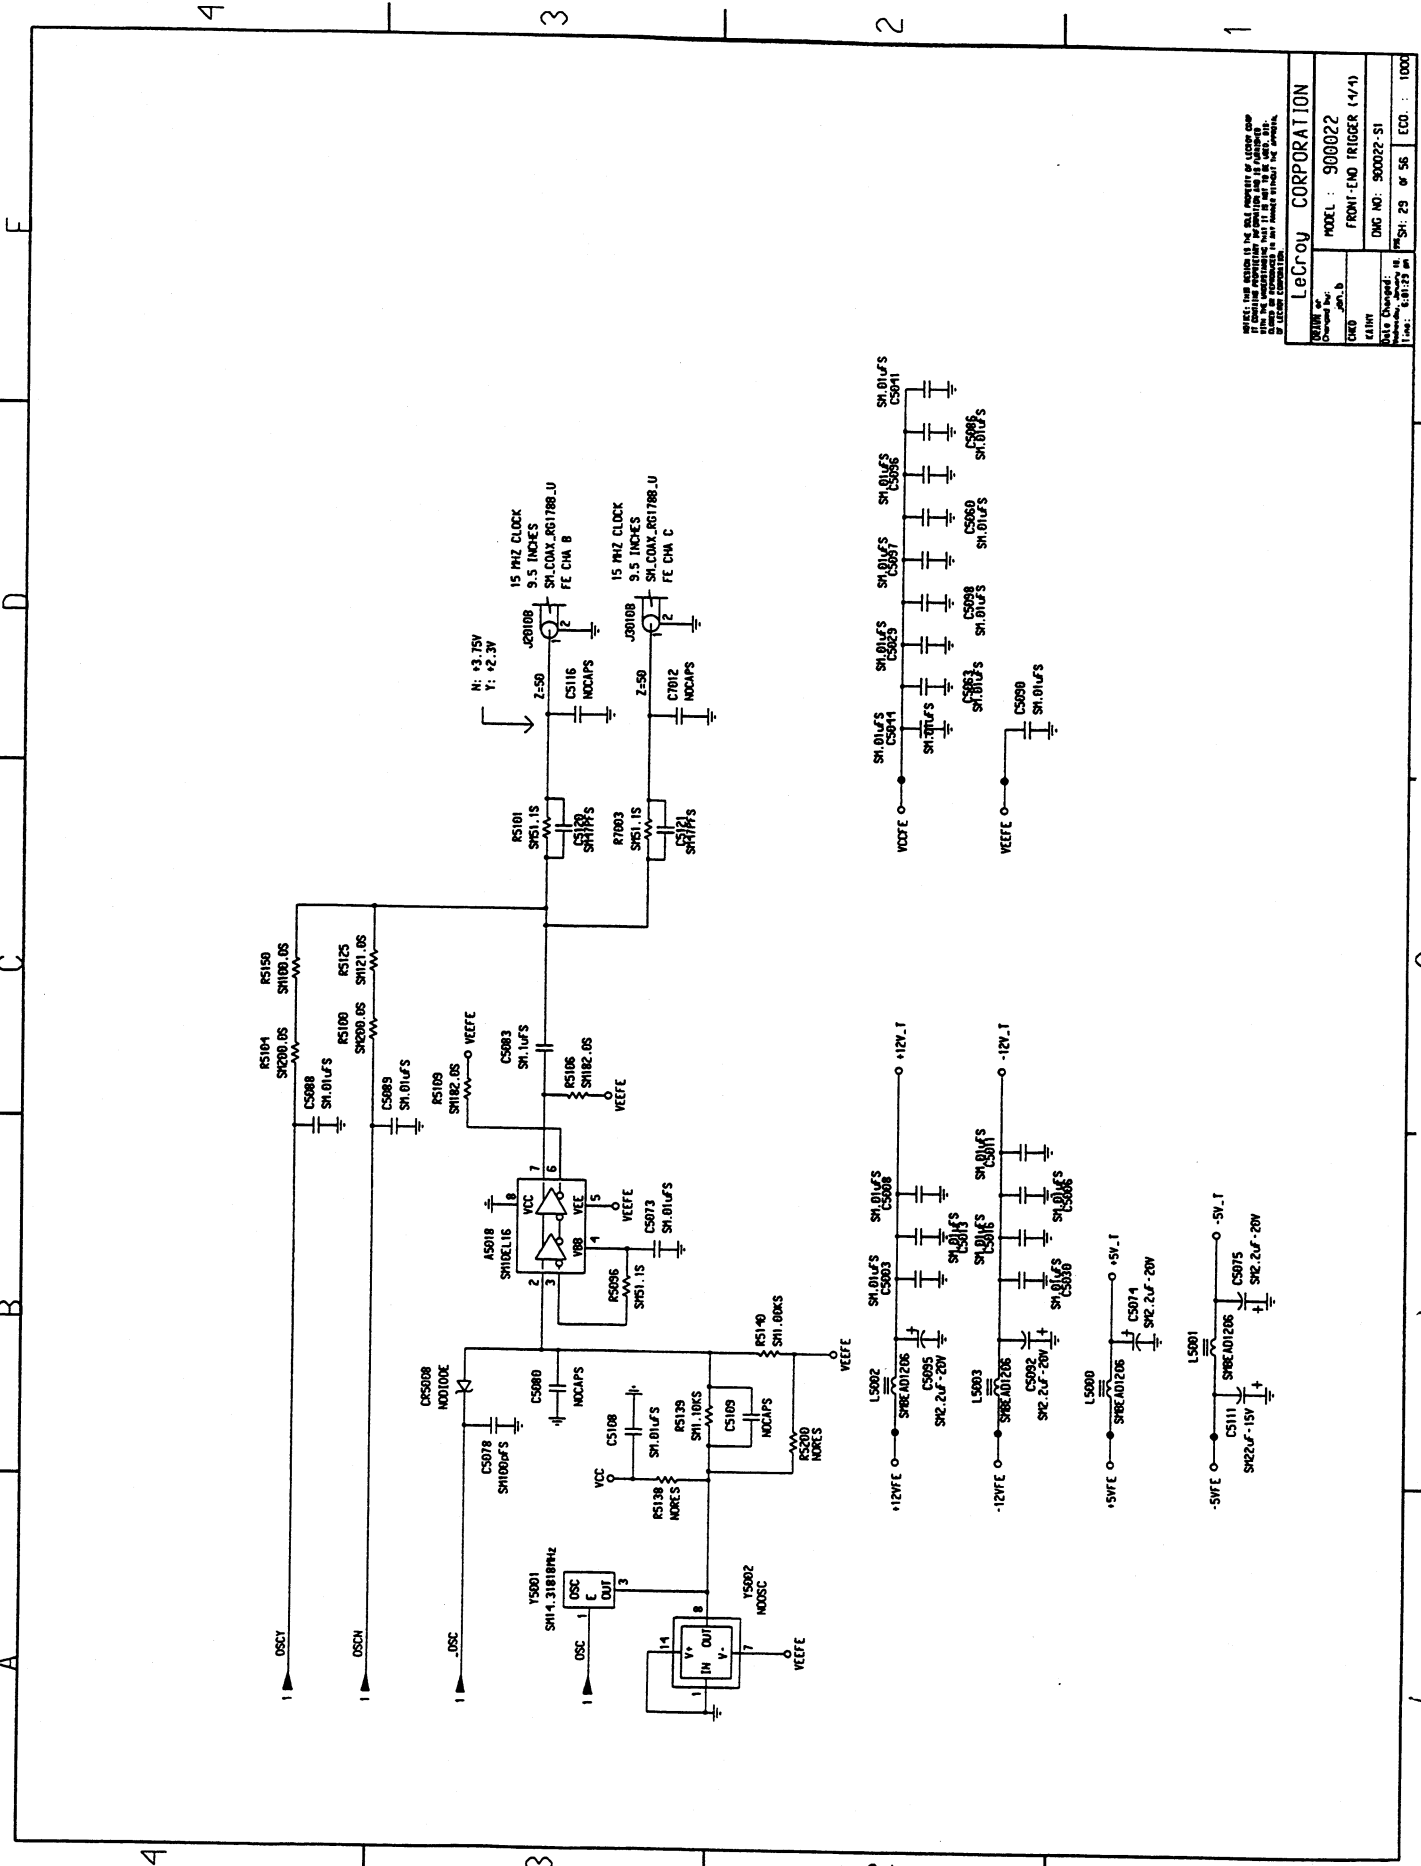

NOTE: THIS SECTION IS THE SOLE PROPERTY OF LEUCROY CORPORATION. IT IS TO BE KEPT IN STRICTLY CONFIDENTIAL AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LeCroy CORPORATION	
Model No.:	900022
Order No.:	FRONT-END TRIGGER (4/4)
DATE:	DMG NO. 900022-S1
FILED:	
File Changed:	10/29/73
Time:	5:41:23 pm
Sheet:	29 of 56
ECO:	1000


PROBE CALIBRATOR

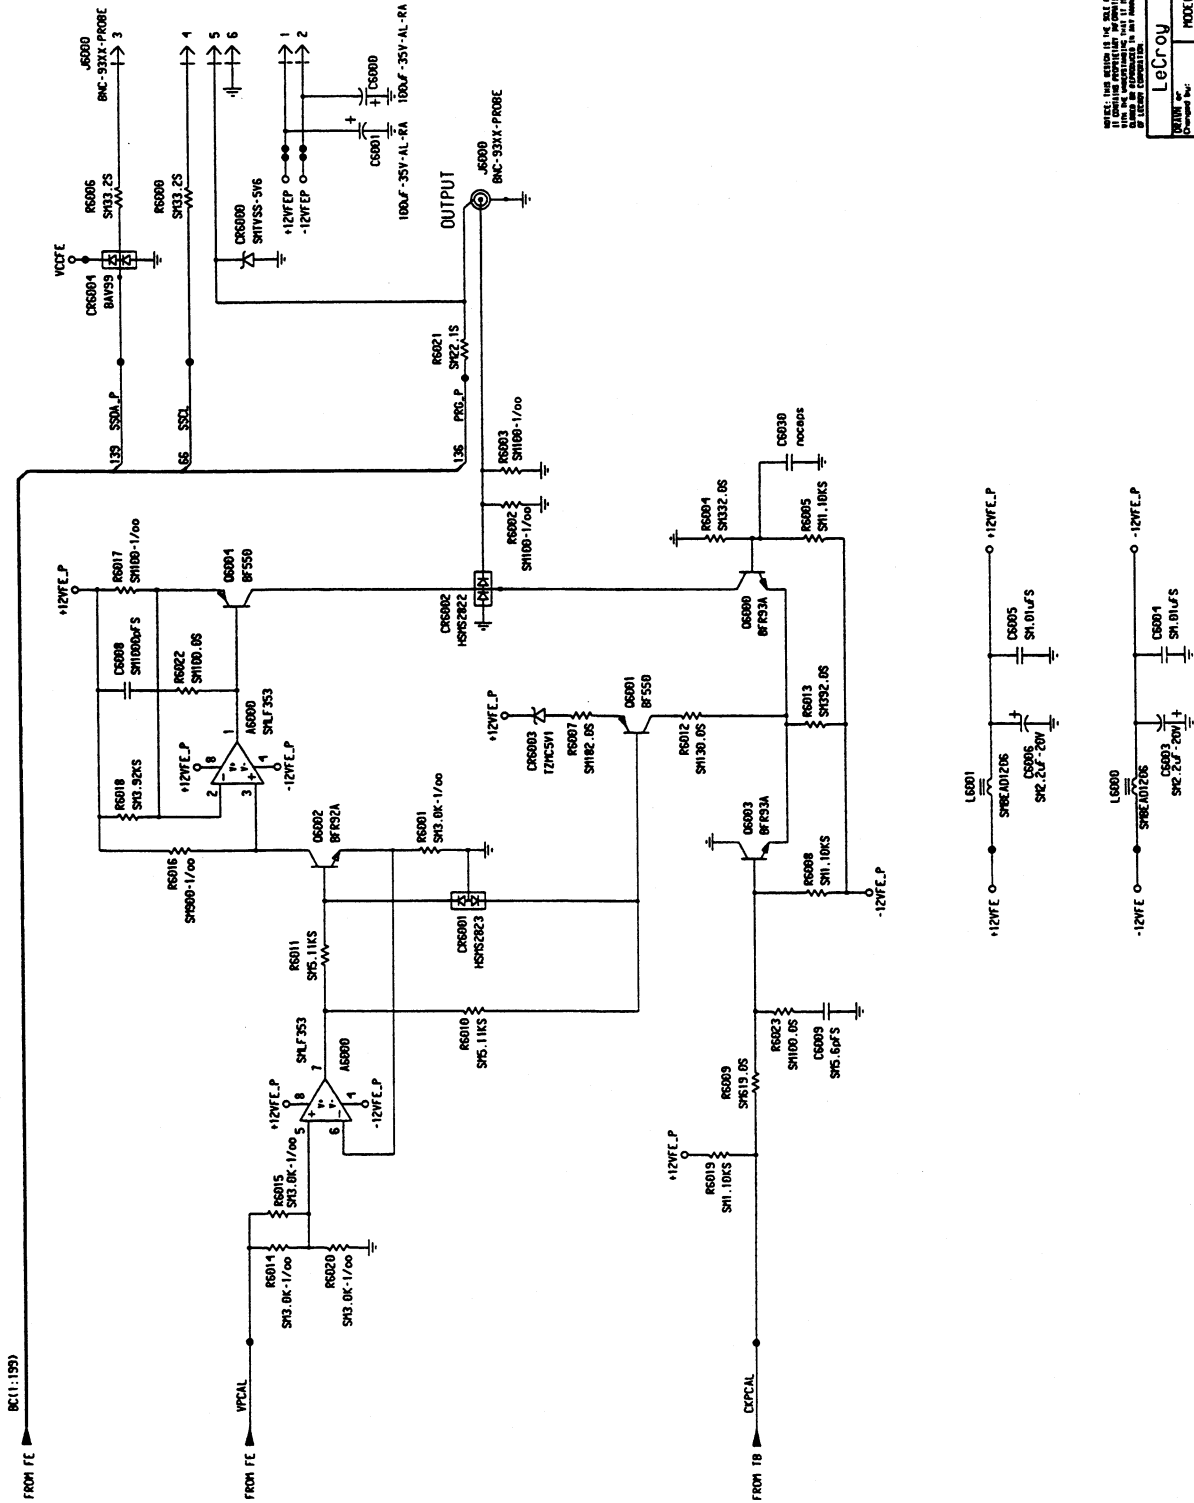

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LEICROY CORP. IT IS THE PROPERTY OF LEICROY CORP. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.


LeCroy CORPORATION	
Model No.	900022
Rev.	1.0
Part No.	900022-S1
Rev. No.	1.0
Date	11/11/81
Drawn By	J.S.
Checked By	J.S.
File No.	900022-S1
Sheet No.	30 of 56
E.O.	1000

Schematics, Layouts

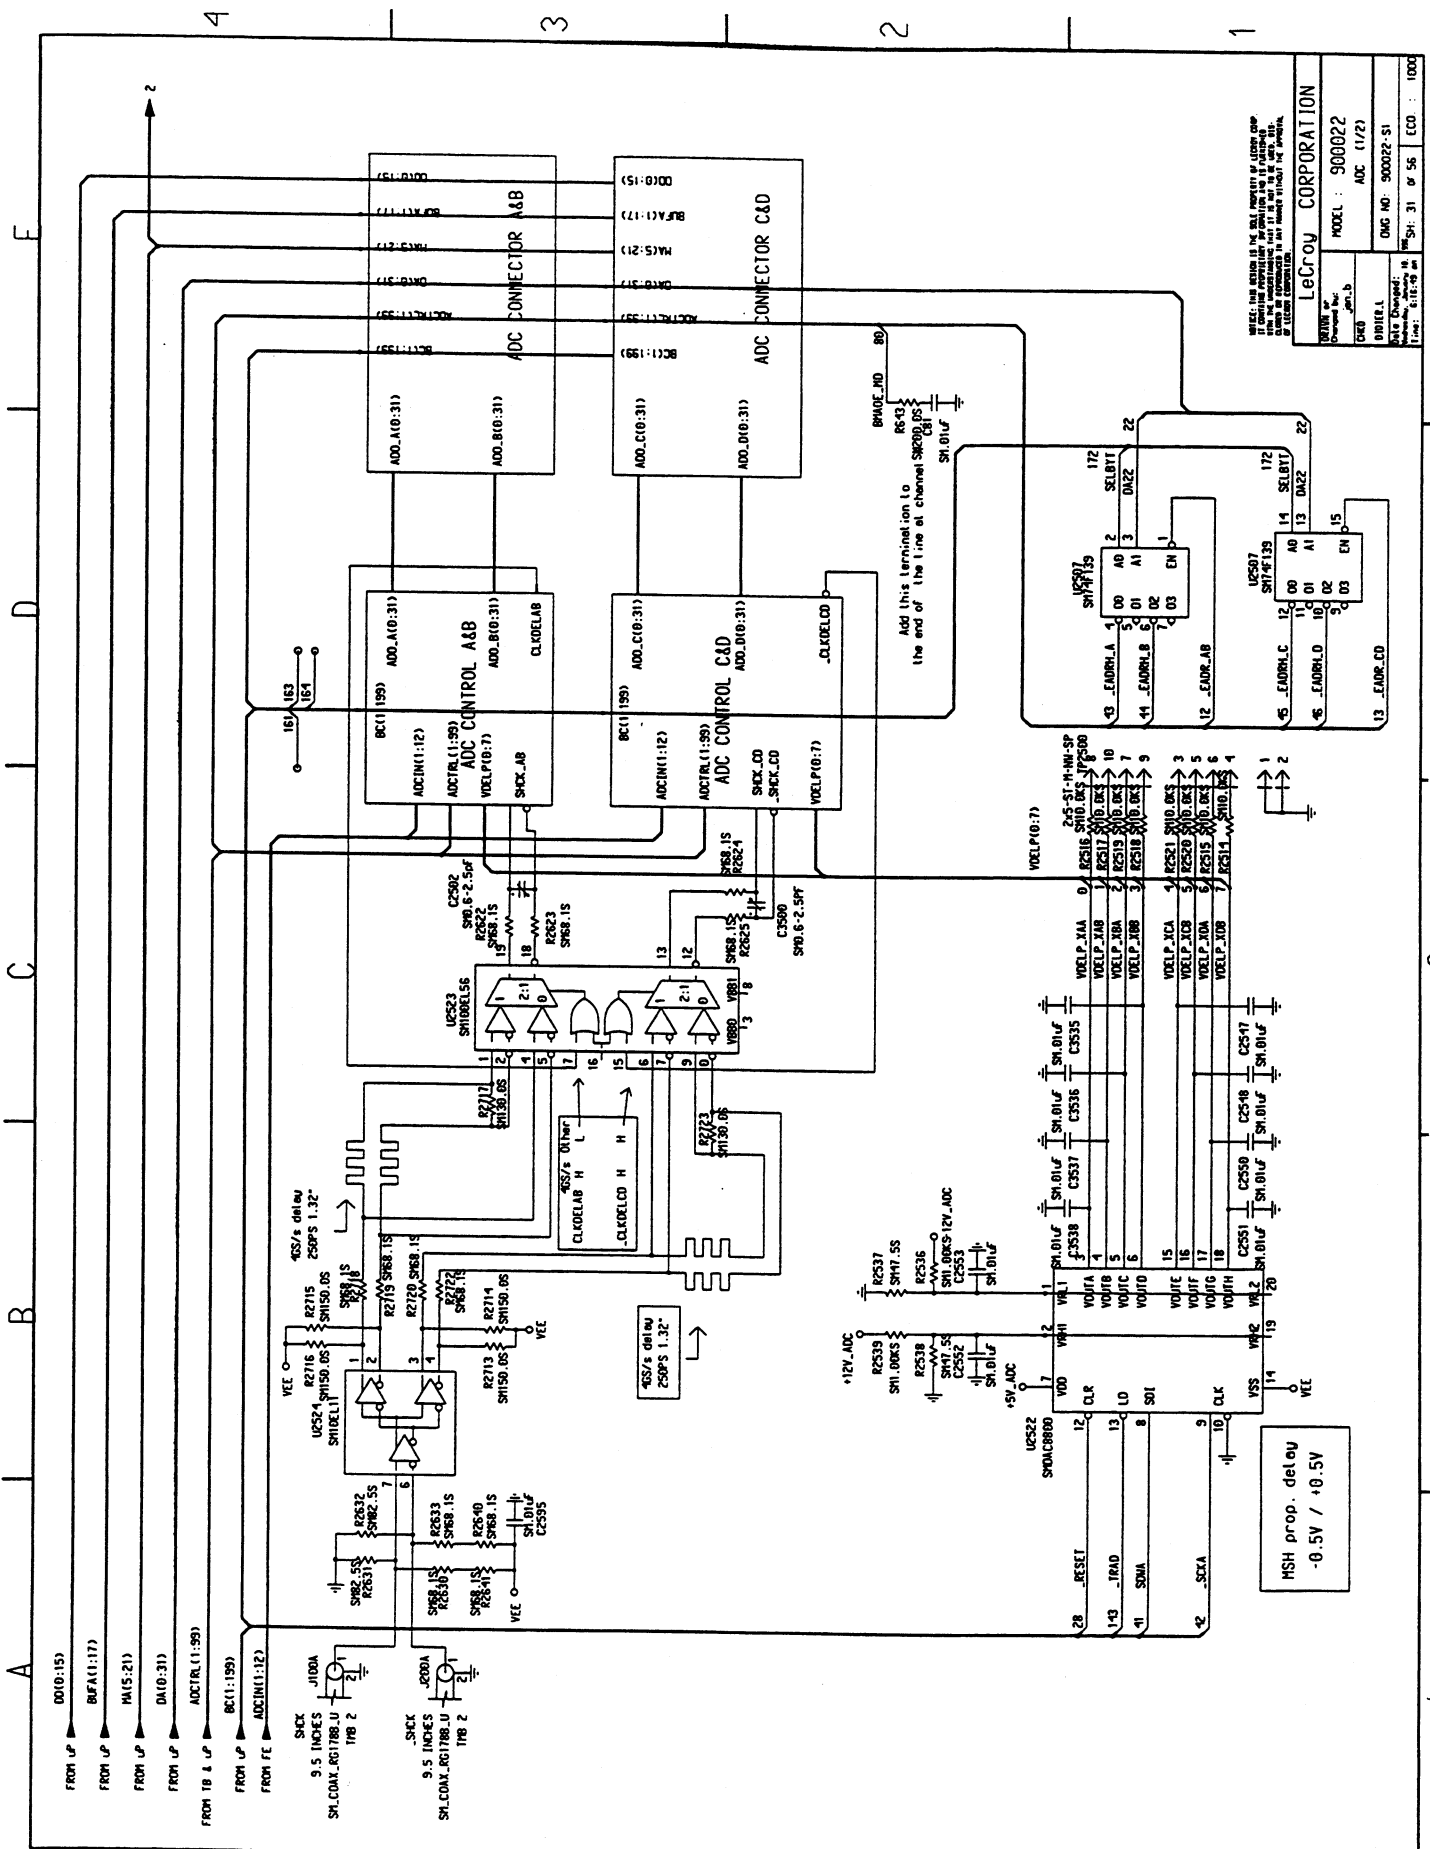


WHICH THE DESIGN IS THE SOLE PROPERTY OF LECROY CORP.
 THIS DRAWING IS THE PROPERTY OF LECROY CORP.
 IT IS TO BE USED ONLY FOR THE PROJECT AND FOR THE QUANTITY
 OF UNITS SPECIFIED IN THE ORDER. IT IS NOT TO BE REPRODUCED
 OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC
 OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY
 ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

Lecroy CORPORATION
 MODEL : 900022
 DWG NO: 900022-S1
 DATE: 11/21
 SHEET: 31 OF 56 | ECO : 1000

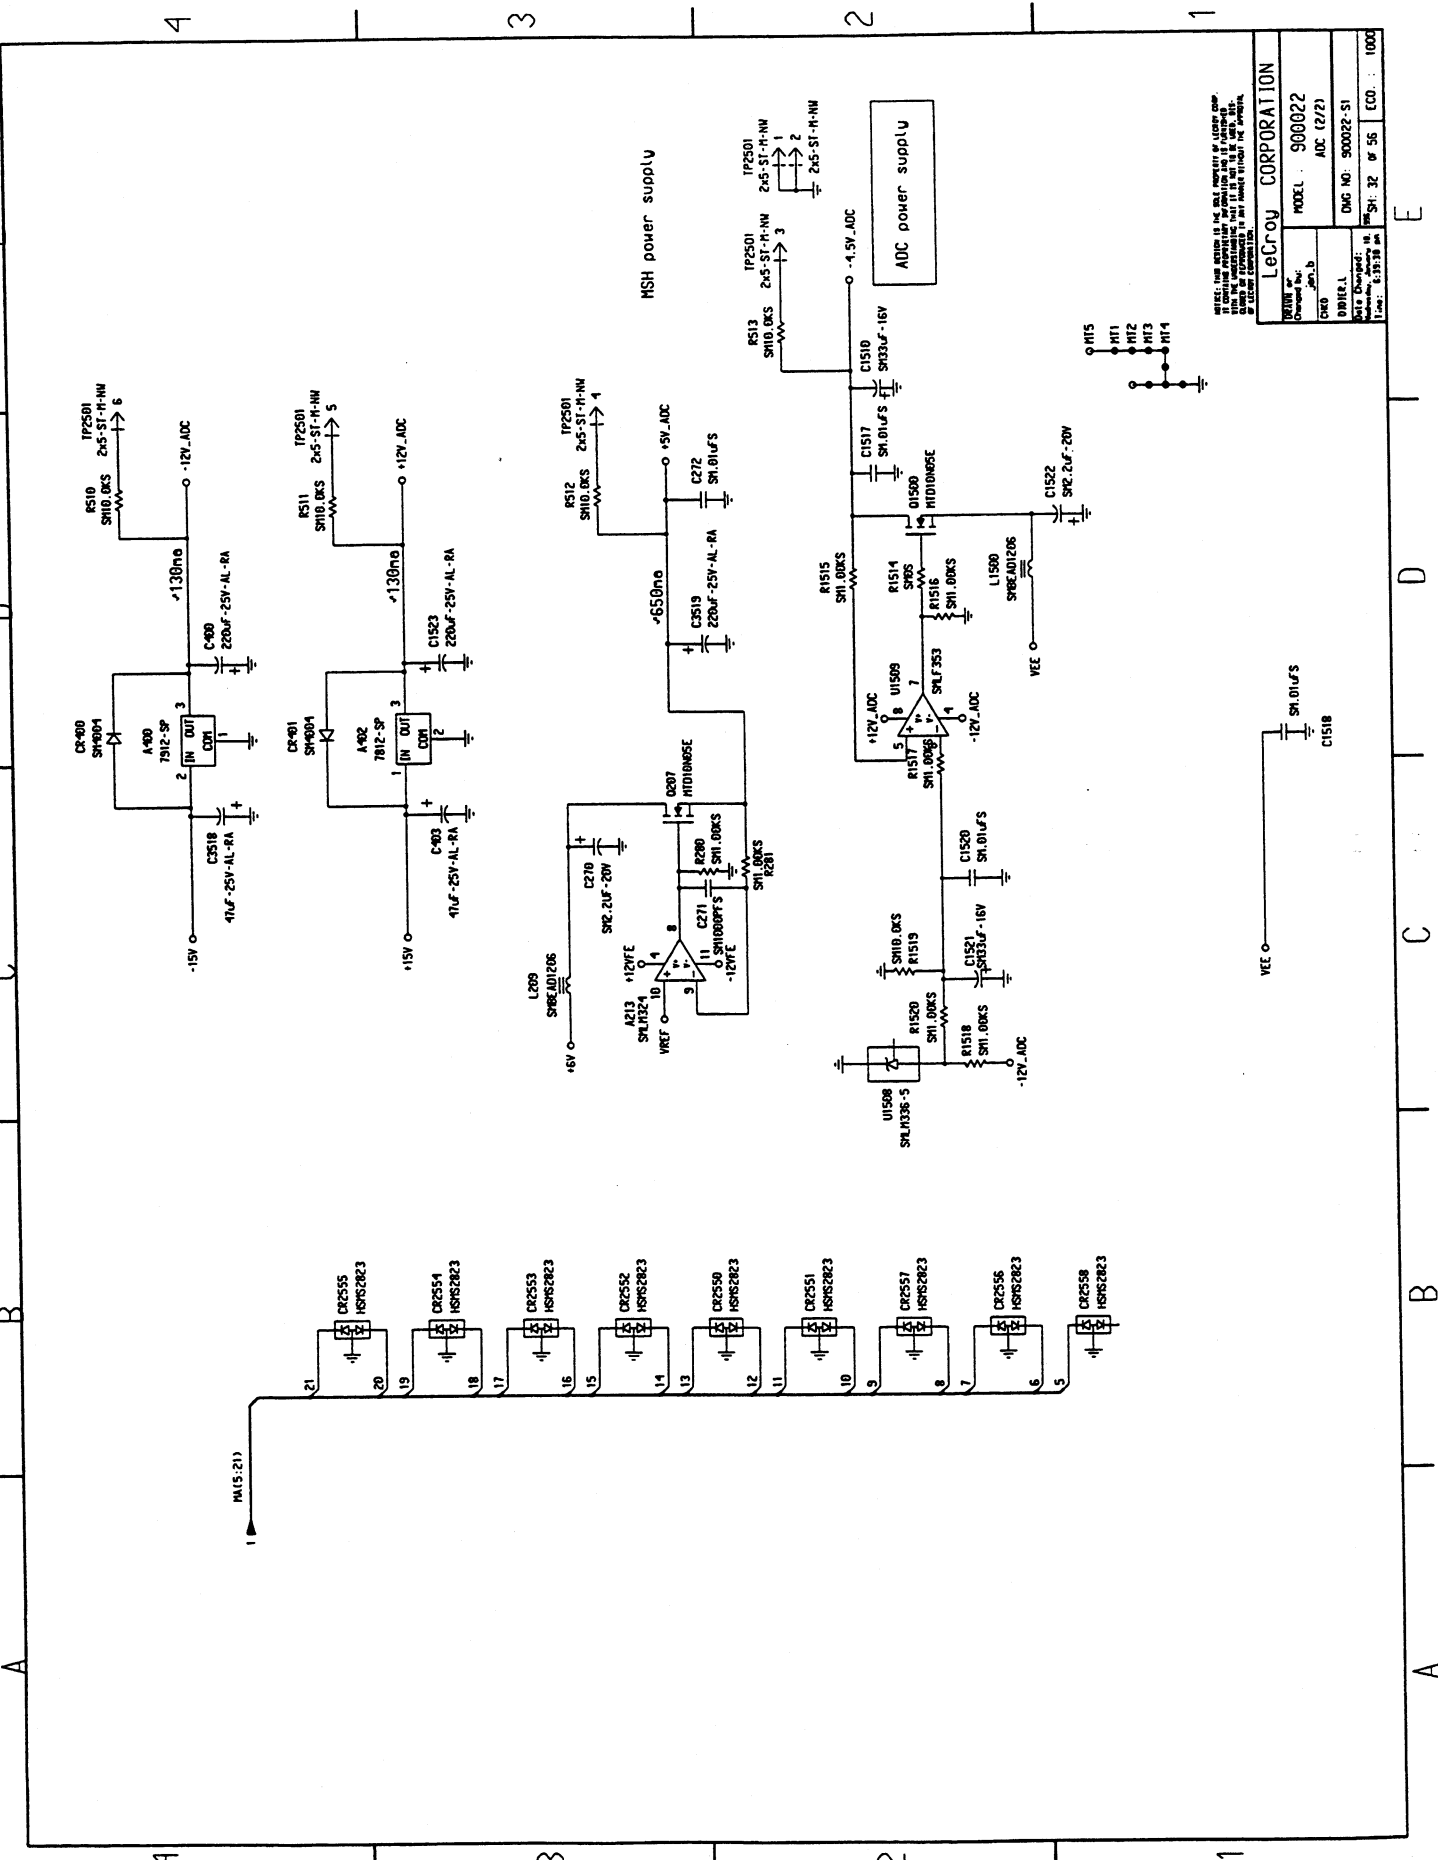


LeCroy CORPORATION	
Model	900022
Part No.	ADC (2/2)
Doc No.	900022-51
Rev.	32 of 56
ECO	1000

Schematics, Layouts

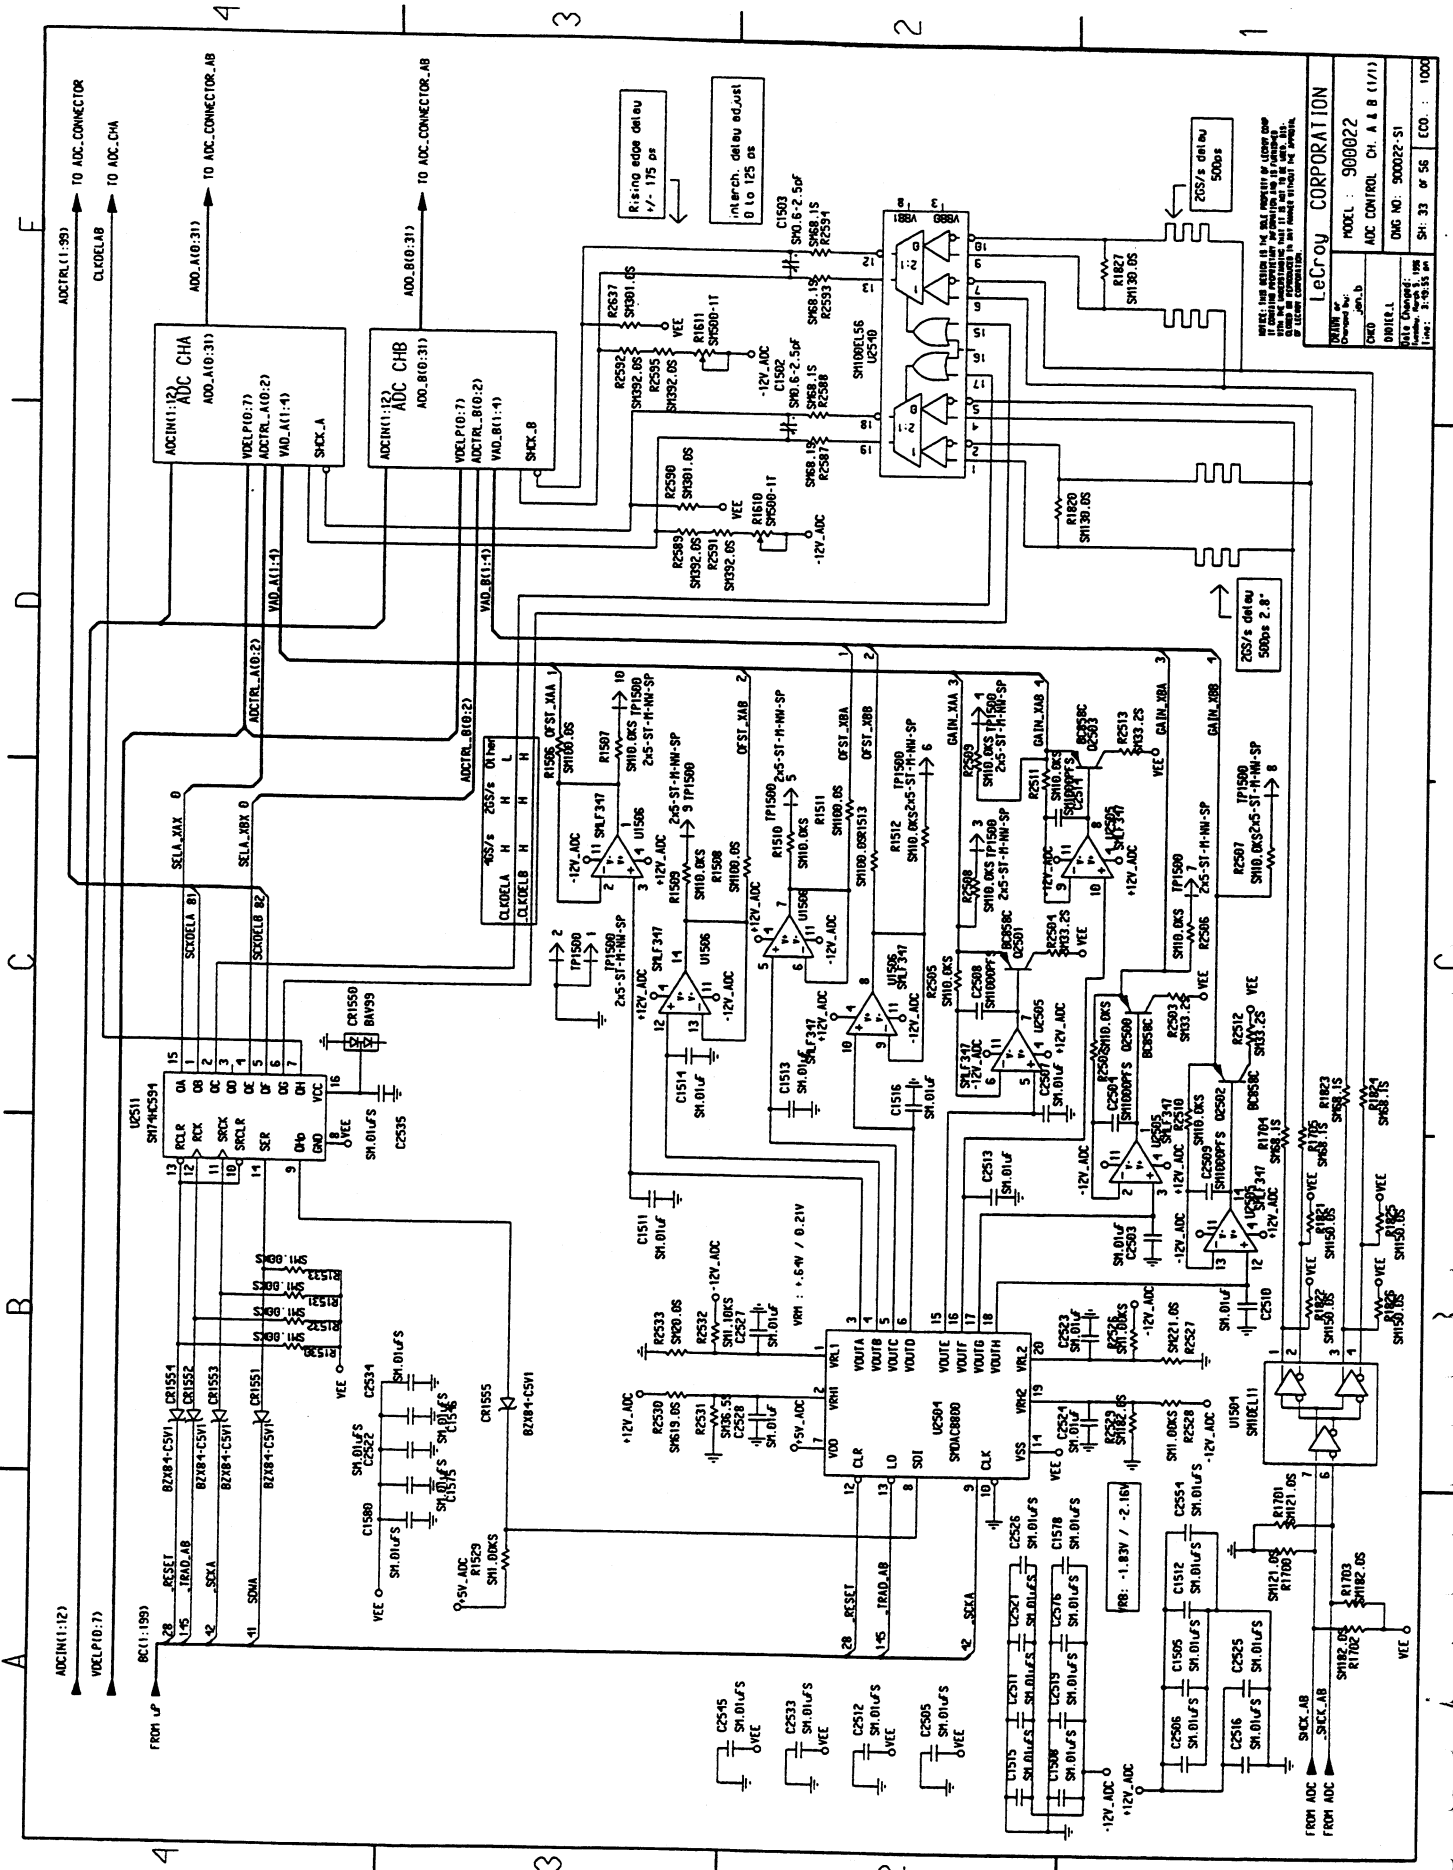

MODEL : 900022 Dwg No. 900022-S1 SH: 33 of 56 ECO: 1000	LeCroy CORPORATION 4000 LeCroy Drive Erie, PA 16510
--	---


NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE QUANTITIES SPECIFIED IN THE ORDER. NO PARTS ARE TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF LECROY CORPORATION.

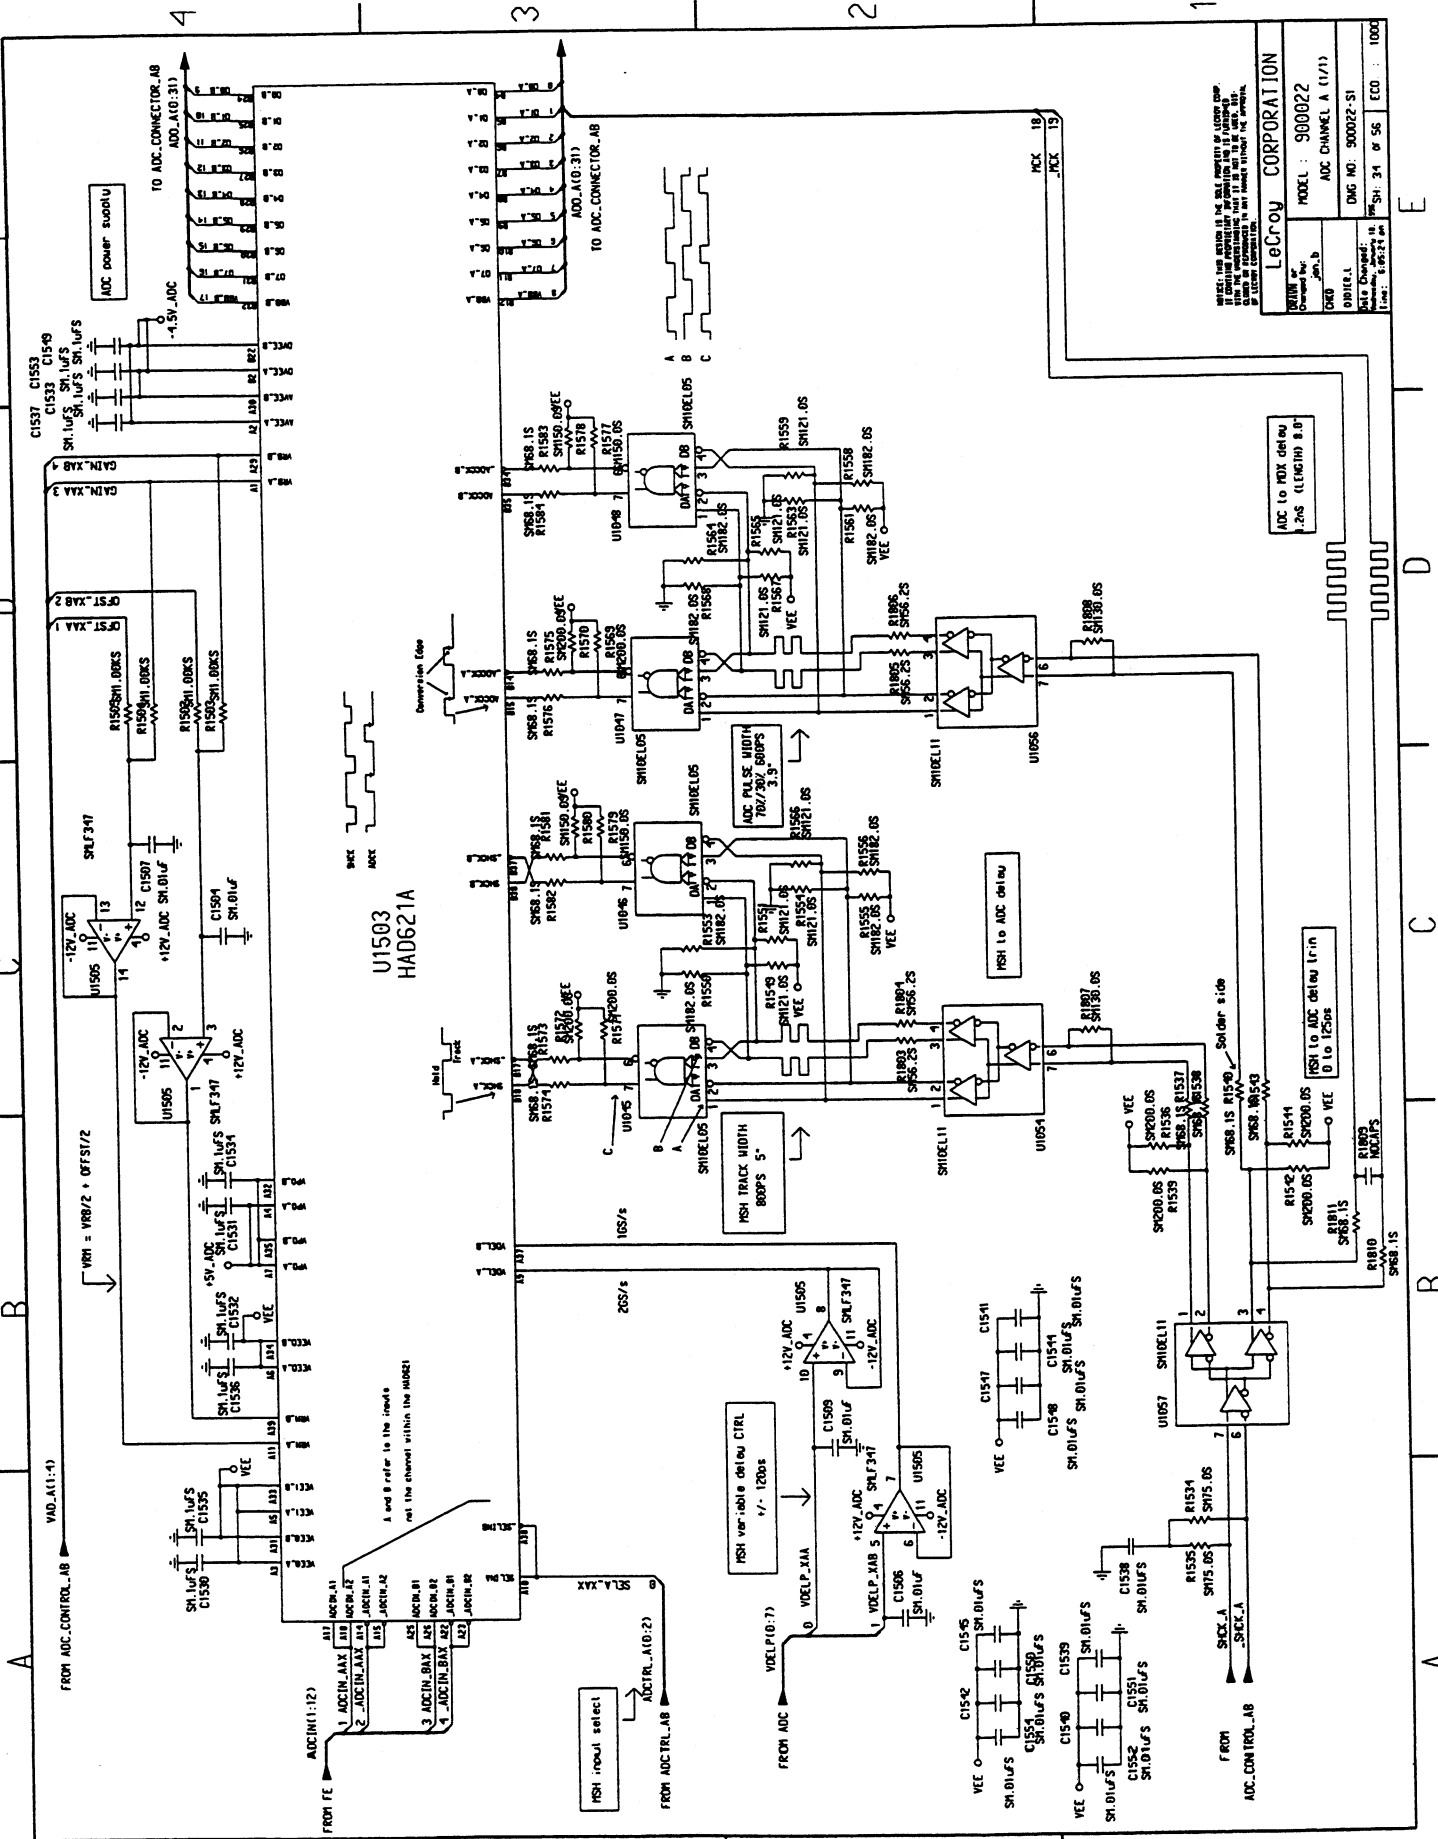

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP. IT IS THE PROPERTY OF LECROY CORP. AND IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LeCroy CORPORATION	
Model No.	900022
Order No.	ADC CHANNEL A (1/71)
Part No.	DWG NO. 900022-S1
Rev.	0
Date	8/23/71
Drawn by	SP-34 or 56
Checked by	ECC
Scale	1:1

Schematics, Layouts

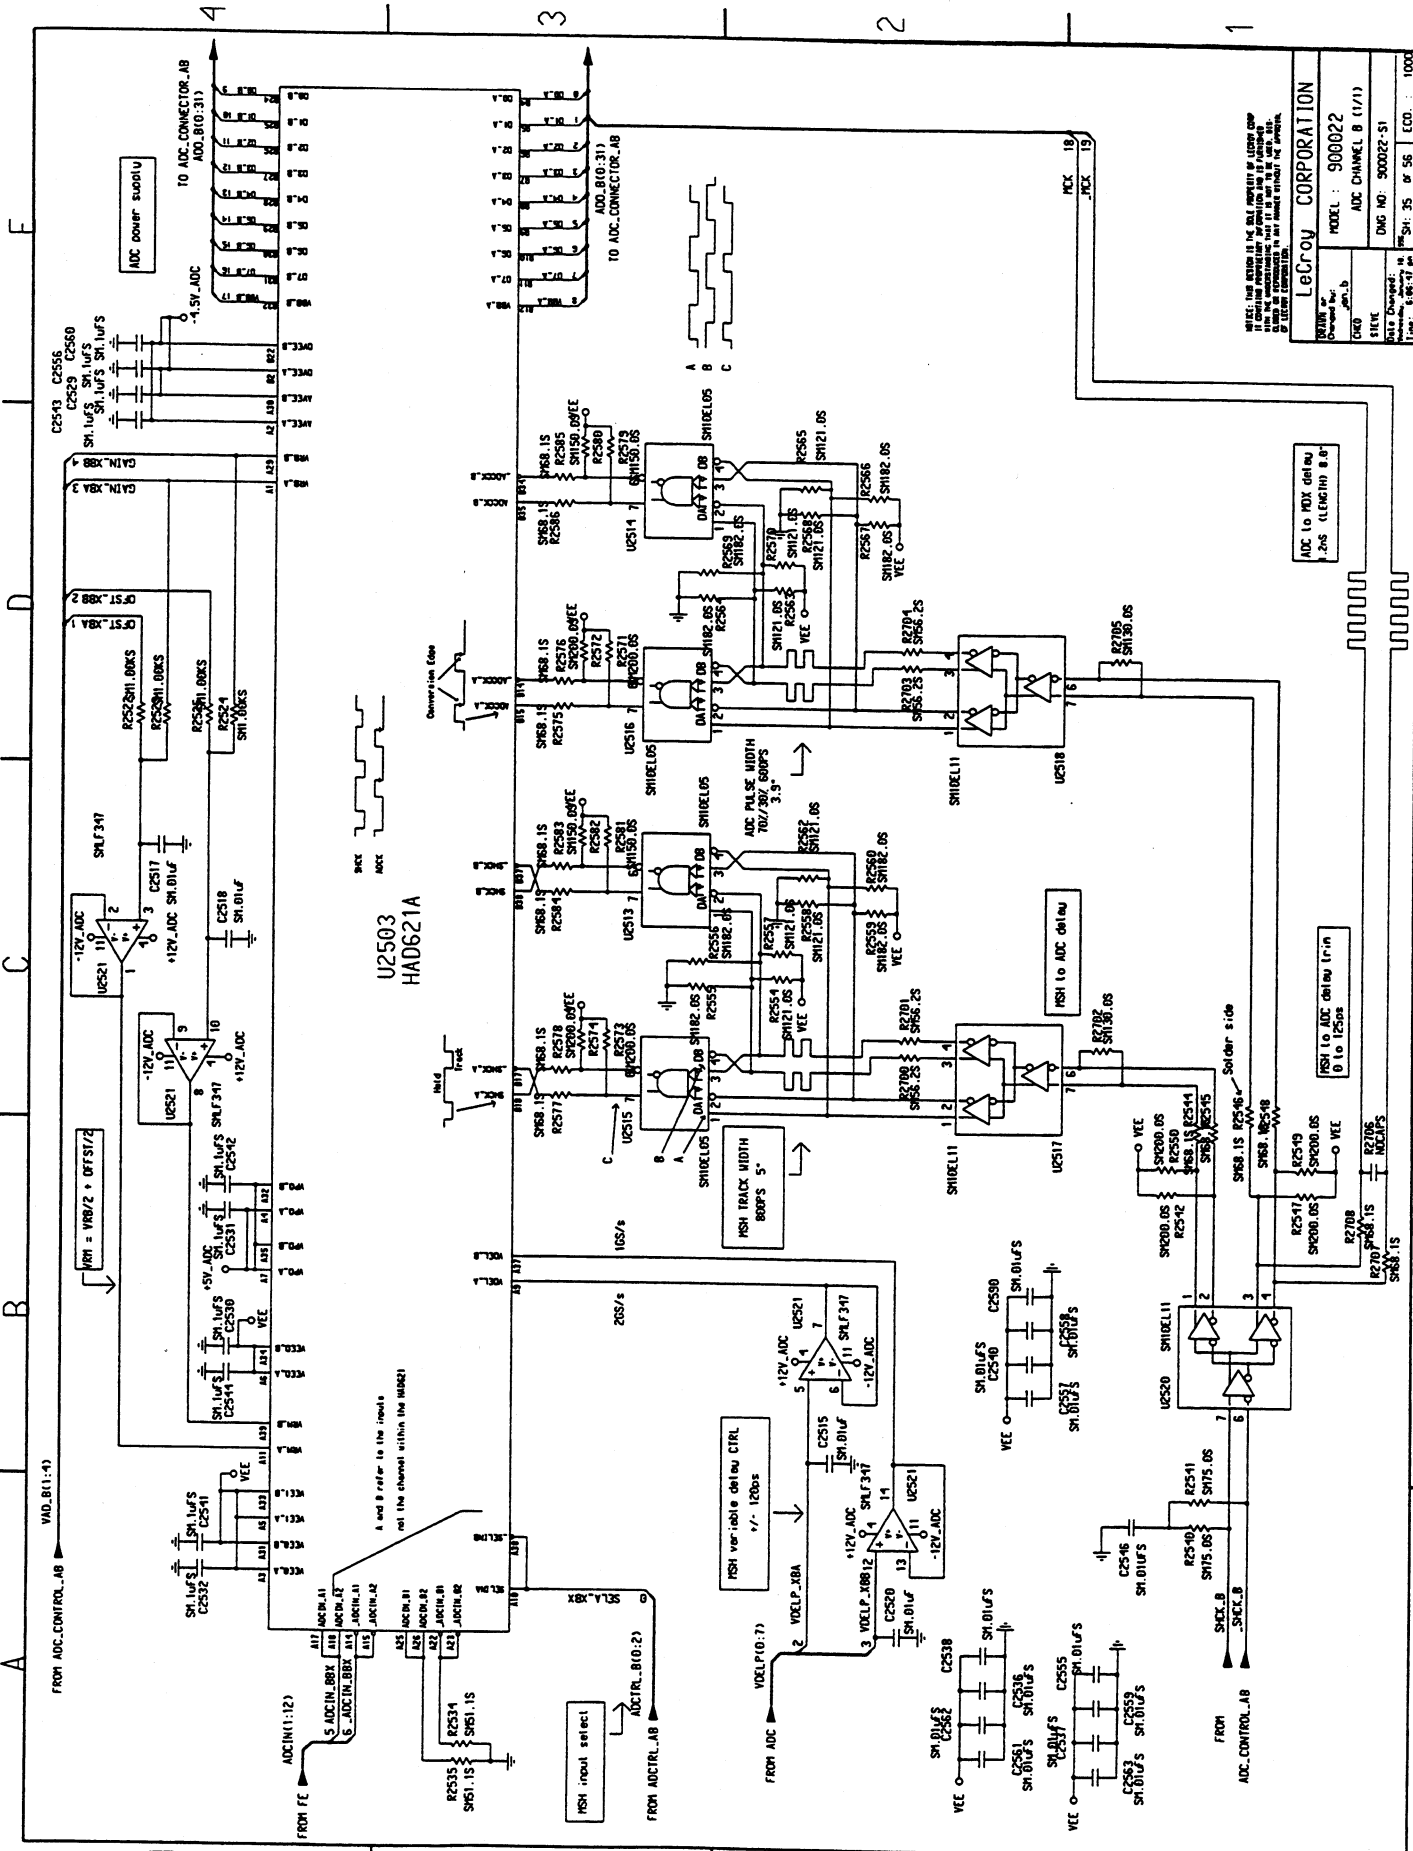



LeCroy CORPORATION

MODEL : 908022
 ADC CHANNEL B (1/1)

DATE DRAWN : 08/11/81
 DRAWN BY : JWB
 CHECKED BY : JWB
 ENG NO. : 908022-51
 ECO. : 1000

NOTE: THIS DRAWING IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

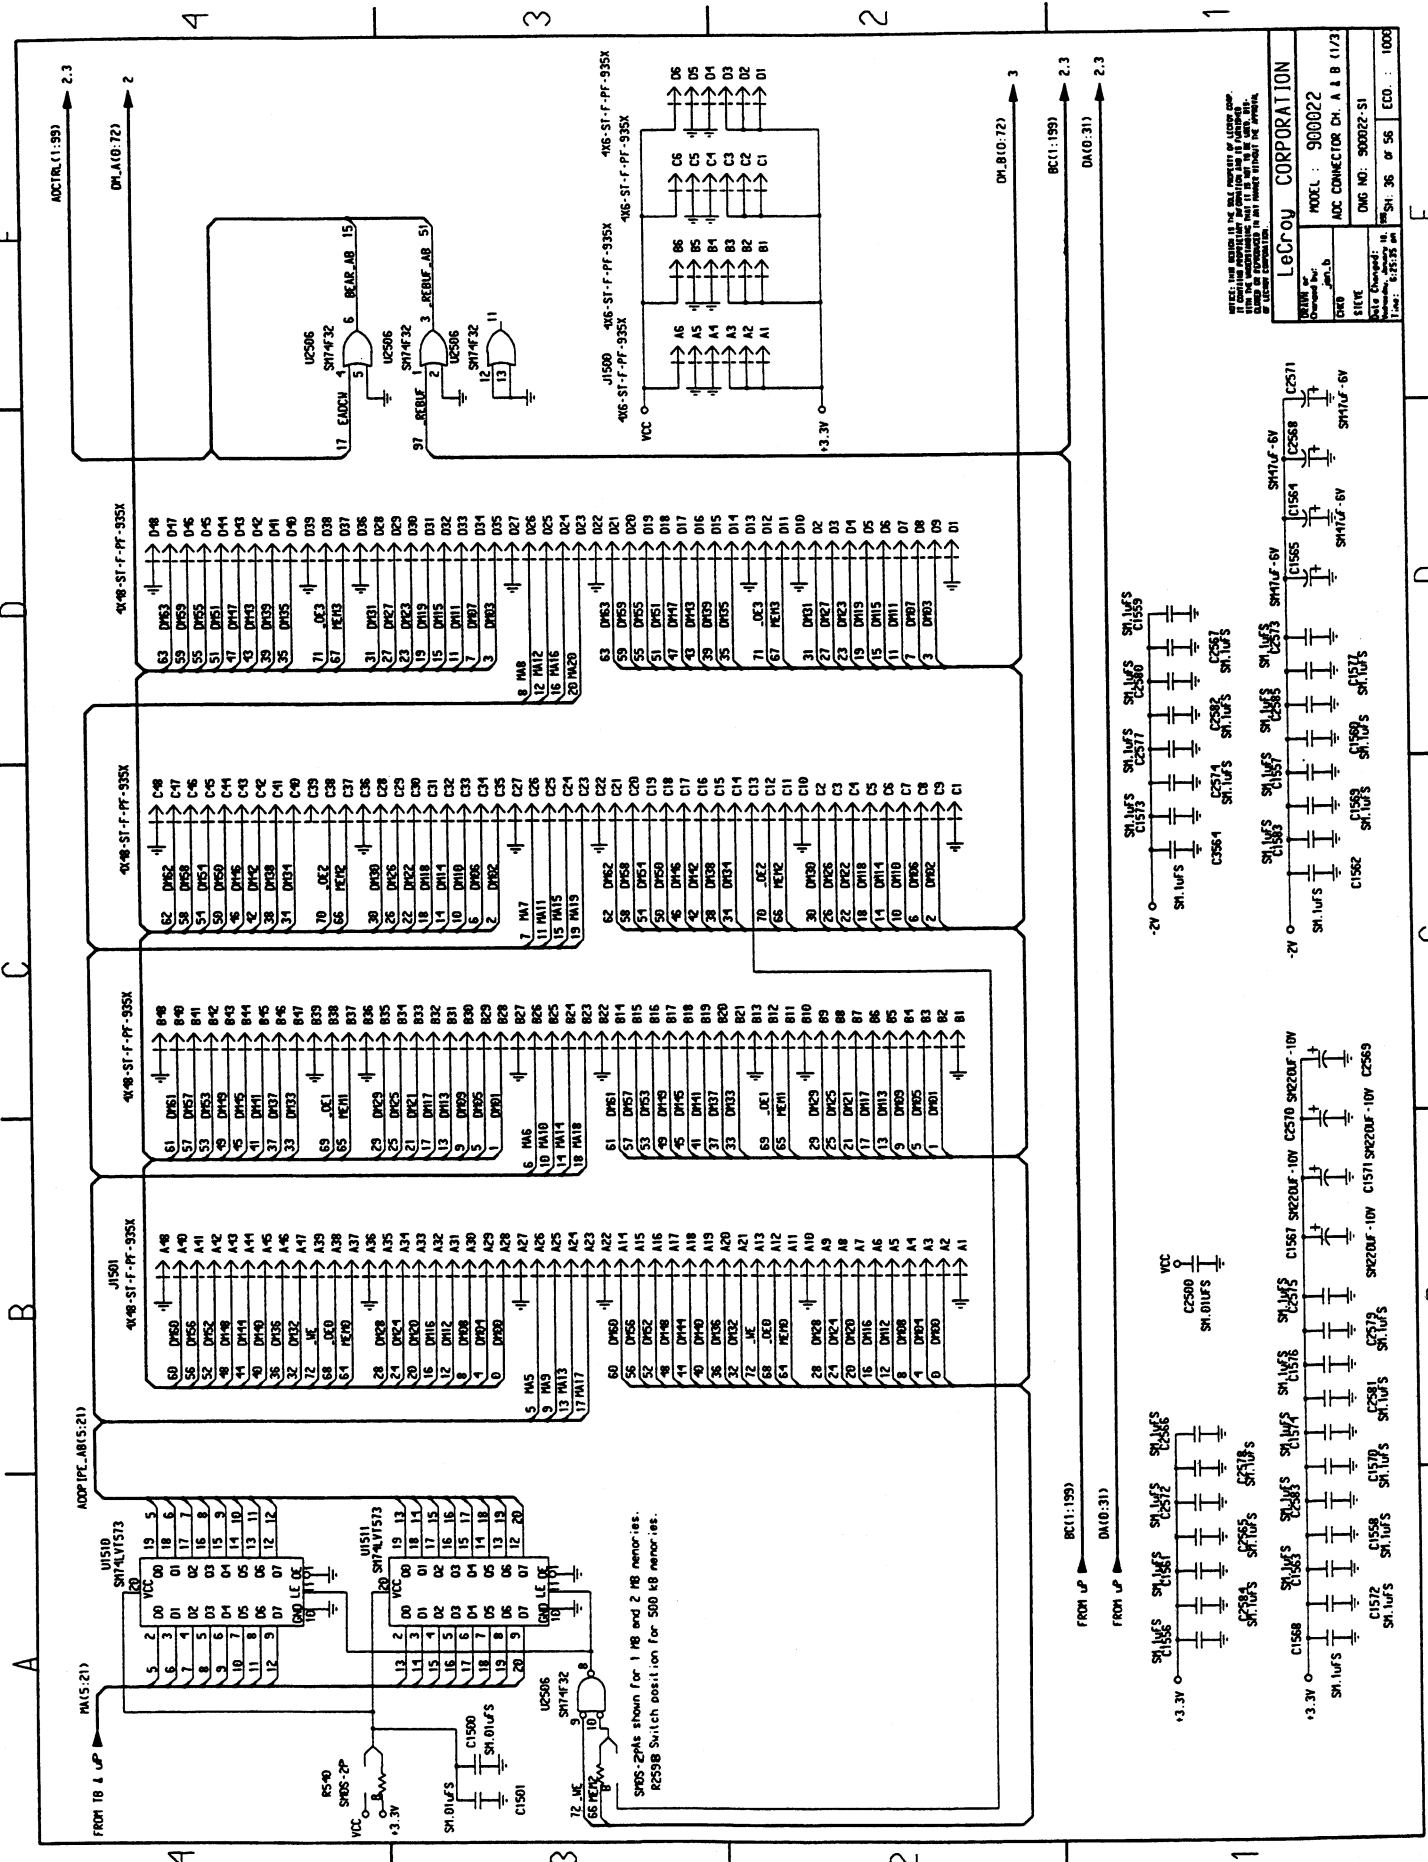


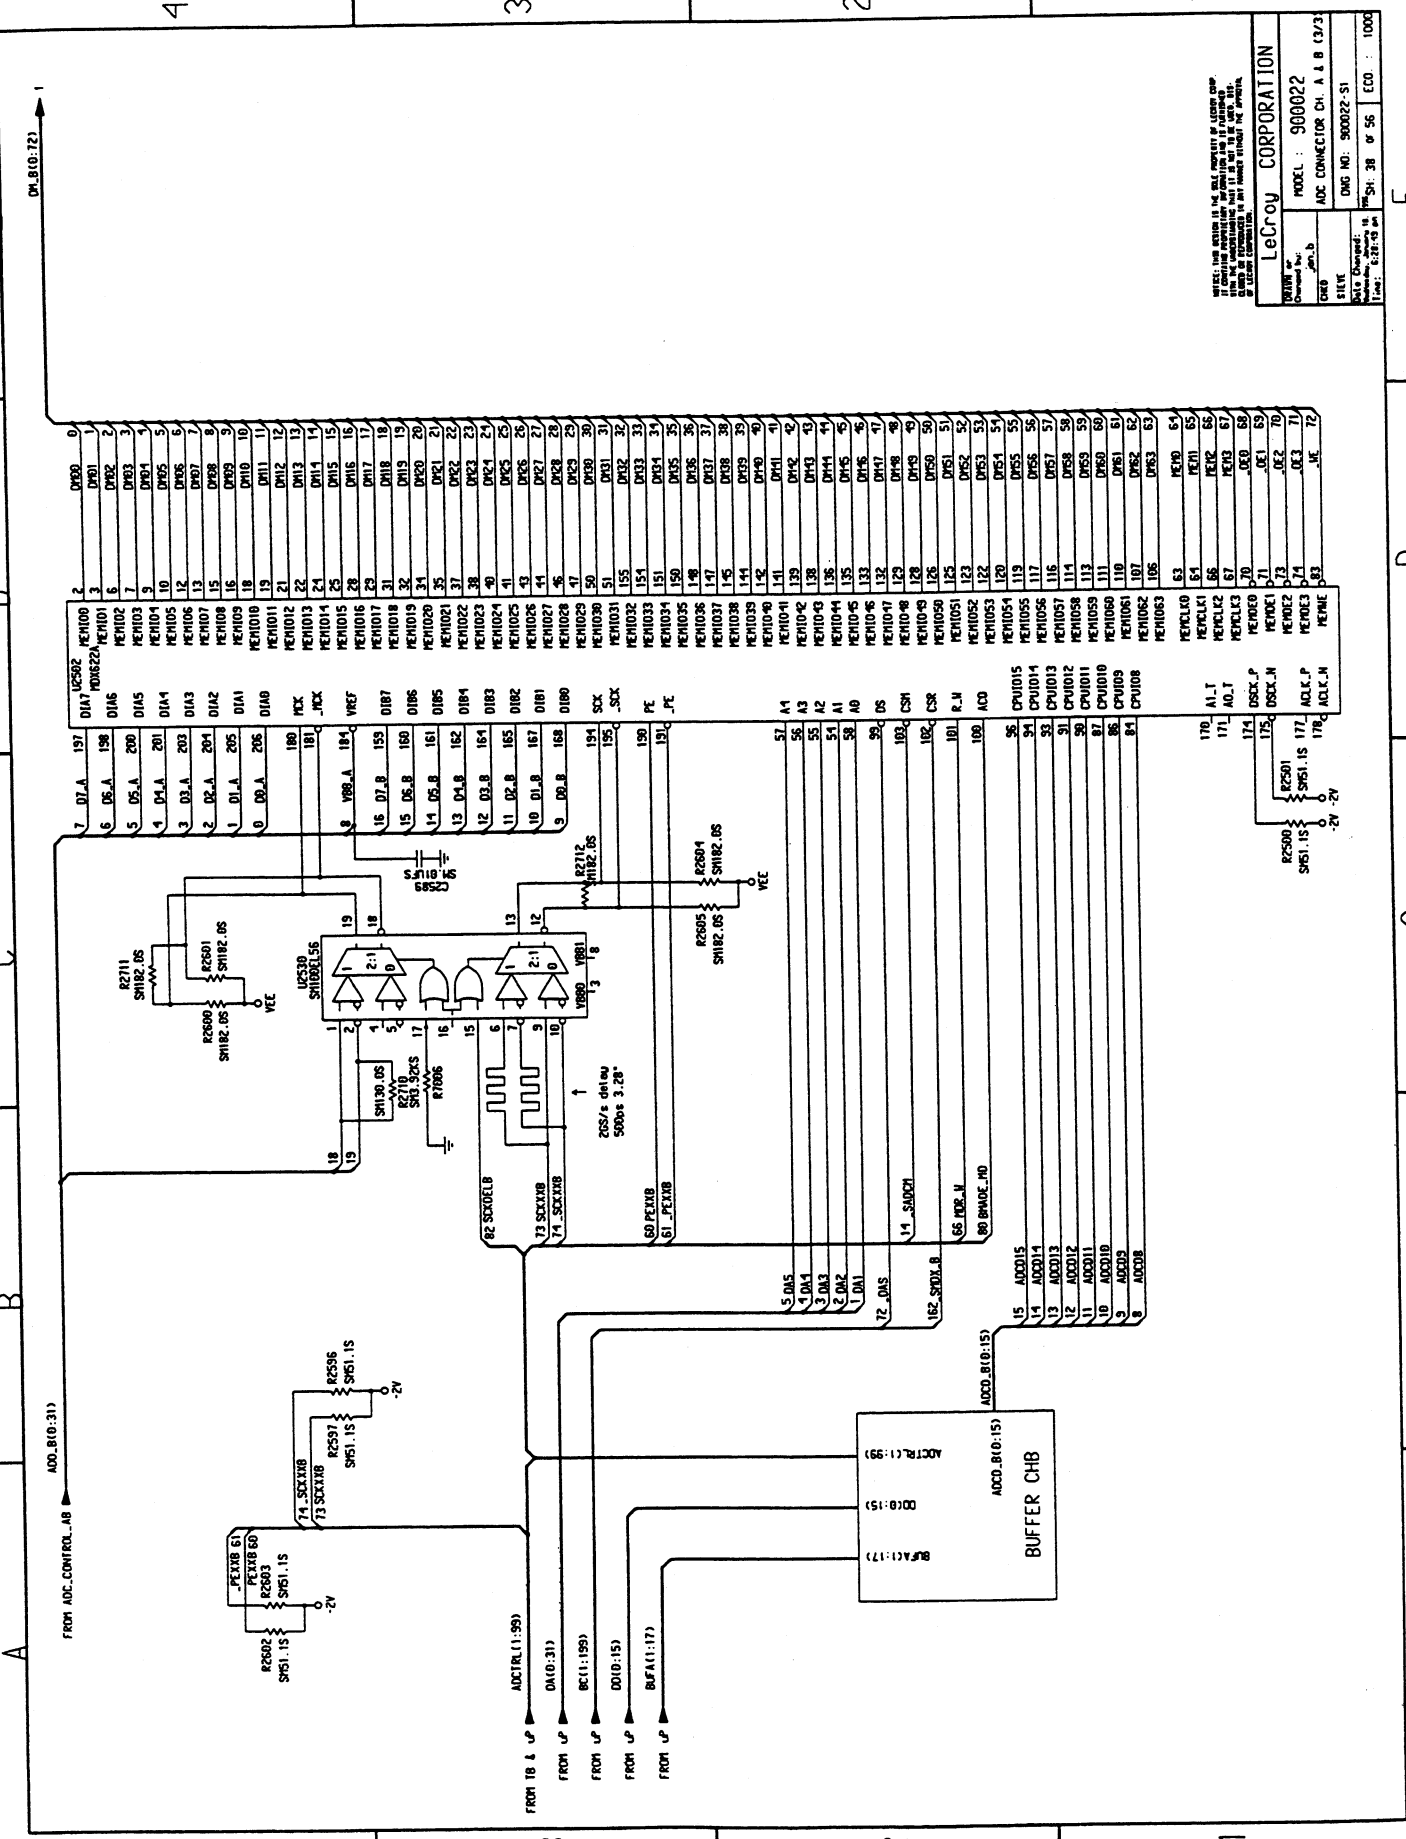

THIS DRAWING IS THE PROPERTY OF LEADERSHIP ELECTRONIC CORPORATION. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREON. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LeCroy CORPORATION
 MODEL : 900022
 ADC CONNECTOR CH. A & B (3/73)
 Dwg No. 900022-51
 Rev. 1
 Date: 5/28/83
 Sh. 38 of 56 E.O. : 1000

Schematics, Layouts

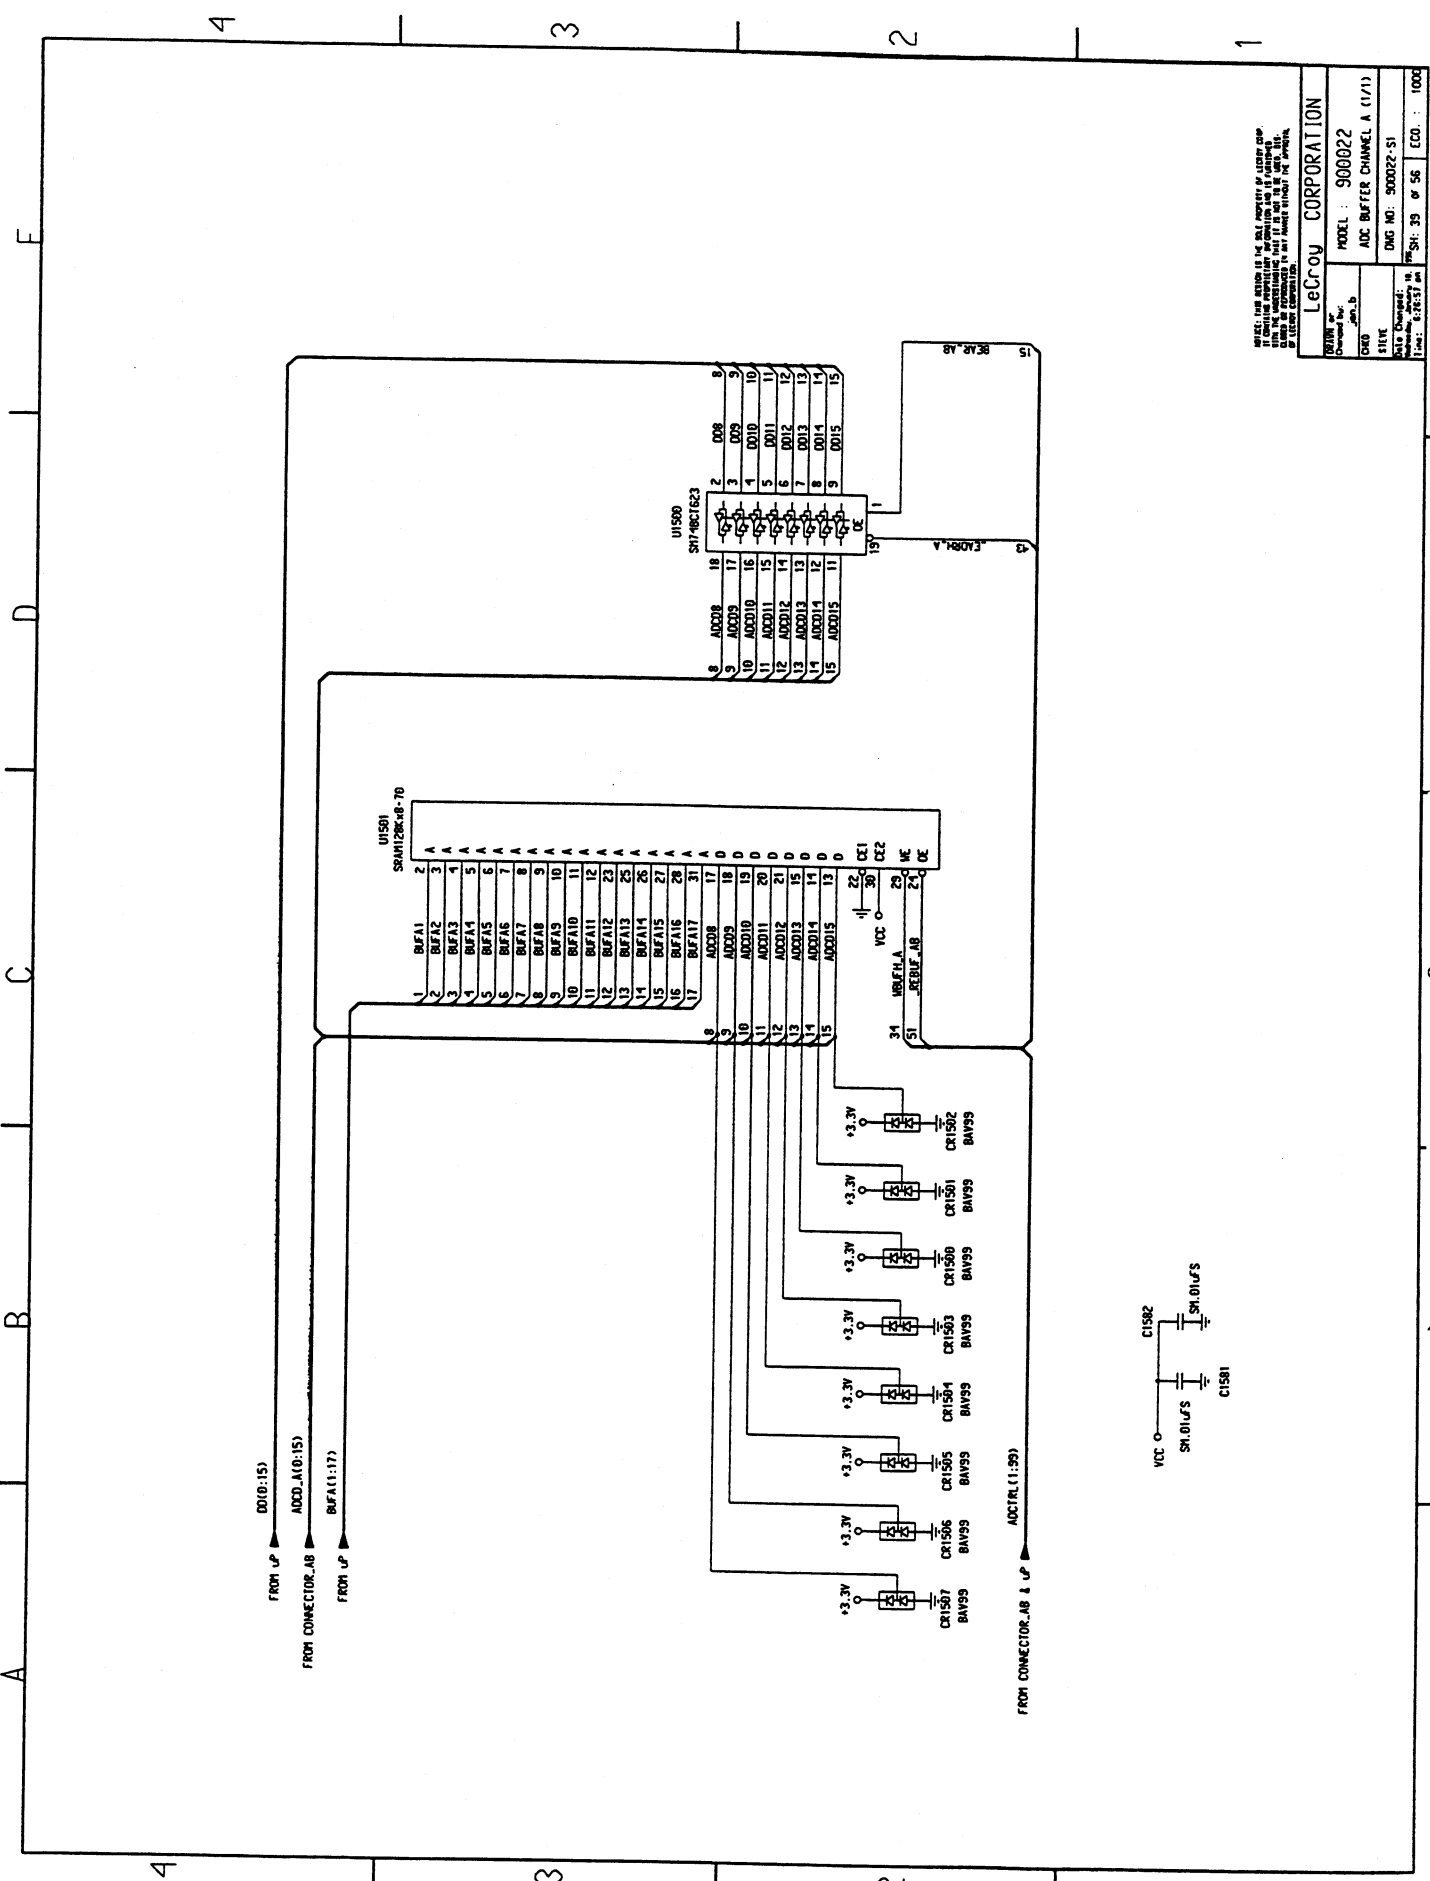


NOTES: THIS DESIGN IS THE SOLE PROPERTY OF LEICOR CORP.
IT IS THE PROPERTY OF LEICOR CORP. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF LEICOR CORP.


LeCroy CORPORATION

MODEL : 900022
ADC BUFFER CHANNEL A (1/1)


DWG NO. 900022-S1
REV. 39 OF 56 E.O. : 1000

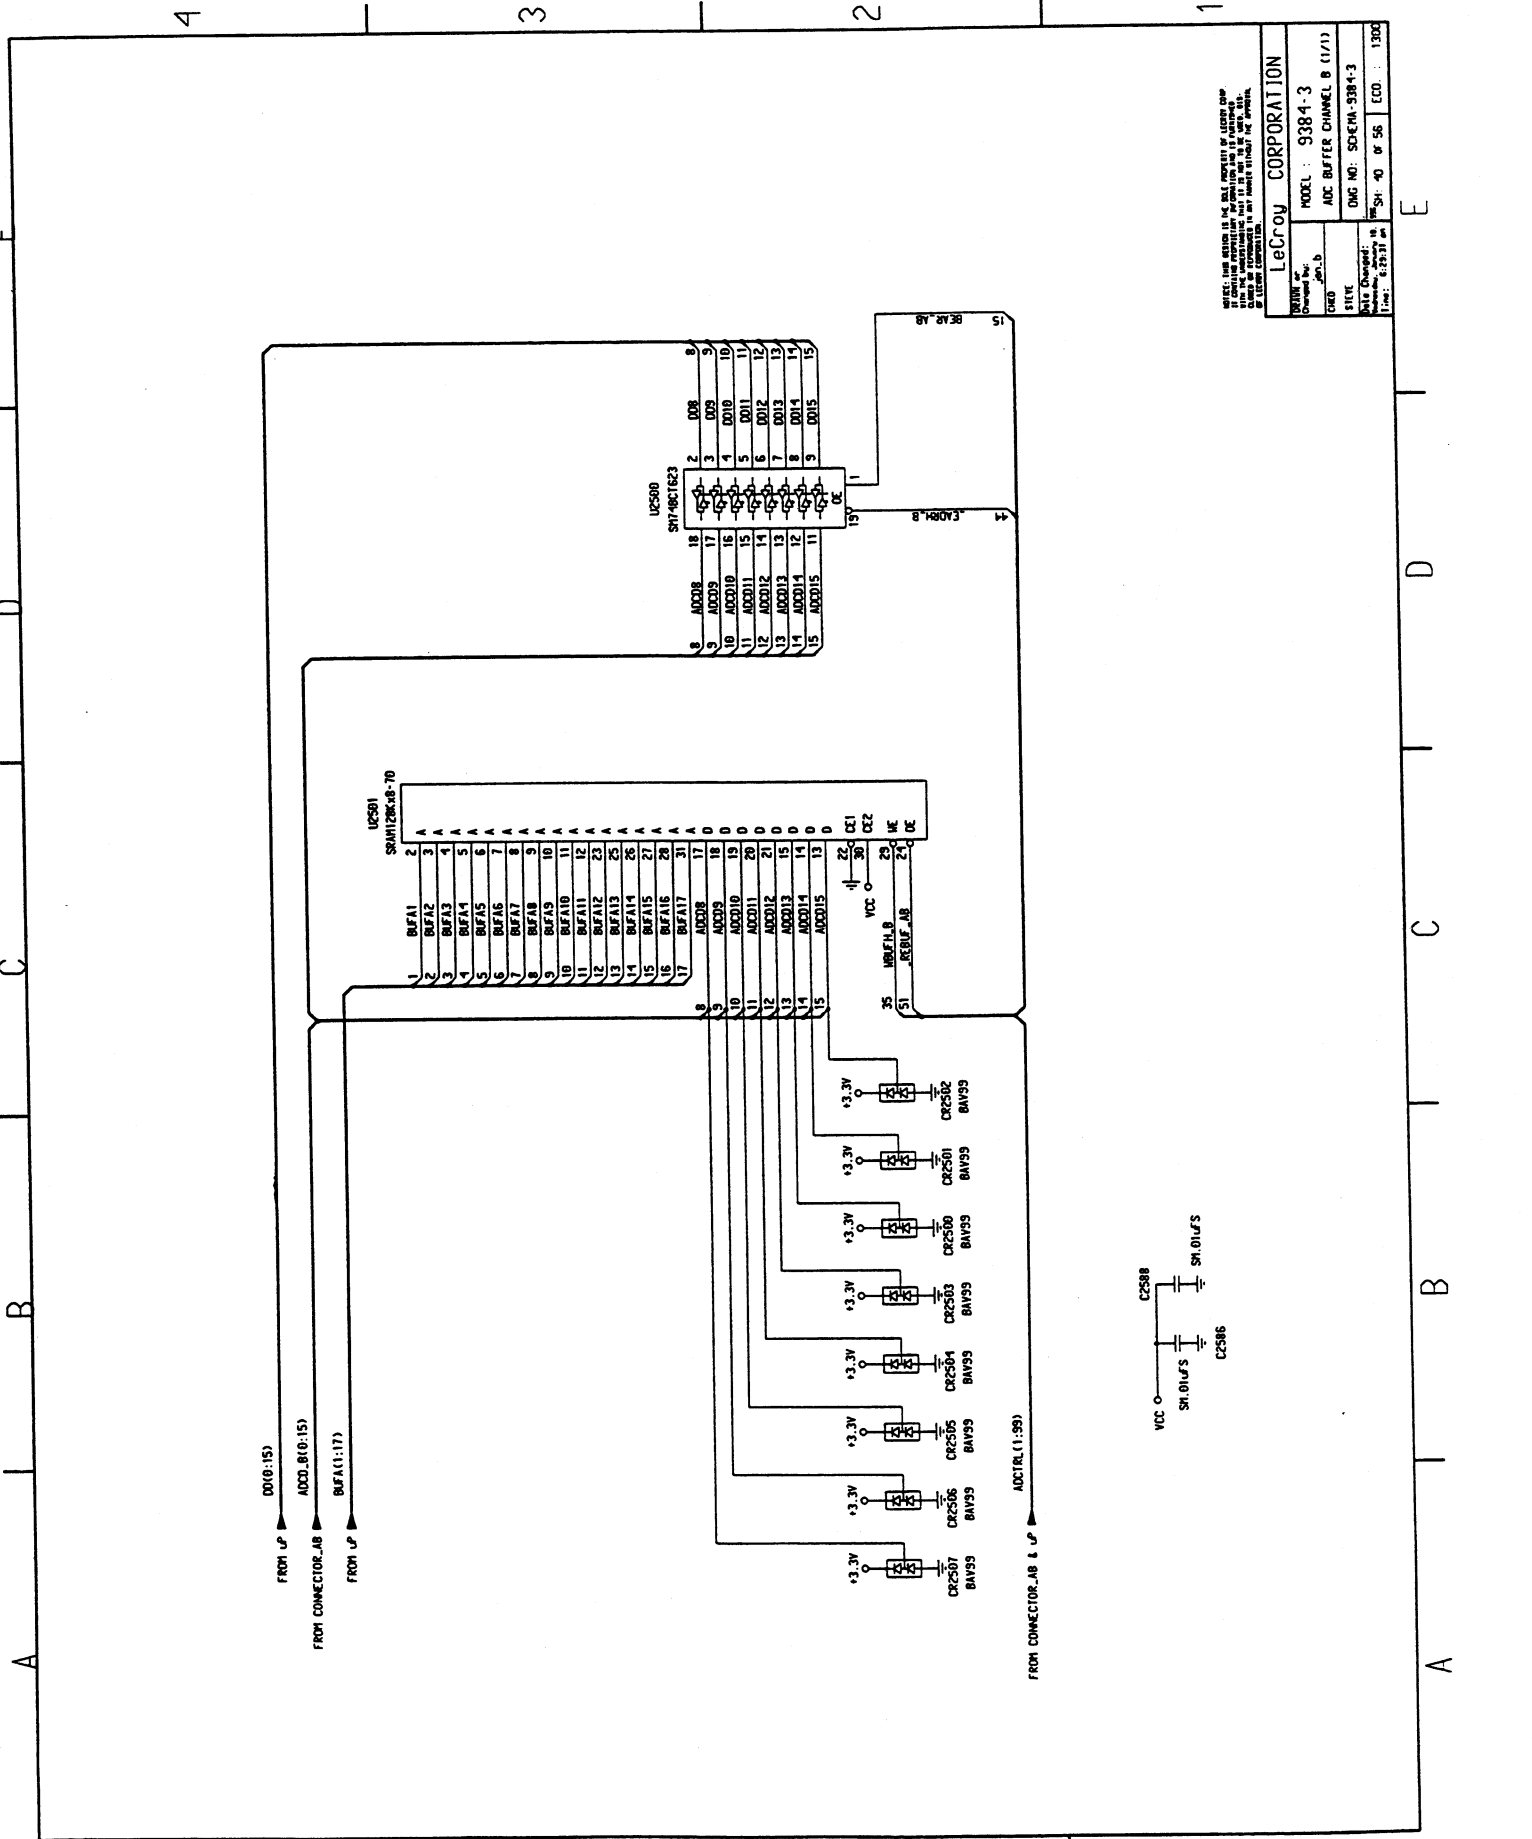


LeCroy CORPORATION
 MODEL : 9384-3
 ADC BUFFER CHANNEL B (11/1)
 SHEET : 01
 DATE CHANGED : 6/23/78
 DRAWN BY : [blank]
 DESIGNED BY : [blank]
 CHECKED BY : [blank]
 INSP. BY : [blank]
 FILE NO. : 9384-3
 SHEET : 40 OF 56
 EDITION : 1300



Schematics, Layouts

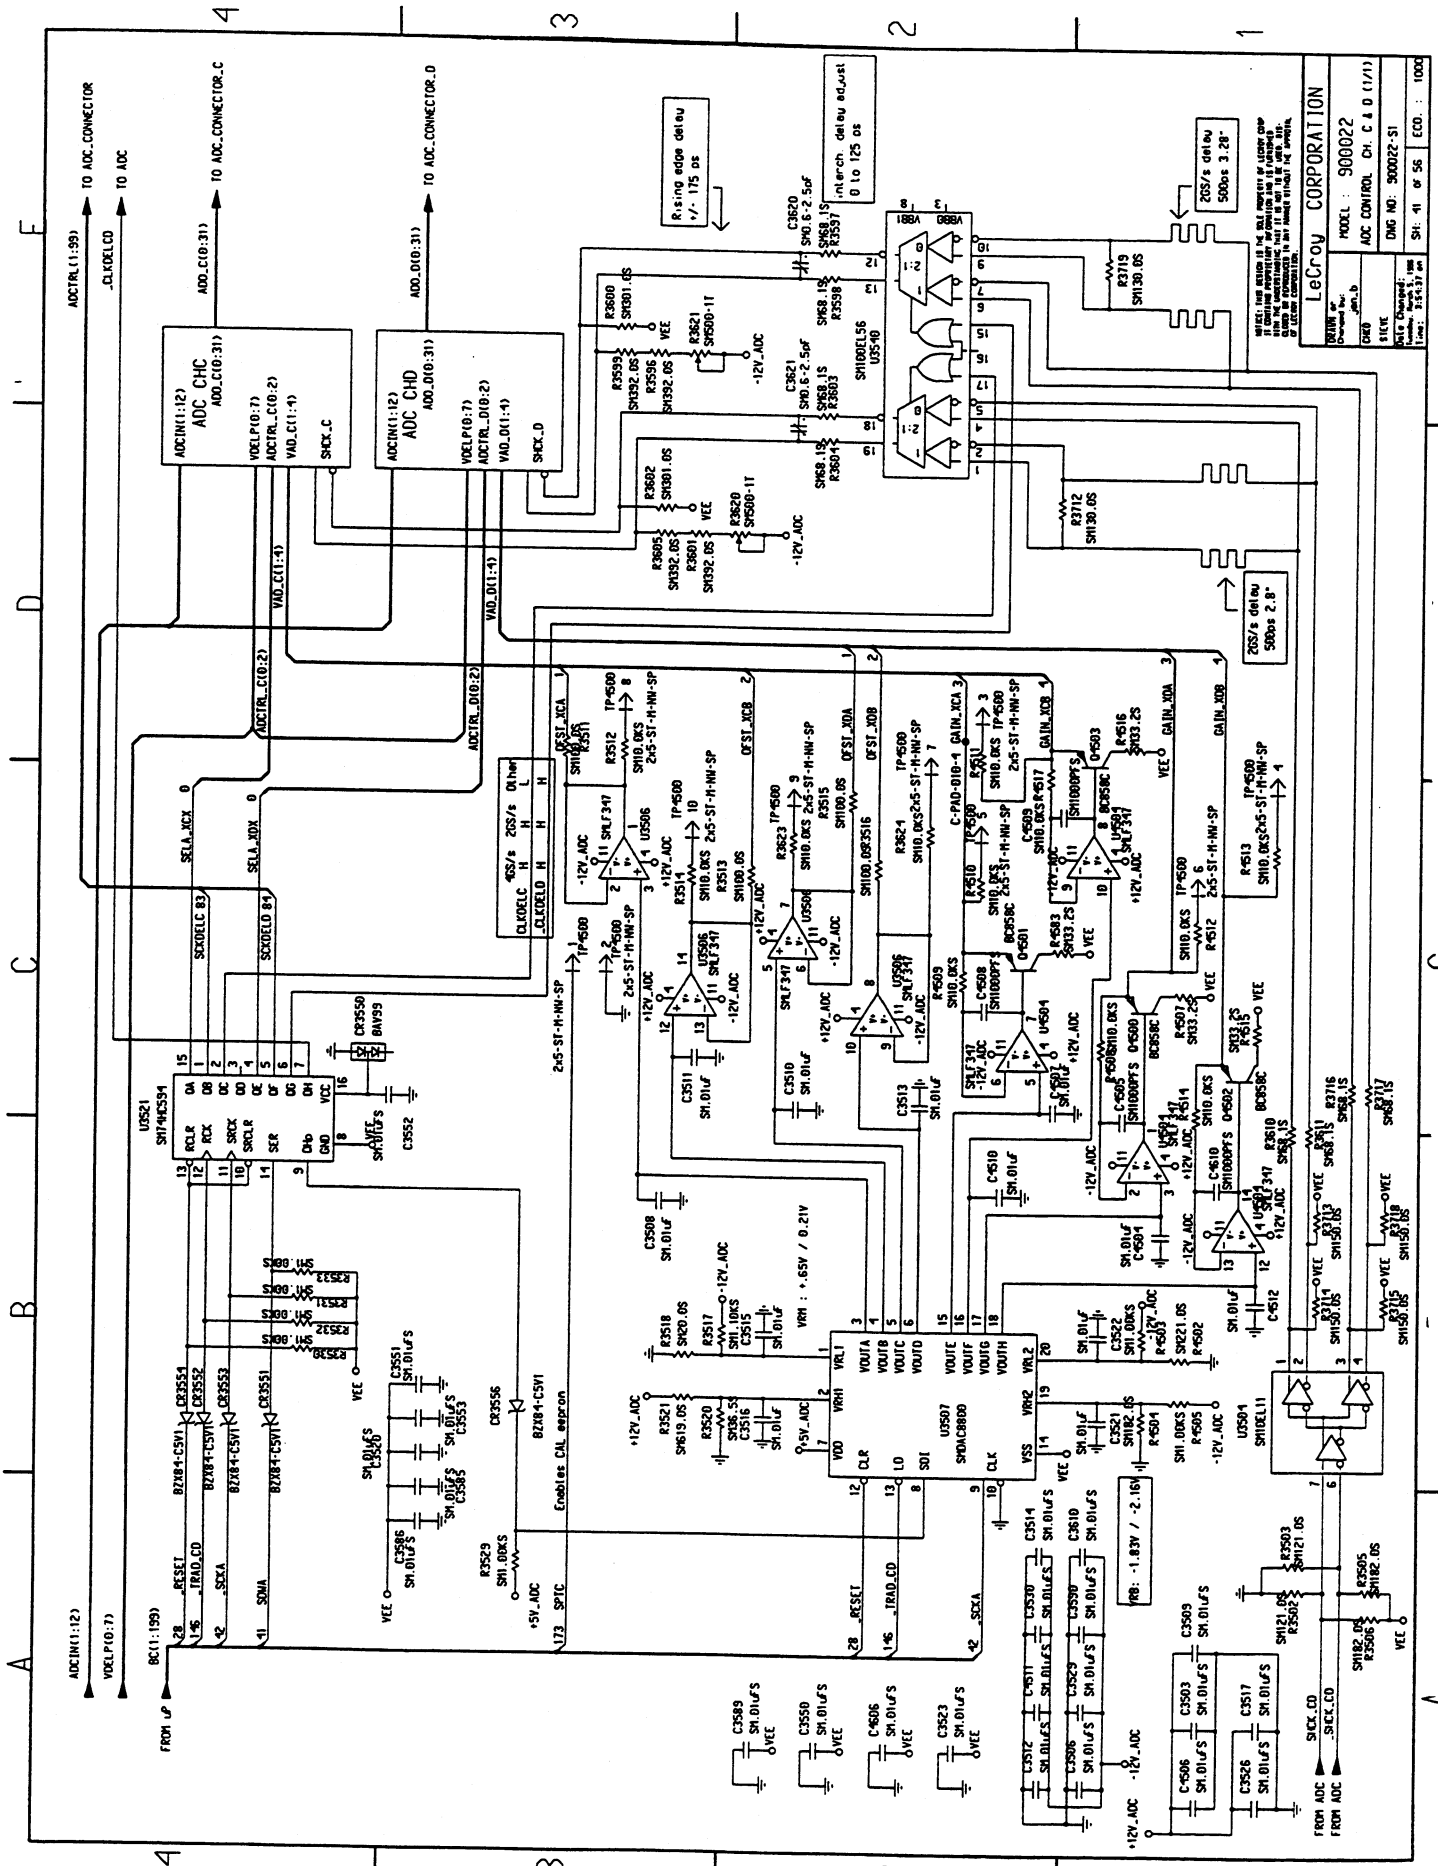

LeCroy CORPORATION
 MODEL: 900022
 ACC CONTROL: CH. C & D (1/1)
 DATE: 9/11/81
 DATE CHANGED: 9/11/81
 DRAWN BY: [Name]
 CHECKED BY: [Name]
 SH. 41 of 56
 ECO. : 1000

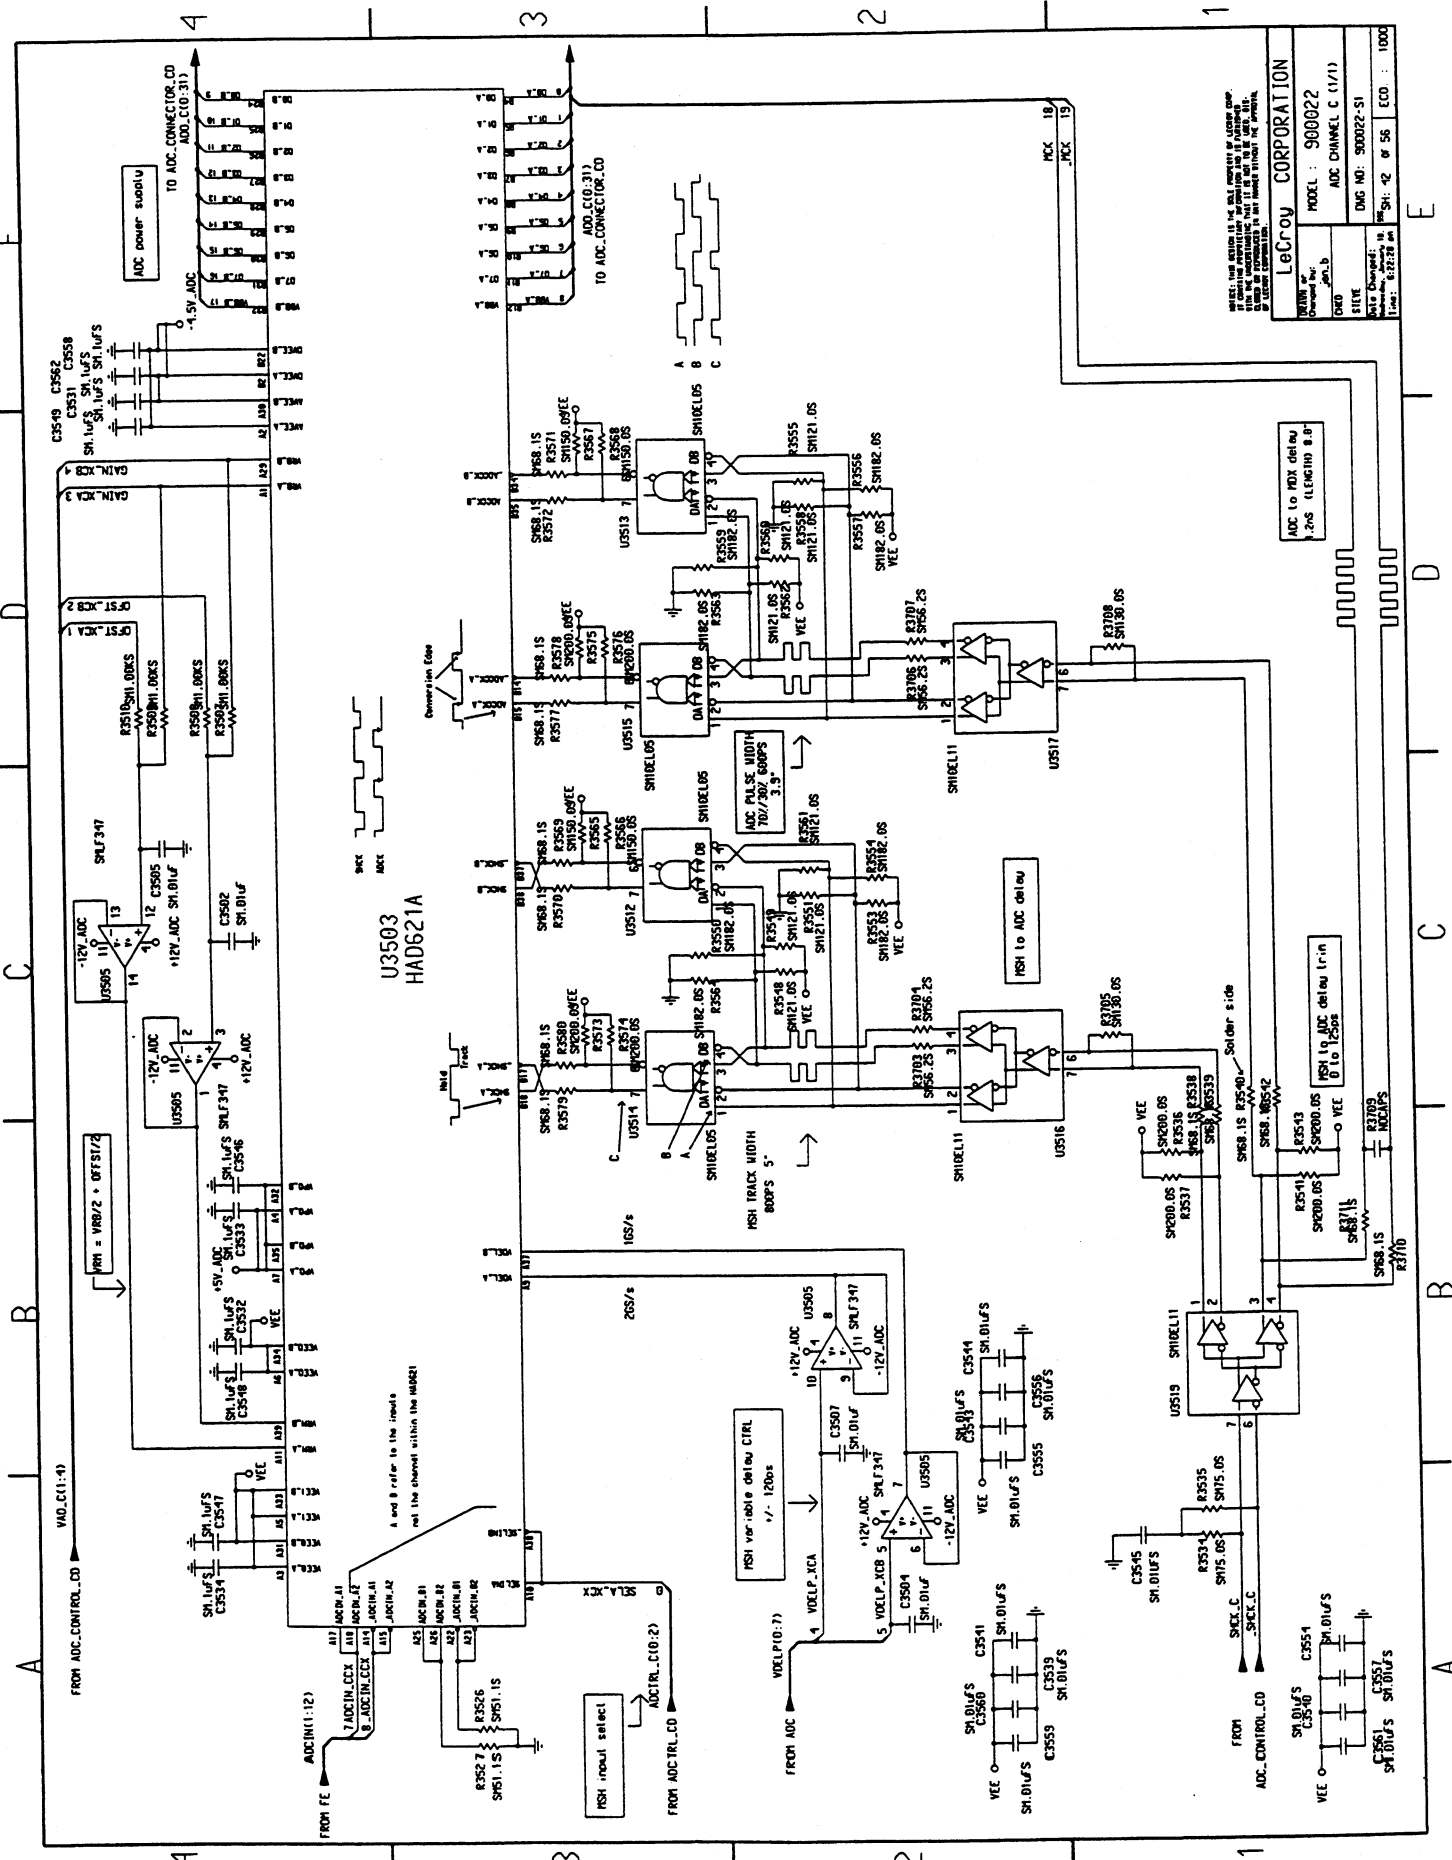


LeCroy CORPORATION
 Model No. 900022
 ADC CHANNEL C (1/1)
 Dwg No. 900022-S1
 Rev. 12 of 56
 Date: 6-22-78
 ECD: 1000

ADC to MDX delay
 2.26 (LENGTH 8.8)

RSH to ADC delay
 0 to 1.200s


RSH variable delay CTRL
 1/2 1.200s

Schematics, Layouts

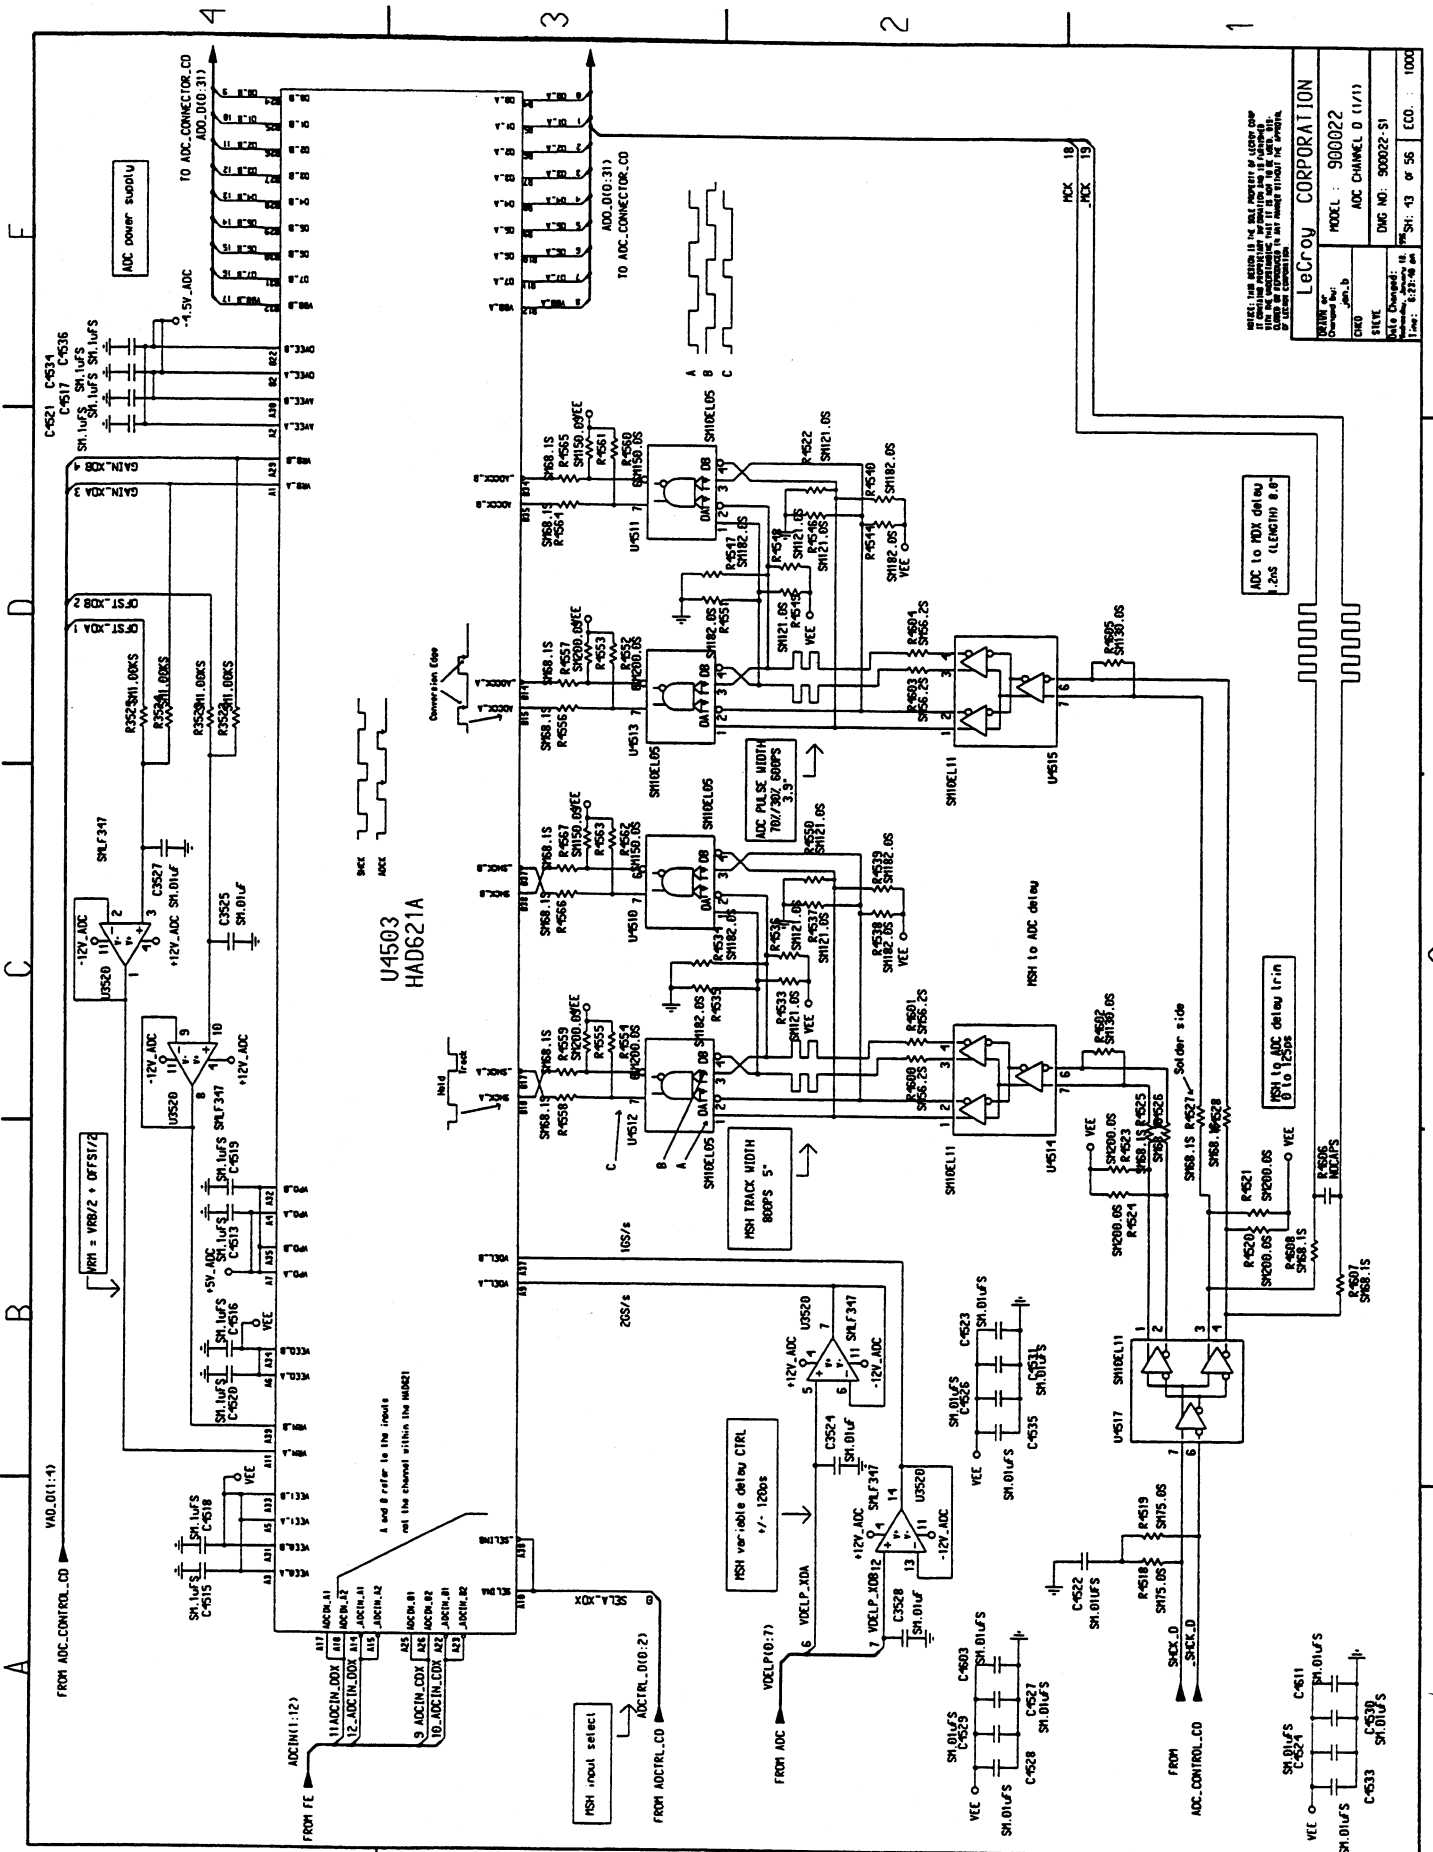

NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORPORATION. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITING OF LECROY CORPORATION.


Model: 990022
 ADC CHANNEL D (1/1)
 SILEX
 DWG NO. 990022-S1
 Date Drawn: 11/1/88
 Time: 8:27:48 am
 Sh: 13 of 58
 ECO: 1000

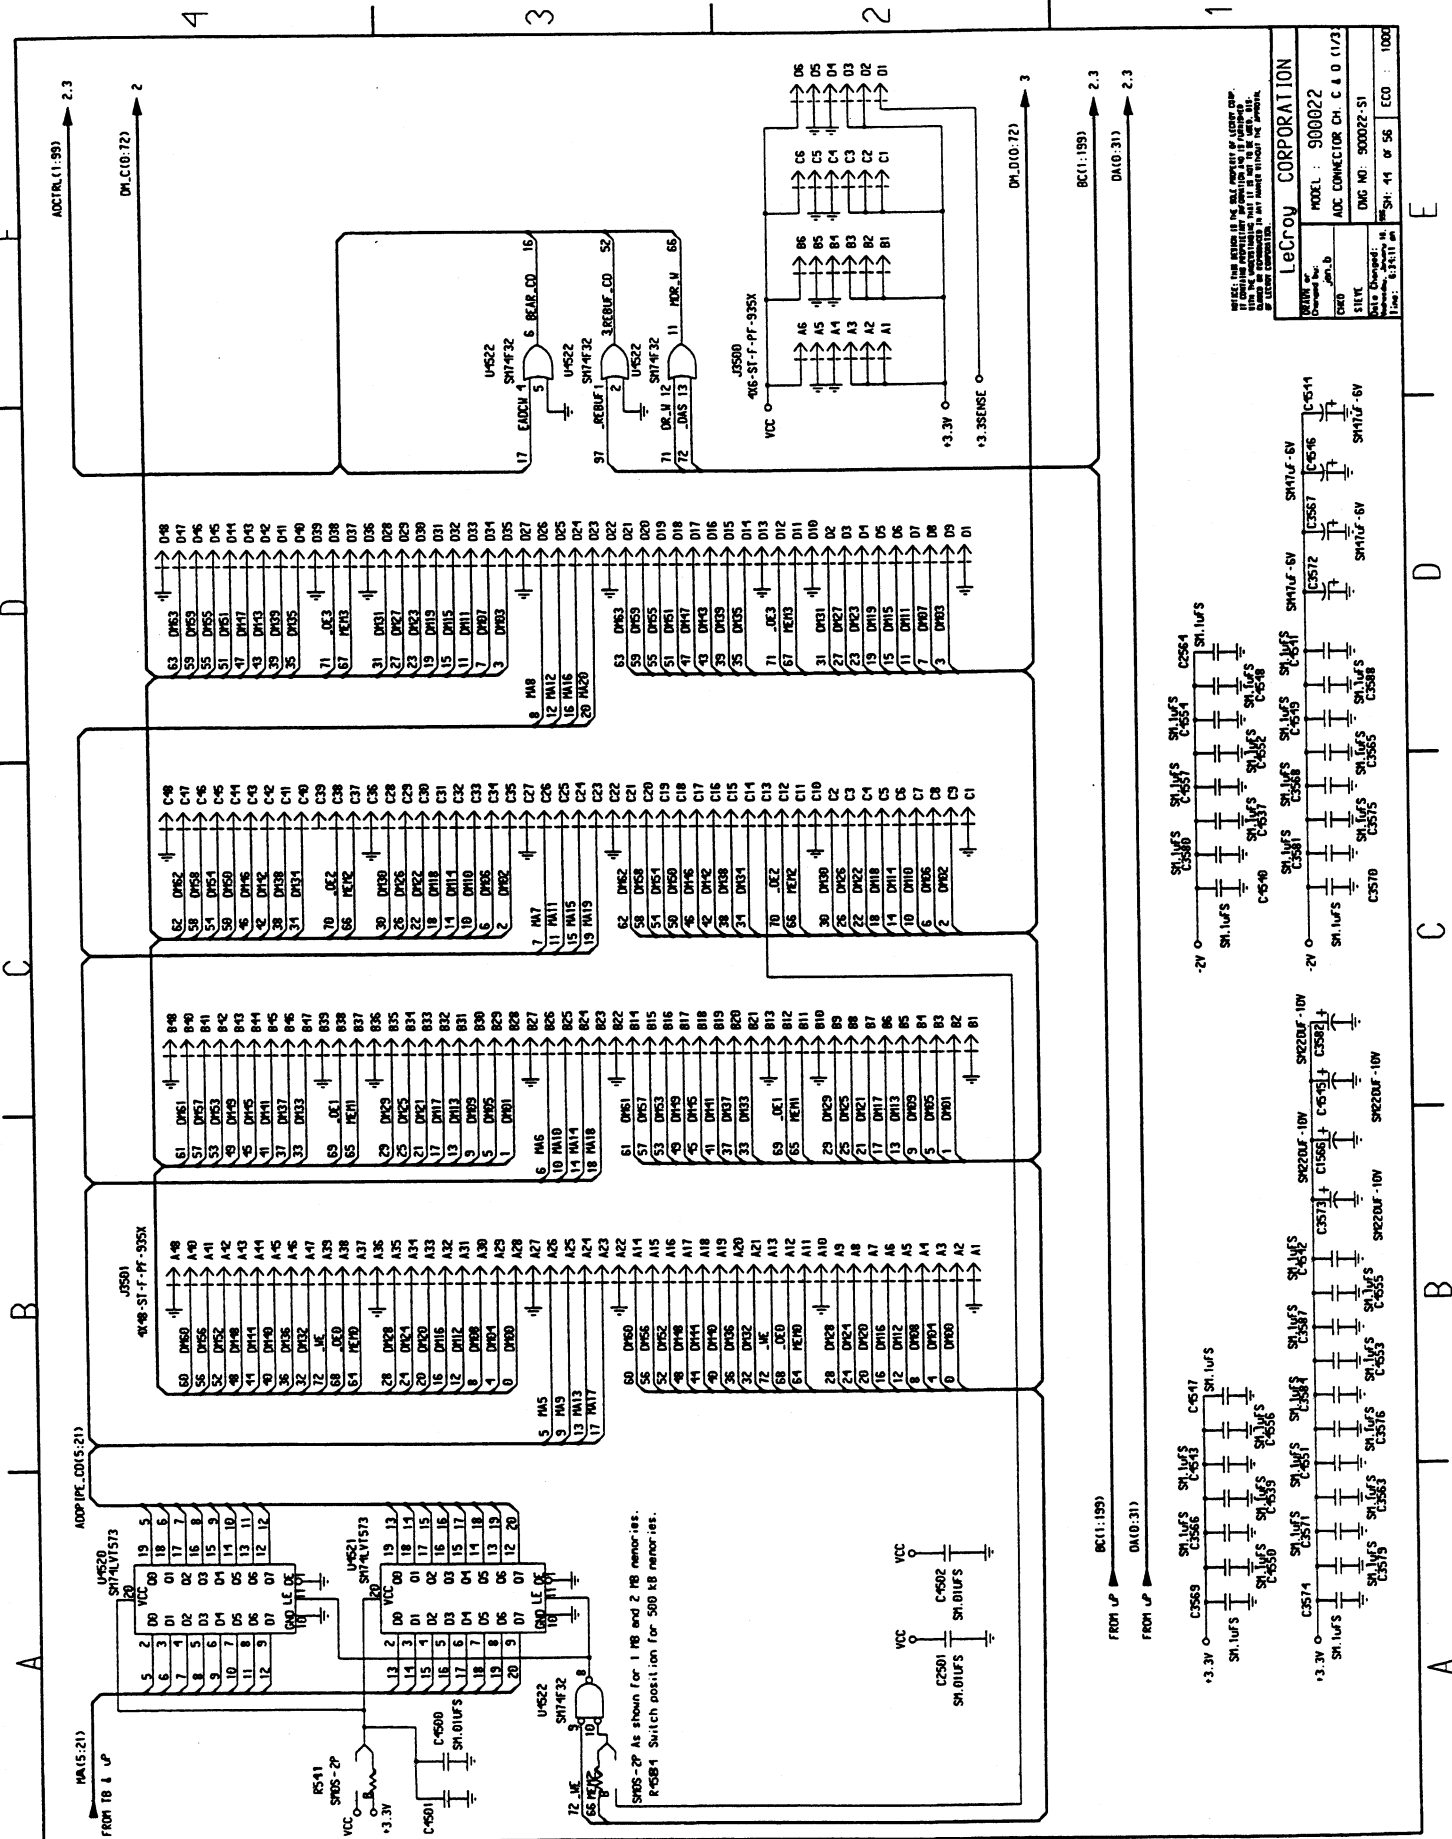

LeCroy CORPORATION


MODEL: 900022
 ADC CONNECTOR CH. C.A.O. (1/73)
 DMC NO: 900022-51
 DATE CHANGED: 14
 DRAWN BY: SH-44 or 56
 ECO: 1000

Schematics, Layouts

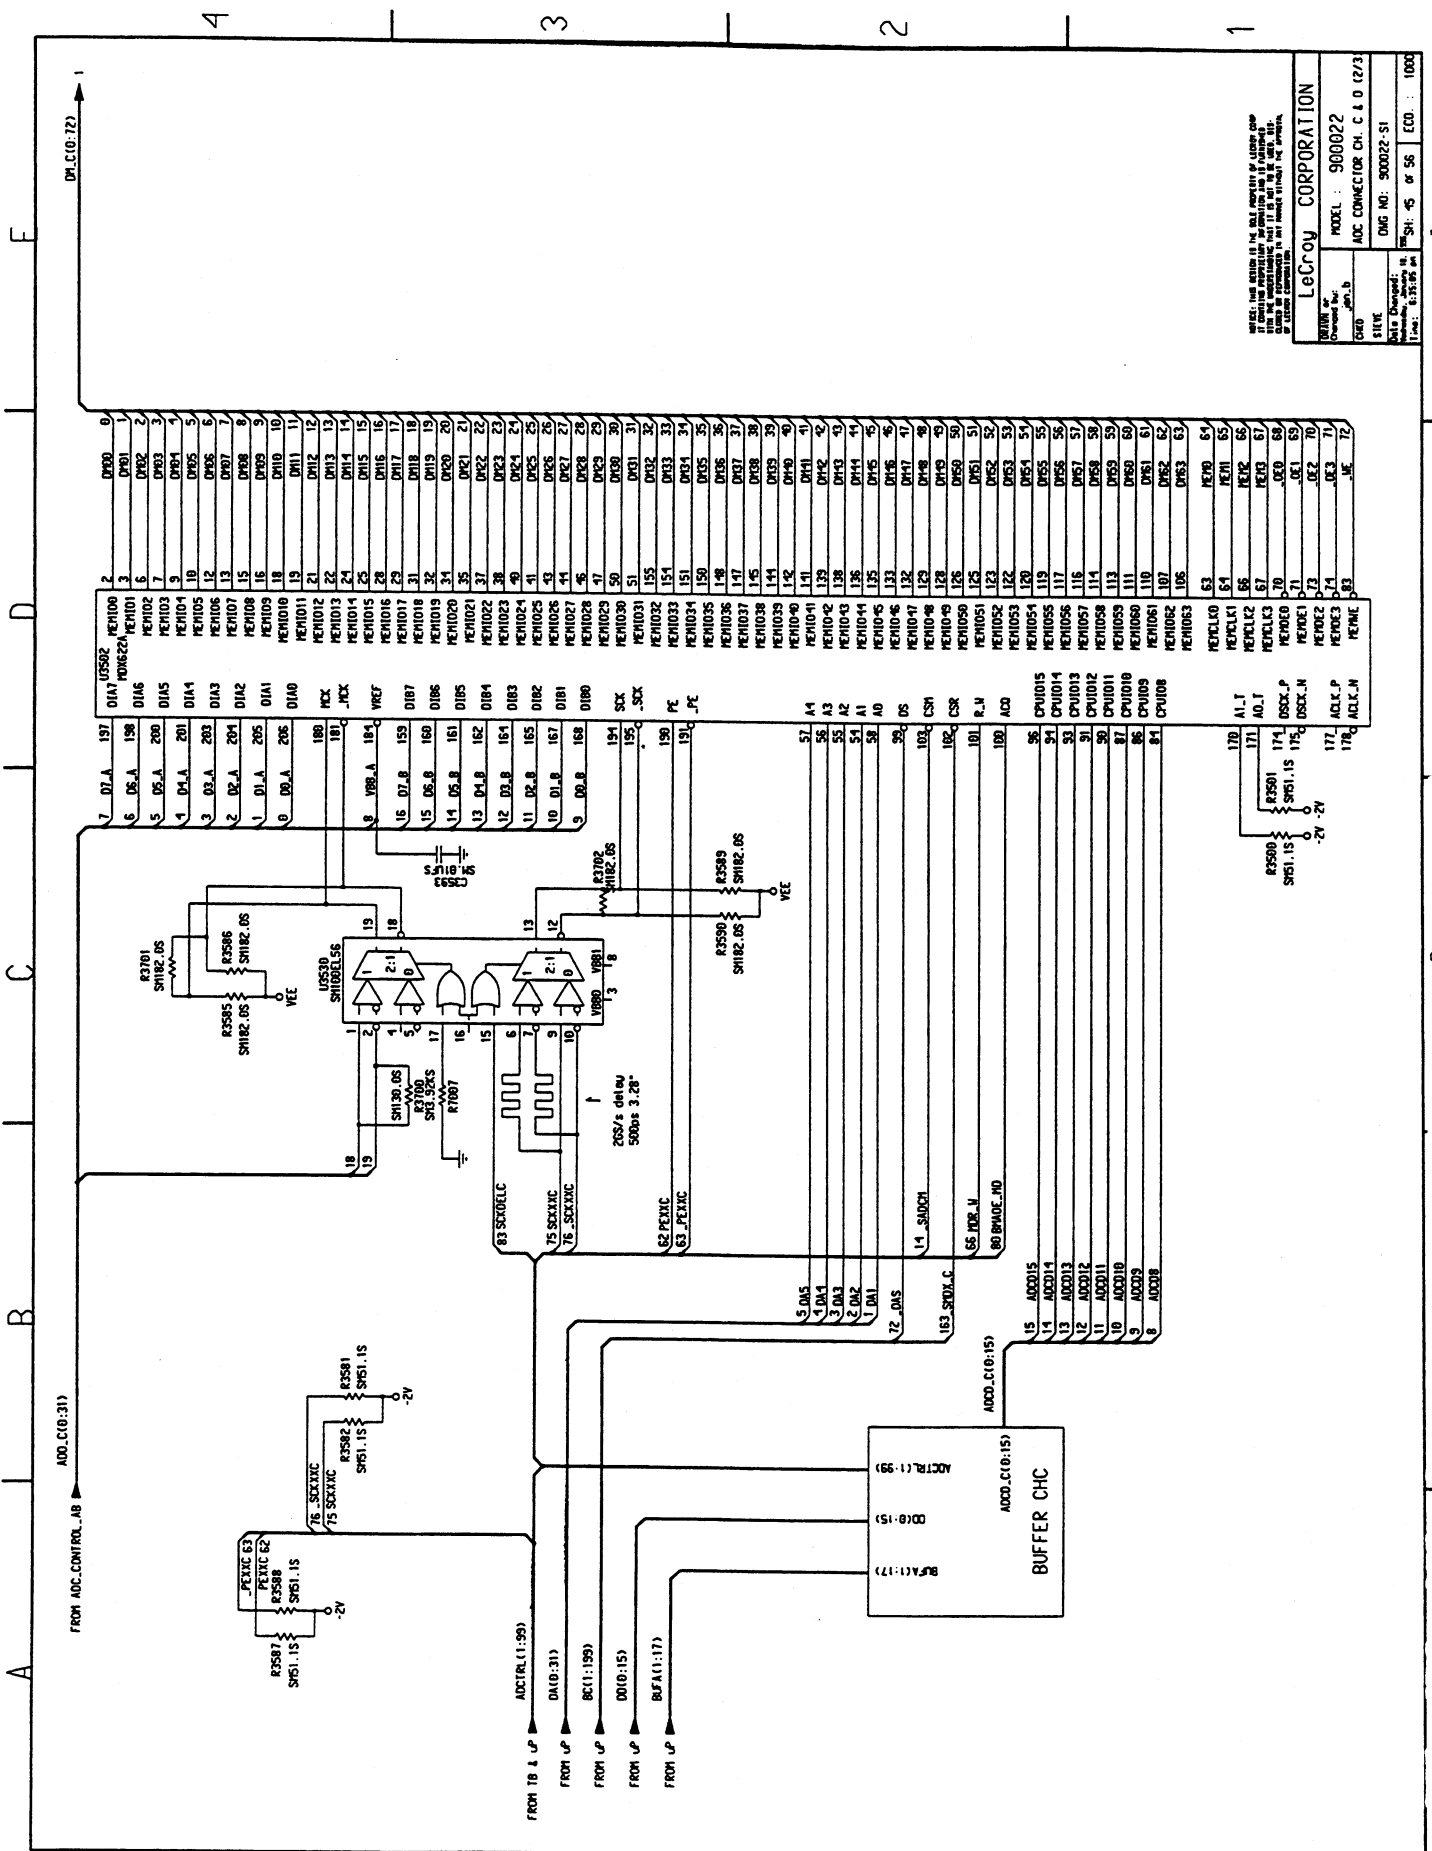

NOTICE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE LECROY MODEL 900022. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.


LeCroy CORPORATION			
Model:	900022	Rev.:	1.0
Part No.:	900022-01	Date Designed:	11-29-83
Drawn By:	John B. STEE	Checked:	John B. STEE
Checked:	John B. STEE	Spec. No.:	45 of 56
Doc No.:	900022-01	ECN No.:	
Scale:	1:1	ECN:	1000

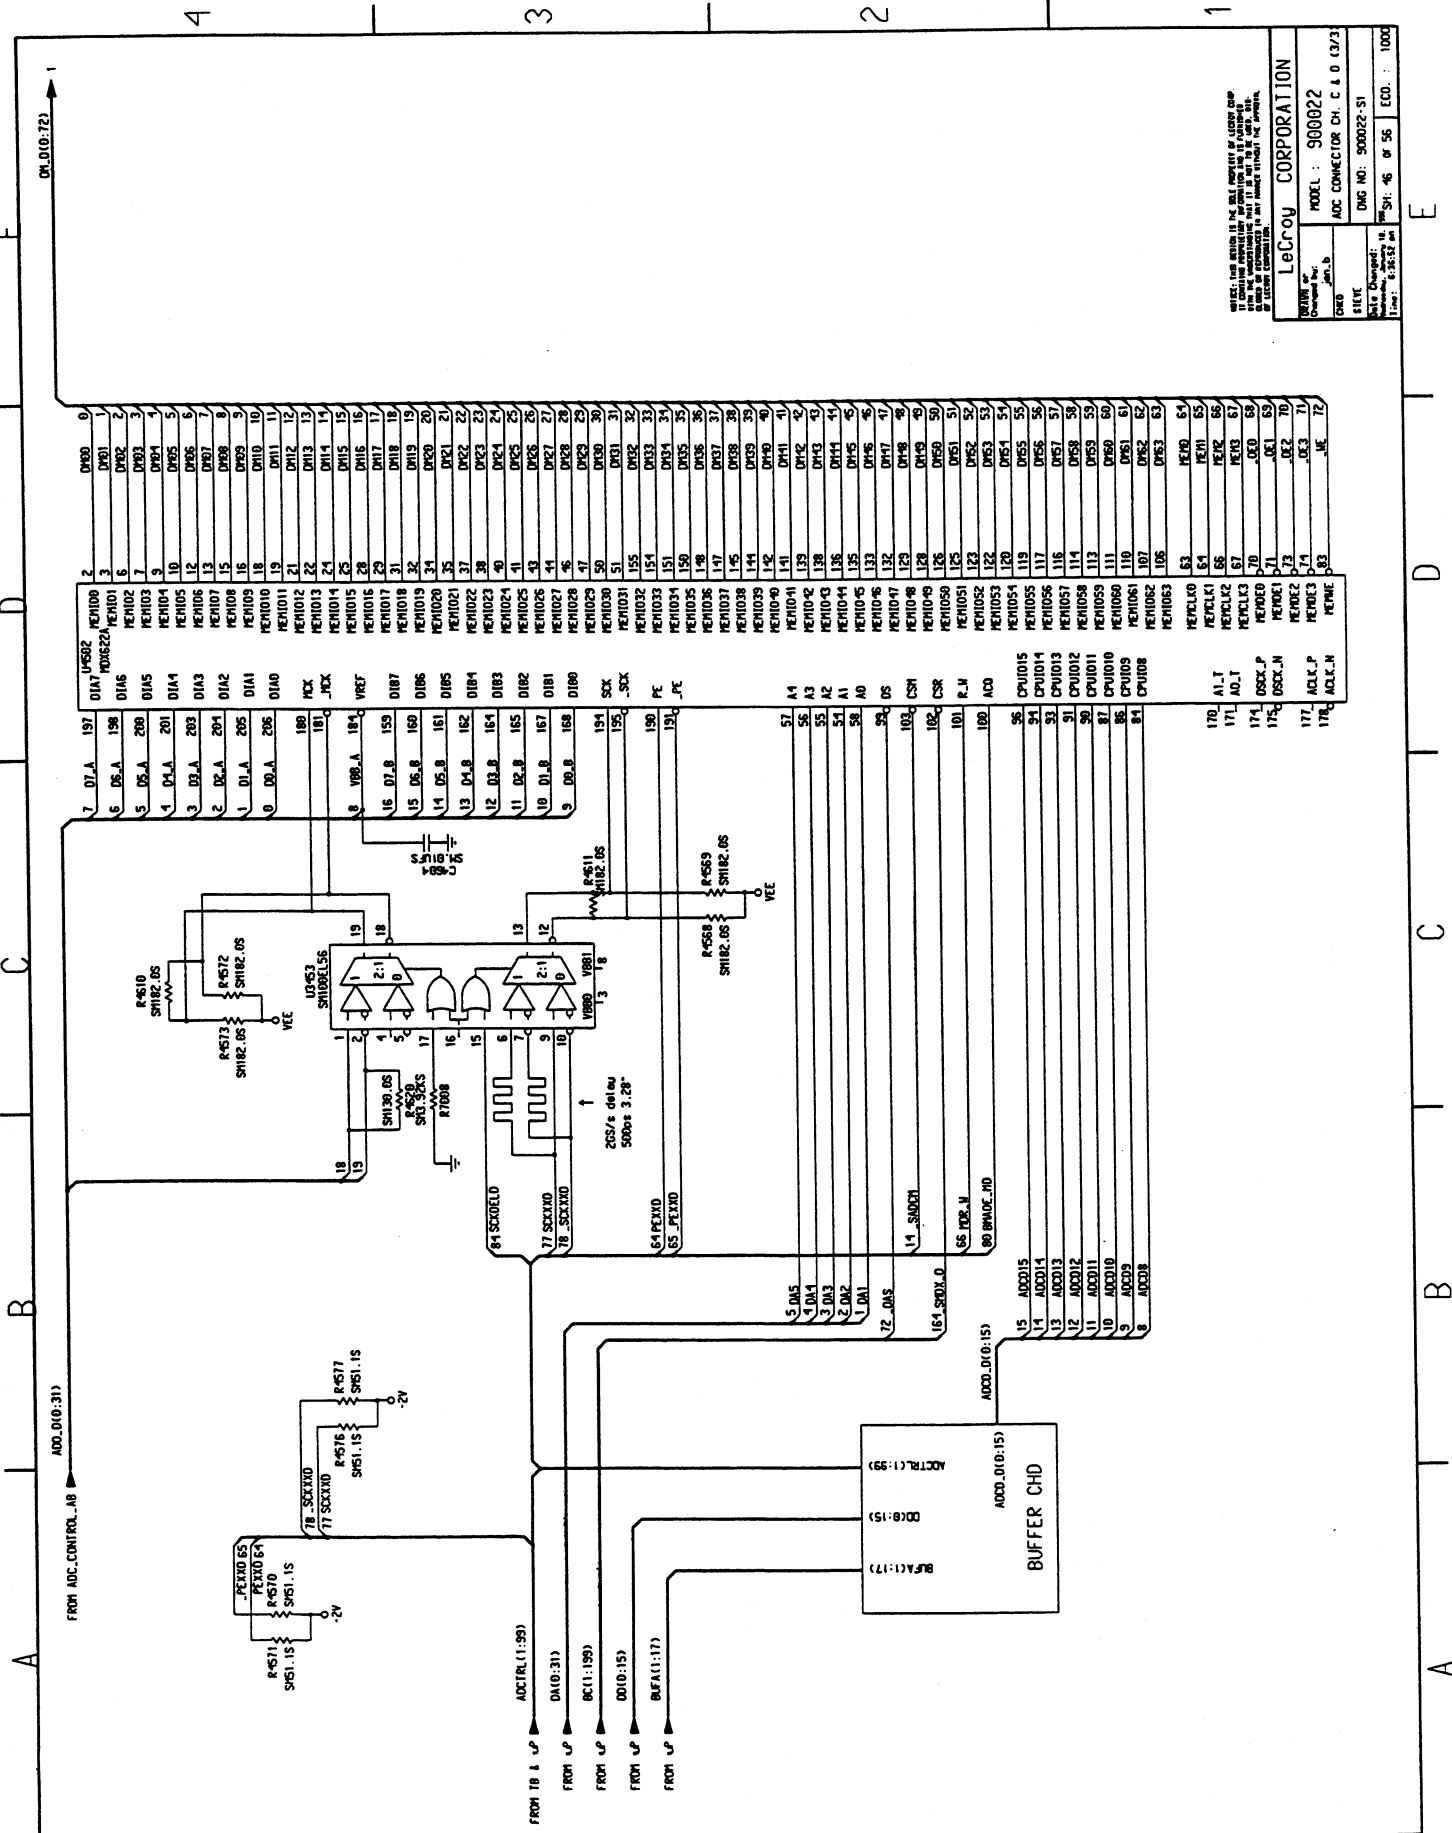

PLEASE REFER TO THE FULL RANGE OF LE CROY COMPONENTS FOR THE MOST COMPLETE LINE OF PRODUCTS. WE ARE PLEASED TO ASSIST YOU IN THE SELECTION OF THE MOST APPROPRIATE COMPONENTS FOR YOUR APPLICATION.

LeCroy CORPORATION
 MODEL : 900022
 ADC CONNECTOR CH. C.A.0 (3/73)
 Dwg No: 900022-51
 Rev: 1
 Date Changed: 12/81
 Drawn By: JMB
 Checked By: JMB
 Scale: 6:38:52 am
 ECD: 1000

Schematics, Layouts

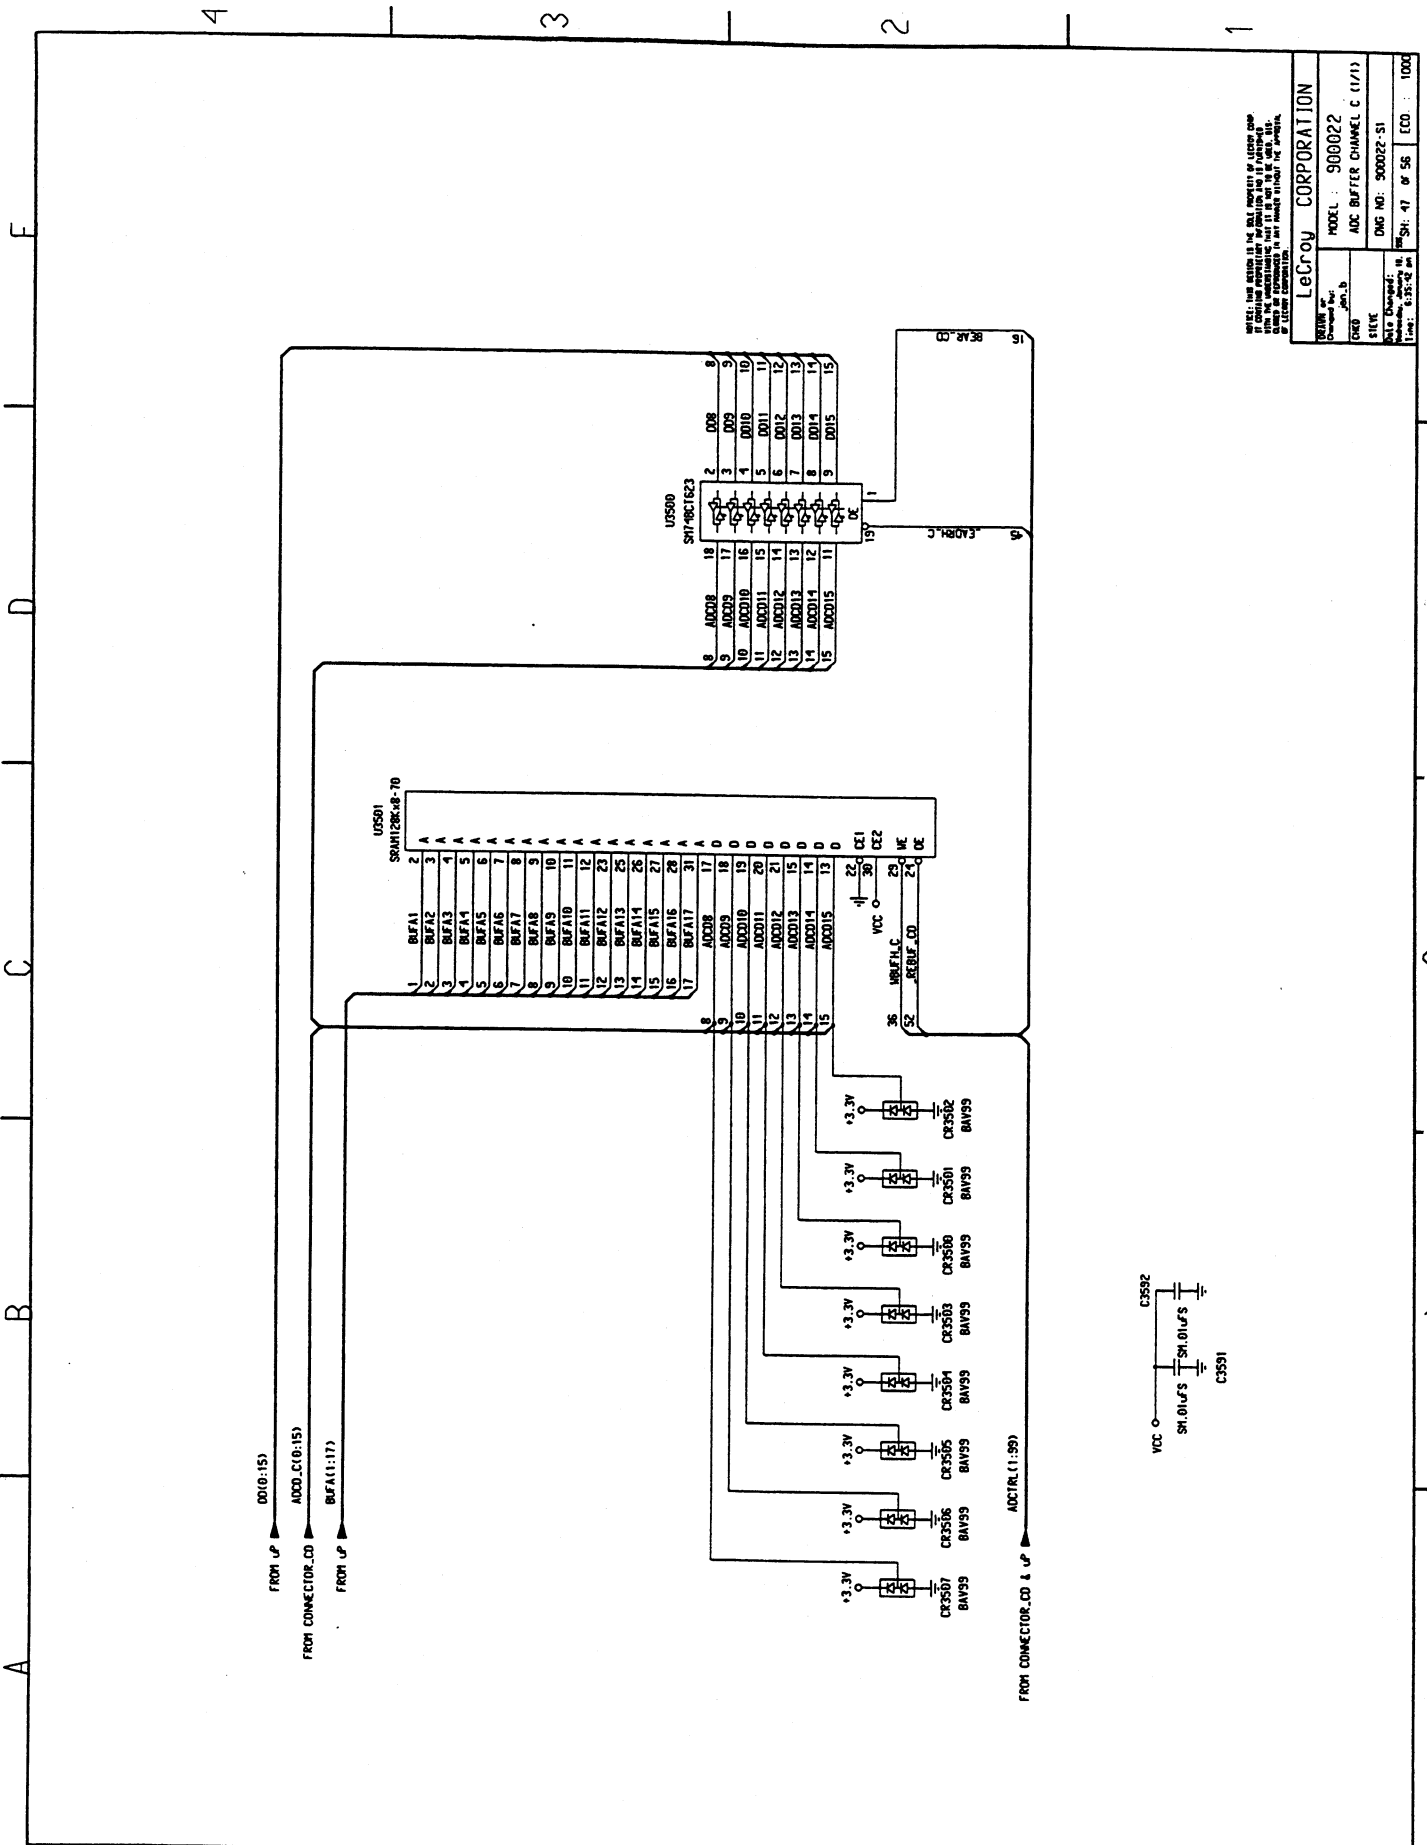


NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORPORATION. IT IS THE PROPERTY OF LECROY CORPORATION AND IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF LECROY CORPORATION.

LeCroy CORPORATION

Model: 900022
 ADC BUFFER CHANNEL C (1/1)


DATE: 08/15/90
 FILE: 900022-S1
 SHEET: 47 OF 56
 ECD: 1000

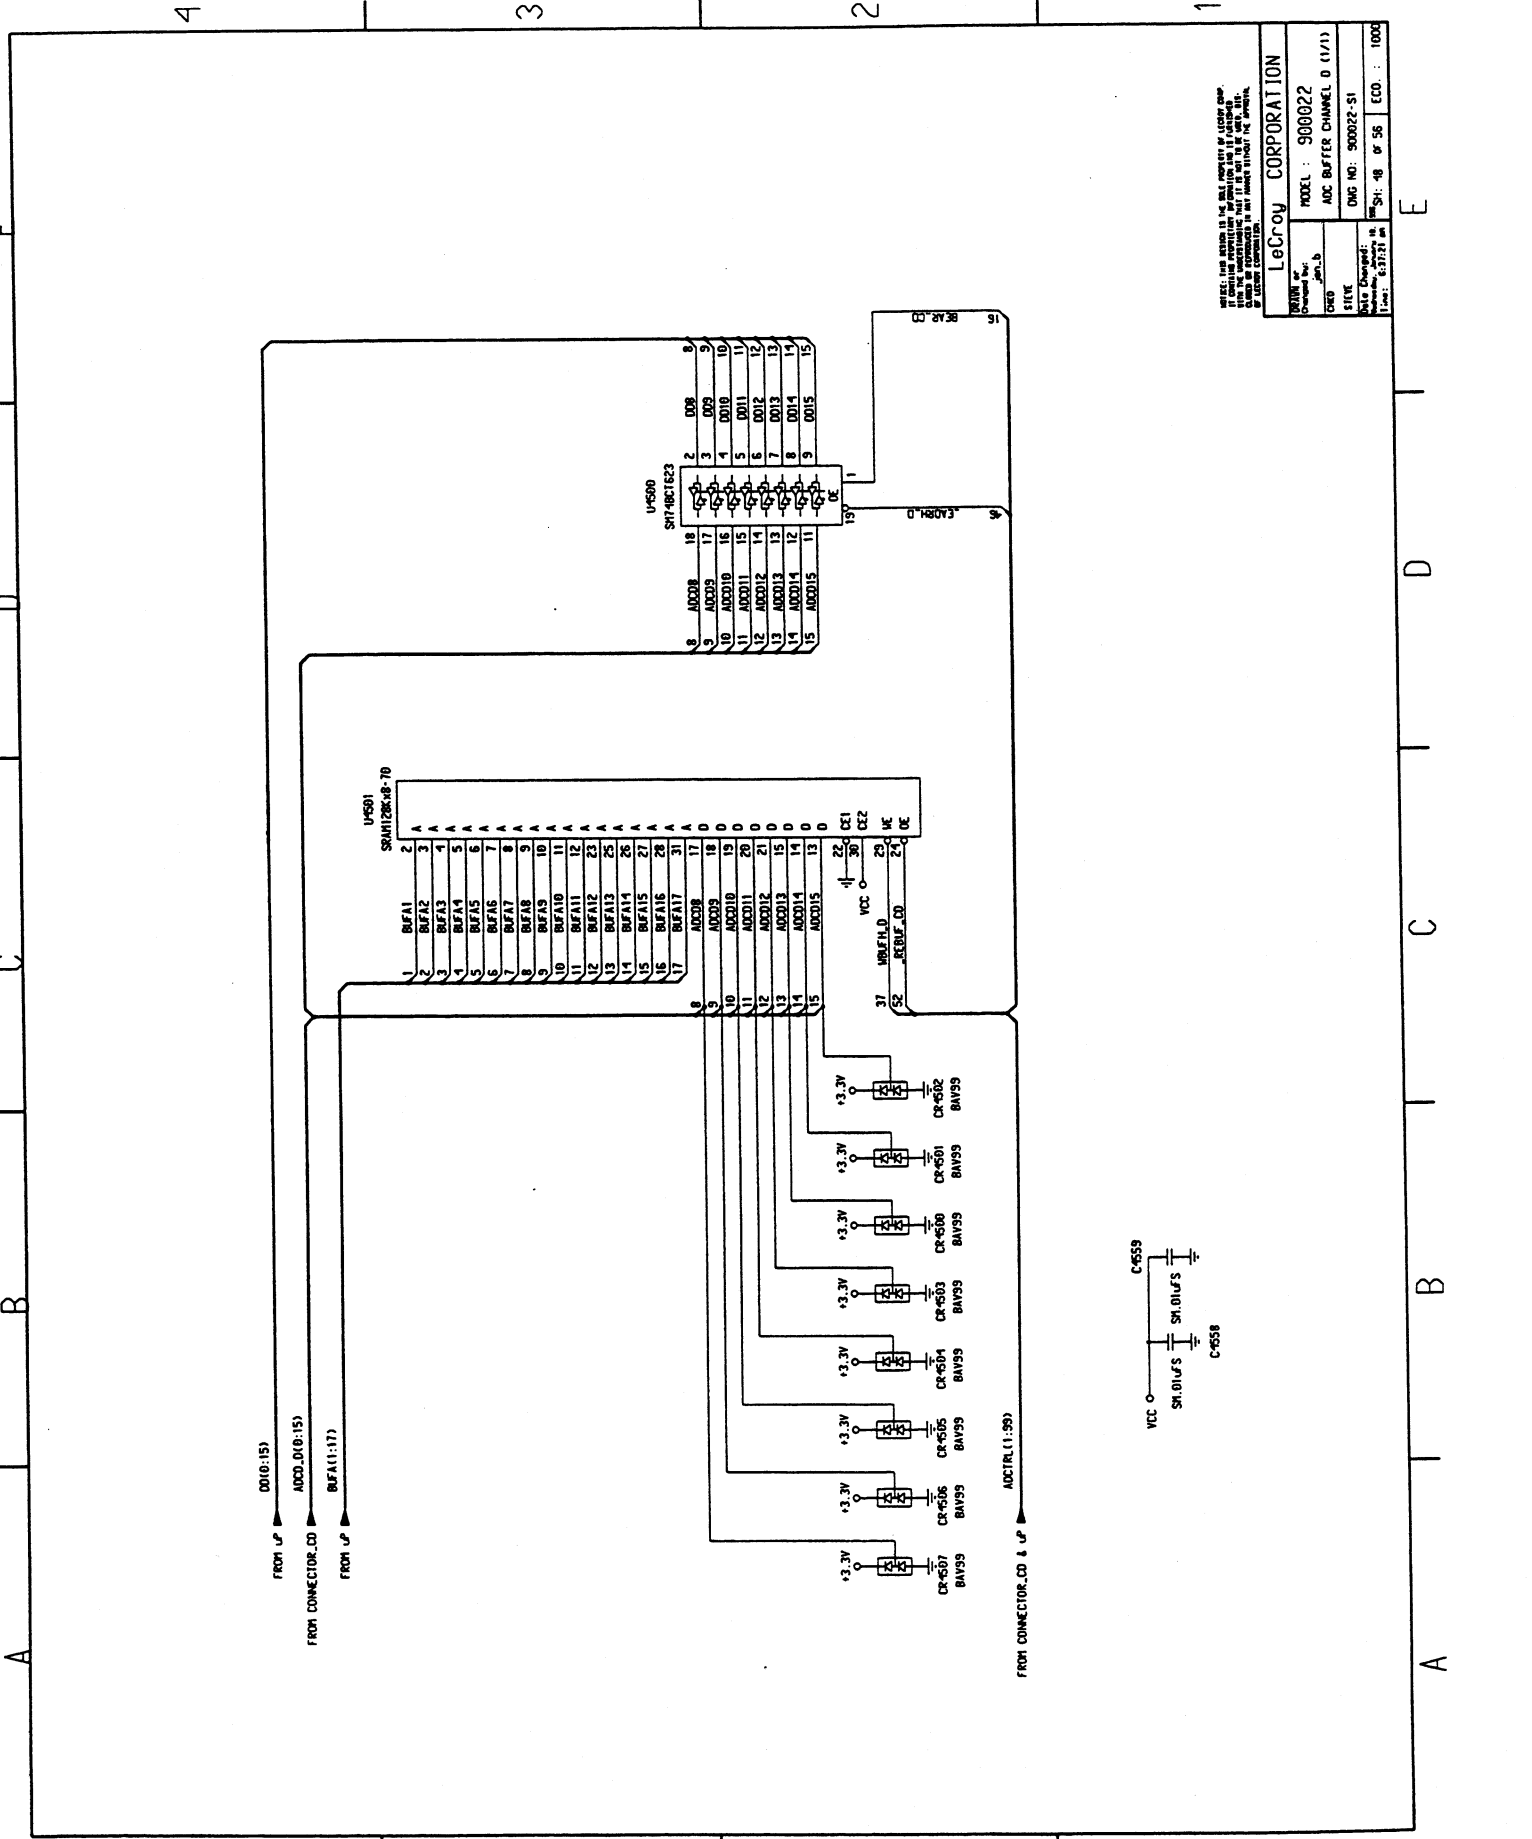

NOTES: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORP.
 IT IS THE PROPERTY OF LECROY CORP. AND IS NOT TO BE REPRODUCED,
 COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC,
 MECHANICAL, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM,
 WITHOUT PERMISSION IN WRITING FROM LECROY CORP.


LeCroy CORPORATION	
Part No.:	MODEL : 900022
Rev.:	ADC BUFFER CHANNEL D (1/1)
DATE:	DWG NO: 900022-S1
DESIGNED BY:	DATE CHANGED:
CHECKED BY:	DATE:
APPROVED BY:	SH: 48 OF 56 ECD: 1000

Schematics, Layouts

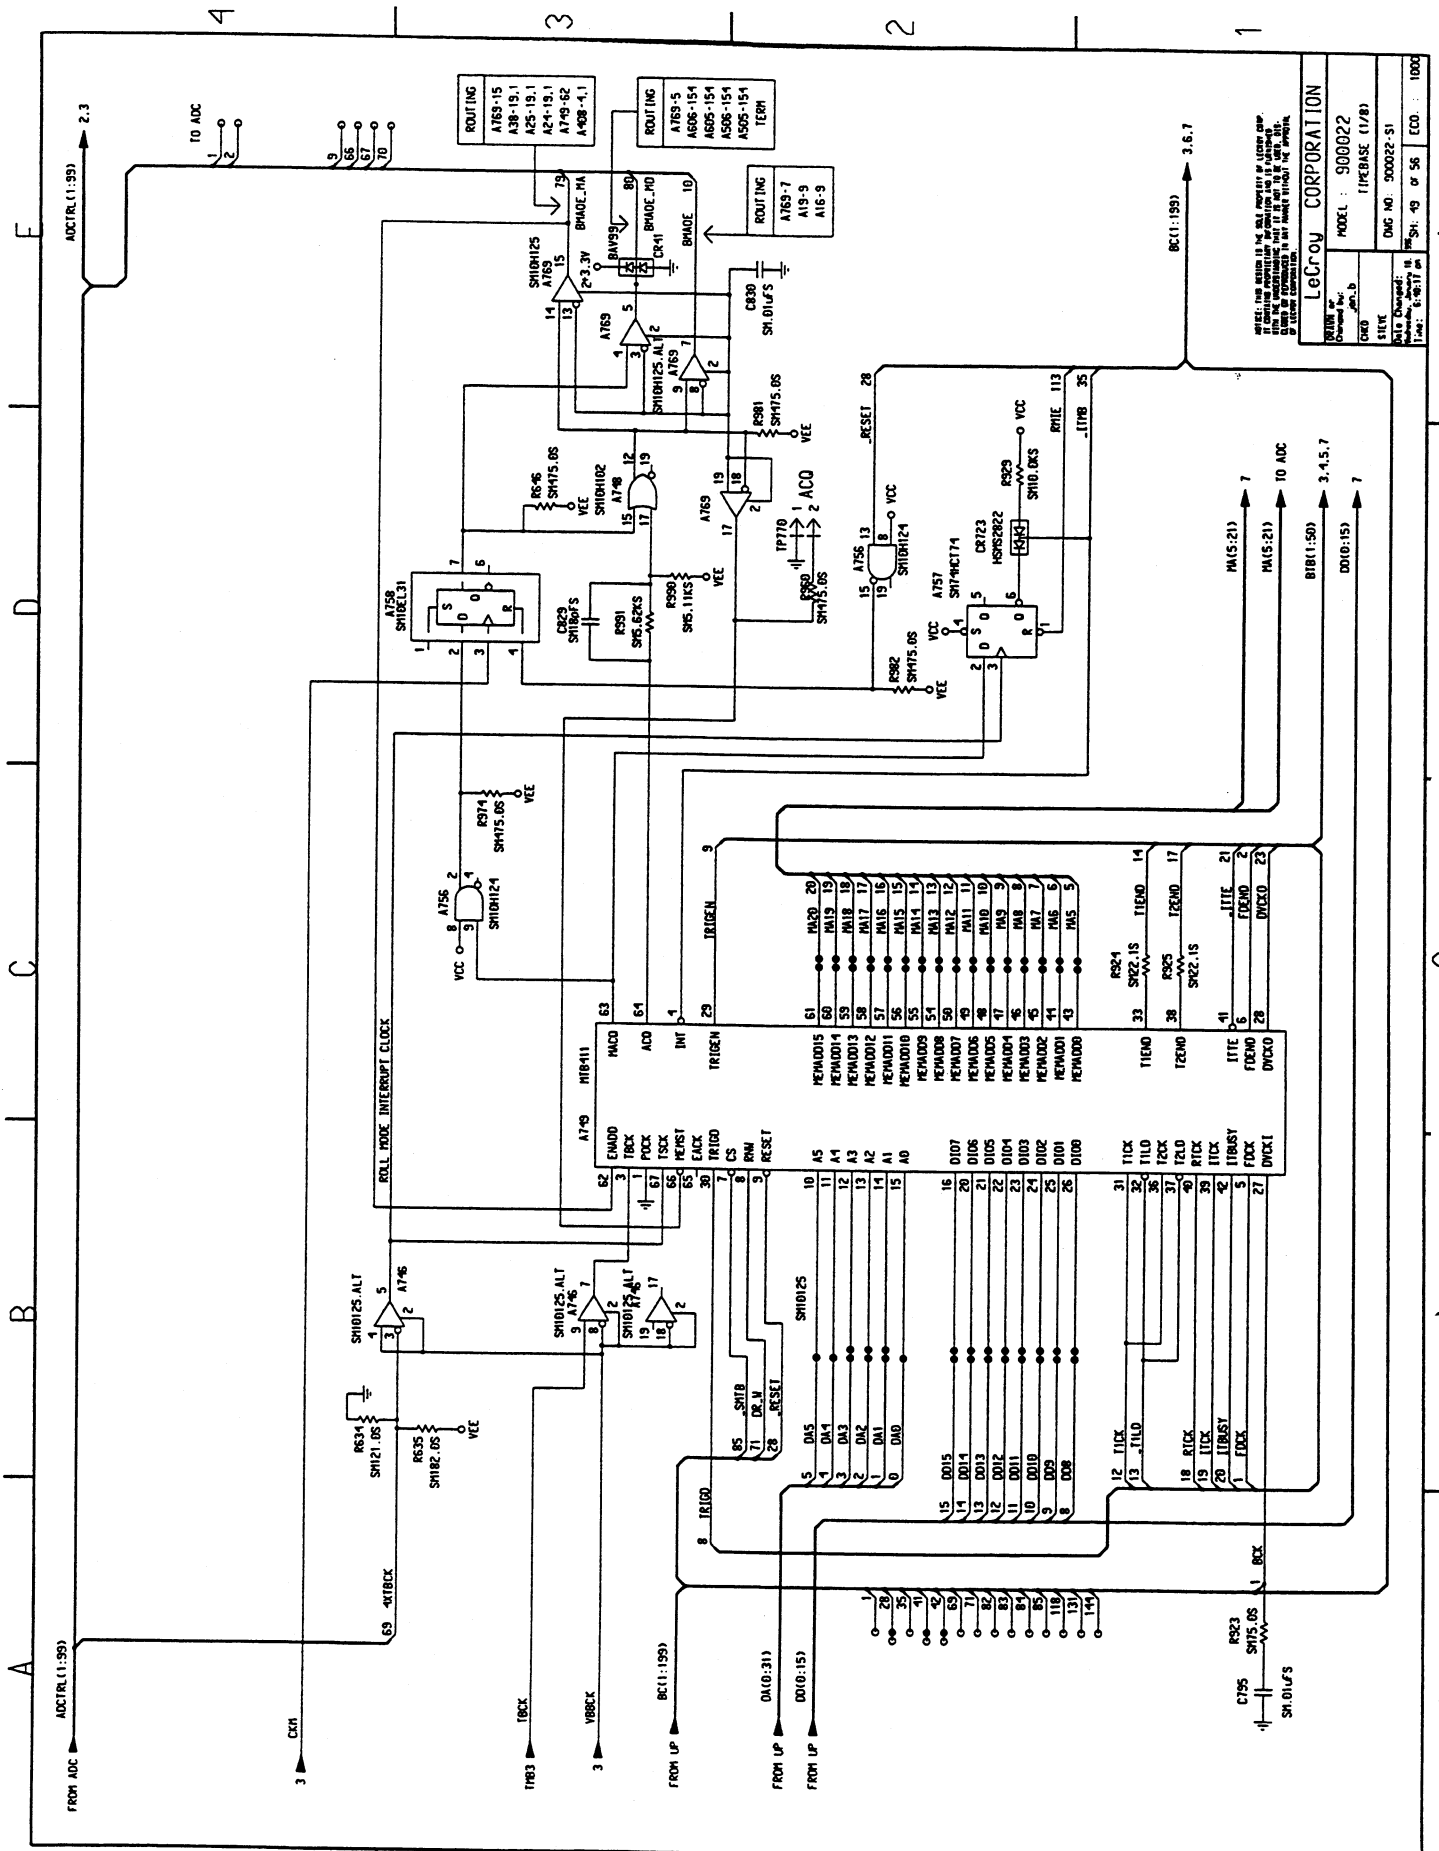

LeCroy CORPORATION
 MODEL : 900022
 DRAWING : 1788
 DATE : 11/81
 FILE : 900022-51
 SHEET : 49 of 56 ECU : 1000


NOTE: THIS DESIGN IS THE SOLE PROPERTY OF LECROY CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE QUANTITIES SPECIFIED IN THE ORDER. NO PARTS ARE TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

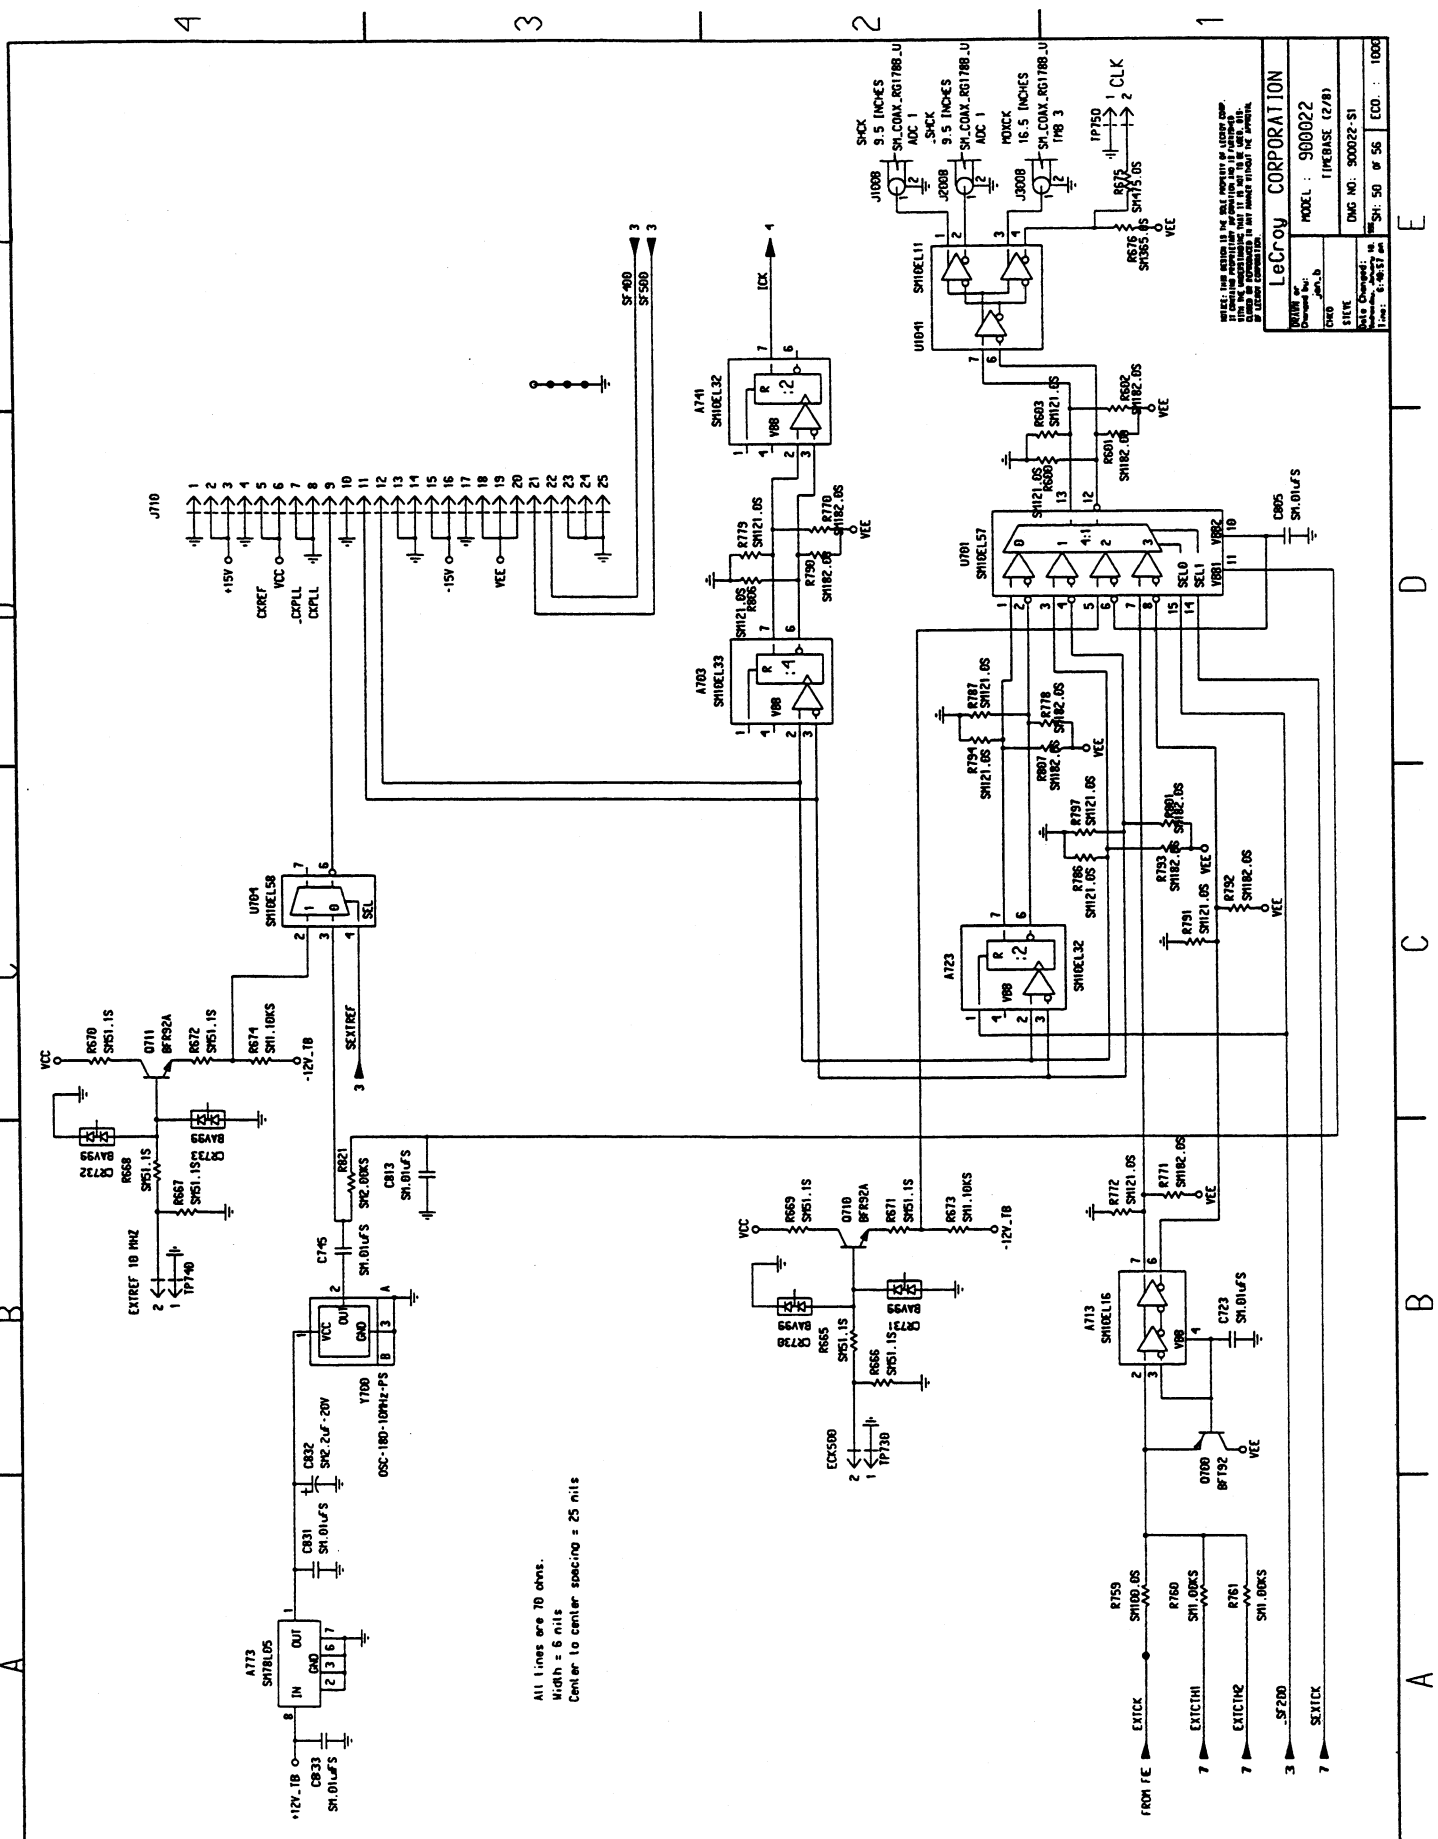


All Lines are 70 ohms.
Width = 6 mils
Center to center spacing = 25 mils

LECROY CORPORATION
 MODEL : 900022
 IMPULSE (278)
 Dwg No: 900022-S1
 DATE Drawn: 6-26-57
 DATE Checked: 6-26-57
 BY: STEVE
 CHECKED: STEVE
 SH: 50 of 56 ECD: 1000

Schematics, Layouts

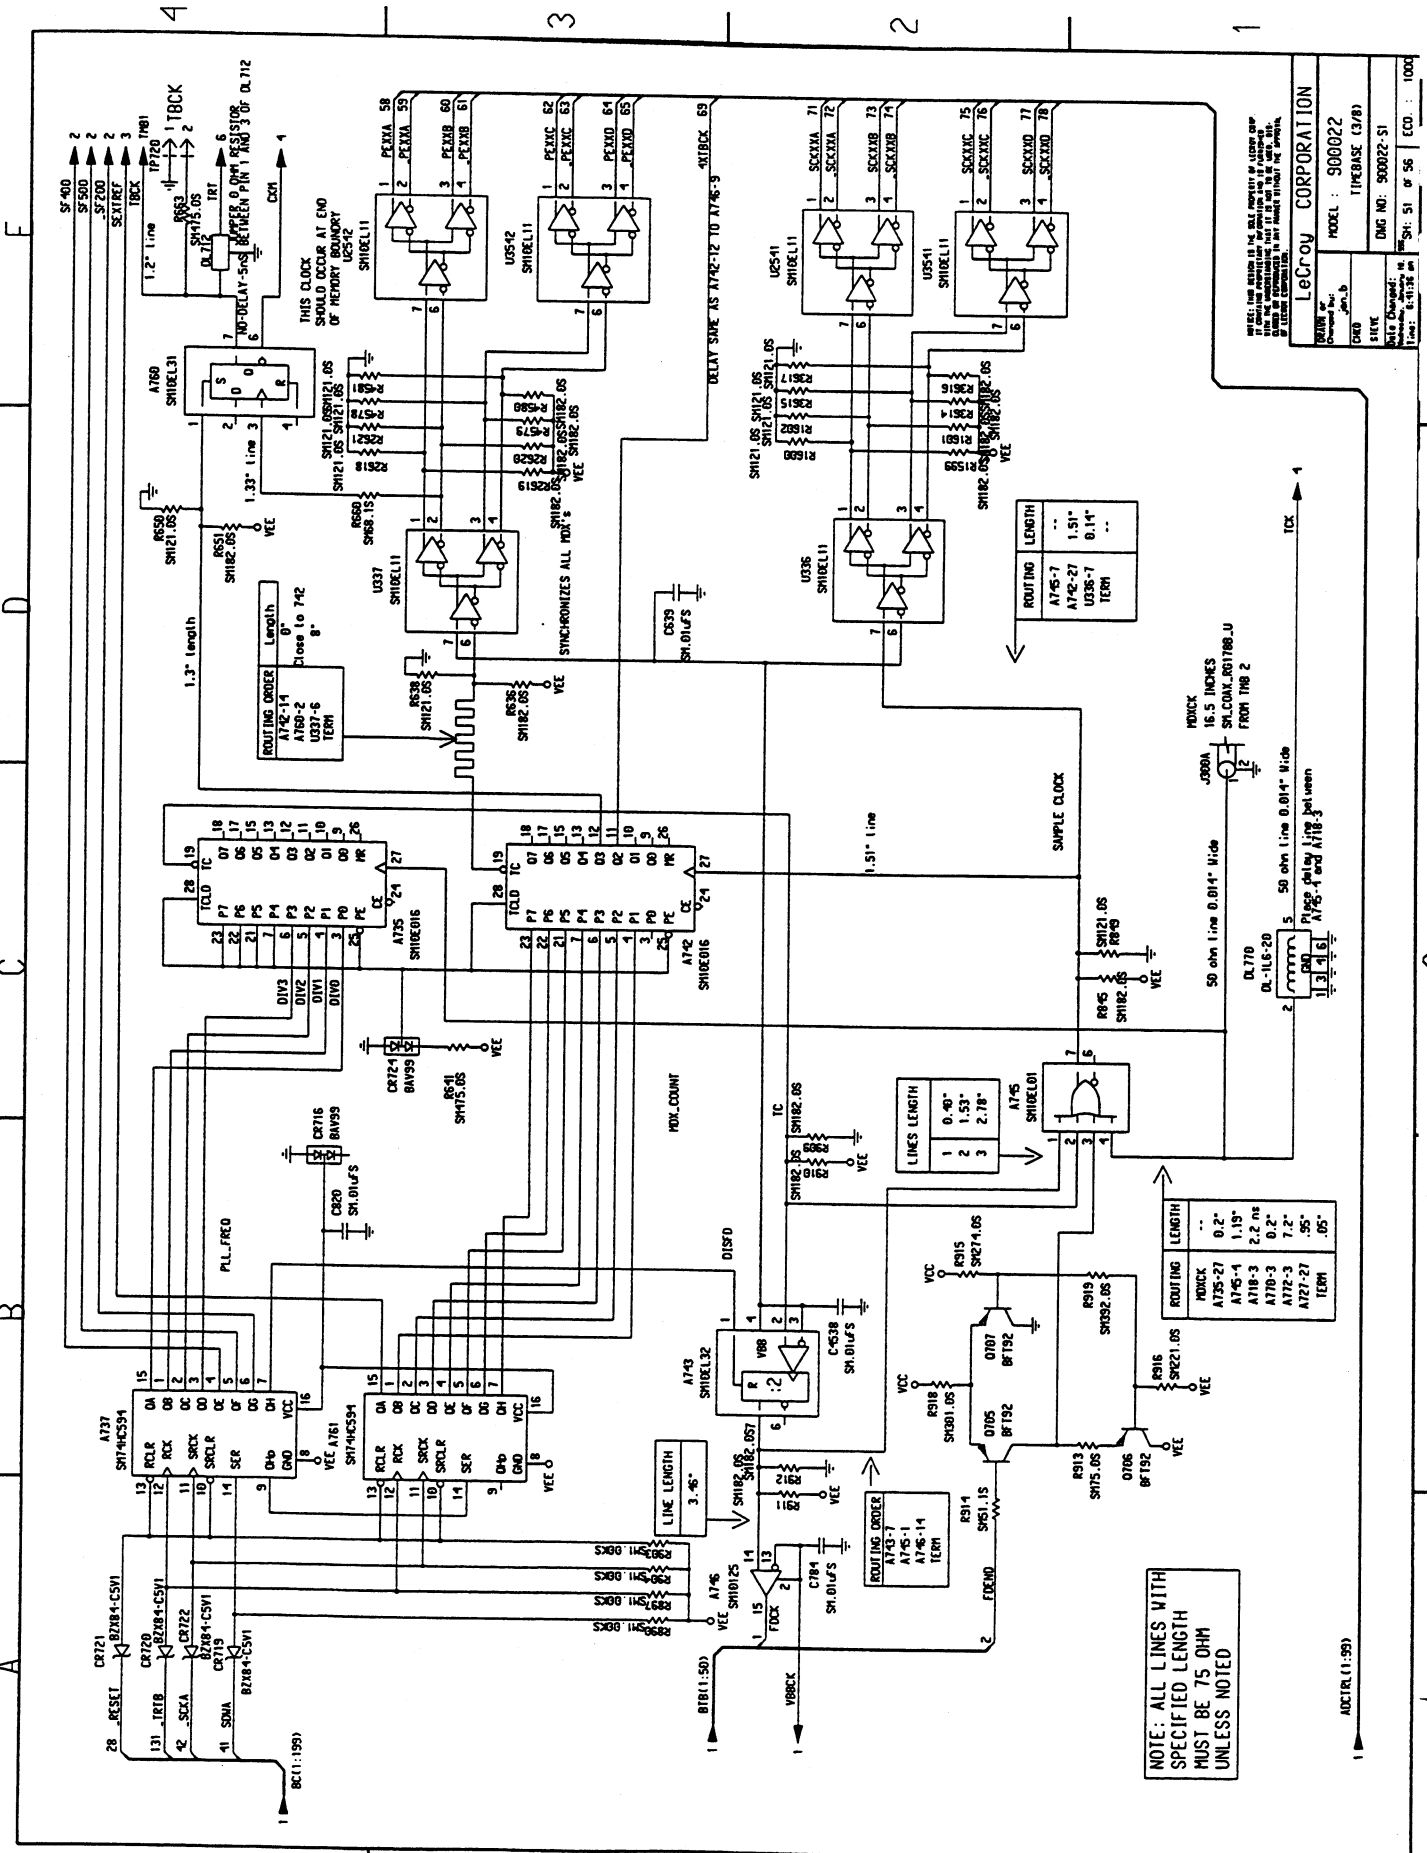


Schematics, Layouts

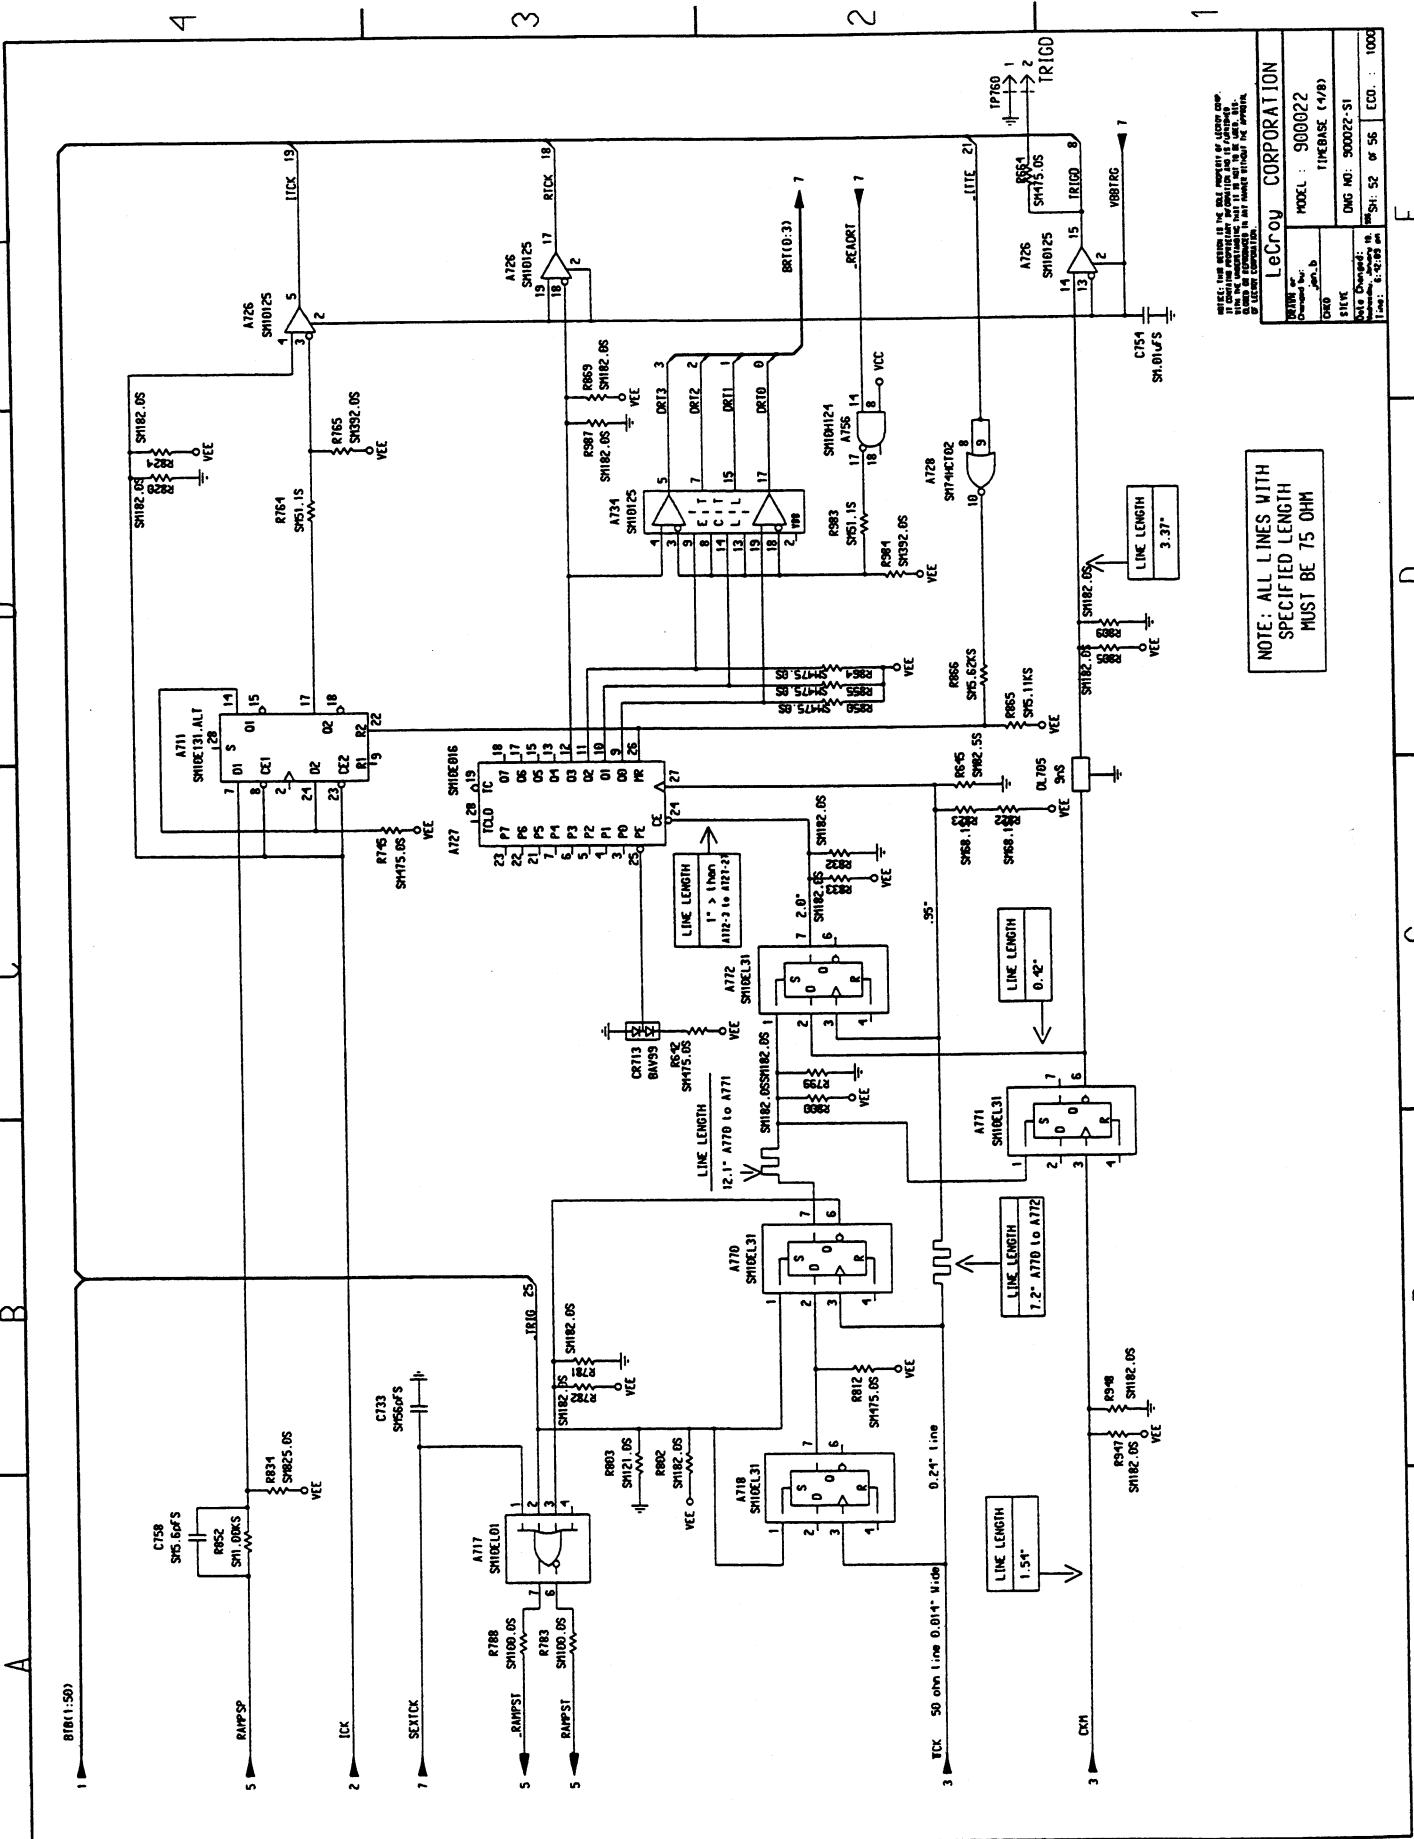

MODEL : 900022
 I11PCBASE (4/8)
 DMC NO: 900022-S1
 DATE DRAWN: 10/11/82
 DRAWN BY: J. B. JONES
 CHECKED BY: J. B. JONES
 100%

NOTE: ALL LINES WITH
 SPECIFIED LENGTH
 MUST BE 75 OHM

Schematics, Layouts

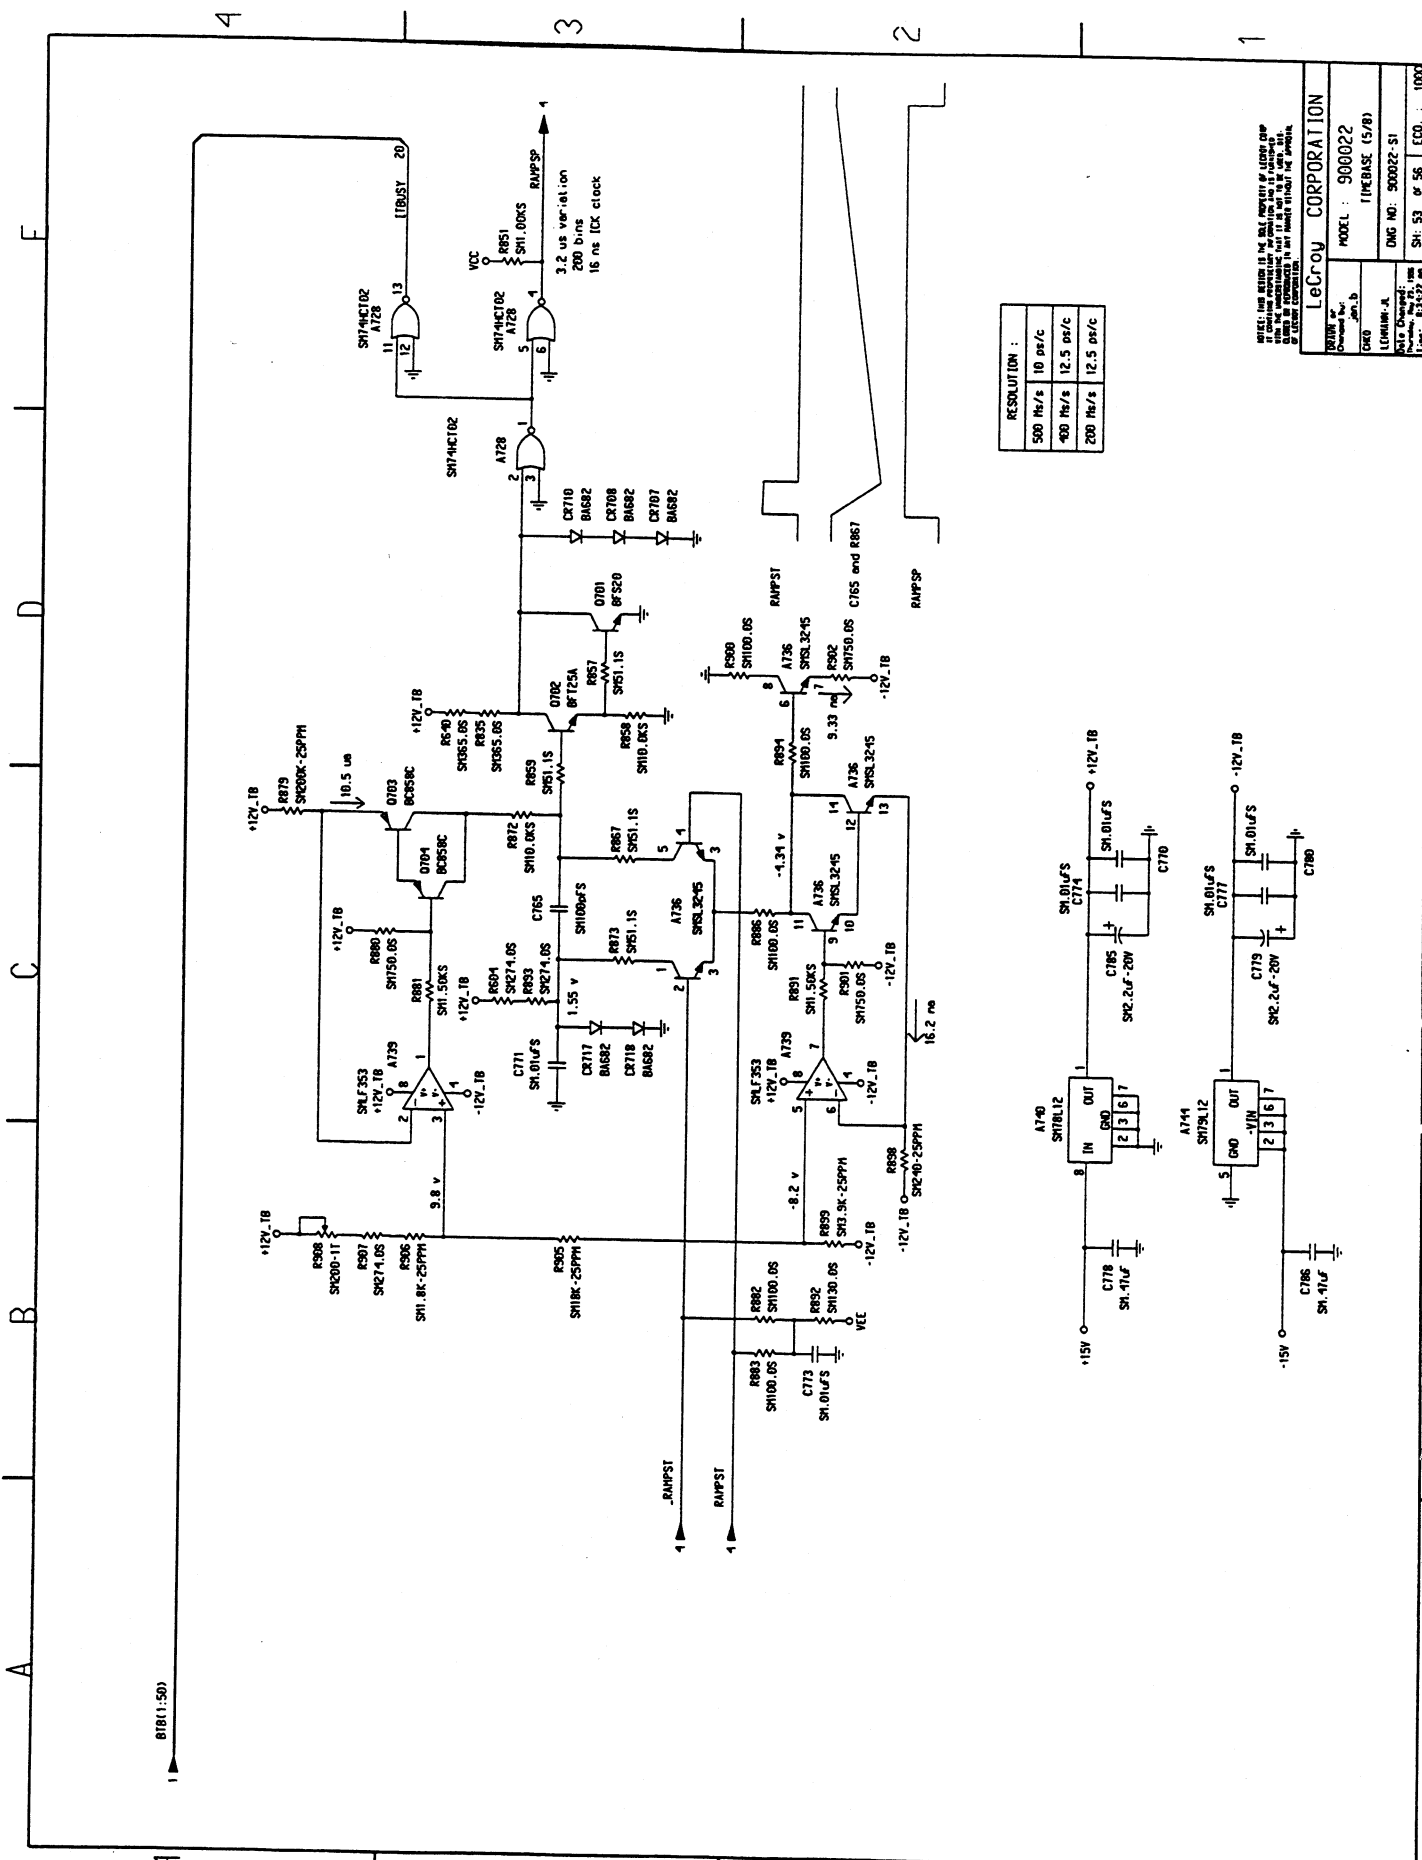


RESOLUTION :	
500 Hz/s	10 ps/c
400 Hz/s	12.5 ps/c
200 Hz/s	12.5 ps/c

PLEASE REFER TO THE DATA SHEET OF EACH CHIP FOR COMPLETE ELECTRICAL CHARACTERISTICS AND TEST PROCEDURES. THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED AND IS BEING RELEASED IN FULL TO THE PUBLIC.


LeCroy CORPORATION

MODEL : 900022
 TYPEBASE (5/8)
 LCM/UM/JA
 DMC NO: 900022-S1
 SH: 53 of 56 ECO : 1000

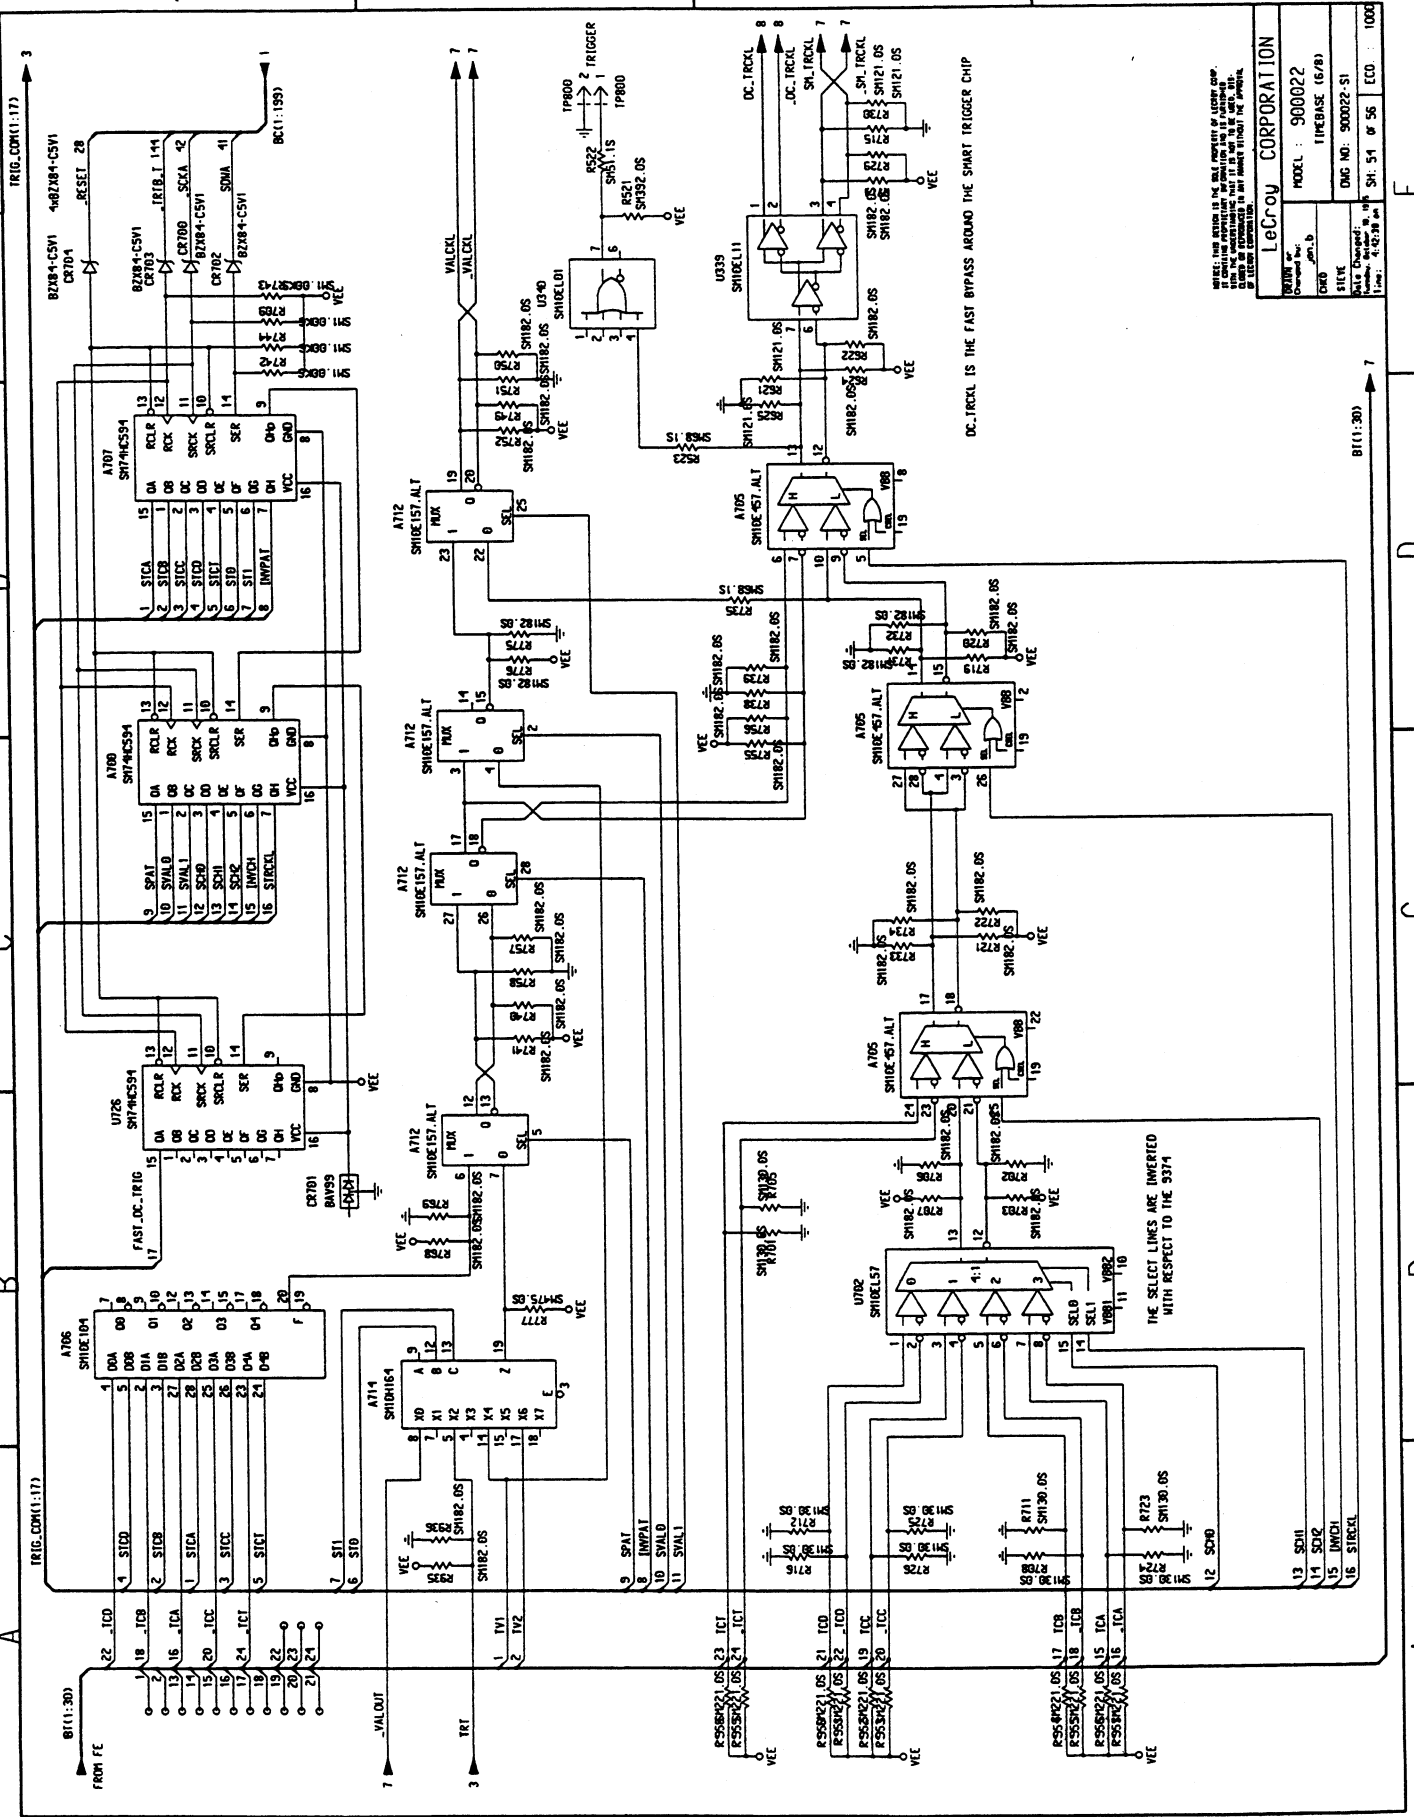


LECROY CORPORATION	
MODEL: 900022	TIMEBASE (G/R)
DWG NO: 900022-S1	REV: 0
DWG DATE: 11-23-68	FILE: SH. 51 OF 56
ECO: 1000	

Schematics, Layouts

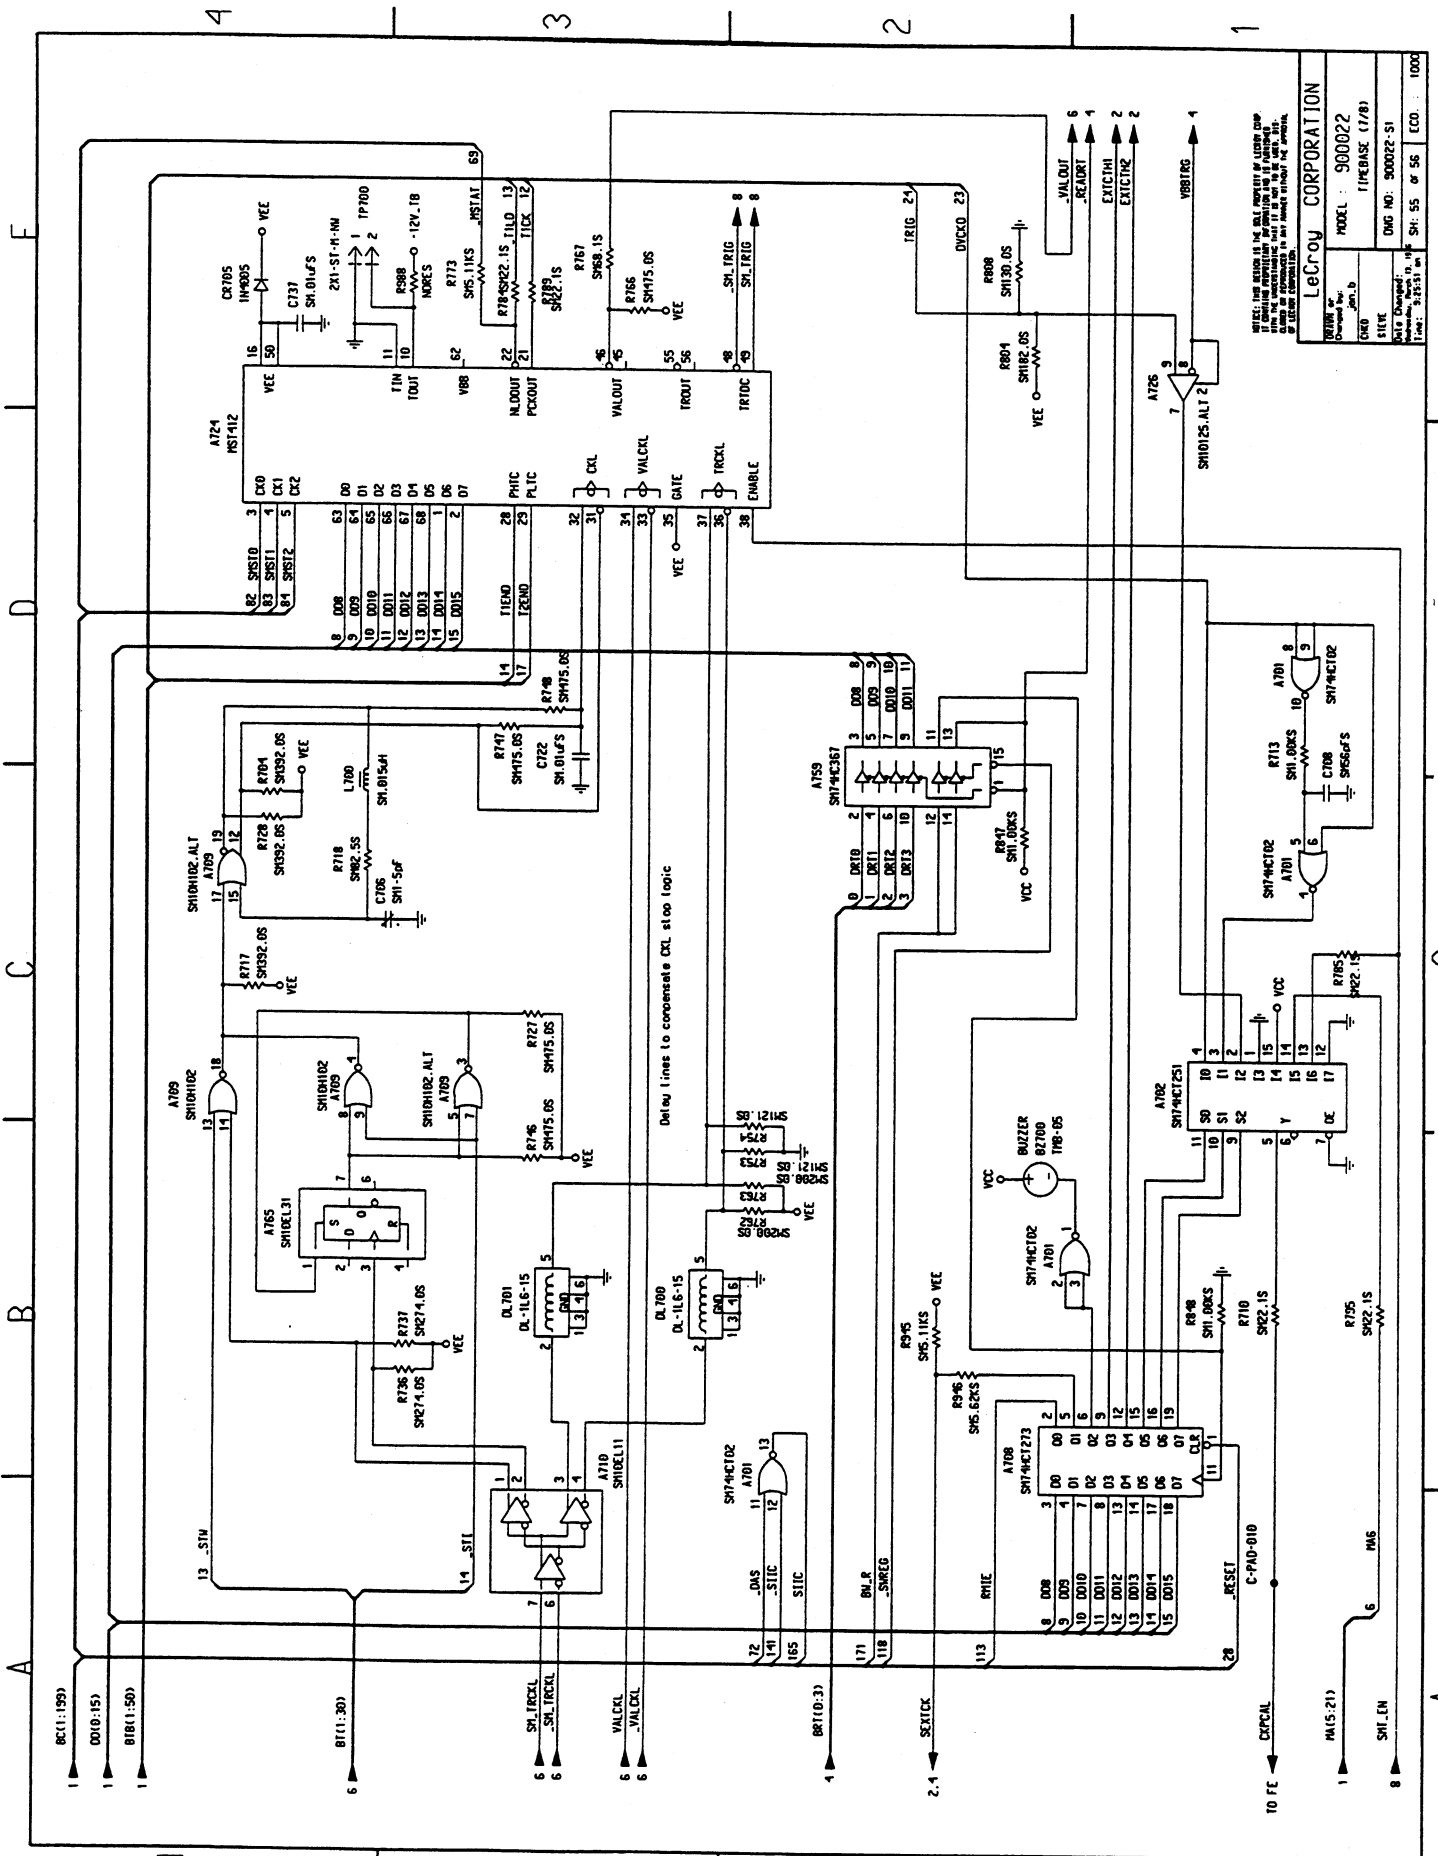


Schematics, Layouts

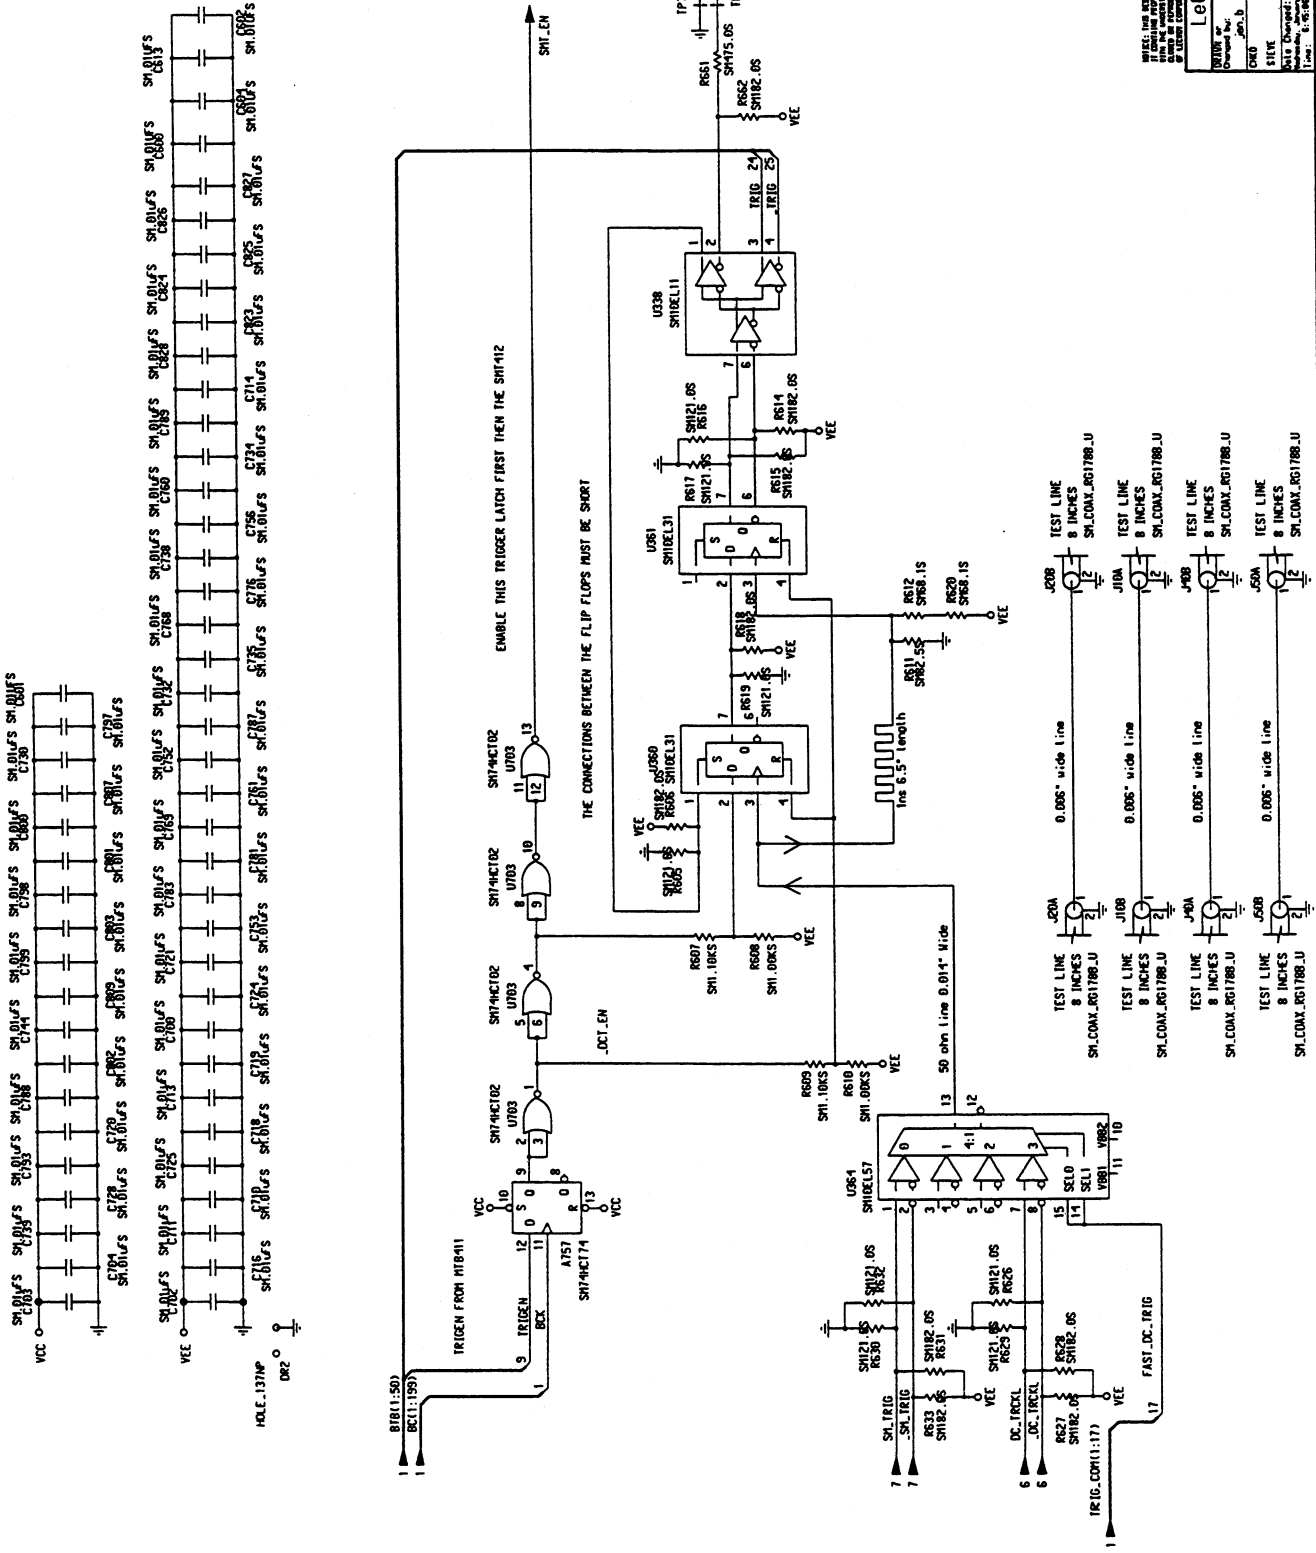


MODEL: 900022
 DATE: 11/28/88
 TIMEBASE: (07/8)
 DWG NO: 900022-S1
 SHEET: 56 OF 56
 ECO: 1000

LeCroy CORPORATION
 MODEL: 900022
 DATE: 11/28/88
 TIMEBASE: (07/8)
 DWG NO: 900022-S1
 SHEET: 56 OF 56
 ECO: 1000



Schematics, Layouts

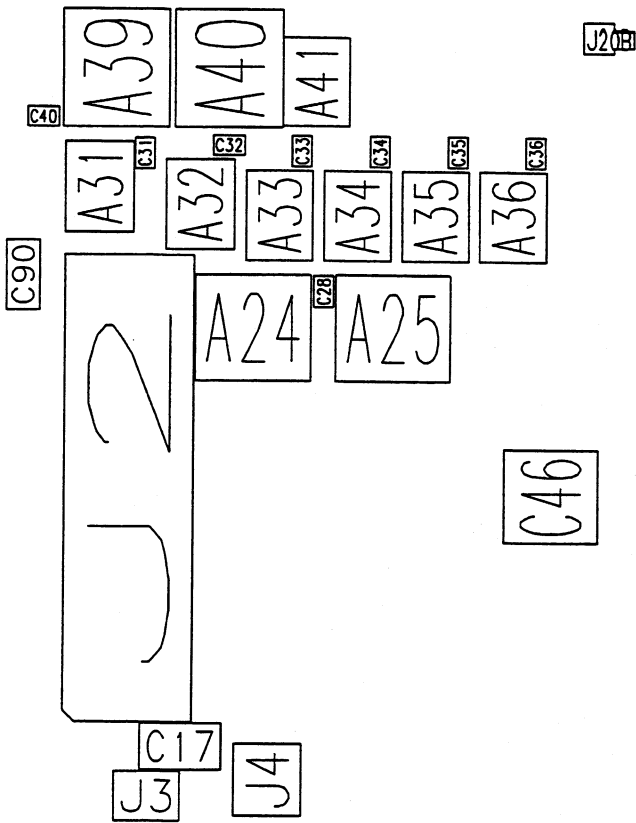

F9384-31 Rev D:
UP Control Side 1

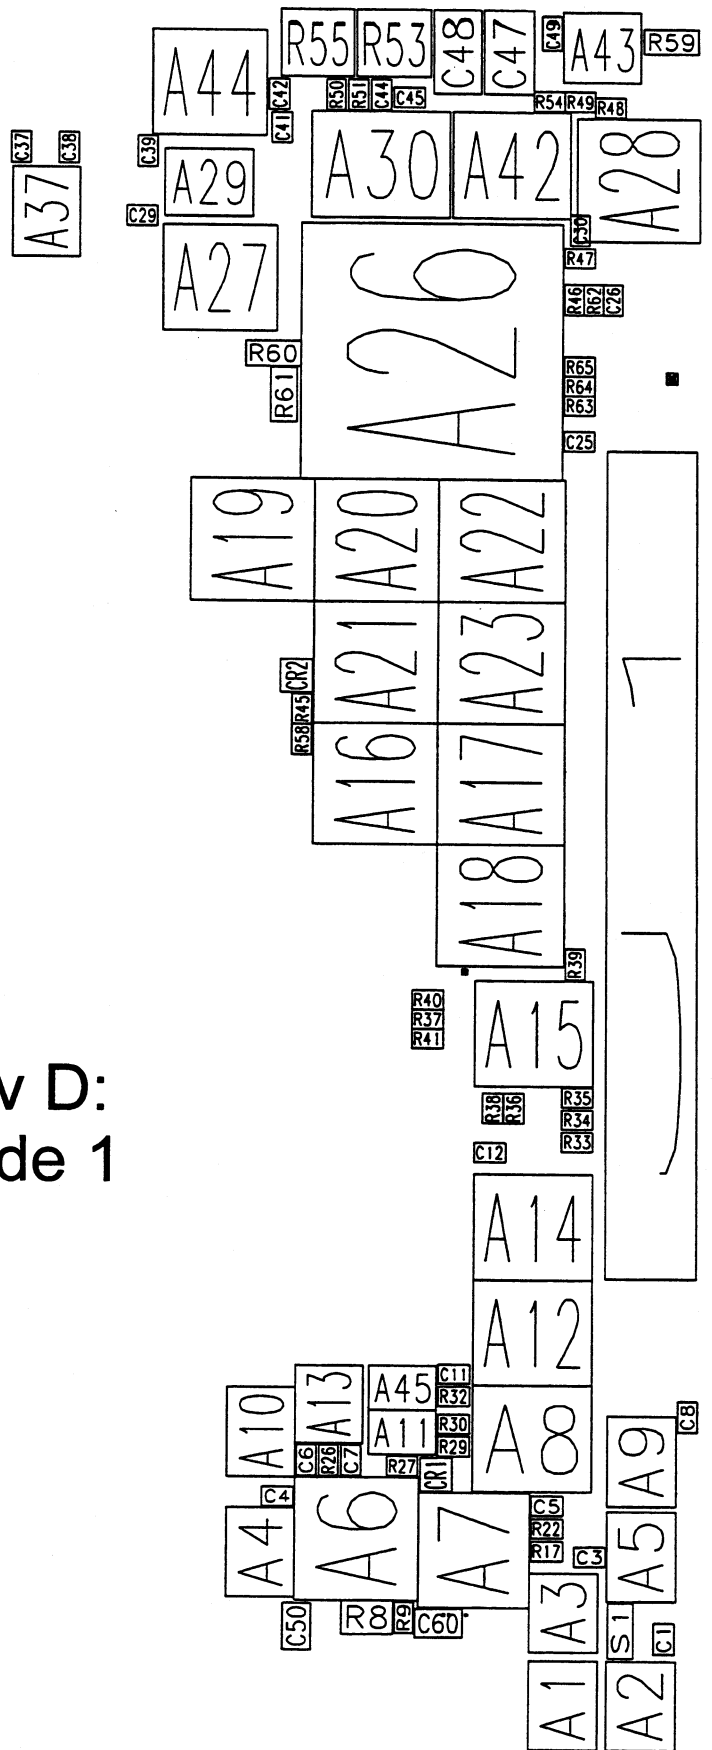

Schematics, Layouts

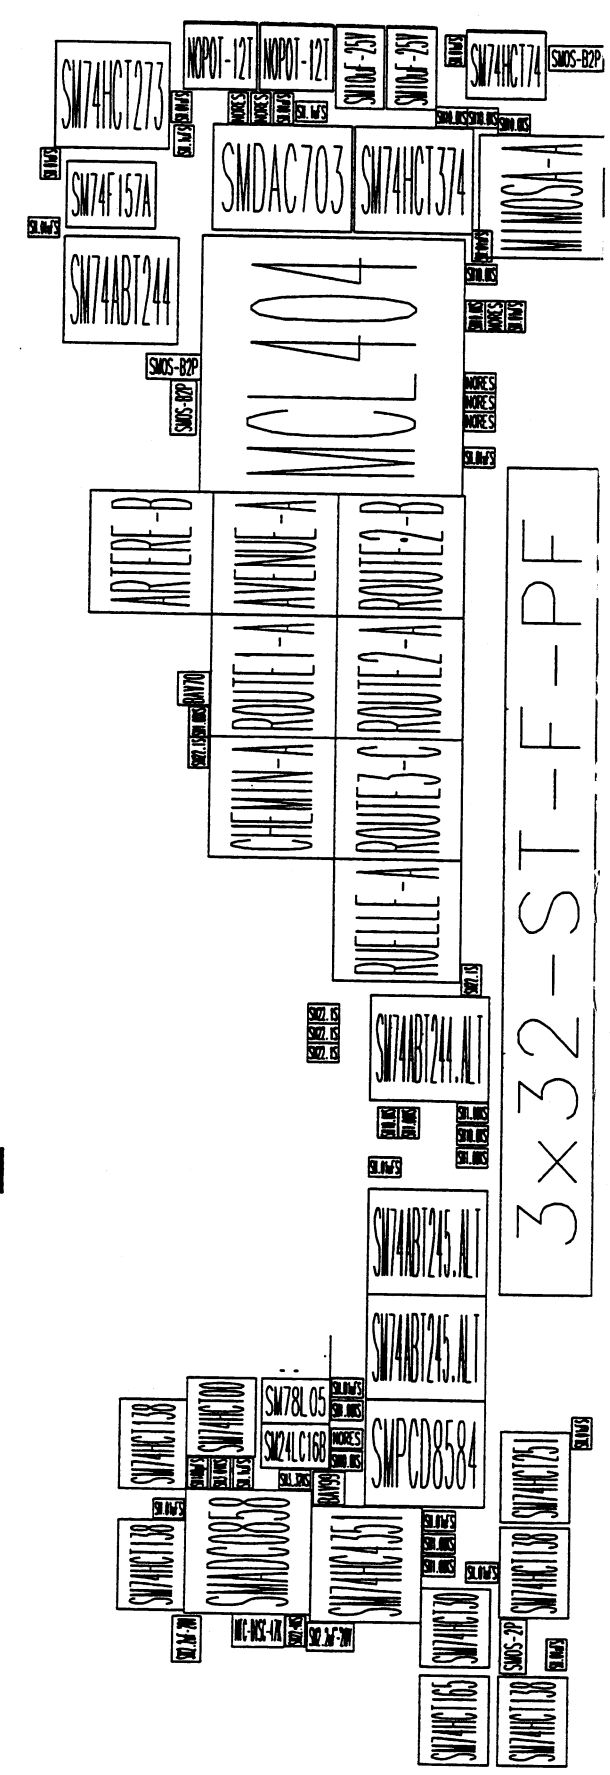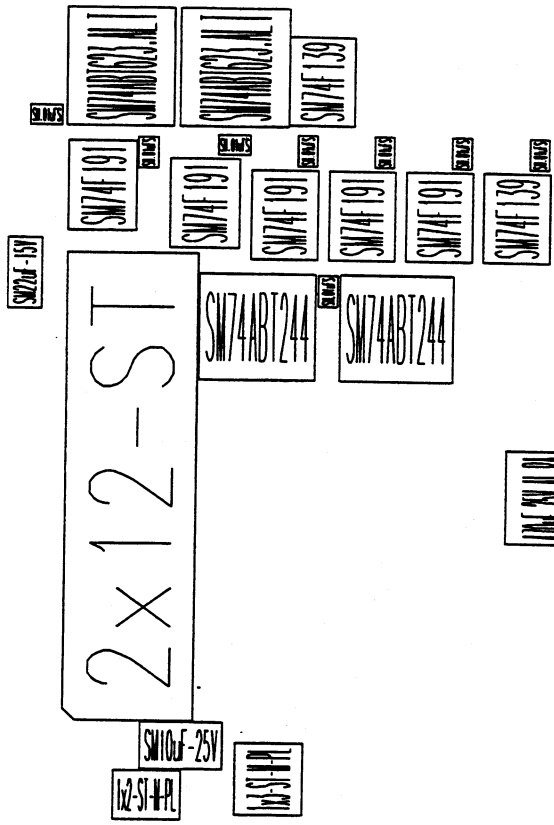

F9384-31 Rev D:
UP Control Side 1

Schematics, Layouts

CR30

CR31|CR32|CR33|CR34|CR35|CR36|CR37|CR38|CR39|CR40

CR41|CR42

C43

C64

C27

C24

C23

C81

C14

C15

C16

C82

C63
C62

R52

C13

R130

C18

C19

C20

CR100|C21

R44

R42
R43

C22

F9384-31 Rev D: UP Control Side 2


C9

C10

R23
C51
C52
R19
R28
C53
R18
C54
R15
R20
R24
R25
R21
R56
R14
C55
R16
R13
R57
C2
R12
R11
C57
R17
R10
R7
R10
R3
R6
R1
R2
R5
R4
R31


C58

Schematics, Layouts

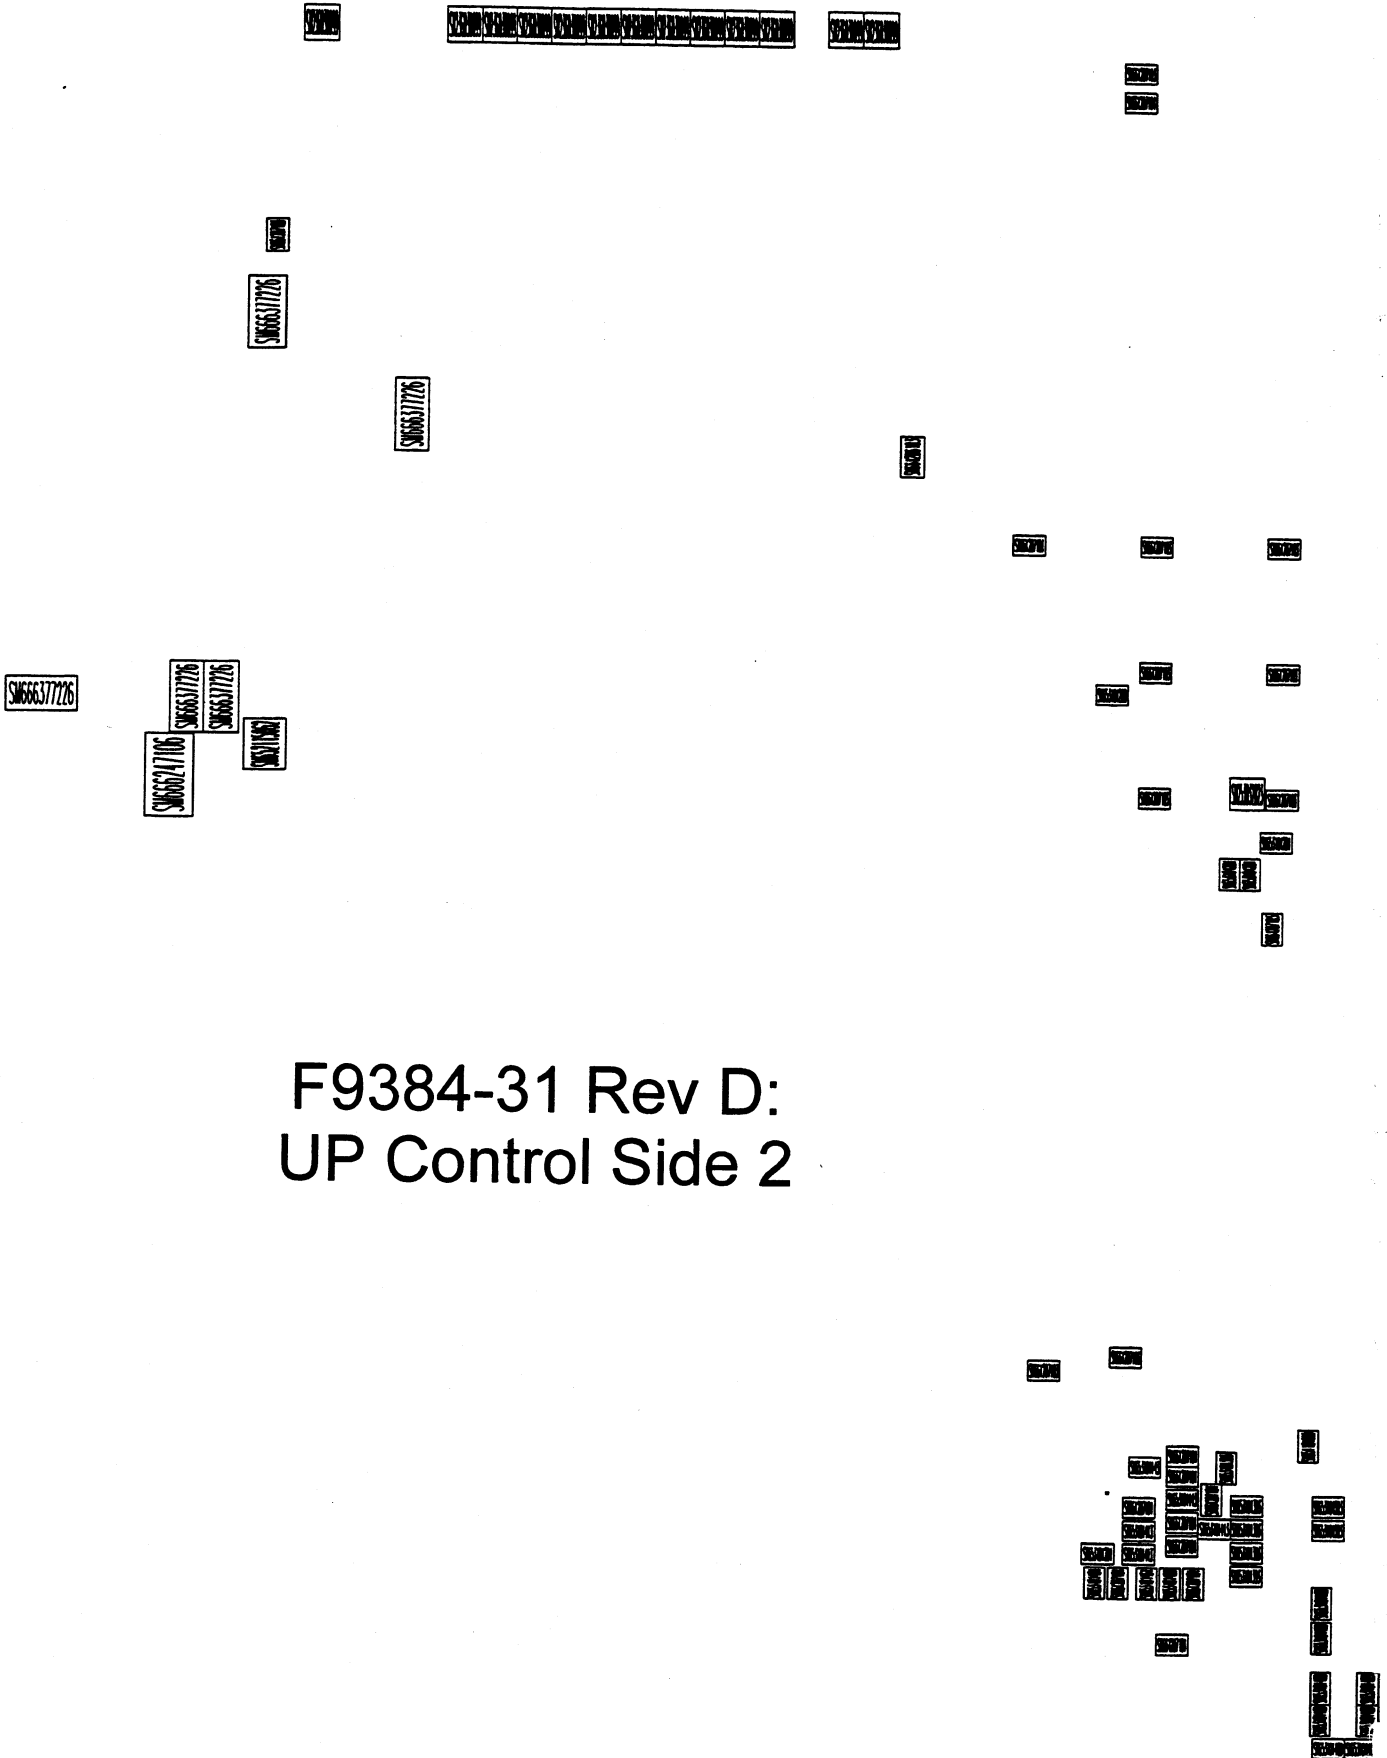

F9384-31 Rev D:
UP Control Side 2






Schematics, Layouts

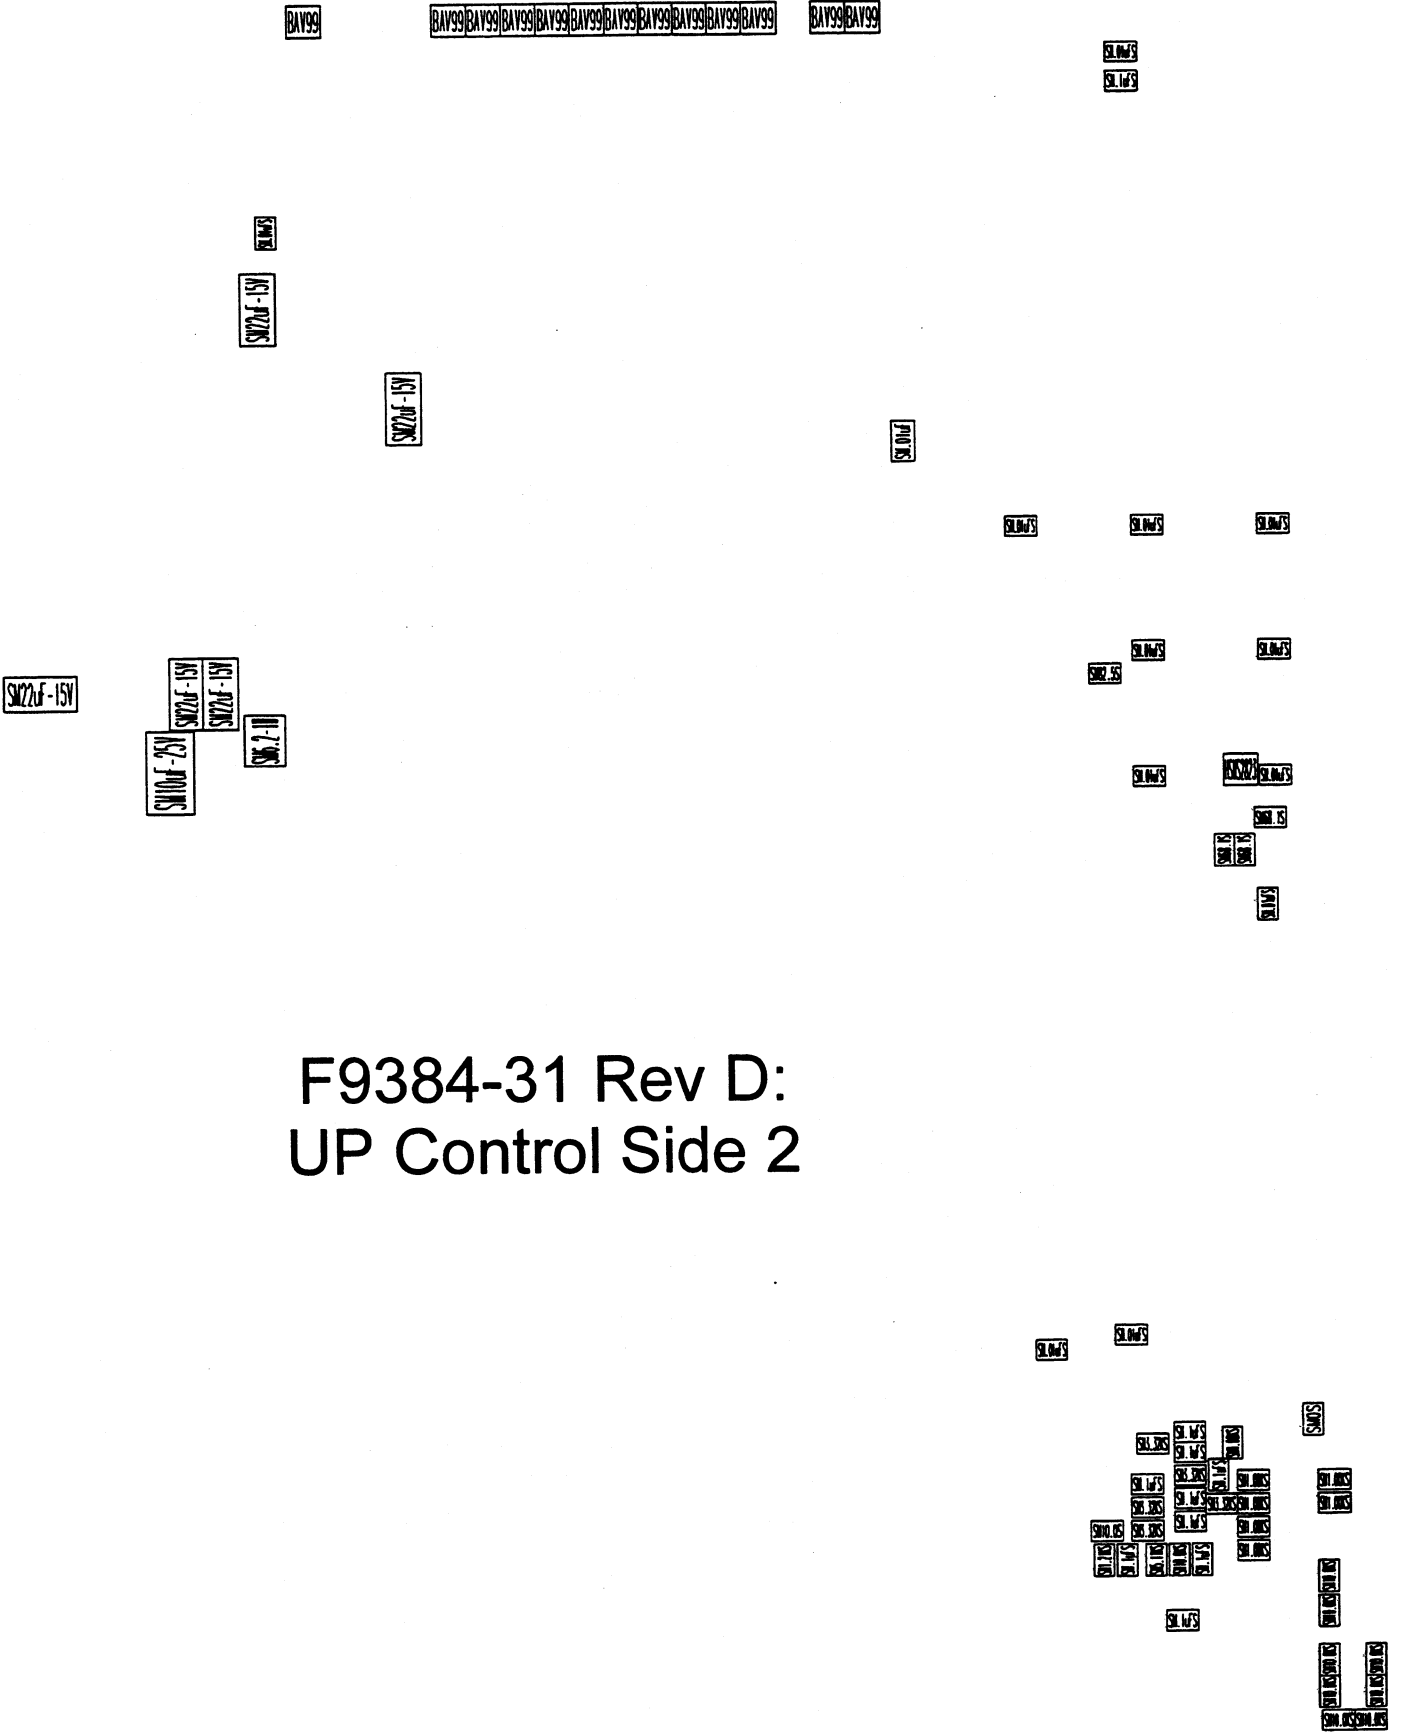





F9384-31 Rev D: UP Control Side 2

Schematics, Layouts

F9384-31 Rev D: Front End Channels Side 1

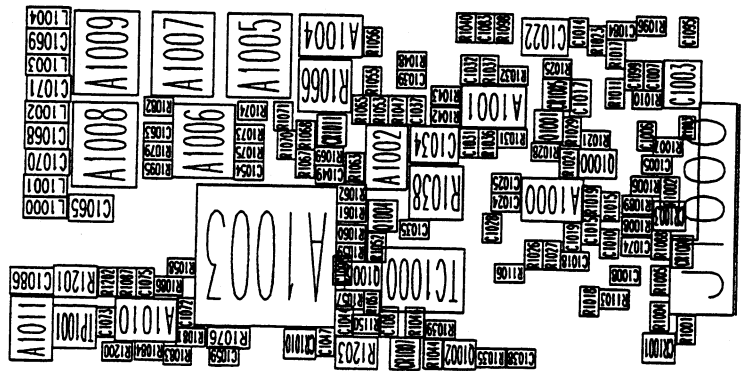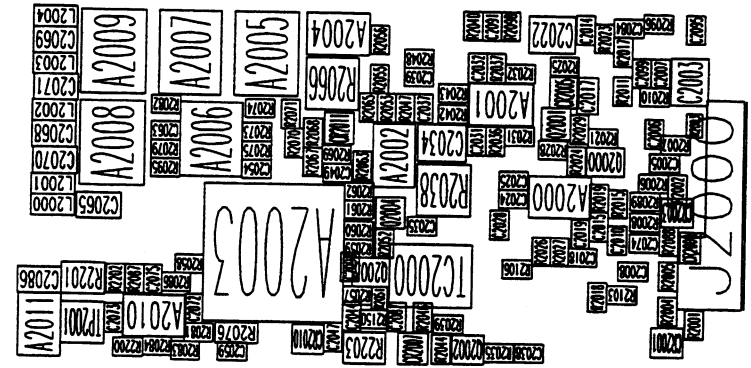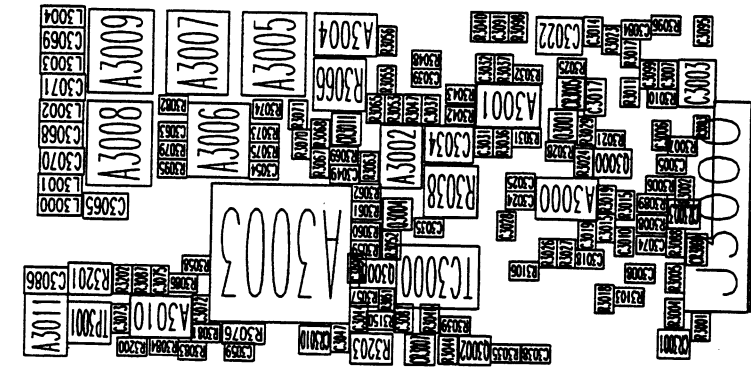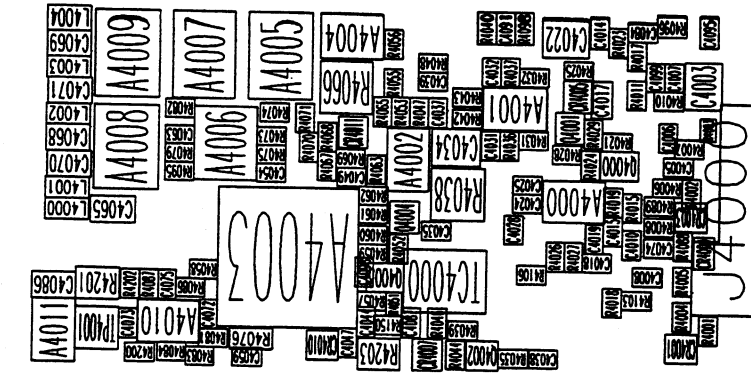

F9384-31 Rev D:
Front End Channels Side 1

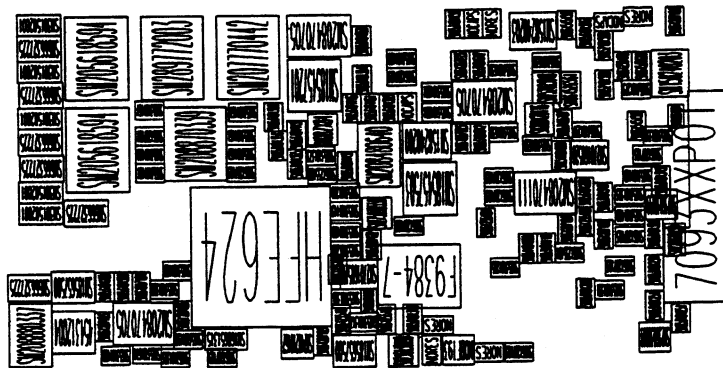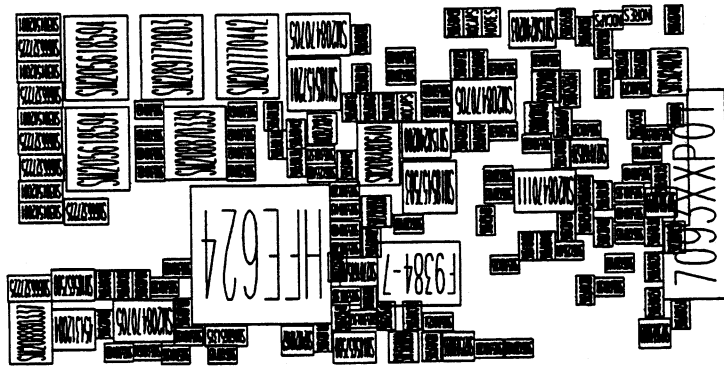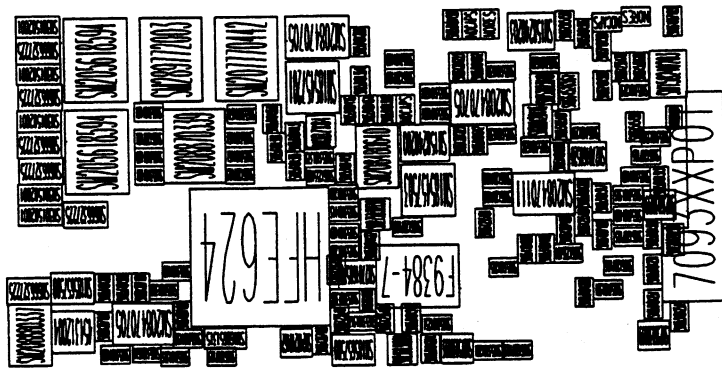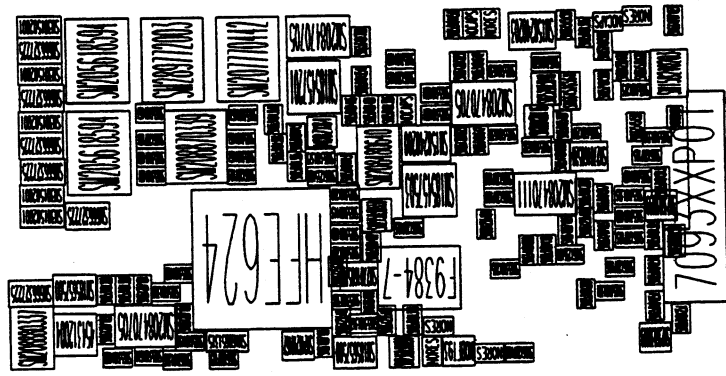





208123002

208123002

454313010

Schematics, Layouts

F9384-31 Rev D: Front End Channels Side 1

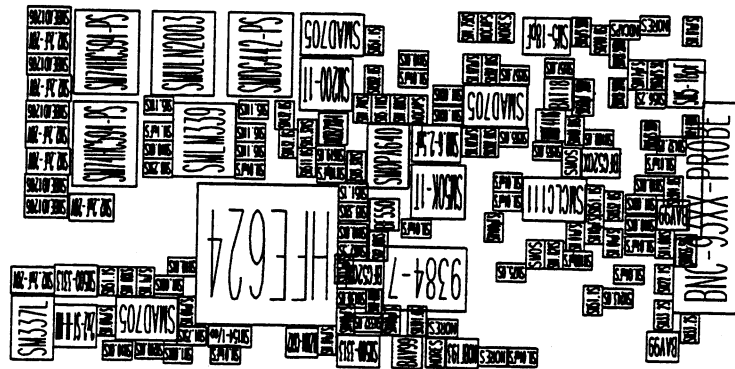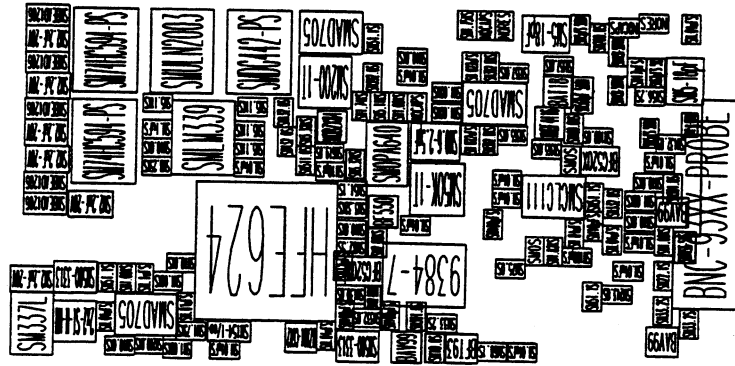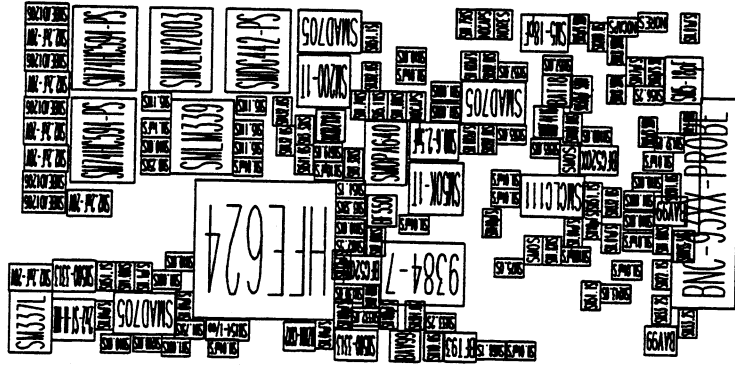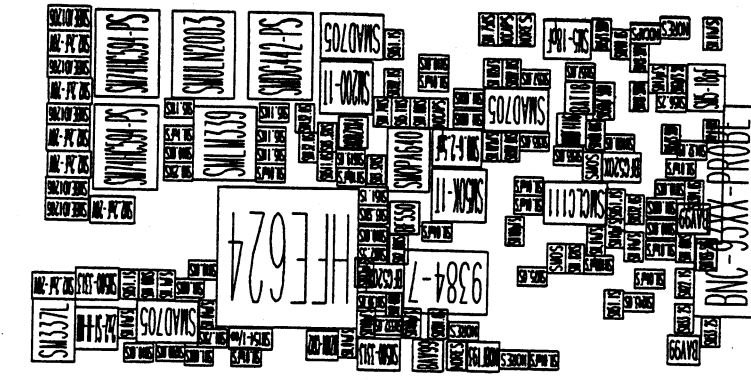


SM337L
SM337L

SMAD705
SMAD705

SMK-11
SMK-11


BNC-5JXX-PROBE
BNC-5JXX-PROBE

F9384-31 Rev D:
Front End Channels Side 2

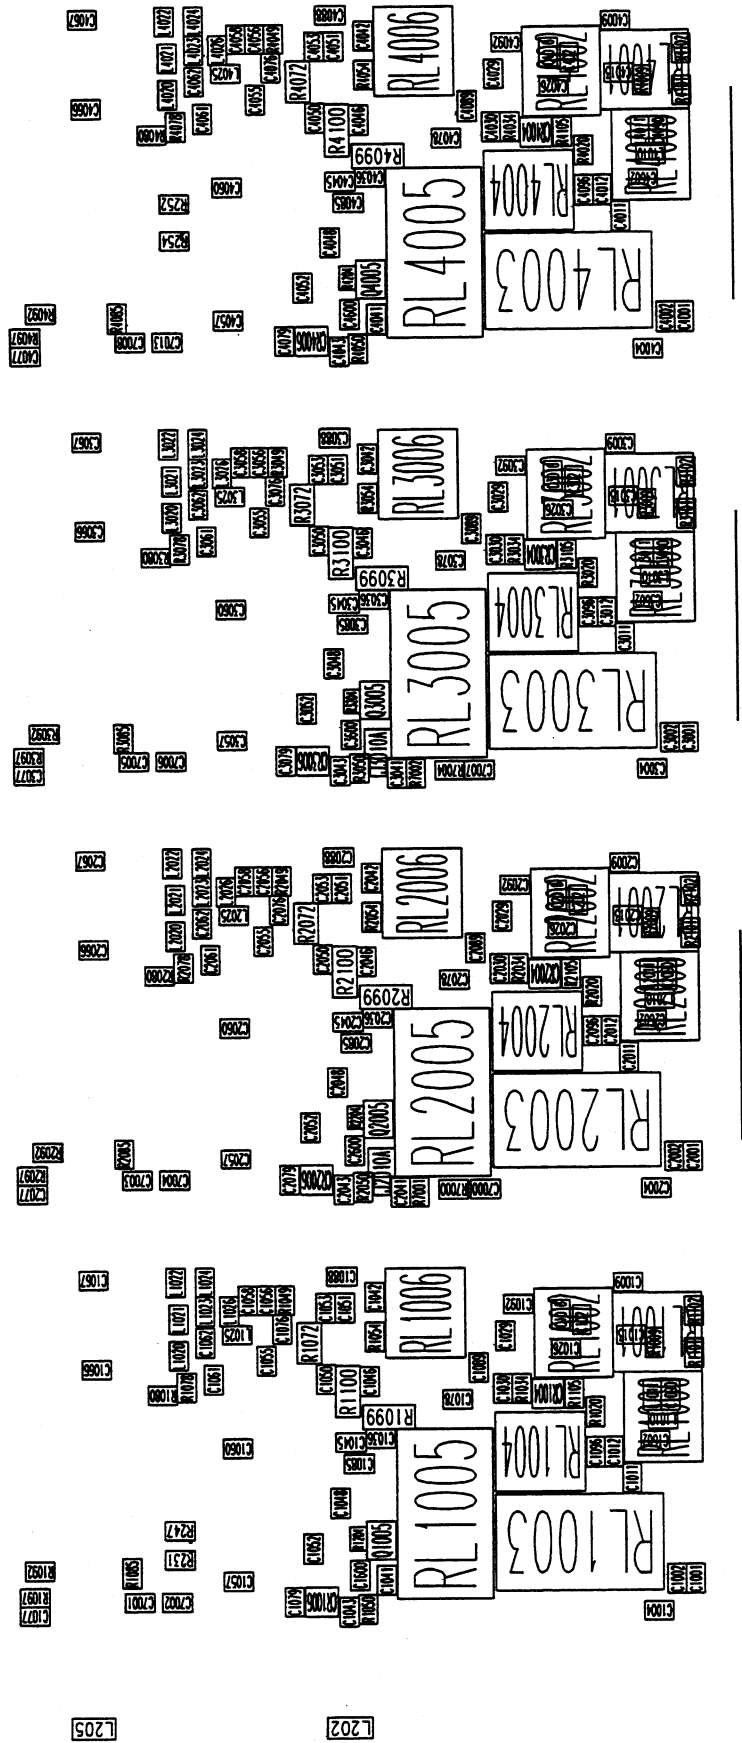


Schematics, Layouts


F9384-31 Rev D: Front End Channels Side 2

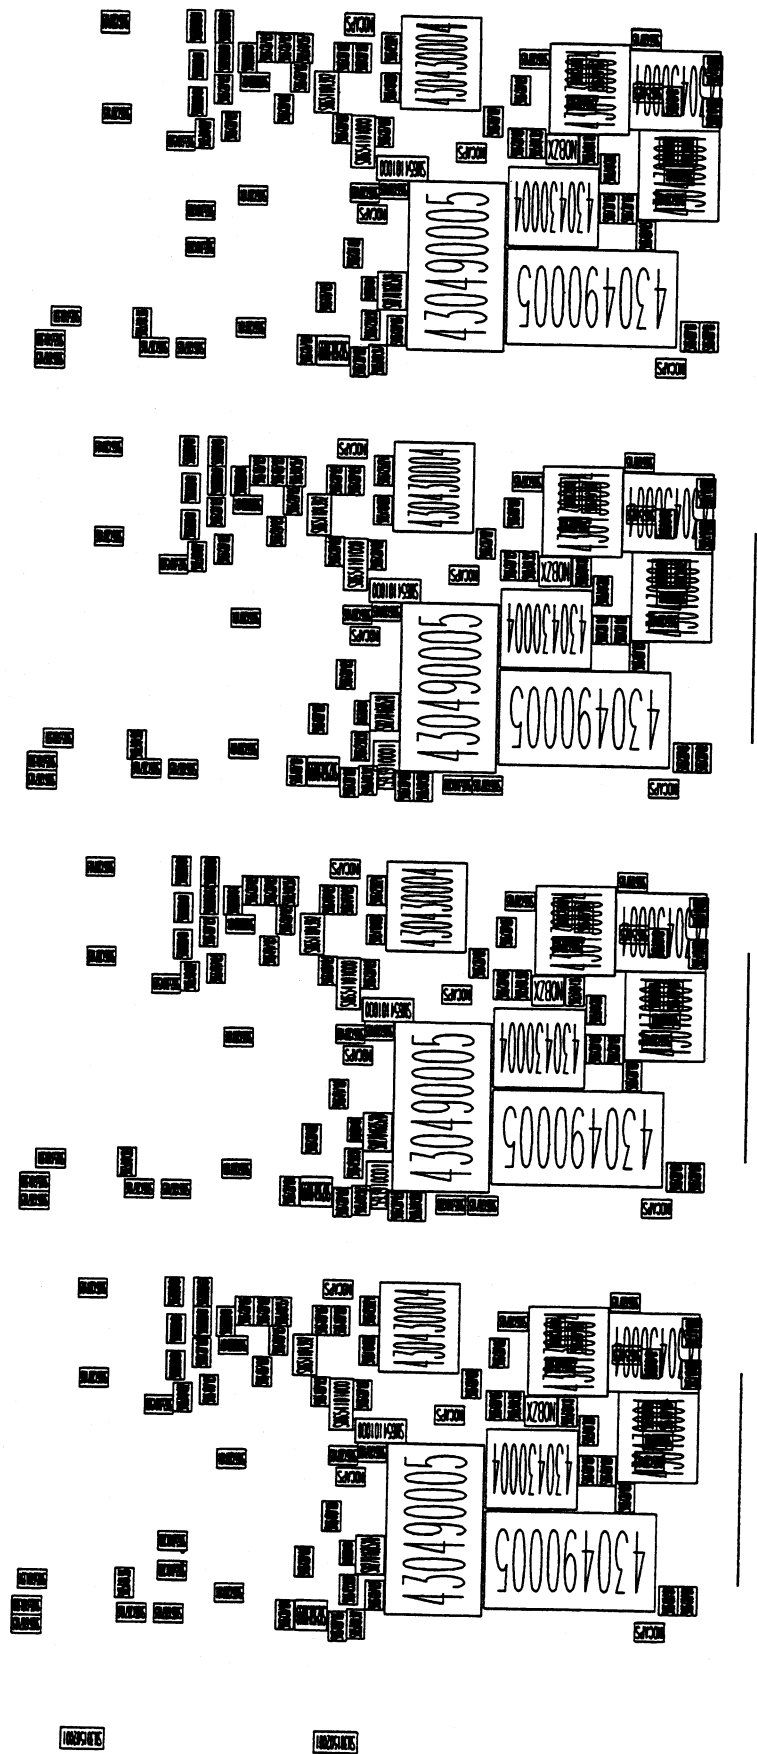

Schematics, Layouts

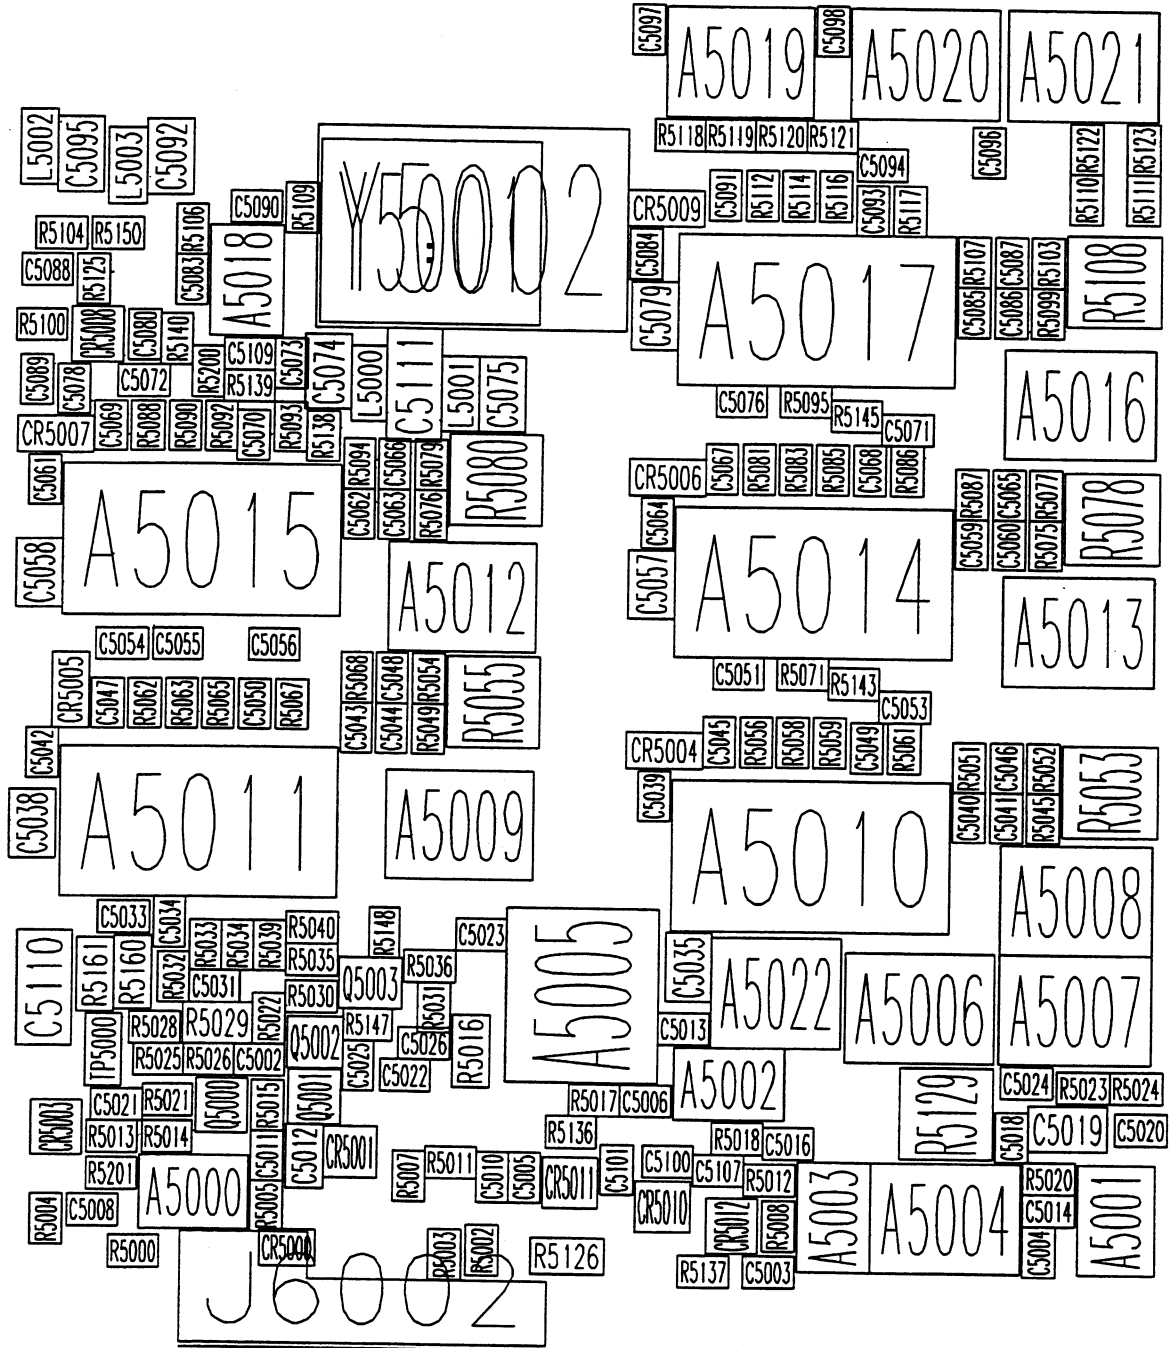


F9384-31 Rev D:
Front End Trigger Side 1

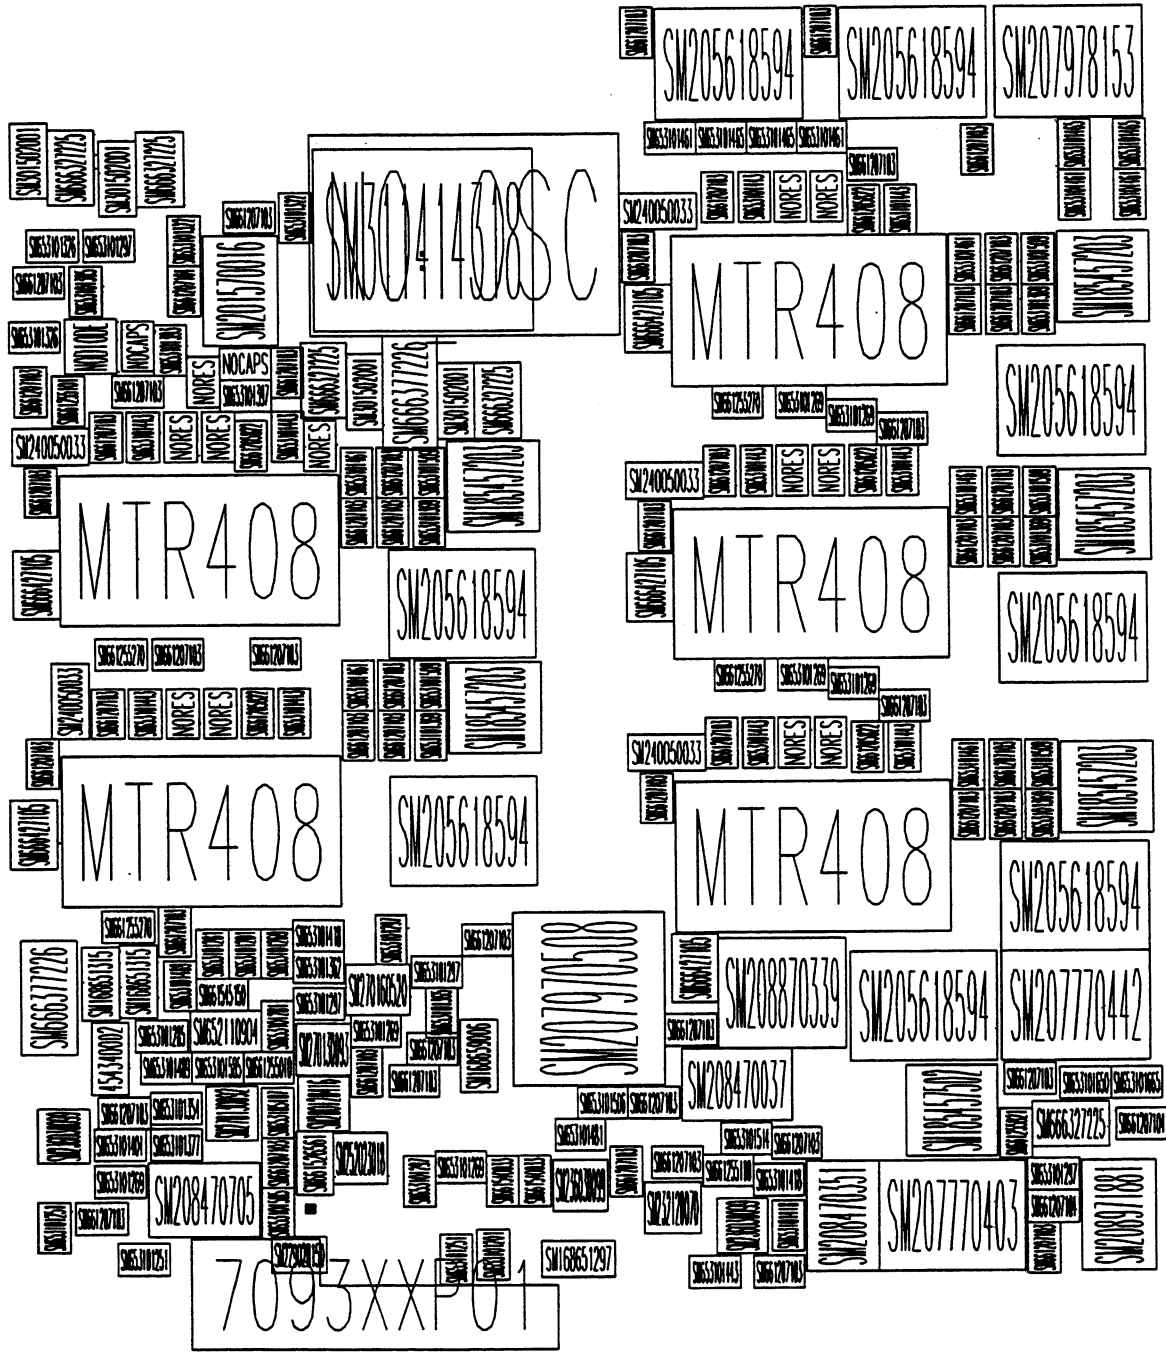


F9384-31 Rev D:
Front End Trigger Side 1

Schematics, Layouts

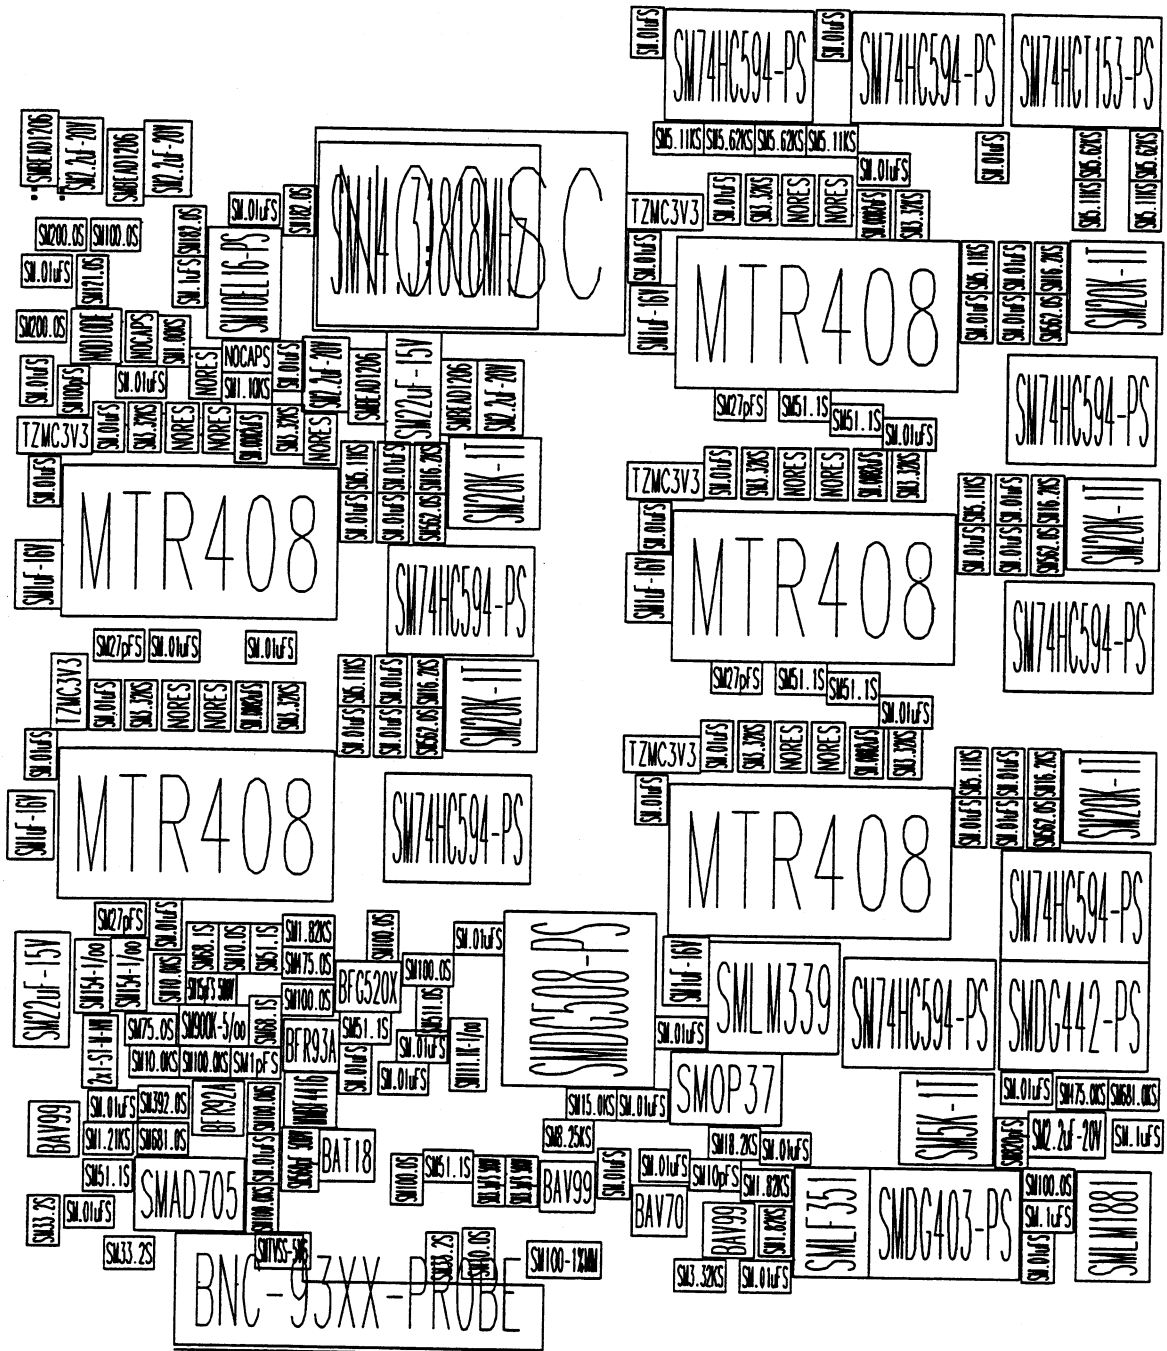


F9384-31 Rev D:
Front End Trigger Side 1

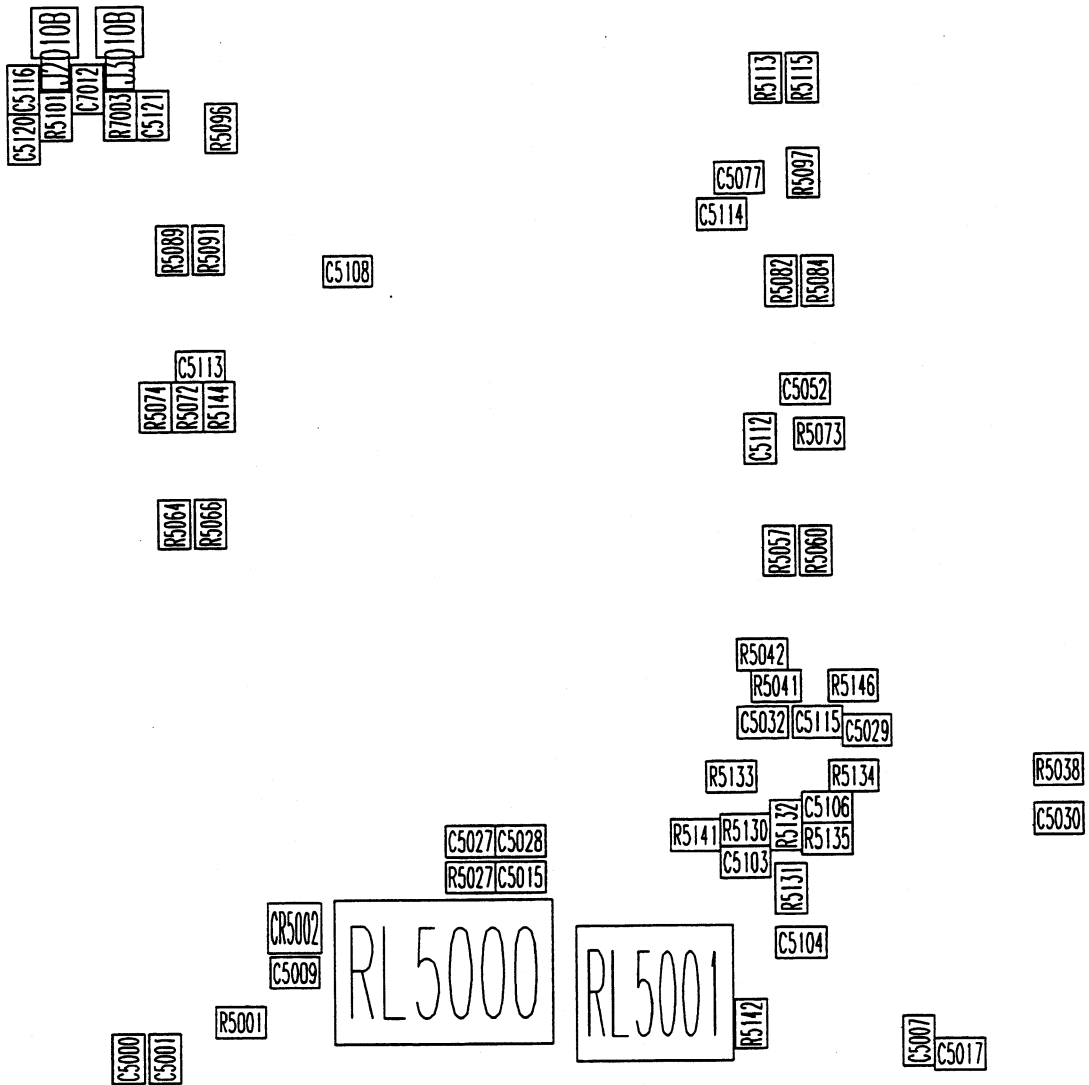


F9384-31 Rev D:
Front End Trigger Side 2

Schematics, Layouts

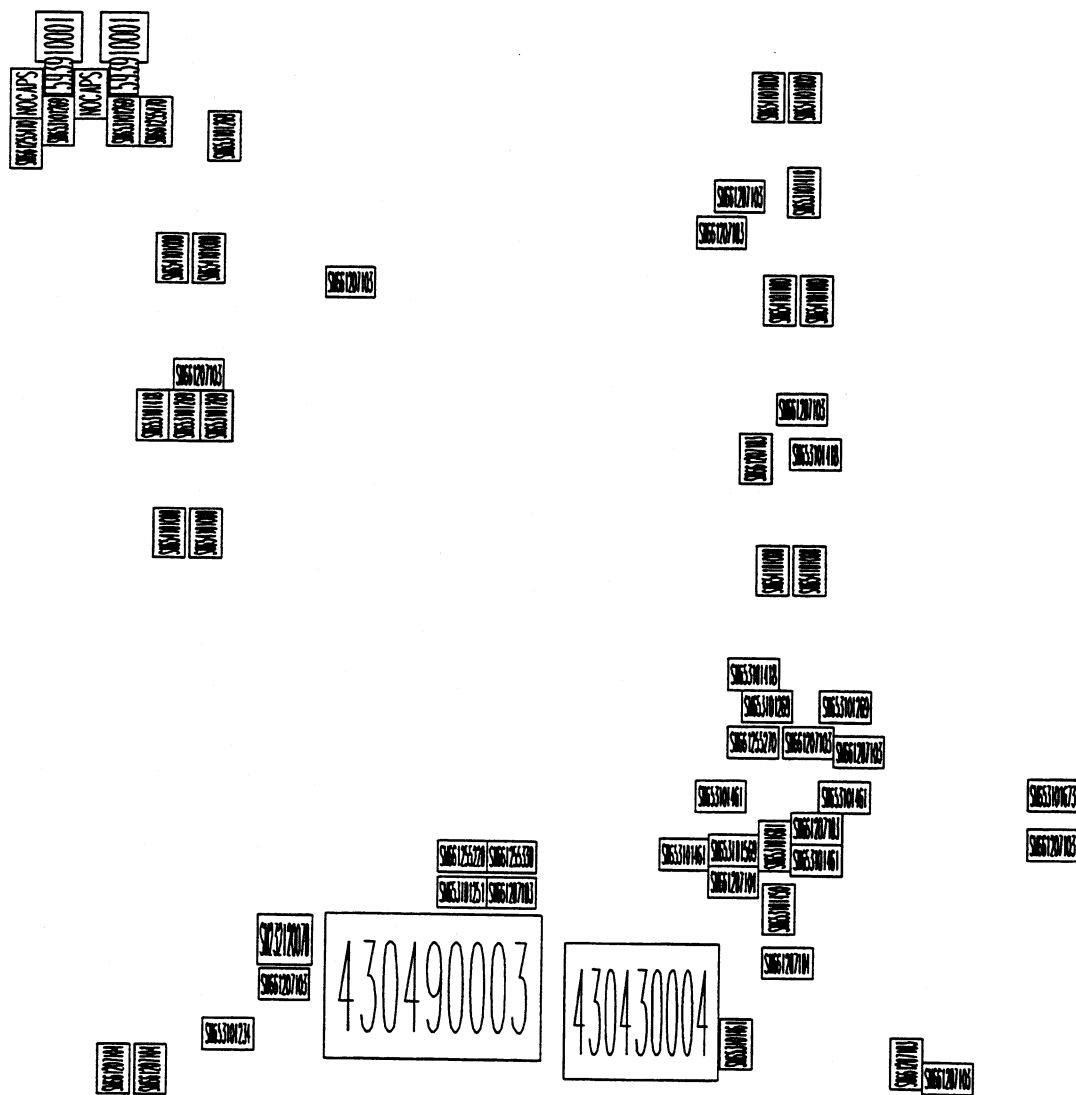


F9384-31 Rev D: Front End Trigger Side 2

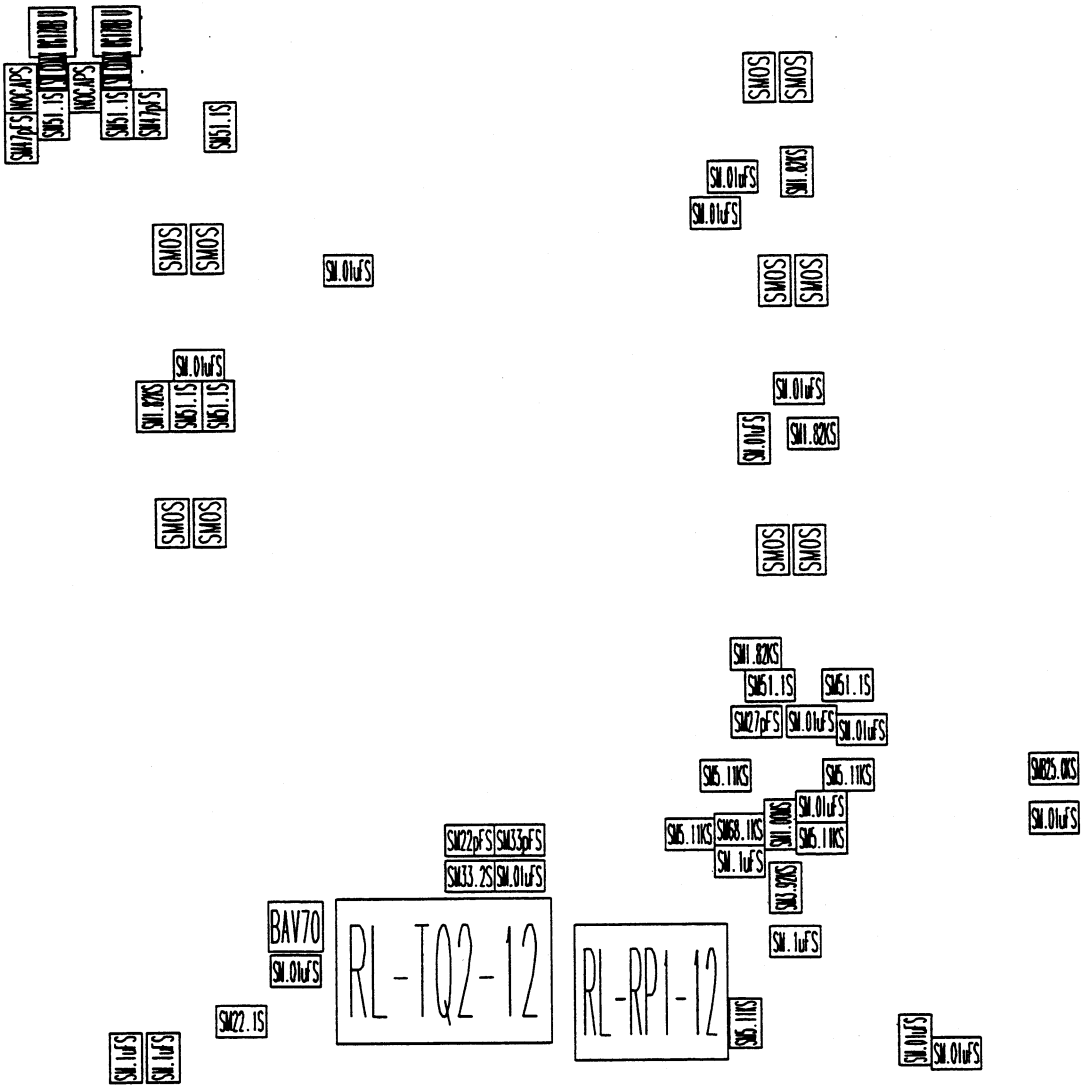


F9384-31 Rev D:
Front End Trigger Side 2


Schematics, Layouts

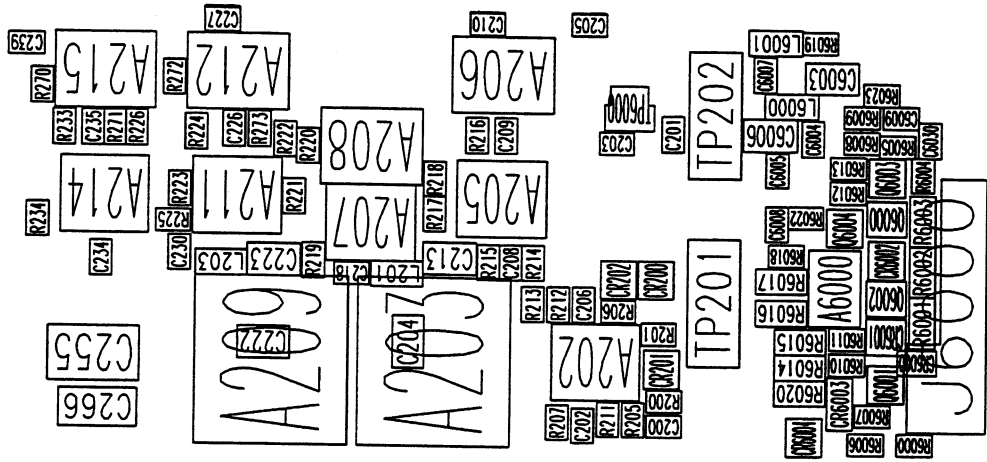


F9384-31 Rev D:
Front End Side 1



Schematics, Layouts

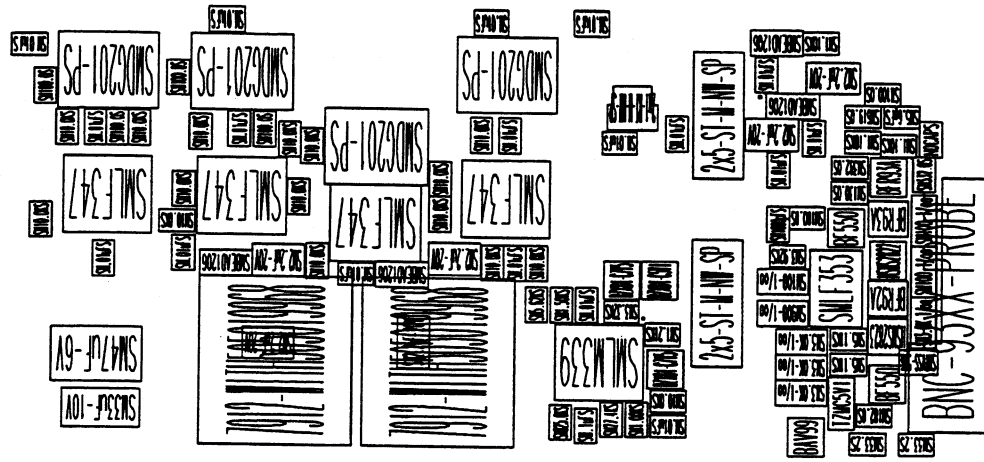

F9384-31 Rev D:
Front End Side 1





C238	C233	C229	C225	C220	C217	C212
------	------	------	------	------	------	------

C237	C232	C228	C224	C219	C216	C211	C207
------	------	------	------	------	------	------	------

86021


F9384-31 Rev D: Front End Side 2

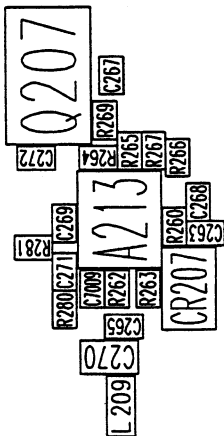

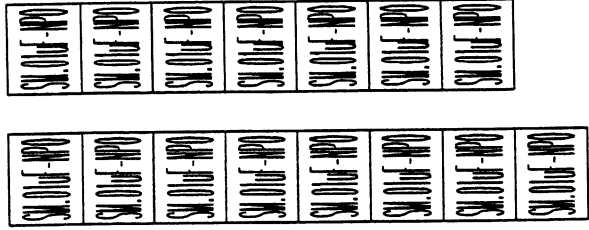


REV. 15


F9384-31 Rev D: Front End Side 2

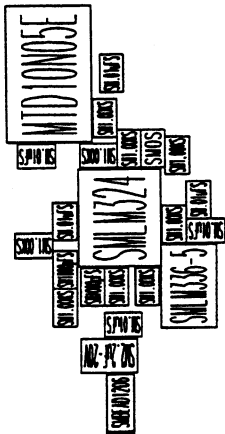

Schematics, Layouts

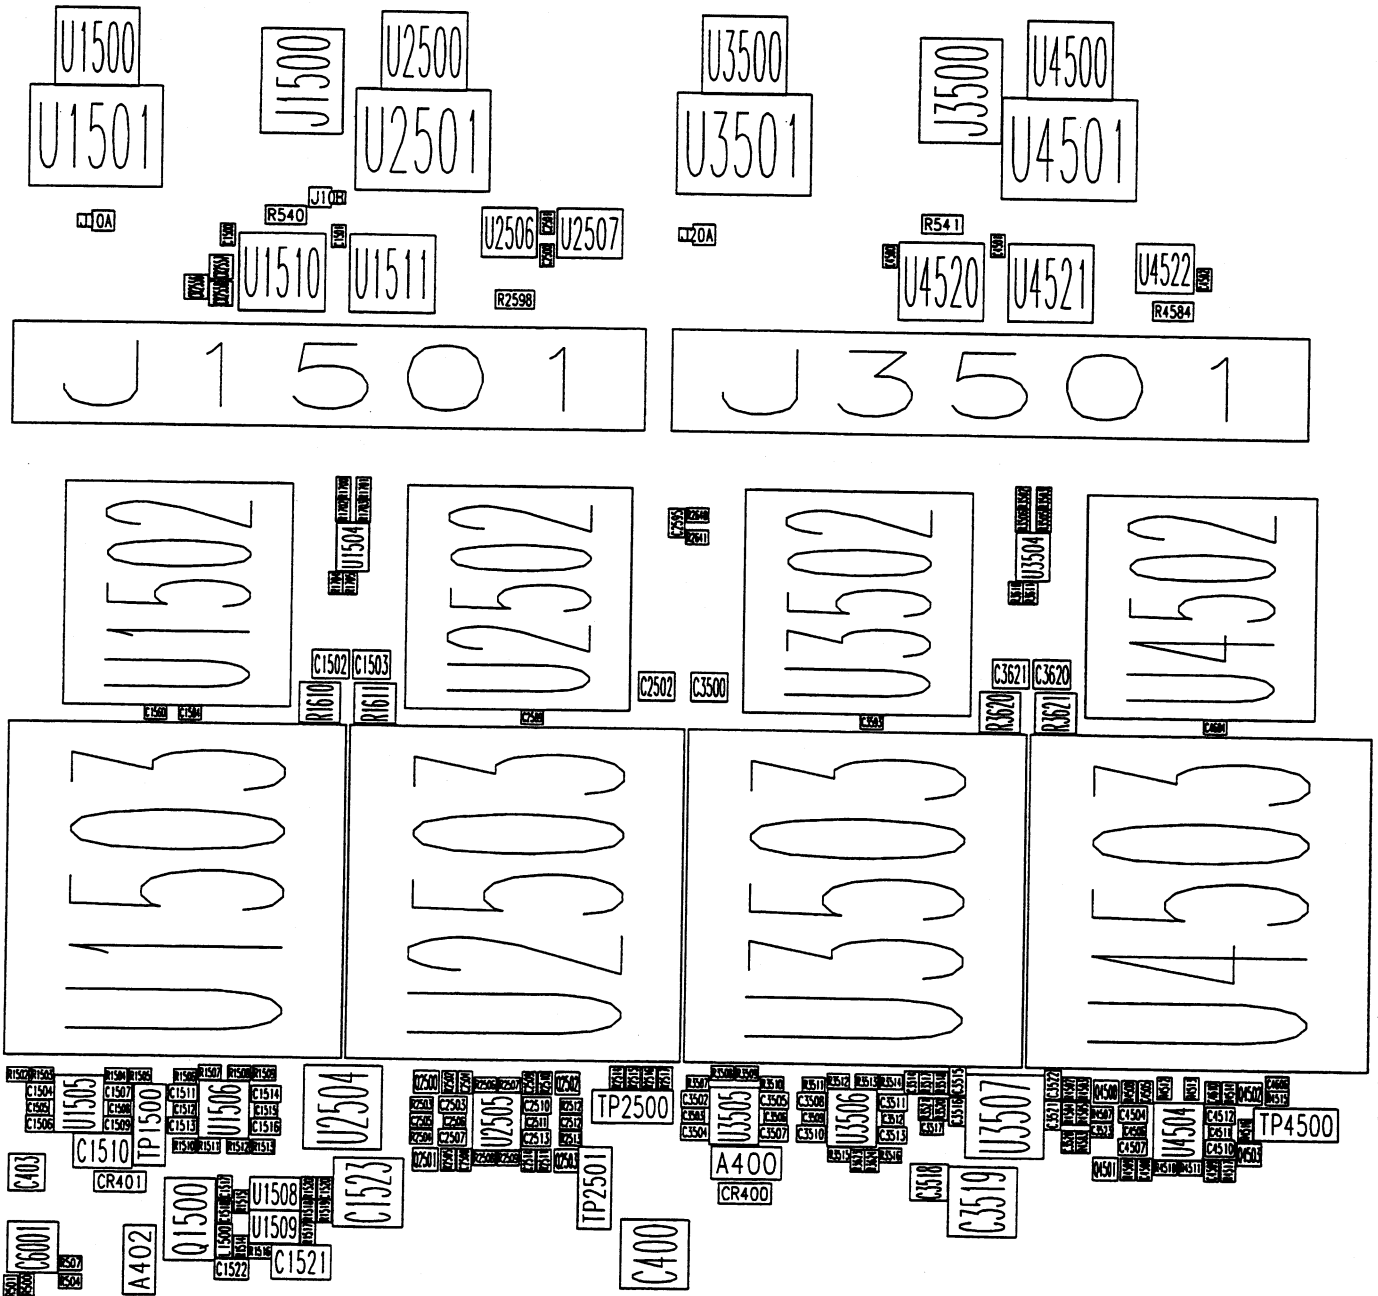


F9384-31 Rev D:
ADC Side 1

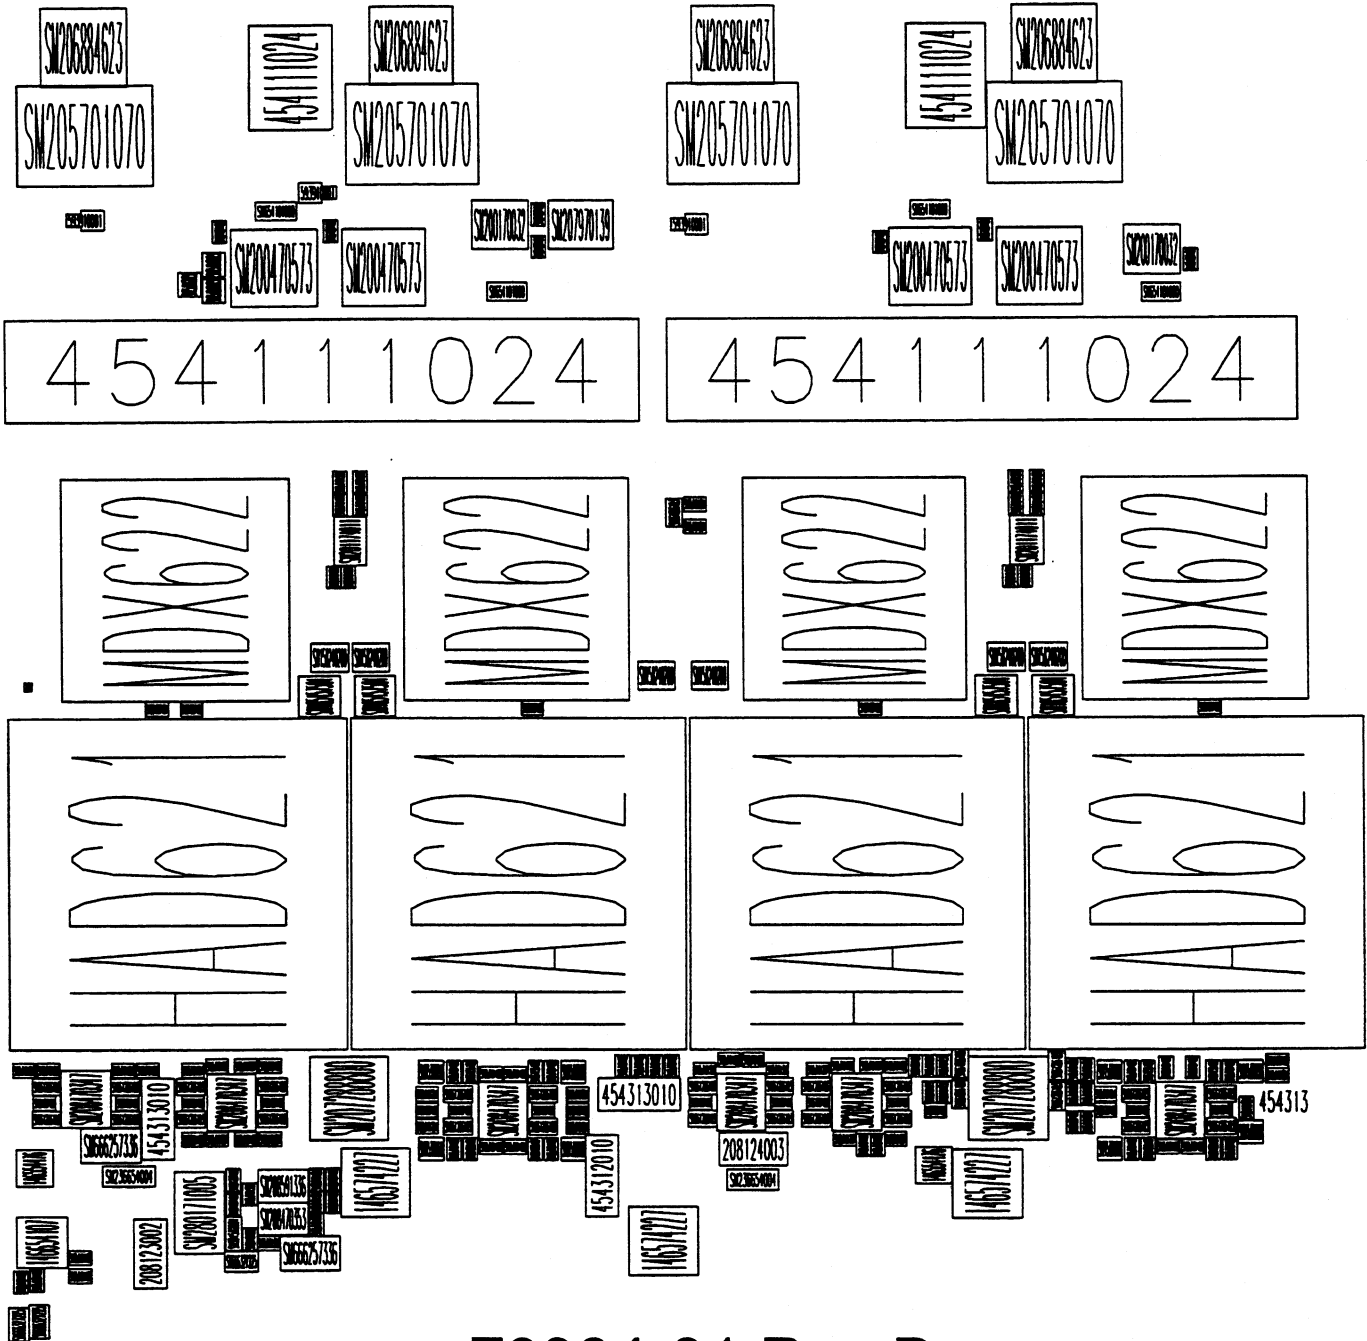


F9384-31 Rev D:
ADC Side 1

Schematics, Layouts

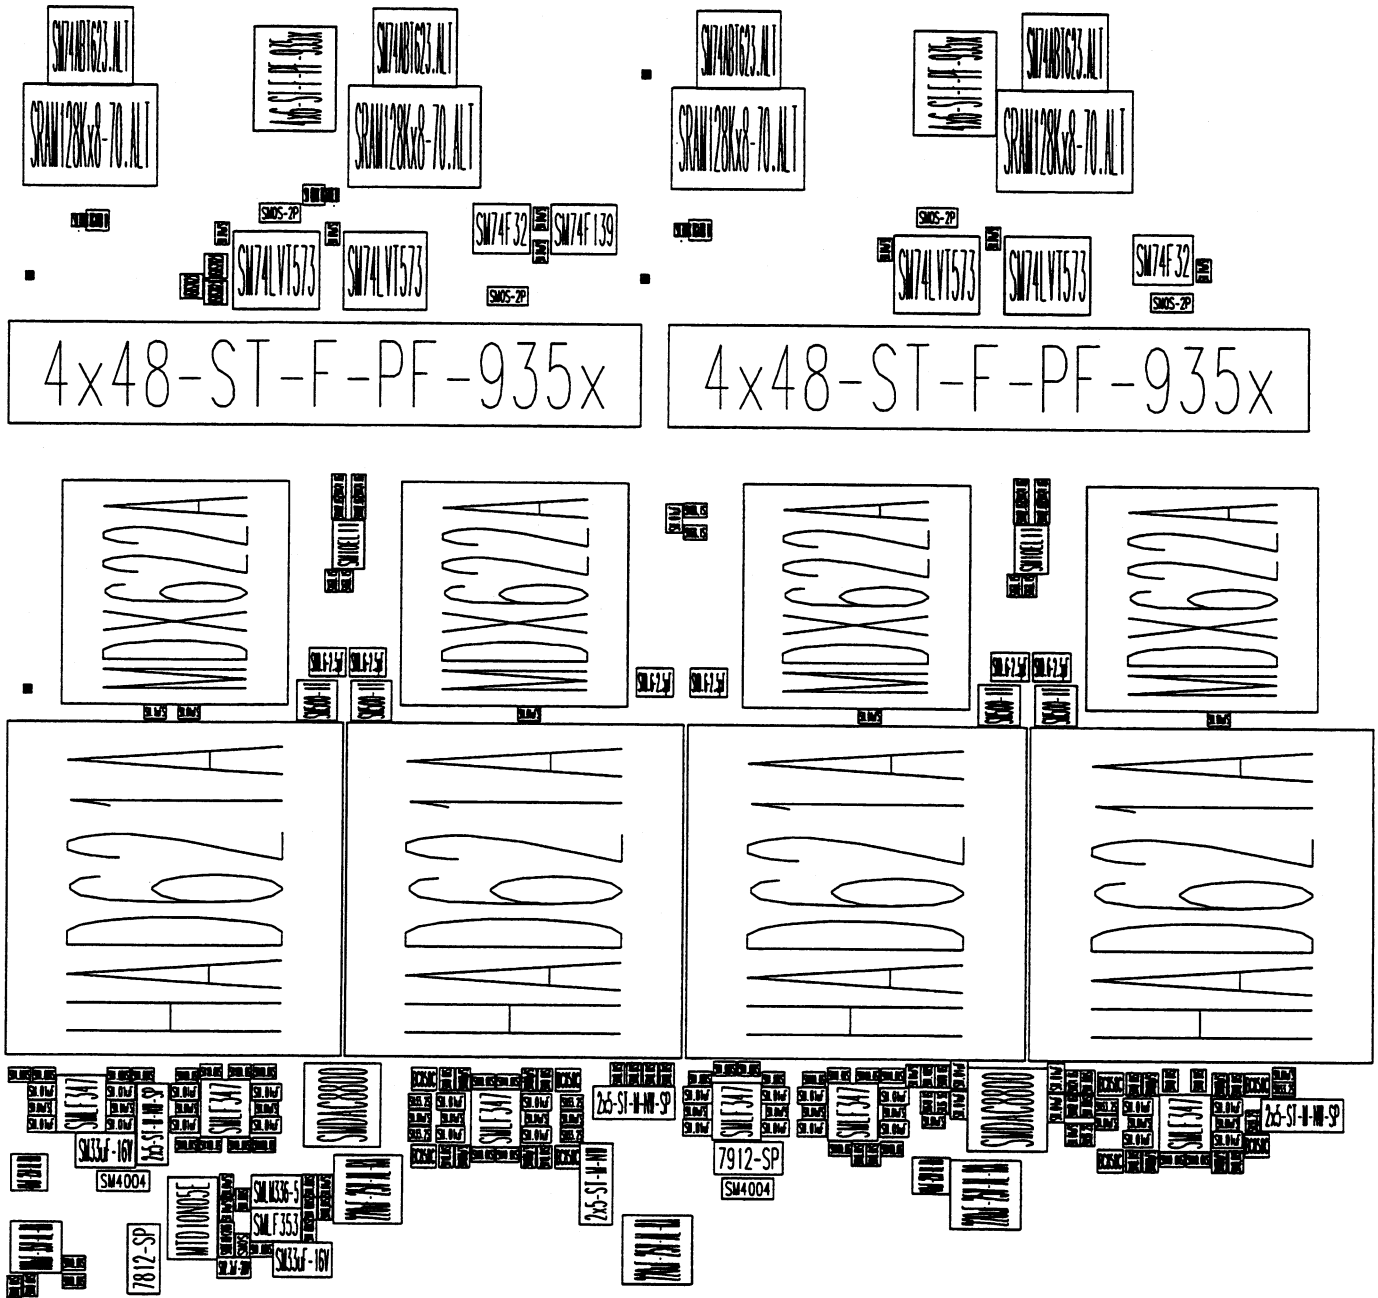

F9384-31 Rev D:
ADC Side 1

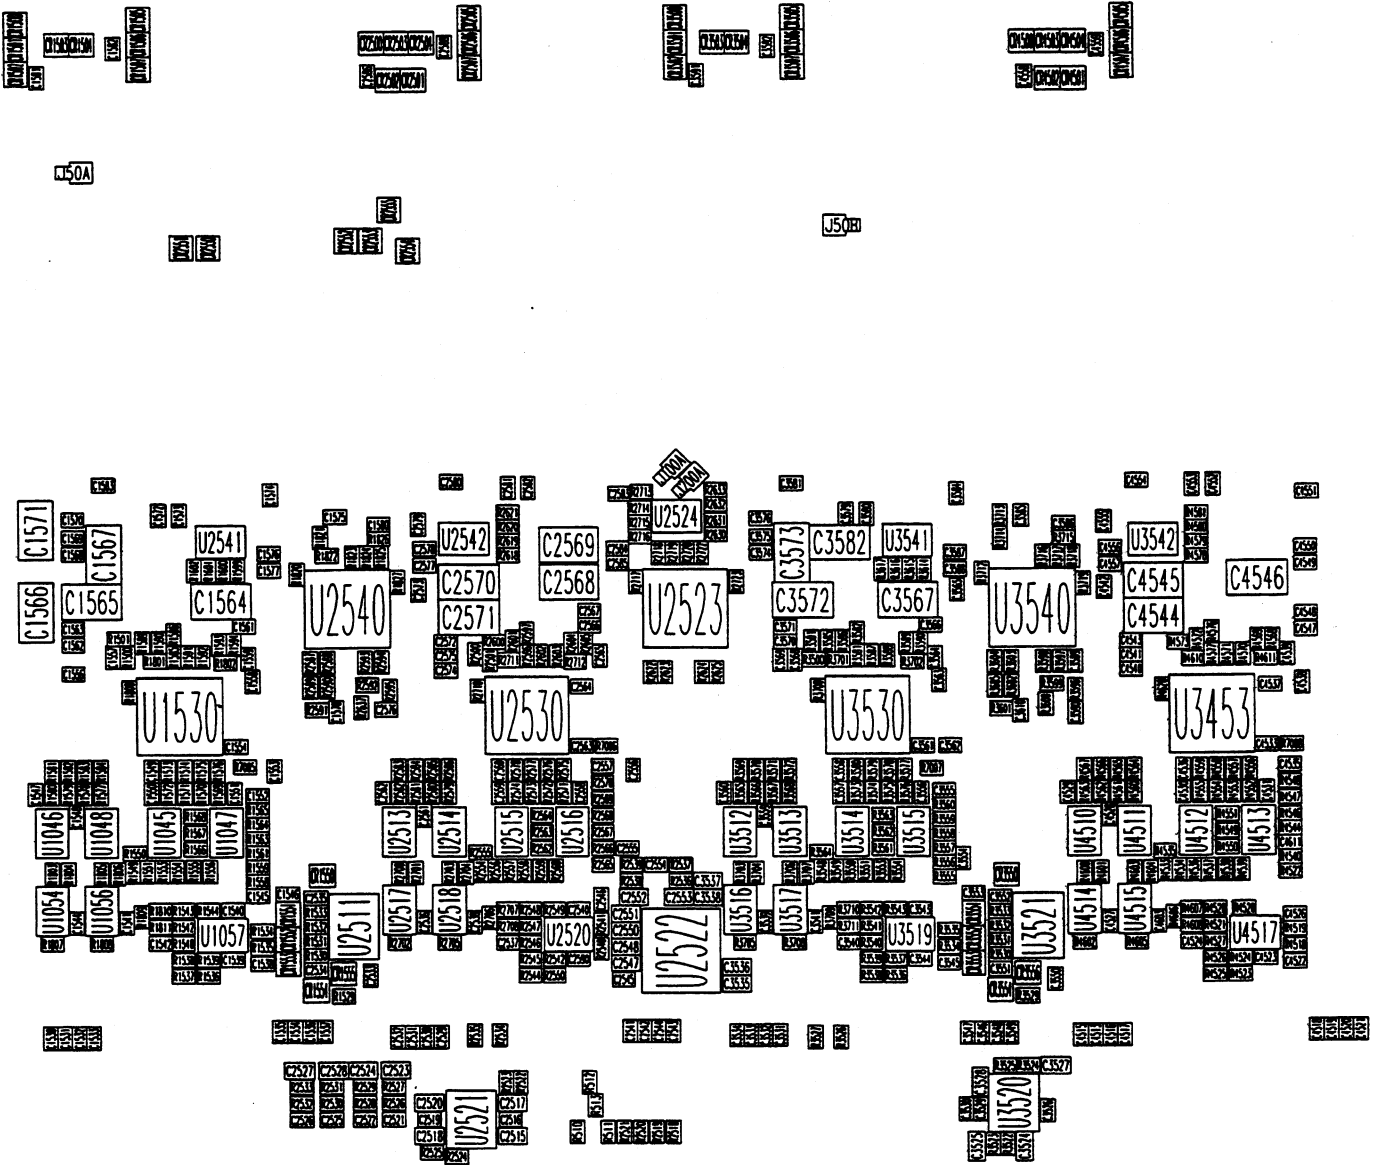

F9384-31 Rev D:
ADC Side 2

Schematics, Layouts




F9384-31 Rev D:
ADC Side 2




F9384-31 Rev D:
ADC Side 2

F9384-31 Rev D: Timebase Side 2

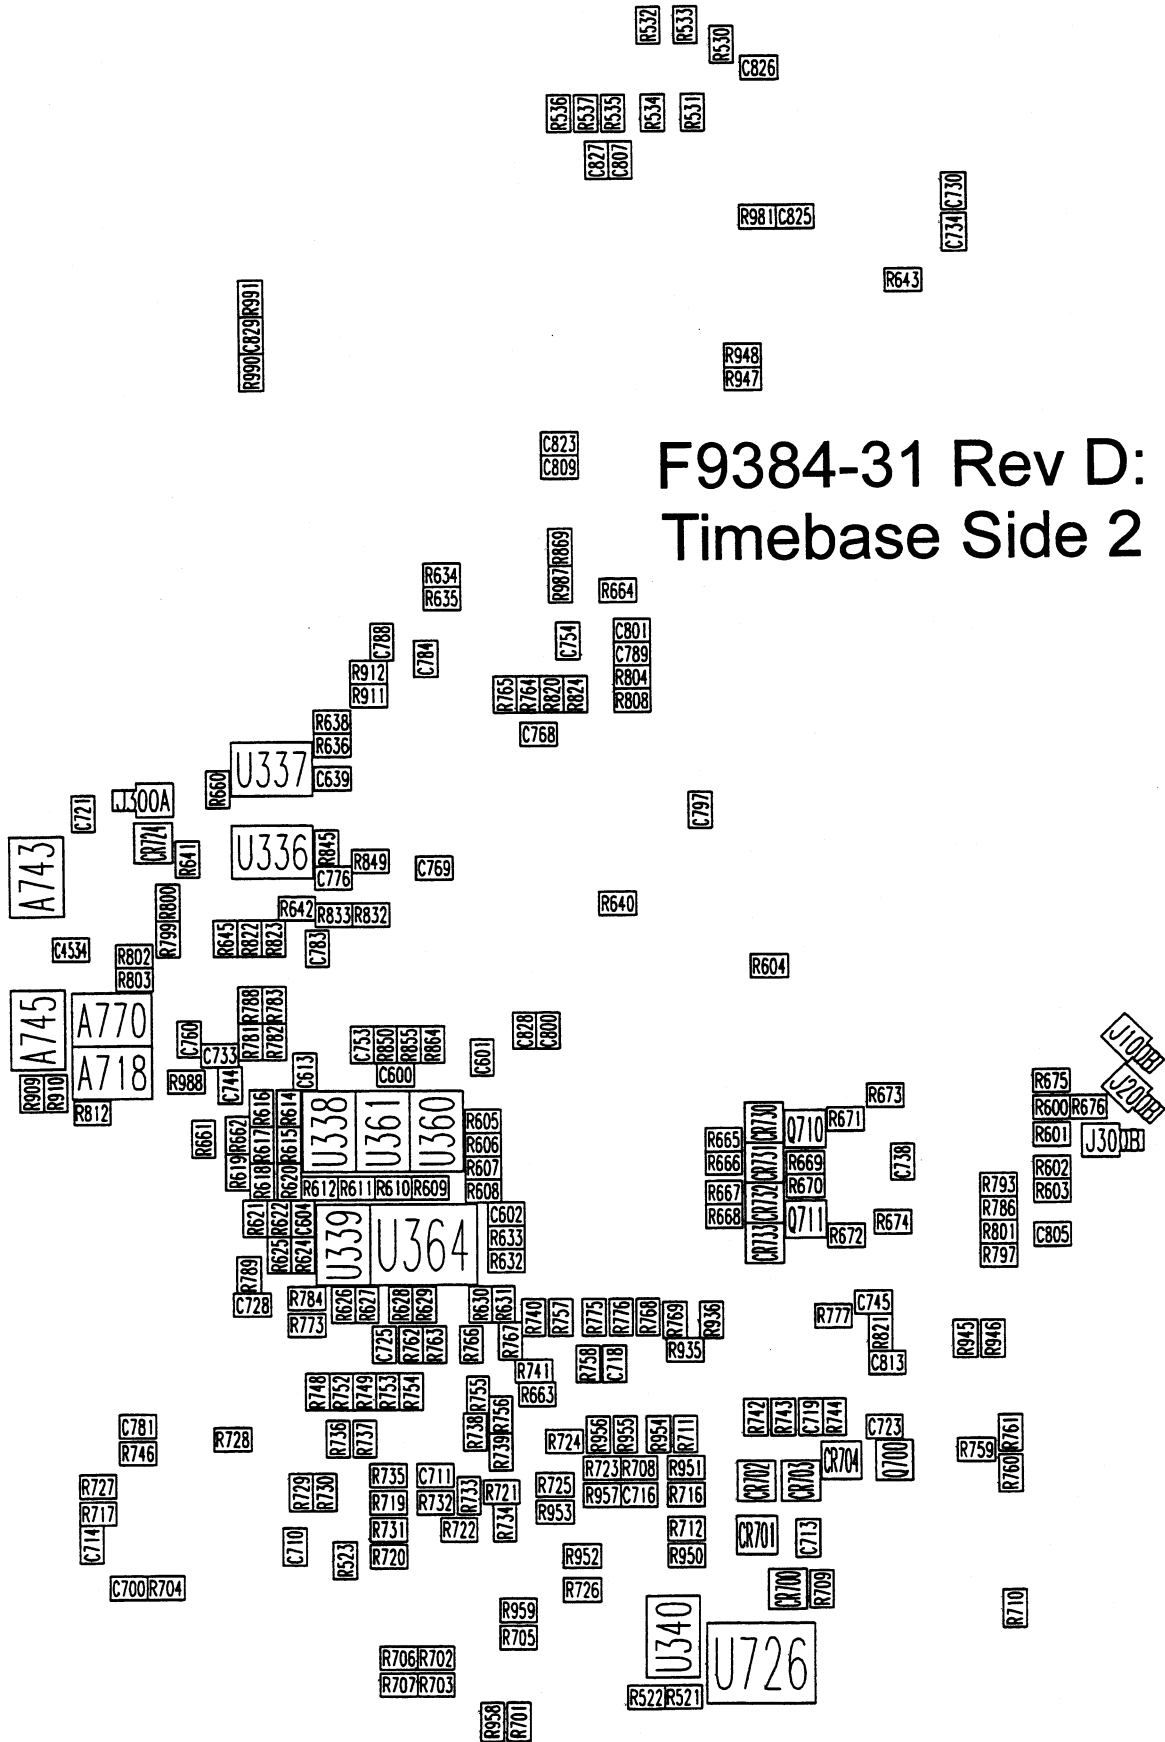

Schematics, Layouts

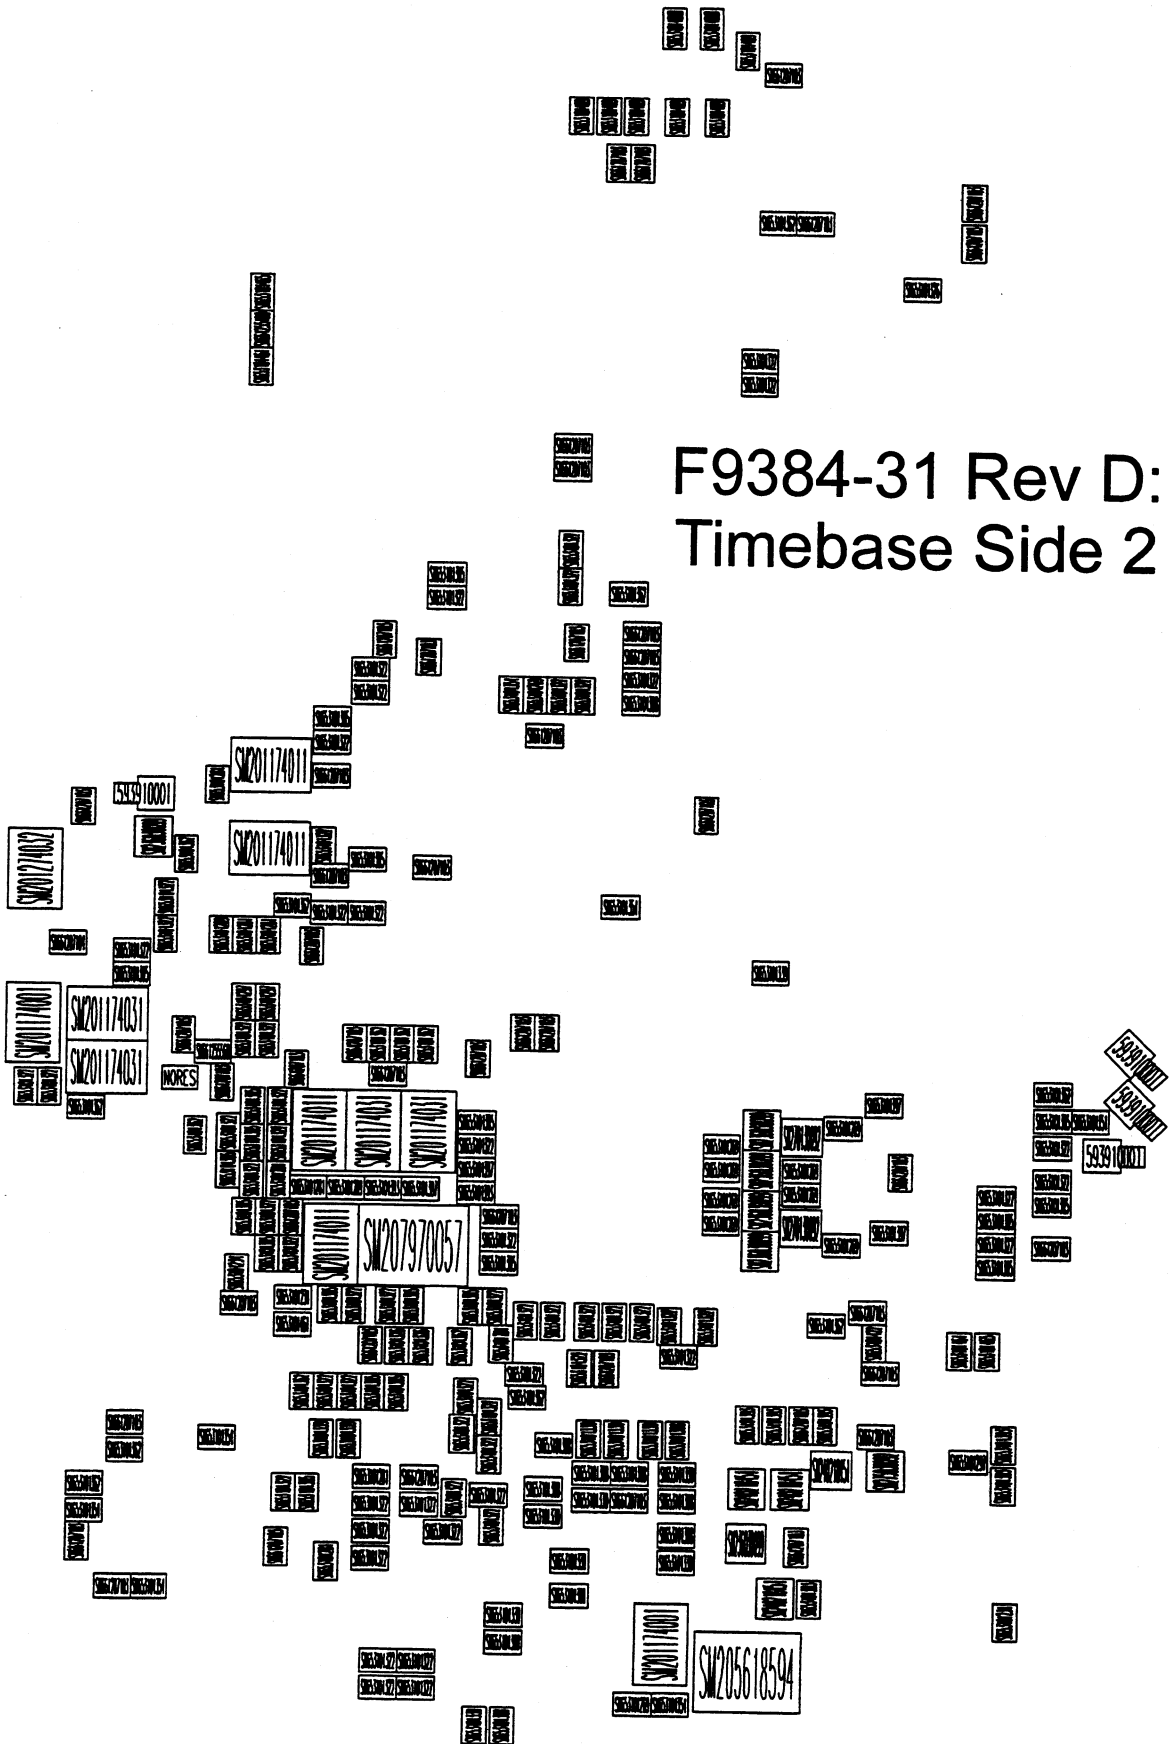

F9384-31 Rev D:
Timebase Side 2

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
A1	SM205618165	SM74HCT165	A45	SM208570805	SM78L05
A2	SM200178138	SM74HCT138	A202	SM208870339	SMLM339
A3	SM200178030	SM74HCT30	A203	208124003	7912
A4	SM200178138	SM74HCT138	A204	208123002	7812
A5	SM200178138	SM74HCT138	A205	SM208470347	SMLF347
A6	SM206260858	SMADC0858	A206	SM207770201	SMDG201-PS
A7	SM207970351	SM74HC4351	A207	SM208470347	SMLF347
A8	SM206070584	SMPCD8584	A208	SM207770201	SMDG201-PS
A9	SM207978251	SM74HCT251	A209	208124003	7912
A10	SM200178138	SM74HCT138	A210	208123002	7812
A11	SM205108016	SM24LC16B	A211	SM208470347	SMLF347
A12	SM206885245	SM74ABT245	A212	SM207770201	SMDG201-PS
A13	SM200178000	SM74HCT00	A213	SM208470324	SMLM324
A14	SM206885245	SM74ABT245	A214	SM208470347	SMLF347
A15	SM207171244	SM74ABT244	A215	SM207770201	SMDG201-PS
A16	SM205045357	CHEMIN-A	A400	208124003	7912-SP
A17	SM205045358	ROUTE3-C	A402	208123002	7812-SP
A18	SM205045355	RUELLE-A	A700	SM205618594	SM74HC594-PS
A19	SM205045359	ARTERE-B	A701	SM200178002	SM74HCT02
A20	SM205045354	AVENUE-A	A702	SM207978251	SM74HCT251
A21	SM205045350	ROUTE1-A	A703	SM201274033	SM10EL33
A22	SM205045352	ROUTE2-B	A705	SM206970457	SM10E457
A23	SM205045351	ROUTE2-A	A706	SM201164104	SM10E104
A24	SM207171244	SM74ABT244	A707	SM205618594	SM74HC594-PS
A25	SM207171244	SM74ABT244	A708	SM200178273	SM74HCT273
A26	MCL404	MCL404	A709	SM200167102	SM10H102
A27	SM207171244	SM74ABT244	A710	SM201174011	SM10EL11
A28	SM205045300	MIMOSA-A	A711	SM201164131	SM10E131
A29	SM207972157	SM74F157A	A712	SM207960157	SM10E157
A30	SM207280703	SMDAC703	A713	SM201570016	SM10EL16
A31	SM200169191	SM74F191	A714	SM200167164	SM10H164
A32	SM200169191	SM74F191	A717	SM201174001	SM10EL01
A33	SM200169191	SM74F191	A718	SM201174031	SM10EL31
A34	SM200169191	SM74F191	A723	SM201274032	SM10EL32
A35	SM200169191	SM74F191	A724	MST412	MST412
A36	SM207970139	SM74F139	A726	SM207360125	SM10125
A37	SM200278040	SM74HCT4040	A727	SM200169016	SM10E016
A39	SM206884623	SM74ABT623	A728	SM200178002	SM74HCT02
A40	SM206884623	SM74ABT623	A734	SM207360125	SM10125
A41	SM207970139	SM74F139	A735	SM200169016	SM10E016
A42	SM200178374	SM74HCT374	A736	SM208030245	SMSL3245
A43	SM200178074	SM74HCT74	A737	SM205618594	SM74HC594-PS
A44	SM200178273	SM74HCT273	A739	SM208470353	SMLF353

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
A740	SM208570078	SM78L12	A2010	SM208470705	SMAD705
A741	SM201274032	SM10EL32	A2011	SM208880337	SM337L
A742	SM200169016	SM10E016	A3000	SM208470111	SMCLC111
A743	SM201274032	SM10EL32	A3001	SM208470705	SMAD705
A744	SM208880079	SM79L12	A3002	SM208480640	SMOPA640
A745	SM201174001	SM10EL01	A3003	HFE624	HFE624
A746	SM207360125	SM10125	A3004	SM208470705	SMAD705
A748	SM200167102	SM10H102	A3005	SM207770442	SMDG442-PS
A749	MTB411	MTB411	A3006	SM208870339	SMLM339
A756	SM207367124	SM10H124	A3007	SM289772003	SMULN2003
A757	SM200178074	SM74HCT74	A3008	SM205618594	SM74HC594-PS
A758	SM201174031	SM10EL31	A3009	SM205618594	SM74HC594-PS
A759	SM207170367	SM74HC367	A3010	SM208470705	SMAD705
A760	SM201174031	SM10EL31	A3011	SM208880337	SM337L
A761	SM205618594	SM74HC594-PS	A4000	SM208470111	SMCLC111
A765	SM201174031	SM10EL31	A4001	SM208470705	SMAD705
A769	SM207367125	SM10H125	A4002	SM208480640	SMOPA640
A770	SM201174031	SM10EL31	A4003	HFE624	HFE624
A771	SM201174031	SM10EL31	A4004	SM208470705	SMAD705
A772	SM201174031	SM10EL31	A4005	SM207770442	SMDG442-PS
A773	SM208570805	SM78L05	A4006	SM208870339	SMLM339
A1000	SM208470111	SMCLC111	A4007	SM289772003	SMULN2003
A1001	SM208470705	SMAD705	A4008	SM205618594	SM74HC594-PS
A1002	SM208480640	SMOPA640	A4009	SM205618594	SM74HC594-PS
A1003	HFE624	HFE624	A4010	SM208470705	SMAD705
A1004	SM208470705	SMAD705	A4011	SM208880337	SM337L
A1005	SM207770442	SMDG442-PS	A5000	SM208470705	SMAD705
A1006	SM208870339	SMLM339	A5001	SM208971881	SMLM1881
A1007	SM289772003	SMULN2003	A5002	SM208470037	SMOP37
A1008	SM205618594	SM74HC594-PS	A5003	SM208470351	SMLF351
A1009	SM205618594	SM74HC594-PS	A5004	SM207770403	SMDG403-PS
A1010	SM208470705	SMAD705	A5005	SM207970508	SMDG508-PS
A1011	SM208880337	SM337L	A5006	SM205618594	SM74HC594-PS
A2000	SM208470111	SMCLC111	A5007	SM207770442	SMDG442-PS
A2001	SM208470705	SMAD705	A5008	SM205618594	SM74HC594-PS
A2002	SM208480640	SMOPA640	A5009	SM205618594	SM74HC594-PS
A2003	HFE624	HFE624	A5010	MTR408	MTR408
A2004	SM208470705	SMAD705	A5011	MTR408	MTR408
A2005	SM207770442	SMDG442-PS	A5012	SM205618594	SM74HC594-PS
A2006	SM208870339	SMLM339	A5013	SM205618594	SM74HC594-PS
A2007	SM289772003	SMULN2003	A5014	MTR408	MTR408
A2008	SM205618594	SM74HC594-PS	A5015	MTR408	MTR408
A2009	SM205618594	SM74HC594-PS	A5016	SM205618594	SM74HC594-PS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
A5017	MTR408	MTR408	C36	SM661207103	SM.01uFS
A5018	SM201570016	SM10EL16-PS	C37	SM661207103	SM.01uFS
A5019	SM205618594	SM74HC594-PS	C38	SM661207103	SM.01uFS
A5020	SM205618594	SM74HC594-PS	C39	SM661207103	SM.01uFS
A5021	SM207978153	SM74HCT153-PS	C40	SM661207103	SM.01uFS
A5022	SM208870339	SMLM339	C41	SM661207104	SM.1uFS
A6000	SM208470353	SMLF353	C42	SM661207103	SM.01uFS
BR1	BRIDGE	BRIDGE-026	C43	SM661207103	SM.01uFS
BZ700	530040007	TMB-05	C44	SM661207103	SM.01uFS
C1	SM661207103	SM.01uFS	C45	SM661207104	SM.1uFS
C2	SM661207104	SM.1uFS	C46	146544471	470uF-25VALR
C3	SM661207103	SM.01uFS	C47	SM666247106	SM10uF-25V
C4	SM661207103	SM.01uFS	C48	SM666247106	SM10uF-25V
C5	SM661207103	SM.01uFS	C49	SM661207103	SM.01uFS
C6	SM661255181	SM180pFS	C50	SM666327225	SM2.2uF-20V
C7	SM661207104	SM.1uFS	C51	SM661207104	SM.1uFS
C8	SM661207103	SM.01uFS	C52	SM661207104	SM.1uFS
C9	SM661207103	SM.01uFS	C53	SM661207104	SM.1uFS
C10	SM661207103	SM.01uFS	C54	SM661207104	SM.1uFS
C11	SM661207103	SM.01uFS	C55	SM661207104	SM.1uFS
C12	SM661207103	SM.01uFS	C56	SM661207104	SM.1uFS
C13	SM666247106	SM10uF-25V	C57	SM661207104	SM.1uFS
C14	SM661207103	SM.01uFS	C58	SM661207104	SM.1uFS
C15	SM661207103	SM.01uFS	C60	SM666327225	SM2.2uF-20V
C16	SM661207103	SM.01uFS	C62	SM666377226	SM22uF-15V
C17	SM666247106	SM10uF-25V	C63	SM666377226	SM22uF-15V
C18	SM661207103	SM.01uFS	C64	SM661207104	SM.1uFS
C19	SM661207103	SM.01uFS	C81	SM661286103	SM.01uF
C20	SM661207103	SM.01uFS	C82	SM666377226	SM22uF-15V
C21	SM661207103	SM.01uFS	C90	SM666377226	SM22uF-15V
C22	SM661207103	SM.01uFS	C200	SM661207103	SM.01uFS
C23	SM666377226	SM22uF-15V	C201	SM661207103	SM.01uFS
C24	SM666377226	SM22uF-15V	C202	SM661207104	SM.1uFS
C25	SM661207103	SM.01uFS	C203	SM661207103	SM.01uFS
C26	SM661207103	SM.01uFS	C204	SM666327225	SM2.2uF-20V
C27	SM661207103	SM.01uFS	C205	SM661207103	SM.01uFS
C28	SM661207103	SM.01uFS	C206	SM661207103	SM.01uFS
C29	SM661207103	SM.01uFS	C207	SM661726103	SM.01uF-NPO
C30	SM661207103	SM.01uFS	C208	SM661207103	SM.01uFS
C31	SM661207103	SM.01uFS	C209	SM661207103	SM.01uFS
C32	SM661207103	SM.01uFS	C210	SM661207103	SM.01uFS
C33	SM661207103	SM.01uFS	C211	SM661726103	SM.01uF-NPO
C34	SM661207103	SM.01uFS	C212	SM661726103	SM.01uF-NPO
C35	SM661207103	SM.01uFS	C213	SM666327225	SM2.2uF-20V

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C214	SM666327225	SM2.2uF-20V	C601	SM661207103	SM.01uFS
C215	SM666327225	SM2.2uF-20V	C602	SM661207103	SM.01uFS
C216	SM661726103	SM.01uF-NPO	C604	SM661207103	SM.01uFS
C217	SM661726103	SM.01uF-NPO	C613	SM661207103	SM.01uFS
C218	SM661207103	SM.01uFS	C639	SM661207103	SM.01uFS
C219	SM661726103	SM.01uF-NPO	C700	SM661207103	SM.01uFS
C220	SM661726103	SM.01uF-NPO	C702	SM661207103	SM.01uFS
C221	SM666327225	SM2.2uF-20V	C703	SM661207103	SM.01uFS
C222	SM666327225	SM2.2uF-20V	C704	SM661207103	SM.01uFS
C223	SM666327225	SM2.2uF-20V	C706	SM158240201	SM1-5pF
C224	SM661726103	SM.01uF-NPO	C708	SM661255560	SM56pFS
C225	SM661726103	SM.01uF-NPO	C710	SM661207103	SM.01uFS
C226	SM661207103	SM.01uFS	C711	SM661207103	SM.01uFS
C227	SM661207103	SM.01uFS	C713	SM661207103	SM.01uFS
C228	SM661726103	SM.01uF-NPO	C714	SM661207103	SM.01uFS
C229	SM661726103	SM.01uF-NPO	C716	SM661207103	SM.01uFS
C230	SM661207103	SM.01uFS	C718	SM661207103	SM.01uFS
C231	SM666327225	SM2.2uF-20V	C719	SM661207103	SM.01uFS
C232	SM661726103	SM.01uF-NPO	C720	SM661207103	SM.01uFS
C233	SM661726103	SM.01uF-NPO	C721	SM661207103	SM.01uFS
C234	SM661207103	SM.01uFS	C722	SM661207103	SM.01uFS
C235	SM661207103	SM.01uFS	C723	SM661207103	SM.01uFS
C236	SM666327225	SM2.2uF-20V	C724	SM661207103	SM.01uFS
C237	SM661726103	SM.01uF-NPO	C725	SM661207103	SM.01uFS
C238	SM661726103	SM.01uF-NPO	C728	SM661207103	SM.01uFS
C239	SM661207103	SM.01uFS	C730	SM661207103	SM.01uFS
C240	SM666327225	SM2.2uF-20V	C732	SM661207103	SM.01uFS
C241	SM666327225	SM2.2uF-20V	C733	SM661255560	SM56pFS
C242	SM666327225	SM2.2uF-20V	C734	SM661207103	SM.01uFS
C255	SM666237476	SM47uF-6V	C735	SM661207103	SM.01uFS
C262	SM666387336	SM33uF-10V	C737	SM661207103	SM.01uFS
C263	SM661207103	SM.01uFS	C738	SM661207103	SM.01uFS
C265	SM661207103	SM.01uFS	C739	SM661207103	SM.01uFS
C266	SM666387336	SM33uF-10V	C744	SM661207103	SM.01uFS
C267	SM661207103	SM.01uFS	C745	SM661207103	SM.01uFS
C268	SM661207103	SM.01uFS	C752	SM661207103	SM.01uFS
C269	SM661207103	SM.01uFS	C753	SM661207103	SM.01uFS
C270	SM666327225	SM2.2uF-20V	C754	SM661207103	SM.01uFS
C271	SM661255102	SM1000pFS	C756	SM661207103	SM.01uFS
C272	SM661207103	SM.01uFS	C758	SM661255056	SM5.6pFS
C400	146574227	220uF-25VALRA	C760	SM661207103	SM.01uFS
C403	146554476	47uF-25VALRA	C761	SM661207103	SM.01uFS
C600	SM661207103	SM.01uFS	C765	SM661255101	SM100pFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C768	SM661207103	SM.01uFS	C831	SM661207103	SM.01uFS
C769	SM661207103	SM.01uFS	C832	SM666327225	SM2.2uF-20V
C770	SM661207103	SM.01uFS	C833	SM661207103	SM.01uFS
C771	SM661207103	SM.01uFS	C1001	SM661207104	SM.1uFS
C773	SM661207103	SM.01uFS	C1002	SM661207104	SM.1uFS
C774	SM661207103	SM.01uFS	C1003	SM158240203	SM5-18pF
C776	SM661207103	SM.01uFS	C1005	SM661207103	SM.01uFS
C777	SM661207103	SM.01uFS	C1006	SM661545150	SM15pFS_500V
C778	SM661446474	SM.47uF	C1007	SM661535620	SM62pFS_5%
C779	SM666327225	SM2.2uF-20V	C1008	SM661207103	SM.01uFS
C780	SM661207103	SM.01uFS	C1009	SM661207103	SM.01uFS
C781	SM661207103	SM.01uFS	C1010	SM661207103	SM.01uFS
C783	SM661207103	SM.01uFS	C1011	SM661207103	SM.01uFS
C784	SM661207103	SM.01uFS	C1012	SM661207103	SM.01uFS
C785	SM666327225	SM2.2uF-20V	C1013	SM661540033	SM3.3pFS_50C
C786	SM661446474	SM.47uF	C1014	SM661545150	SM15pFS_500V
C787	SM661207103	SM.01uFS	C1015	SM661255100	SM10pFS
C788	SM661207103	SM.01uFS	C1016	SM661255101	SM100pFS
C789	SM661207103	SM.01uFS	C1017	SM661526561	SM560pF_500V
C793	SM661207103	SM.01uFS	C1018	SM661255101	SM100pFS
C795	SM661207103	SM.01uFS	C1019	SM661207103	SM.01uFS
C797	SM661207103	SM.01uFS	C1021	SM661207103	SM.01uFS
C798	SM661207103	SM.01uFS	C1022	SM158240203	SM5-18pF
C799	SM661207103	SM.01uFS	C1024	SM661207103	SM.01uFS
C800	SM661207103	SM.01uFS	C1025	SM661207103	SM.01uFS
C801	SM661207103	SM.01uFS	C1026	SM661207103	SM.01uFS
C802	SM661207103	SM.01uFS	C1028	SM661255101	SM100pFS
C803	SM661207103	SM.01uFS	C1029	SM661207103	SM.01uFS
C805	SM661207103	SM.01uFS	C1030	SM661207103	SM.01uFS
C807	SM661207103	SM.01uFS	C1031	SM661207223	SM.022uFS
C809	SM661207103	SM.01uFS	C1032	SM661207223	SM.022uFS
C813	SM661207103	SM.01uFS	C1034	SM158240200	SM0.6-2.5pF
C820	SM661207103	SM.01uFS	C1035	SM661207103	SM.01uFS
C823	SM661207103	SM.01uFS	C1036	SM661207103	SM.01uFS
C824	SM661207103	SM.01uFS	C1038	SM661207103	SM.01uFS
C825	SM661207103	SM.01uFS	C1039	SM661207103	SM.01uFS
C826	SM661207103	SM.01uFS	C1041	SM661207103	SM.01uFS
C827	SM661207103	SM.01uFS	C1042	SM661255821	SM820pFS
C828	SM661207103	SM.01uFS	C1043	SM661207103	SM.01uFS
C829	SM661255180	SM18pFS	C1044	SM661255101	SM100pFS
C830	SM661207103	SM.01uFS	C1045	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C1046	SM661207103	SM.01uFS	C1502	SM158240200	SM0.6-2.5pF
C1047	SM661207103	SM.01uFS	C1503	SM158240200	SM0.6-2.5pF
C1048	SM661207103	SM.01uFS	C1504	SM661286103	SM.01uF
C1049	SM661255100	SM10pFS	C1505	SM661207103	SM.01uFS
C1050	SM661207103	SM.01uFS	C1506	SM661286103	SM.01uF
C1051	SM661207103	SM.01uFS	C1507	SM661286103	SM.01uF
C1052	SM661207103	SM.01uFS	C1508	SM661207103	SM.01uFS
C1053	SM661207103	SM.01uFS	C1509	SM661286103	SM.01uF
C1054	SM661207103	SM.01uFS	C1510	SM666257336	SM33uF-16V
C1055	SM661207103	SM.01uFS	C1511	SM661286103	SM.01uF
C1056	SM661207103	SM.01uFS	C1512	SM661207103	SM.01uFS
C1057	SM661207104	SM.1uFS	C1513	SM661286103	SM.01uF
C1058	SM661207103	SM.01uFS	C1514	SM661286103	SM.01uF
C1059	SM661207103	SM.01uFS	C1515	SM661207103	SM.01uFS
C1060	SM661207104	SM.1uFS	C1516	SM661286103	SM.01uF
C1061	SM661207103	SM.01uFS	C1517	SM661207103	SM.01uFS
C1062	SM661207103	SM.01uFS	C1518	SM661207103	SM.01uFS
C1063	SM661207104	SM.1uFS	C1520	SM661207103	SM.01uFS
C1065	SM666327225	SM2.2uF-20V	C1521	SM666257336	SM33uF-16V
C1066	SM661207103	SM.01uFS	C1522	SM666327225	SM2.2uF-20V
C1067	SM661207103	SM.01uFS	C1523	146574227	220uF-25VALRA
C1068	SM666327225	SM2.2uF-20V	C1530	SM661207104	SM.1uFS
C1069	SM666327225	SM2.2uF-20V	C1531	SM661207104	SM.1uFS
C1070	SM666327225	SM2.2uF-20V	C1532	SM661207104	SM.1uFS
C1071	SM666327225	SM2.2uF-20V	C1533	SM661207104	SM.1uFS
C1072	SM661207103	SM.01uFS	C1534	SM661207104	SM.1uFS
C1073	SM661207103	SM.01uFS	C1535	SM661207104	SM.1uFS
C1074	SM661207103	SM.01uFS	C1536	SM661207104	SM.1uFS
C1075	SM661207104	SM.1uFS	C1537	SM661207104	SM.1uFS
C1076	SM661207103	SM.01uFS	C1538	SM661207103	SM.01uFS
C1077	SM661207103	SM.01uFS	C1539	SM661207103	SM.01uFS
C1079	SM661207104	SM.1uFS	C1540	SM661207103	SM.01uFS
C1086	SM666327225	SM2.2uF-20V	C1541	SM661207103	SM.01uFS
C1087	SM661255101	SM100pFS	C1542	SM661207103	SM.01uFS
C1089	SM661207102	SM.001uFS	C1544	SM661207103	SM.01uFS
C1090	SM661207103	SM.01uFS	C1545	SM661207103	SM.01uFS
C1092	SM661207103	SM.01uFS	C1546	SM661207103	SM.01uFS
C1095	SM661207103	SM.01uFS	C1547	SM661207103	SM.01uFS
C1096	SM661207103	SM.01uFS	C1548	SM661207103	SM.01uFS
C1098	SM661256120	SM12pFS	C1549	SM661207104	SM.1uFS
C1099	SM661255470	SM47pFS	C1550	SM661207103	SM.01uFS
C1500	SM661207103	SM.01uFS	C1551	SM661207103	SM.01uFS
C1501	SM661207103	SM.01uFS	C1552	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C1553	SM661207104	SM.1uFS	C2011	SM661207103	SM.01uFS
C1554	SM661207103	SM.01uFS	C2012	SM661207103	SM.01uFS
C1556	SM661207104	SM.1uFS	C2013	SM661540033	SM3.3pFS_500V
C1557	SM661207104	SM.1uFS	C2014	SM661545150	SM15pFS_500V
C1558	SM661207104	SM.1uFS	C2015	SM661255100	SM10pFS
C1559	SM661207104	SM.1uFS	C2016	SM661255101	SM100pFS
C1560	SM661207104	SM.1uFS	C2017	SM661526561	SM560pF_500V
C1561	SM661207104	SM.1uFS	C2018	SM661255101	SM100pFS
C1562	SM661207104	SM.1uFS	C2019	SM661207103	SM.01uFS
C1563	SM661207104	SM.1uFS	C2021	SM661207103	SM.01uFS
C1564	SM666237476	SM47uF-6V	C2022	SM158240203	SM5-18pF
C1565	SM666237476	SM47uF-6V	C2024	SM661207103	SM.01uFS
C1566	SM666267227	SM220uF-10V	C2025	SM661207103	SM.01uFS
C1567	SM666267227	SM220uF-10V	C2026	SM661207103	SM.01uFS
C1568	SM661207104	SM.1uFS	C2028	SM661255101	SM100pFS
C1569	SM661207104	SM.1uFS	C2029	SM661207103	SM.01uFS
C1570	SM661207104	SM.1uFS	C2030	SM661207103	SM.01uFS
C1571	SM666267227	SM220uF-10V	C2031	SM661207223	SM.022uFS
C1572	SM661207104	SM.1uFS	C2032	SM661207223	SM.022uFS
C1573	SM661207104	SM.1uFS	C2034	SM158240200	SM0.6-2.5pF
C1574	SM661207104	SM.1uFS	C2035	SM661207103	SM.01uFS
C1575	SM661207103	SM.01uFS	C2036	SM661207103	SM.01uFS
C1576	SM661207104	SM.1uFS	C2038	SM661207103	SM.01uFS
C1577	SM661207104	SM.1uFS	C2039	SM661207103	SM.01uFS
C1578	SM661207103	SM.01uFS	C2041	SM661207103	SM.01uFS
C1580	SM661207103	SM.01uFS	C2042	SM661255821	SM820pFS
C1581	SM661207103	SM.01uFS	C2043	SM661207103	SM.01uFS
C1582	SM661207103	SM.01uFS	C2044	SM661255101	SM100pFS
C1583	SM661207104	SM.1uFS	C2045	SM661207103	SM.01uFS
C1584	SM661207103	SM.01uFS	C2046	SM661207103	SM.01uFS
C1600	SM661255039	SM3.9pFS	C2047	SM661207103	SM.01uFS
C1601	158849009	0.5-2.5pF	C2048	SM661207103	SM.01uFS
C1602	SM661207103	SM.01uFS	C2049	SM661255100	SM10pFS
C2001	SM661207104	SM.1uFS	C2050	SM661207103	SM.01uFS
C2002	SM661207104	SM.1uFS	C2051	SM661207103	SM.01uFS
C2003	SM158240203	SM5-18pF	C2052	SM661207103	SM.01uFS
C2005	SM661207103	SM.01uFS	C2053	SM661207103	SM.01uFS
C2006	SM661545150	SM15pFS_500V	C2054	SM661207103	SM.01uFS
C2007	SM661535620	SM62pFS_5%	C2055	SM661207103	SM.01uFS
C2008	SM661207103	SM.01uFS	C2056	SM661207103	SM.01uFS
C2009	SM661207103	SM.01uFS	C2057	SM661207104	SM.1uFS
C2010	SM661207103	SM.01uFS	C2058	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C2059	SM661207103	SM.01uFS	C2515	SM661286103	SM.01uF
C2060	SM661207104	SM.1uFS	C2516	SM661207103	SM.01uFS
C2061	SM661207103	SM.01uFS	C2517	SM661286103	SM.01uF
C2062	SM661207103	SM.01uFS	C2518	SM661286103	SM.01uF
C2063	SM661207104	SM.1uFS	C2519	SM661207103	SM.01uFS
C2065	SM666327225	SM2.2uF-20V	C2520	SM661286103	SM.01uF
C2066	SM661207103	SM.01uFS	C2521	SM661207103	SM.01uFS
C2067	SM661207103	SM.01uFS	C2522	SM661207103	SM.01uFS
C2068	SM666327225	SM2.2uF-20V	C2523	SM661286103	SM.01uF
C2069	SM666327225	SM2.2uF-20V	C2524	SM661286103	SM.01uF
C2070	SM666327225	SM2.2uF-20V	C2525	SM661207103	SM.01uFS
C2071	SM666327225	SM2.2uF-20V	C2526	SM661207103	SM.01uFS
C2072	SM661207103	SM.01uFS	C2527	SM661286103	SM.01uF
C2073	SM661207103	SM.01uFS	C2528	SM661286103	SM.01uF
C2074	SM661207103	SM.01uFS	C2529	SM661207104	SM.1uFS
C2075	SM661207104	SM.1uFS	C2530	SM661207104	SM.1uFS
C2076	SM661207103	SM.01uFS	C2531	SM661207104	SM.1uFS
C2077	SM661207103	SM.01uFS	C2532	SM661207104	SM.1uFS
C2079	SM661207104	SM.1uFS	C2533	SM661207103	SM.01uFS
C2086	SM666327225	SM2.2uF-20V	C2534	SM661207103	SM.01uFS
C2087	SM661255101	SM100pFS	C2535	SM661207103	SM.01uFS
C2089	SM661207102	SM.001uFS	C2536	SM661207103	SM.01uFS
C2090	SM661207103	SM.01uFS	C2537	SM661207103	SM.01uFS
C2092	SM661207103	SM.01uFS	C2538	SM661207103	SM.01uFS
C2095	SM661207103	SM.01uFS	C2540	SM661207103	SM.01uFS
C2096	SM661207103	SM.01uFS	C2541	SM661207104	SM.1uFS
C2098	SM661256120	SM12pFS	C2542	SM661207104	SM.1uFS
C2099	SM661255470	SM47pFS	C2543	SM661207104	SM.1uFS
C2500	SM661207103	SM.01uFS	C2544	SM661207104	SM.1uFS
C2501	SM661207103	SM.01uFS	C2545	SM661207103	SM.01uFS
C2502	SM158240200	SM0.6-2.5pF	C2546	SM661207103	SM.01uFS
C2503	SM661286103	SM.01uF	C2547	SM661286103	SM.01uF
C2504	SM661255102	SM1000pFS	C2548	SM661286103	SM.01uF
C2505	SM661207103	SM.01uFS	C2550	SM661286103	SM.01uF
C2506	SM661207103	SM.01uFS	C2551	SM661286103	SM.01uF
C2507	SM661286103	SM.01uF	C2552	SM661286103	SM.01uF
C2508	SM661255102	SM1000pFS	C2553	SM661286103	SM.01uF
C2509	SM661255102	SM1000pFS	C2554	SM661207103	SM.01uFS
C2510	SM661286103	SM.01uF	C2555	SM661207103	SM.01uFS
C2511	SM661207103	SM.01uFS	C2556	SM661207104	SM.1uFS
C2512	SM661207103	SM.01uFS	C2557	SM661207103	SM.01uFS
C2513	SM661286103	SM.01uF	C2558	SM661207103	SM.01uFS
C2514	SM661255102	SM1000pFS	C2559	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C2560	SM661207104	SM.1uFS	C3012	SM661207103	SM.01uFS
C2561	SM661207103	SM.01uFS	C3013	SM661540033	SM3.3pFS_500V
C2562	SM661207103	SM.01uFS	C3014	SM661545150	SM15pFS_500V
C2563	SM661207103	SM.01uFS	C3015	SM661255100	SM10pFS
C2564	SM661207104	SM.1uFS	C3016	SM661255101	SM100pFS
C2565	SM661207104	SM.1uFS	C3017	SM661526561	SM560pF_500V
C2566	SM661207104	SM.1uFS	C3018	SM661255101	SM100pFS
C2567	SM661207104	SM.1uFS	C3019	SM661207103	SM.01uFS
C2568	SM666237476	SM47uF-6V	C3021	SM661207103	SM.01uFS
C2569	SM666267227	SM220uF-10V	C3022	SM158240203	SM5-18pF
C2570	SM666267227	SM220uF-10V	C3024	SM661207103	SM.01uFS
C2571	SM666237476	SM47uF-6V	C3025	SM661207103	SM.01uFS
C2572	SM661207104	SM.1uFS	C3026	SM661207103	SM.01uFS
C2573	SM661207104	SM.1uFS	C3028	SM661255101	SM100pFS
C2574	SM661207104	SM.1uFSC2575	C3029	SM661207103	SM.01uFS
C2576	SM661207103	SM.01uFS	C3030	SM661207103	SM.01uFS
C2577	SM661207104	SM.1uFS	C3031	SM661207223	SM.022uFS
C2578	SM661207104	SM.1uFS	C3032	SM661207223	SM.022uFS
C2579	SM661207104	SM.1uFS	C3034	SM158240200	SM0.6-2.5pF
C2580	SM661207104	SM.1uFS	C3035	SM661207103	SM.01uFS
C2581	SM661207104	SM.1uFS	C3036	SM661207103	SM.01uFS
C2582	SM661207104	SM.1uFS	C3038	SM661207103	SM.01uFS
C2583	SM661207104	SM.1uFS	C3039	SM661207103	SM.01uFS
C2584	SM661207104	SM.1uFS	C3041	SM661207103	SM.01uFS
C2585	SM661207104	SM.1uFS	C3042	SM661255821	SM820pFS
C2586	SM661207103	SM.01uFS	C3043	SM661207103	SM.01uFS
C2588	SM661207103	SM.01uFS	C3044	SM661255101	SM100pFS
C2589	SM661207103	SM.01uFS	C3045	SM661207103	SM.01uFS
C2590	SM661207103	SM.01uFS	C3046	SM661207103	SM.01uFS
C2595	SM661286103	SM.01uF	C3047	SM661207103	SM.01uFS
C2600	SM661255039	SM3.9pFS	C3048	SM661207103	SM.01uFS
C2601	158849009	0.5-2.5pF	C3049	SM661255100	SM10pFS
C2602	SM661207103	SM.01uFS	C3050	SM661207103	SM.01uFS
C3001	SM661207104	SM.1uFS	C3051	SM661207103	SM.01uFS
C3002	SM661207104	SM.1uFS	C3052	SM661207103	SM.01uFS
C3003	SM158240203	SM5-18pF	C3053	SM661207103	SM.01uFS
C3005	SM661207103	SM.01uFS	C3054	SM661207103	SM.01uFS
C3006	SM661545150	SM15pFS_500V	C3055	SM661207103	SM.01uFS
C3007	SM661535620	SM62pFS_5%	C3056	SM661207103	SM.01uFS
C3008	SM661207103	SM.01uFS	C3057	SM661207104	SM.1uFS
C3009	SM661207103	SM.01uFS	C3058	SM661207103	SM.01uFS
C3010	SM661207103	SM.01uFS	C3059	SM661207103	SM.01uFS
C3011	SM661207103	SM.01uFS	C3060	SM661207104	SM.1uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C3061	SM661207103	SM.01uFS	C3518	146554476	47uF-25VALRA
C3062	SM661207103	SM.01uFS	C3519	146574227	220uF-25VALRA
C3063	SM661207104	SM.1uFS	C3520	SM661207103	SM.01uFS
C3065	SM666327225	SM2.2uF-20V	C3521	SM661286103	SM.01uF
C3066	SM661207103	SM.01uFS	C3522	SM661286103	SM.01uF
C3067	SM661207103	SM.01uFS	C3523	SM661207103	SM.01uFS
C3068	SM666327225	SM2.2uF-20V	C3524	SM661286103	SM.01uF
C3069	SM666327225	SM2.2uF-20V	C3525	SM661286103	SM.01uF
C3070	SM666327225	SM2.2uF-20V	C3526	SM661207103	SM.01uFS
C3071	SM666327225	SM2.2uF-20V	C3527	SM661286103	SM.01uF
C3072	SM661207103	SM.01uFS	C3528	SM661286103	SM.01uF
C3073	SM661207103	SM.01uFS	C3529	SM661207103	SM.01uFS
C3074	SM661207103	SM.01uFS	C3530	SM661207103	SM.01uFS
C3075	SM661207104	SM.1uFS	C3531	SM661207104	SM.1uFS
C3076	SM661207103	SM.01uFS	C3532	SM661207104	SM.1uFS
C3077	SM661207103	SM.01uFS	C3533	SM661207104	SM.1uFS
C3079	SM661207104	SM.1uFS	C3534	SM661207104	SM.1uFS
C3086	SM666327225	SM2.2uF-20V	C3535	SM661286103	SM.01uF
C3087	SM661255101	SM100pFS	C3536	SM661286103	SM.01uF
C3089	SM661207102	SM.001uFS	C3537	SM661286103	SM.01uF
C3090	SM661207103	SM.01uFS	C3538	SM661286103	SM.01uF
C3092	SM661207103	SM.01uFS	C3539	SM661207103	SM.01uFS
C3095	SM661207103	SM.01uFS	C3540	SM661207103	SM.01uFS
C3096	SM661207103	SM.01uFS	C3541	SM661207103	SM.01uFS
C3098	SM661256120	SM12pFS	C3543	SM661207103	SM.01uFS
C3099	SM661255470	SM47pFS	C3544	SM661207103	SM.01uFS
C3500	SM158240200	SM0.6-2.5pF	C3545	SM661207103	SM.01uFS
C3502	SM661286103	SM.01uF	C3546	SM661207104	SM.1uFS
C3503	SM661207103	SM.01uFS	C3547	SM661207104	SM.1uFS
C3504	SM661286103	SM.01uF	C3548	SM661207104	SM.1uFS
C3505	SM661286103	SM.01uF	C3549	SM661207104	SM.1uFS
C3506	SM661207103	SM.01uFS	C3550	SM661207103	SM.01uFS
C3507	SM661286103	SM.01uF	C3551	SM661207103	SM.01uFS
C3508	SM661286103	SM.01uF	C3552	SM661207103	SM.01uFS
C3509	SM661207103	SM.01uFS	C3553	SM661207103	SM.01uFS
C3510	SM661286103	SM.01uF	C3554	SM661207103	SM.01uFS
C3511	SM661286103	SM.01uF	C3555	SM661207103	SM.01uFS
C3512	SM661207103	SM.01uFS	C3556	SM661207103	SM.01uFS
C3513	SM661286103	SM.01uF	C3557	SM661207103	SM.01uFS
C3514	SM661207103	SM.01uFS	C3558	SM661207104	SM.1uFS
C3515	SM661286103	SM.01uF	C3559	SM661207103	SM.01uFS
C3516	SM661286103	SM.01uF	C3560	SM661207103	SM.01uFS
C3517	SM661207103	SM.01uFS	C3561	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C3562	SM661207104	SM.1uFS	C4009	SM661207103	SM.01uFS
C3563	SM661207104	SM.1uFS	C4010	SM661207103	SM.01uFS
C3564	SM661207104	SM.1uFS	C4011	SM661207103	SM.01uFS
C3565	SM661207104	SM.1uFS	C4012	SM661207103	SM.01uFS
C3566	SM661207104	SM.1uFS	C4013	SM661540033	SM3.3pFS_500V
C3567	SM666237476	SM47uF-6V	C4014	SM661545150	SM15pFS_500V
C3568	SM661207104	SM.1uFS	C4015	SM661255100	SM10pFS
C3569	SM661207104	SM.1uFS	C4016	SM661255101	SM100pFS
C3570	SM661207104	SM.1uFS	C4017	SM661526561	SM560pF_500V
C3571	SM661207104	SM.1uFS	C4018	SM661255101	SM100pFS
C3572	SM666237476	SM47uF-6V	C4019	SM661207103	SM.01uFS
C3573	SM666267227	SM220uF-10V	C4021	SM661207103	SM.01uFS
C3574	SM661207104	SM.1uFS	C4022	SM158240203	SM5-18pF
C3575	SM661207104	SM.1uFS	C4024	SM661207103	SM.01uFS
C3576	SM661207104	SM.1uFS	C4025	SM661207103	SM.01uFS
C3579	SM661207104	SM.1uFS	C4026	SM661207103	SM.01uFS
C3580	SM661207104	SM.1uFS	C4028	SM661255101	SM100pFS
C3581	SM661207104	SM.1uFS	C4029	SM661207103	SM.01uFS
C3582	SM666267227	SM220uF-10V	C4030	SM661207103	SM.01uFS
C3584	SM661207104	SM.1uFS	C4031	SM661207223	SM.022uFS
C3585	SM661207103	SM.01uFS	C4032	SM661207223	SM.022uFS
C3586	SM661207103	SM.01uFS	C4034	SM158240200	SM0.6-2.5pF
C3587	SM661207104	SM.1uFS	C4035	SM661207103	SM.01uFS
C3588	SM661207104	SM.1uFS	C4036	SM661207103	SM.01uFS
C3589	SM661207103	SM.01uFS	C4038	SM661207103	SM.01uFS
C3590	SM661207103	SM.01uFS	C4039	SM661207103	SM.01uFS
C3591	SM661207103	SM.01uFS	C4041	SM661207103	SM.01uFS
C3592	SM661207103	SM.01uFS	C4042	SM661255821	SM820pFS
C3593	SM661207103	SM.01uFS	C4043	SM661207103	SM.01uFS
C3600	SM661255039	SM3.9pFS	C4044	SM661255101	SM100pFS
C3601	158849009	0.5-2.5pF	C4045	SM661207103	SM.01uFS
C3602	SM661207103	SM.01uFS	C4046	SM661207103	SM.01uFS
C3610	SM661207103	SM.01uFS	C4047	SM661207103	SM.01uFS
C3620	SM158240200	SM0.6-2.5pF	C4048	SM661207103	SM.01uFS
C3621	SM158240200	SM0.6-2.5pF	C4049	SM661255100	SM10pFS
C4001	SM661207104	SM.1uFS	C4050	SM661207103	SM.01uFS
C4002	SM661207104	SM.1uFS	C4051	SM661207103	SM.01uFS
C4003	SM158240203	SM5-18pF	C4052	SM661207103	SM.01uFS
C4005	SM661207103	SM.01uFS	C4053	SM661207103	SM.01uFS
C4006	SM661545150	SM15pFS_500V	C4054	SM661207103	SM.01uFS
C4007	SM661535620	SM62pFS_5%	C4055	SM661207103	SM.01uFS
C4008	SM661207103	SM.01uFS	C4056	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C4057	SM661207104	SM.1uFS	C4515	SM661207104	SM.1uFS
C4058	SM661207103	SM.01uFS	C4516	SM661207104	SM.1uFS
C4059	SM661207103	SM.01uFS	C4517	SM661207104	SM.1uFS
C4060	SM661207104	SM.1uFS	C4518	SM661207104	SM.1uFS
C4061	SM661207103	SM.01uFS	C4519	SM661207104	SM.1uFS
C4062	SM661207103	SM.01uFS	C4520	SM661207104	SM.1uFS
C4063	SM661207104	SM.1uFS	C4521	SM661207104	SM.1uFS
C4065	SM666327225	SM2.2uF-20V	C4522	SM661207103	SM.01uFS
C4066	SM661207103	SM.01uFS	C4523	SM661207103	SM.01uFS
C4067	SM661207103	SM.01uFS	C4524	SM661207103	SM.01uFS
C4068	SM666327225	SM2.2uF-20V	C4526	SM661207103	SM.01uFS
C4069	SM666327225	SM2.2uF-20V	C4527	SM661207103	SM.01uFS
C4070	SM666327225	SM2.2uF-20V	C4528	SM661207103	SM.01uFS
C4071	SM666327225	SM2.2uF-20V	C4529	SM661207103	SM.01uFS
C4072	SM661207103	SM.01uFS	C4530	SM661207103	SM.01uFS
C4073	SM661207103	SM.01uFS	C4531	SM661207103	SM.01uFS
C4074	SM661207103	SM.01uFS	C4533	SM661207103	SM.01uFS
C4075	SM661207104	SM.1uFS	C4534	SM661207104	SM.1uFS
C4076	SM661207103	SM.01uFS	C4535	SM661207103	SM.01uFS
C4077	SM661207103	SM.01uFS	C4536	SM661207104	SM.1uFS
C4079	SM661207104	SM.1uFS	C4537	SM661207104	SM.1uFS
C4086	SM666327225	SM2.2uF-20V	C4538	SM661207103	SM.01uFS
C4087	SM661255101	SM100pFS	C4539	SM661207104	SM.1uFS
C4089	SM661207102	SM.001uFS	C4540	SM661207104	SM.1uFS
C4090	SM661207103	SM.01uFS	C4541	SM661207104	SM.1uFS
C4092	SM661207103	SM.01uFS	C4542	SM661207104	SM.1uFS
C4095	SM661207103	SM.01uFS	C4543	SM661207104	SM.1uFS
C4096	SM661207103	SM.01uFS	C4544	SM666237476	SM47uF-6V
C4098	SM661256120	SM12pFS	C4545	SM666267227	SM220uF-10V
C4099	SM661255470	SM47pFS	C4546	SM666237476	SM47uF-6V
C4500	SM661207103	SM.01uFS	C4547	SM661207104	SM.1uFS
C4501	SM661207103	SM.01uFS	C4548	SM661207104	SM.1uFS
C4502	SM661207103	SM.01uFS	C4549	SM661207104	SM.1uFS
C4504	SM661286103	SM.01uF	C4550	SM661207104	SM.1uFS
C4505	SM661255102	SM1000pFS	C4551	SM661207104	SM.1uFS
C4506	SM661207103	SM.01uFS	C4552	SM661207104	SM.1uFS
C4507	SM661286103	SM.01uF	C4553	SM661207104	SM.1uFS
C4508	SM661255102	SM1000pFS	C4554	SM661207104	SM.1uFS
C4509	SM661255102	SM1000pFS	C4555	SM661207104	SM.1uFS
C4510	SM661286103	SM.01uF	C4556	SM661207104	SM.1uFS
C4511	SM661207103	SM.01uFS	C4557	SM661207104	SM.1uFS
C4512	SM661286103	SM.01uF	C4558	SM661207103	SM.01uFS
C4513	SM661207104	SM.1uFS	C4559	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C4600	SM661255039	SM3.9pFS	C5034	SM661207103	SM.01uFS
C4601	158849009	0.5-2.5pF	C5035	SM666427105	SM1uF-16V
C4602	SM661207103	SM.01uFS	C5038	SM666427105	SM1uF-16V
C4603	SM661207103	SM.01uFS	C5039	SM661207103	SM.01uFS
C4604	SM661207103	SM.01uFS	C5040	SM661207103	SM.01uFS
C4606	SM661207103	SM.01uFS	C5041	SM661207103	SM.01uFS
C4610	SM661255102	SM1000pFS	C5042	SM661207103	SM.01uFS
C4611	SM661207103	SM.01uFS	C5043	SM661207103	SM.01uFS
C5000	SM661207104	SM.1uFS	C5044	SM661207103	SM.01uFS
C5001	SM661207104	SM.1uFS	C5045	SM661207103	SM.01uFS
C5002	SM661255010	SM1pFS	C5046	SM661207103	SM.01uFS
C5003	SM661207103	SM.01uFS	C5047	SM661207103	SM.01uFS
C5004	SM661207103	SM.01uFS	C5048	SM661207103	SM.01uFS
C5005	SM661540033	SM3.3pFS_500V	C5049	SM661205822	SM.0082uFS
C5006	SM661207103	SM.01uFS	C5050	SM661205822	SM.0082uFS
C5007	SM661207103	SM.01uFS	C5051	SM661255270	SM27pFS
C5008	SM661207103	SM.01uFS	C5052	SM661207103	SM.01uFS
C5009	SM661207103	SM.01uFS	C5053	SM661207103	SM.01uFS
C5010	SM661540033	SM3.3pFS_500V	C5054	SM661255270	SM27pFS
C5011	SM661207103	SM.01uFS	C5055	SM661207103	SM.01uFS
C5012	SM661526561	SM560pF_500V	C5056	SM661207103	SM.01uFS
C5013	SM661207103	SM.01uFS	C5057	SM666427105	SM1uF-16V
C5014	SM661207104	SM.1uFS	C5058	SM666427105	SM1uF-16V
C5015	SM661207103	SM.01uFS	C5059	SM661207103	SM.01uFS
C5016	SM661207103	SM.01uFS	C5060	SM661207103	SM.01uFS
C5017	SM661207103	SM.01uFS	C5061	SM661207103	SM.01uFS
C5018	SM661255821	SM820pFS	C5062	SM661207103	SM.01uFS
C5019	SM666327225	SM2.2uF-20V	C5063	SM661207103	SM.01uFS
C5020	SM661207104	SM.1uFS	C5064	SM661207103	SM.01uFS
C5021	SM661207103	SM.01uFS	C5065	SM661207103	SM.01uFS
C5022	SM661207103	SM.01uFS	C5066	SM661207103	SM.01uFS
C5023	SM661207103	SM.01uFS	C5067	SM661207103	SM.01uFS
C5024	SM661207103	SM.01uFS	C5068	SM661205822	SM.0082uFS
C5025	SM661207103	SM.01uFS	C5069	SM661207103	SM.01uFS
C5026	SM661207103	SM.01uFS	C5070	SM661205822	SM.0082uFS
C5027	SM661255220	SM22pFS	C5071	SM661207103	SM.01uFS
C5028	SM661255330	SM33pFS	C5072	SM661207103	SM.01uFS
C5029	SM661207103	SM.01uFS	C5073	SM661207103	SM.01uFS
C5030	SM661207103	SM.01uFS	C5074	SM666327225	SM2.2uF-20V
C5031	SM661545150	SM15pFS_500V	C5075	SM666327225	SM2.2uF-20V
C5032	SM661255270	SM27pFS	C5076	SM661255270	SM27pFS
C5033	SM661255270	SM27pFS	C5077	SM661207103	SM.01uFS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
C5078	SM661255101	SM100pFS	C7001	SM661207103	SM.01uFS
C5079	SM666427105	SM1uF-16V	C7002	SM661207103	SM.01uFS
C5083	SM661207104	SM.1uFS	C7003	SM661207103	SM.01uFS
C5084	SM661207103	SM.01uFS	C7004	SM661207103	SM.01uFS
C5085	SM661207103	SM.01uFS	C7005	SM661207103	SM.01uFS
C5086	SM661207103	SM.01uFS	C7006	SM661207103	SM.01uFS
C5087	SM661207103	SM.01uFS	C7007	SM661207103	SM.01uFS
C5088	SM661207103	SM.01uFS	C7008	SM661207103	SM.01uFS
C5089	SM661207103	SM.01uFS	C7009	SM661255102	SM1000pFS
C5090	SM661207103	SM.01uFS	C7013	SM661207103	SM.01uFS
C5091	SM661207103	SM.01uFS	CR1	SM236030099	BAV99
C5092	SM666327225	SM2.2uF-20V	CR2	SM232120070	BAV70
C5093	SM661205822	SM.0082uFS	CR30	SM236030099	BAV99
C5094	SM661207103	SM.01uFS	CR31	SM236030099	BAV99
C5095	SM666327225	SM2.2uF-20V	CR32	SM236030099	BAV99
C5096	SM661207103	SM.01uFS	CR33	SM236030099	BAV99
C5097	SM661207103	SM.01uFS	CR34	SM236030099	BAV99
C5098	SM661207103	SM.01uFS	CR35	SM236030099	BAV99
C5100	SM661207103	SM.01uFS	CR36	SM236030099	BAV99
C5101	SM661207103	SM.01uFS	CR37	SM236030099	BAV99
C5103	SM661207104	SM.1uFS	CR38	SM236030099	BAV99
C5104	SM661207104	SM.1uFS	CR39	SM236030099	BAV99
C5106	SM661207103	SM.01uFS	CR40	SM236030099	BAV99
C5107	SM661255100	SM10pFS	CR41	SM236030099	BAV99
C5108	SM661207103	SM.01uFS	CR42	SM236030099	BAV99
C5110	SM666377226	SM22uF-15V	CR100	SM253032823	HSMS2823
C5111	SM666377226	SM22uF-15V	CR200	SM240218451	BZX84-C5V1
C5112	SM661207103	SM.01uFS	CR201	SM240218475	BZX84-C7V5
C5113	SM661207103	SM.01uFS	CR202	SM240218475	BZX84-C7V5
C5114	SM661207103	SM.01uFS	CR207	SM208591336	SMLM336-5
C5115	SM661207103	SM.01uFS	CR400	SM236654004	SM4004
C5120	SM661255470	SM47pFS	CR401	SM236654004	SM4004
C5121	SM661255470	SM47pFS	CR700	SM240218451	BZX84-C5V1
C6000	146654107	100uF-35VALRA	CR701	SM236030099	BAV99
C6001	146654107	100uF-35VALRA	CR702	SM240218451	BZX84-C5V1
C6003	SM666327225	SM2.2uF-20V	CR703	SM240218451	BZX84-C5V1
C6004	SM661207103	SM.01uFS	CR704	SM240218451	BZX84-C5V1
C6005	SM661207103	SM.01uFS	CR705	235010005	1N4005
C6006	SM666327225	SM2.2uF-20V	CR707	SM252080682	BA682
C6007	SM661207103	SM.01uFS	CR708	SM252080682	BA682
C6008	SM661255102	SM1000pFS	CR710	SM252080682	BA682
C6009	SM661255056	SM5.6pFS	CR713	SM236030099	BAV99
C7000	SM661207103	SM.01uFS	CR716	SM236030099	BAV99

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
CR717	SM252080682	BA682	CR2010	SM240218462	BZX84-C6V2
CR718	SM252080682	BA682	CR2011	NOBZX84	NOBZX84
CR719	SM240218451	BZX84-C5V1	CR2500	SM236030099	BAV99
CR720	SM240218451	BZX84-C5V1	CR2501	SM236030099	BAV99
CR721	SM240218451	BZX84-C5V1	CR2502	SM236030099	BAV99
CR722	SM240218451	BZX84-C5V1	CR2503	SM236030099	BAV99
CR723	SM232022822	HSMS2822	CR2504	SM236030099	BAV99
CR724	SM236030099	BAV99	CR2505	SM236030099	BAV99
CR730	SM236030099	BAV99	CR2506	SM236030099	BAV99
CR731	SM236030099	BAV99	CR2507	SM236030099	BAV99
CR732	SM236030099	BAV99	CR2550	SM253032823	HSMS2823
CR733	SM236030099	BAV99	CR2551	SM253032823	HSMS2823
CR1000	SM229020150	SMTVSS-5V6	CR2552	SM253032823	HSMS2823
CR1001	SM236030099	BAV99	CR2553	SM253032823	HSMS2823
CR1003	SM236030099	BAV99	CR2554	SM253032823	HSMS2823
CR1004	NOBZX	NOBZX	CR2555	SM253032823	HSMS2823
CR1005	SM252023018	BAT18	CR2556	SM253032823	HSMS2823
CR1006	SM236030099	BAV99	CR2557	SM253032823	HSMS2823
CR1007	SM236030099	BAV99	CR2558	SM253032823	HSMS2823
CR1010	SM240218462	BZX84-C6V2	CR3000	SM229020150	SMTVSS-5V6
CR1011	NOBZX84	NOBZX84	CR3001	SM236030099	BAV99
CR1500	SM236030099	BAV99	CR3003	SM236030099	BAV99
CR1501	SM236030099	BAV99	CR3004	NOBZX	NOBZX
CR1502	SM236030099	BAV99	CR3005	SM252023018	BAT18
CR1503	SM236030099	BAV99	CR3006	SM236030099	BAV99
CR1504	SM236030099	BAV99	CR3007	SM236030099	BAV99
CR1505	SM236030099	BAV99	CR3010	SM240218462	BZX84-C6V2
CR1506	SM236030099	BAV99	CR3011	NOBZX84	NOBZX84
CR1507	SM236030099	BAV99	CR3500	SM236030099	BAV99
CR1550	SM236030099	BAV99	CR3501	SM236030099	BAV99
CR1551	SM240218451	BZX84-C5V1	CR3502	SM236030099	BAV99
CR1552	SM240218451	BZX84-C5V1	CR3503	SM236030099	BAV99
CR1553	SM240218451	BZX84-C5V1	CR3504	SM236030099	BAV99
CR1554	SM240218451	BZX84-C5V1	CR3505	SM236030099	BAV99
CR1555	SM240218451	BZX84-C5V1	CR3506	SM236030099	BAV99
CR2000	SM229020150	SMTVSS-5V6	CR3507	SM236030099	BAV99
CR2001	SM236030099	BAV99	CR3550	SM236030099	BAV99
CR2003	SM236030099	BAV99	CR3551	SM240218451	BZX84-C5V1
CR2004	NOBZX	NOBZX	CR3552	SM240218451	BZX84-C5V1
CR2005	SM252023018	BAT18	CR3553	SM240218451	BZX84-C5V1
CR2006	SM236030099	BAV99	CR3554	SM240218451	BZX84-C5V1
CR2007	SM236030099	BAV99	CR3556	SM240218451	BZX84-C5V1

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
CR4000	SM229020150	SMTVSS-5V6	J3	454390002	1x2-ST-M-PL
CR4001	SM236030099	BAV99	J4	454117003	1x3-ST-M-PL
CR4003	SM236030099	BAV99	J710	SM454120025	SM1x12-13-ST-
CR4004	NOBZX	NOBZX	J1000	7093XXP01	BNC-93XX-
CR4005	SM252023018	BAT18	J1500	454111024	4x6-ST-F-PF-
CR4006	SM236030099	BAV99	J1501	454111024	4x48-ST-F-PF-
CR4007	SM236030099	BAV99	J2000	7093XXP01	BNC-93XX
CR4010	SM240218462	BZX84-C6V2	J3000	7093XXP01	BNC-93XX-
CR4011	NOBZX84	NOBZX84	J3500	454111024	4x6-ST-F-PF-
CR4500	SM236030099	BAV99	J3501	454111024	4x48-ST-F-PF-
CR4501	SM236030099	BAV99	J4000	7093XXP01	BNC-93XX-
CR4502	SM236030099	BAV99	J6000	7093XXP01	BNC-93XX-
CR4503	SM236030099	BAV99	J6002	7093XXP01	BNC-93XX-
CR4504	SM236030099	BAV99	J100A	593910001	RG178B_U
CR4505	SM236030099	BAV99	J100B	593910001	RG178B_U
CR4506	SM236030099	BAV99	J10A	593910001	RG178B_U
CR4507	SM236030099	BAV99	J10B	593910001	RG178B_U
CR5000	SM229020150	SMTVSS-5V6	J200A	593910001	RG178B_U
CR5001	SM252023018	BAT18	J200B	593910001	RG178B_U
CR5002	SM232120070	BAV70	J2010A	593910001	RG178B_U
CR5003	SM236030099	BAV99	J2010B	593910001	RG178B_U
CR5004	SM240050033	TZMC3V3	J20A	593910001	RG178B_U
CR5005	SM240050033	TZMC3V3	J20B	593910001	RG178B_U
CR5006	SM240050033	TZMC3V3	J300A	593910001	RG178B_U
CR5007	SM240050033	TZMC3V3	J300B	593910001	RG178B_U
CR5008	NODIODE	NODIODE	J3010A	593910001	RG178B_U
CR5009	SM240050033	TZMC3V3	J3010B	593910001	RG178B_U
CR5010	SM232120070	BAV70	J40A	593910001	RG178B_U
CR5011	SM236030099	BAV99	J40B	593910001	RG178B_U
CR5012	SM236030099	BAV99	J50A	593910001	RG178B_U
CR6000	SM229020150	SMTVSS-5V6	J50B	593910001	RG178B_U
CR6001	SM253032823	HSMS2823	L201	SM301502001	SMBEAD1206
CR6002	SM232022822	HSMS2822	L202	SM301502001	SMBEAD1206
CR6003	SM240050051	TZMC5V1	L203	SM301502001	SMBEAD1206
CR6004	SM236030099	BAV99	L204	SM301502001	SMBEAD1206
DL30	290120005	5nS	L205	SM301502001	SMBEAD1206
DL700	290199015	DL-1L6-15	L206	SM301502001	SMBEAD1206
DL701	290199015	DL-1L6-15	L207	SM301502001	SMBEAD1206
DL705	290120009	9nS	L208	SM301502001	SMBEAD1206
DL712	NO-DELAY	NO-DELAY-5nS	L209	SM301502001	SMBEAD1206
DL770	290199020	DL-1L6-20	L700	SM300446150	SM.015uH
J1	454220096	3x32-ST-F-PF	L1000	SM301502001	SMBEAD1206
J2	454112024	2x12-ST	L1001	SM301502001	SMBEAD1206

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
L1002	SM301502001	SMBEAD1206	L4001	SM301502001	SMBEAD1206
L1003	SM301502001	SMBEAD1206	L4002	SM301502001	SMBEAD1206
L1004	SM301502001	SMBEAD1206	L4003	SM301502001	SMBEAD1206
L1010	SM669080181	SMBEAD0805	L4004	SM301502001	SMBEAD1206
L1011	SM669080181	SMBEAD0805	L4010	SM669080181	SMBEAD0805
L1020	SM669080181	SMBEAD0805	L4011	SM669080181	SMBEAD0805
L1021	SM669080181	SMBEAD0805	L4020	SM669080181	SMBEAD0805
L1022	SM669080181	SMBEAD0805	L4021	SM669080181	SMBEAD0805
L1023	SM669080181	SMBEAD0805	L4022	SM669080181	SMBEAD0805
L1024	SM669080181	SMBEAD0805	L4023	SM669080181	SMBEAD0805
L1025	SM669080181	SMBEAD0805	L4024	SM669080181	SMBEAD0805
L1026	SM669080181	SMBEAD0805	L4025	SM669080181	SMBEAD0805
L1500	SM301502001	SMBEAD1206	L4026	SM669080181	SMBEAD0805
L2000	SM301502001	SMBEAD1206	L5000	SM301502001	SMBEAD1206
L2001	SM301502001	SMBEAD1206	L5001	SM301502001	SMBEAD1206
L2002	SM301502001	SMBEAD1206	L5002	SM301502001	SMBEAD1206
L2003	SM301502001	SMBEAD1206	L5003	SM301502001	SMBEAD1206
L2004	SM301502001	SMBEAD1206	L6000	SM301502001	SMBEAD1206
L2010	SM669080181	SMBEAD0805	L6001	SM301502001	SMBEAD1206
L2011	SM669080181	SMBEAD0805	Q205	SM280171005	MTD10N05E
L2020	SM669080181	SMBEAD0805	Q206	SM280171005	MTD10N05E
L2021	SM669080181	SMBEAD0805	Q207	SM280171005	MTD10N05E
L2022	SM669080181	SMBEAD0805	Q700	SM275030092	BFT92
L2023	SM669080181	SMBEAD0805	Q701	SM270030020	BFS20
L2024	SM669080181	SMBEAD0805	Q702	SM207130025	BFT25A
L2025	SM669080181	SMBEAD0805	Q703	SM275330858	BC858C
L2026	SM669080181	SMBEAD0805	Q704	SM275330858	BC858C
L3000	SM301502001	SMBEAD1206	Q705	SM275030092	BFT92
L3001	SM301502001	SMBEAD1206	Q706	SM275030092	BFT92
L3002	SM301502001	SMBEAD1206	Q707	SM275030092	BFT92
L3003	SM301502001	SMBEAD1206	Q710	SM270130092	BFR92A
L3004	SM301502001	SMBEAD1206	Q711	SM270130092	BFR92A
L3010	SM669080181	SMBEAD0805	Q1000	SM270160520	BFG520X
L3011	SM669080181	SMBEAD0805	Q1001	SM280120416	MMBF4416
L3020	SM669080181	SMBEAD0805	Q1002	NOBFT93	NOBFT93
L3021	SM669080181	SMBEAD0805	Q1003	SM270160520	BFG520X
L3022	SM669080181	SMBEAD0805	Q1004	SM275030550	BF550
L3023	SM669080181	SMBEAD0805	Q1005	SM270160520	BFG520X
L3024	SM669080181	SMBEAD0805	Q1500	SM280171005	MTD10N05E
L3025	SM669080181	SMBEAD0805	Q2000	SM270160520	BFG520X
L3026	SM669080181	SMBEAD0805	Q2001	SM280120416	MMBF4416
L4000	SM301502001	SMBEAD1206	Q2002	SM275030093	BFT93

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
Q2003	SM270160520	BFG520X	R12	SM653101461	SM5.11KS
Q2004	SM275030550	BF550	R13	SM653101393	SM1.00KS
Q2005	SM270160520	BFG520X	R14	SM653101443	SM3.32KS
Q2500	SM275330858	BC858C	R15	SM653101443	SM3.32KS
Q2501	SM275330858	BC858C	R16	SM653101393	SM1.00KS
Q2502	SM275330858	BC858C	R17	SM653101393	SM1.00KS
Q2503	SM275330858	BC858C	R18	SM653101443	SM3.32KS
Q3000	SM270160520	BFG520X	R19	SM653101443	SM3.32KS
Q3001	SM280120416	MMBF4416	R20	SM653101393	SM1.00KS
Q3002	SM275030093	BFT93	R21	SM653101393	SM1.00KS
Q3003	SM270160520	BFG520X	R22	SM653101393	SM1.00KS
Q3004	SM275030550	BF550	R23	SM653101443	SM3.32KS
Q3005	SM270160520	BFG520X	R24	SM653101393	SM1.00KS
Q4000	SM270160520	BFG520X	R25	SM653101393	SM1.00KS
Q4001	SM280120416	MMBF4416	R26	SM653101439	SM3.01KS
Q4002	NOBFT93	NOBFT93	R27	SM653101443	SM3.32KS
Q4003	SM270160520	BFG520X	R28	SM653101393	SM1.00KS
Q4004	SM275030550	BF550	R29	SM653101489	SM10.0KS
Q4005	SM270160520	BFG520X	R31	SM654101000	SM0S
Q4500	SM275330858	BC858C	R32	SM653101393	SM1.00KS
Q4501	SM275330858	BC858C	R33	SM653101393	SM1.00KS
Q4502	SM275330858	BC858C	R34	SM653101489	SM10.0KS
Q4503	SM275330858	BC858C	R35	SM653101393	SM1.00KS
Q5000	SM270130092	BFR92A	R36	SM653101393	SM1.00KS
Q5001	SM280120416	MMBF4416	R37	SM653101234	SM22.1S
Q5002	SM270130093	BFR93A	R38	SM653101489	SM10.0KS
Q5003	SM270160520	BFG520X	R39	SM653101234	SM22.1S
Q6000	SM270130093	BFR93A	R40	SM653101234	SM22.1S
Q6001	SM275030550	BF550	R41	SM653101234	SM22.1S
Q6002	SM270130092	BFR92A	R42	SM653101281	SM68.1S
Q6003	SM270130093	BFR93A	R43	SM653101281	SM68.1S
Q6004	SM275030550	BF550	R44	SM653101281	SM68.1S
R1	SM653101489	SM10.0KS	R45	SM653101393	SM1.00KS
R2	SM653101489	SM10.0KS	R46	SM653101489	SM10.0KS
R3	SM653101489	SM10.0KS	R47	SM653101489	SM10.0KS
R4	SM653101489	SM10.0KS	R48	SM653101489	SM10.0KS
R5	SM653101489	SM10.0KS	R49	SM653101489	SM10.0KS
R6	SM653101489	SM10.0KS	R52	SM652115062	SM6.2-1W
R7	SM653101489	SM10.0KS	R54	SM653101489	SM10.0KS
R8	169416473	NTC-DISC-47K	R56	SM653101201	SM10.0S
R9	SM653101522	SM22.1KS	R57	SM653101401	SM1.21KS
R10	SM653101489	SM10.0KS	R58	SM653101234	SM22.1S
R11	SM653101489	SM10.0KS	R59	SM654101000	SM0S-B2P

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R60	SM654101000	SM0S-B2P	R280	SM653101393	SM1.00KS
R61	SM654101000	SM0S-B2P	R281	SM653101393	SM1.00KS
R130	SM653101289	SM82.5S	R500	SM653101489	SM10.0KS
R200	SM653101489	SM10.0KS	R501	SM653101489	SM10.0KS
R201	SM653101401	SM1.21KS	R502	SM653101489	SM10.0KS
R205	SM653101393	SM1.00KS	R503	SM653101489	SM10.0KS
R206	SM653101443	SM3.32KS	R504	SM653101489	SM10.0KS
R207	SM653101673	SM825.0KS	R505	SM653101489	SM10.0KS
R211	SM653101531	SM27.4KS	R506	SM653101489	SM10.0KS
R212	SM653101410	SM1.50KS	R507	SM653101489	SM10.0KS
R213	SM653101465	SM5.62KS	R510	SM653101489	SM10.0KS
R214	SM653101489	SM10.0KS	R511	SM653101489	SM10.0KS
R215	SM653101489	SM10.0KS	R512	SM653101489	SM10.0KS
R216	SM653101489	SM10.0KS	R513	SM653101489	SM10.0KS
R217	SM653101489	SM10.0KS	R521	SM653101354	SM392.0S
R218	SM653101489	SM10.0KS	R522	SM653101269	SM51.1S
R219	SM653101489	SM10.0KS	R523	SM653101281	SM68.1S
R220	SM653101489	SM10.0KS	R530	SM653101489	SM10.0KS
R221	SM653101489	SM10.0KS	R531	SM653101489	SM10.0KS
R222	SM653101489	SM10.0KS	R532	SM653101489	SM10.0KS
R223	SM653101489	SM10.0KS	R533	SM653101489	SM10.0KS
R224	SM653101489	SM10.0KS	R534	SM653101489	SM10.0KS
R225	SM653101489	SM10.0KS	R535	SM653101489	SM10.0KS
R226	SM653101489	SM10.0KS	R536	SM653101489	SM10.0KS
R231	SM653101269	SM51.1S	R537	SM653101489	SM10.0KS
R233	SM653101489	SM10.0KS	R540	SM654101000	SM0S-2P
R234	SM653101489	SM10.0KS	R541	SM654101000	SM0S-2P
R247	SM653101269	SM51.1S	R600	SM653101305	SM121.0S
R252	SM653101269	SM51.1S	R601	SM653101322	SM182.0S
R254	SM653101269	SM51.1S	R602	SM653101322	SM182.0S
R260	SM653101393	SM1.00KS	R603	SM653101305	SM121.0S
R262	SM653101393	SM1.00KS	R604	SM653101339	SM274.0S
R263	SM653101393	SM1.00KS	R605	SM653101305	SM121.0S
R264	SM653101393	SM1.00KS	R606	SM653101322	SM182.0S
R265	SM653101393	SM1.00KS	R607	SM653101397	SM1.10KS
R266	SM653101393	SM1.00KS	R608	SM653101393	SM1.00KS
R267	SM654101000	SM0S	R609	SM653101397	SM1.10KS
R269	SM653101393	SM1.00KS	R610	SM653101393	SM1.00KS
R270	SM653101297	SM100.0S	R611	SM653101289	SM82.5S
R271	SM653101297	SM100.0S	R612	SM653101281	SM68.1S
R272	SM653101297	SM100.0S	R614	SM653101322	SM182.0S
R273	SM653101297	SM100.0S	R615	SM653101322	SM182.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R616	SM653101305	SM121.0S	R745	SM653101362	SM475.0S
R617	SM653101305	SM121.0S	R746	SM653101362	SM475.0S
R618	SM653101322	SM182.0S	R747	SM653101362	SM475.0S
R619	SM653101305	SM121.0S	R748	SM653101362	SM475.0S
R620	SM653101281	SM68.1S	R749	SM653101322	SM182.0S
R621	SM653101305	SM121.0S	R750	SM653101322	SM182.0S
R622	SM653101322	SM182.0S	R751	SM653101322	SM182.0S
R624	SM653101322	SM182.0S	R752	SM653101322	SM182.0S
R625	SM653101305	SM121.0S	R753	SM653101305	SM121.0S
R626	SM653101305	SM121.0S	R754	SM653101305	SM121.0S
R627	SM653101322	SM182.0S	R755	SM653101322	SM182.0S
R628	SM653101322	SM182.0S	R756	SM653101322	SM182.0S
R629	SM653101305	SM121.0S	R757	SM653101322	SM182.0S
R630	SM653101305	SM121.0S	R758	SM653101322	SM182.0S
R631	SM653101322	SM182.0S	R759	SM653101297	SM100.0S
R632	SM653101305	SM121.0S	R760	SM653101393	SM1.00KS
R633	SM653101322	SM182.0S	R761	SM653101393	SM1.00KS
R634	SM653101305	SM121.0S	R762	SM653101326	SM200.0S
R635	SM653101322	SM182.0S	R763	SM653101326	SM200.0S
R636	SM653101322	SM182.0S	R764	SM653101269	SM51.1S
R638	SM653101305	SM121.0S	R765	SM653101354	SM392.0S
R640	SM653101351	SM365.0S	R766	SM653101362	SM475.0S
R641	SM653101362	SM475.0S	R767	SM653101281	SM68.1S
R642	SM653101362	SM475.0S	R768	SM653101322	SM182.0S
R643	SM653101326	SM200.0S	R769	SM653101322	SM182.0S
R645	SM653101289	SM82.5S	R770	SM653101322	SM182.0S
R646	SM653101362	SM475.0S	R771	SM653101322	SM182.0S
R650	SM653101305	SM121.0S	R772	SM653101305	SM121.0S
R651	SM653101322	SM182.0S	R773	SM653101461	SM5.11KS
R660	SM653101281	SM68.1S	R775	SM653101322	SM182.0S
R661	SM653101362	SM475.0S	R776	SM653101322	SM182.0S
R662	SM653101322	SM182.0S	R777	SM653101362	SM475.0S
R663	SM653101362	SM475.0S	R778	SM653101322	SM182.0S
R664	SM653101362	SM475.0S	R779	SM653101305	SM121.0S
R665	SM653101269	SM51.1S	R781	SM653101322	SM182.0S
R666	SM653101269	SM51.1S	R782	SM653101322	SM182.0S
R667	SM653101269	SM51.1S	R783	SM653101297	SM100.0S
R668	SM653101269	SM51.1S	R784	SM653101234	SM22.1S
R669	SM653101269	SM51.1S	R785	SM653101234	SM22.1S
R670	SM653101269	SM51.1S	R786	SM653101305	SM121.0S
R671	SM653101269	SM51.1S	R787	SM653101305	SM121.0S
R672	SM653101269	SM51.1S	R788	SM653101297	SM100.0S
R673	SM653101397	SM1.10KS	R789	SM653101234	SM22.1S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R790	SM653101322	SM182.0S	R867	SM653101269	SM51.1S
R791	SM653101305	SM121.0S	R869	SM653101322	SM182.0S
R792	SM653101322	SM182.0S	R872	SM653101489	SM10.0KS
R793	SM653101322	SM182.0S	R873	SM653101269	SM51.1S
R794	SM653101305	SM121.0S	R879	SM651104204	SM200K-25PPM
R795	SM653101234	SM22.1S	R880	SM653101381	SM750.0S
R797	SM653101305	SM121.0S	R881	SM653101410	SM1.50KS
R799	SM653101322	SM182.0S	R882	SM653101297	SM100.0S
R800	SM653101322	SM182.0S	R883	SM653101297	SM100.0S
R801	SM653101322	SM182.0S	R886	SM653101297	SM100.0S
R802	SM653101322	SM182.0S	R890	SM653101393	SM1.00KS
R803	SM653101305	SM121.0S	R891	SM653101410	SM1.50KS
R804	SM653101322	SM182.0S	R892	SM653101308	SM130.0S
R805	SM653101322	SM182.0S	R893	SM653101339	SM274.0S
R806	SM653101305	SM121.0S	R894	SM653101297	SM100.0S
R807	SM653101322	SM182.0S	R897	SM653101393	SM1.00KS
R808	SM653101308	SM130.0S	R898	SM651104241	SM240-25PPM
R809	SM653101322	SM182.0S	R899	SM651104392	SM3.9K-25PPM
R812	SM653101362	SM475.0S	R900	SM653101297	SM100.0S
R820	SM653101322	SM182.0S	R901	SM653101381	SM750.0S
R821	SM653101422	SM2.00KS	R902	SM653101381	SM750.0S
R822	SM653101281	SM68.1S	R903	SM653101393	SM1.00KS
R823	SM653101281	SM68.1S	R904	SM653101393	SM1.00KS
R824	SM653101322	SM182.0S	R905	SM651104183	SM18K-25PPM
R832	SM653101322	SM182.0S	R906	SM651104182	SM1.8K-25PPM
R833	SM653101322	SM182.0S	R907	SM653101339	SM274.0S
R834	SM653101385	SM825.0S	R908	SM185457201	SM200-1T
R835	SM653101351	SM365.0S	R909	SM653101322	SM182.0S
R845	SM653101322	SM182.0S	R910	SM653101322	SM182.0S
R847	SM653101393	SM1.00KS	R911	SM653101322	SM182.0S
R848	SM653101393	SM1.00KS	R912	SM653101322	SM182.0S
R849	SM653101305	SM121.0S	R913	SM653101285	SM75.0S
R850	SM653101362	SM475.0S	R914	SM653101269	SM51.1S
R851	SM653101393	SM1.00KS	R915	SM653101339	SM274.0S
R852	SM653101393	SM1.00KS	R916	SM653101330	SM221.0S
R855	SM653101362	SM475.0S	R918	SM653101343	SM301.0S
R857	SM653101269	SM51.1S	R919	SM653101354	SM392.0S
R858	SM653101489	SM10.0KS	R923	SM653101285	SM75.0S
R859	SM653101269	SM51.1S	R924	SM653101234	SM22.1S
R864	SM653101362	SM475.0S	R925	SM653101234	SM22.1S
R865	SM653101461	SM5.11KS	R929	SM653101489	SM10.0KS
R866	SM653101465	SM5.62KS	R935	SM653101322	SM182.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R936	SM653101322	SM182.0S	R1020	SM653101269	SM51.1S
R945	SM653101461	SM5.11KS	R1021	SM653101297	SM100.0S
R946	SM653101465	SM5.62KS	R1023	SM653101326	SM200.0S
R947	SM653101322	SM182.0S	R1024	SM654101000	SM0S
R948	SM653101322	SM182.0S	R1025	SM653101638	SM357.0KS
R950	SM653101330	SM221.0S	R1026	SM654101000	SM0S
R951	SM653101330	SM221.0S	R1027	SM653101418	SM1.82KS
R952	SM653101330	SM221.0S	R1028	SM653101639	SM365.0KS
R953	SM653101330	SM221.0S	R1029	SM653185107	SM100.0MS
R954	SM653101330	SM221.0S	R1031	SM653101639	SM365.0KS
R955	SM653101330	SM221.0S	R1032	SM653101638	SM357.0KS
R956	SM653101330	SM221.0S	R1034	SM653101393	SM1.00KS
R957	SM653101330	SM221.0S	R1036	SM653101642	SM392.0KS
R958	SM653101330	SM221.0S	R1037	SM653101642	SM392.0KS
R959	SM653101330	SM221.0S	R1038	SM185457503	SM50K-1T
R960	SM653101362	SM475.0S	R1040	SM653101458	SM4.75KS
R974	SM653101362	SM475.0S	R1042	SM653101681	SM1.00MS
R981	SM653101362	SM475.0S	R1043	SM653101681	SM1.00MS
R982	SM653101362	SM475.0S	R1046	SM653101343	SM301.0S
R983	SM653101269	SM51.1S	R1047	SM653101393	SM1.00KS
R984	SM653101354	SM392.0S	R1048	SM653101489	SM10.0KS
R987	SM653101322	SM182.0S	R1049	SM653101557	SM51.1KS
R990	SM653101461	SM5.11KS	R1050	SM653101347	SM332.0S
R991	SM653101465	SM5.62KS	R1051	SM652061820	SM82-0603
R1000	168909001	900.0K-.1%500V	R1052	SM653101422	SM2.00KS
R1001	SM653101251	SM33.2S	R1053	SM653101461	SM5.11KS
R1002	SM653101343	SM301.0S	R1054	SM654101000	SM0S
R1003	SM652061024	SM2.4-0603	R1055	SM653101354	SM392.0S
R1004	SM653101251	SM33.2S	R1056	SM653101269	SM51.1S
R1005	SM653101234	SM22.1S	R1057	SM653101308	SM130.0S
R1006	SM653101489	SM10.0KS	R1058	SM653101489	SM10.0KS
R1007	SM653101358	SM432.0S	R1059	SM653101289	SM82.5S
R1008	SM653101489	SM10.0KS	R1060	SM653101489	SM10.0KS
R1009	SM653101401	SM1.21KS	R1061	SM653101443	SM3.32KS
R1010	SM653101273	SM56.2S	R1062	SM653101269	SM51.1S
R1011	SM652181590	SM113K-50PPM	R1063	SM653101443	SM3.32KS
R1012	SM168651315	SM154-1%	R1065	SM653101416	SM1.74KS
R1013	SM168651315	SM154-1%	R1066	SM185457201	SM200-1T
R1015	SM653101347	SM332.0S	R1067	SM653101365	SM511.0S
R1016	168909001	900.0K-.1%500V	R1068	SM653101443	SM3.32KS
R1017	SM652181590	SM113K-50PPM	R1069	SM653101373	SM619.0S
R1018	SM653101269	SM51.1S	R1070	SM653101358	SM432.0S
R1019	SM653101269	SM51.1S	R1071	SM653101358	SM432.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R1072	SM651104392	SM3.9K-25PPM	R1508	SM653101297	SM100.0S
R1073	SM653101461	SM5.11KS	R1509	SM653101489	SM10.0KS
R1074	SM653101461	SM5.11KS	R1510	SM653101489	SM10.0KS
R1075	SM653101461	SM5.11KS	R1511	SM653101297	SM100.0S
R1076	SM168651315	SM154-1/oo	R1512	SM653101489	SM10.0KS
R1078	SM653101602	SM150.0KS	R1513	SM653101297	SM100.0S
R1079	SM653101489	SM10.0KS	R1514	SM654101000	SM0S
R1080	SM653101569	SM68.1KS	R1515	SM653101393	SM1.00KS
R1081	SM653101458	SM4.75KS	R1516	SM653101393	SM1.00KS
R1082	SM653101461	SM5.11KS	R1517	SM653101393	SM1.00KS
R1083	SM653101393	SM1.00KS	R1518	SM653101393	SM1.00KS
R1084	SM653101614	SM200.0KS	R1519	SM653101489	SM10.0KS
R1085	SM653101393	SM1.00KS	R1520	SM653101393	SM1.00KS
R1086	SM653101393	SM1.00KS	R1529	SM653101393	SM1.00KS
R1087	SM653101393	SM1.00KS	R1530	SM653101393	SM1.00KS
R1088	SM653101393	SM1.00KS	R1531	SM653101393	SM1.00KS
R1089	SM653101393	SM1.00KS	R1532	SM653101393	SM1.00KS
R1092	SM653101334	SM243.0S	R1533	SM653101393	SM1.00KS
R1095	SM653101481	SM8.25KS	R1534	SM653101285	SM75.0S
R1097	SM653101358	SM432.0S	R1535	SM653101285	SM75.0S
R1099	SM654101000	SM0S-B2P	R1536	SM653101326	SM200.0S
R1100	SM654101000	SM0S-B2P	R1537	SM653101281	SM68.1S
R1101	SM654101000	SM0S	R1538	SM653101281	SM68.1S
R1102	SM654101000	SM0S	R1539	SM653101326	SM200.0S
R1103	SM653101334	SM243.0S	R1540	SM653101281	SM68.1S
R1105	SM653101418	SM1.82KS	R1542	SM653101326	SM200.0S
R1106	SM653101285	SM75.0S	R1543	SM653101281	SM68.1S
R1150	SM653101347	SM332.0S	R1544	SM653101326	SM200.0S
R1151	SM185657201	SM200-3313	R1549	SM653101305	SM121.0S
R1200	SM653101489	SM10.0KS	R1550	SM653101322	SM182.0S
R1201	SM185657500	SM500-3313	R1551	SM653101305	SM121.0S
R1202	SM653101269	SM51.1S	R1553	SM653101322	SM182.0S
R1203	SM185657500	SM500-3313	R1554	SM653101305	SM121.0S
R1204	SM652061181	SM180-0603	R1555	SM653101322	SM182.0S
R1500	SM653101269	SM51.1S	R1556	SM653101322	SM182.0S
R1501	SM653101269	SM51.1S	R1558	SM653101322	SM182.0S
R1502	SM653101393	SM1.00KS	R1559	SM653101305	SM121.0S
R1503	SM653101393	SM1.00KS	R1561	SM653101322	SM182.0S
R1504	SM653101393	SM1.00KS	R1563	SM653101305	SM121.0S
R1505	SM653101393	SM1.00KS	R1564	SM653101322	SM182.0S
R1506	SM653101297	SM100.0S	R1565	SM653101305	SM121.0S
R1507	SM653101489	SM10.0KS	R1566	SM653101305	SM121.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R1567	SM653101305	SM121.0S	R1805	SM653101273	SM56.2S
R1568	SM653101322	SM182.0S	R1806	SM653101273	SM56.2S
R1569	SM653101326	SM200.0S	R1807	SM653101308	SM130.0S
R1570	SM653101326	SM200.0S	R1808	SM653101308	SM130.0S
R1571	SM653101326	SM200.0S	R1810	SM653101281	SM68.1S
R1572	SM653101326	SM200.0S	R1811	SM653101281	SM68.1S
R1573	SM653101281	SM68.1S	R1820	SM653101308	SM130.0S
R1574	SM653101281	SM68.1S	R1821	SM653101314	SM150.0S
R1575	SM653101281	SM68.1S	R1822	SM653101314	SM150.0S
R1576	SM653101281	SM68.1S	R1823	SM653101281	SM68.1S
R1577	SM653101314	SM150.0S	R1824	SM653101281	SM68.1S
R1578	SM653101314	SM150.0S	R1825	SM653101314	SM150.0S
R1579	SM653101314	SM150.0S	R1826	SM653101314	SM150.0S
R1580	SM653101314	SM150.0S	R1827	SM653101308	SM130.0S
R1581	SM653101281	SM68.1S	R2000	168909001	900.0K-.1%500V
R1582	SM653101281	SM68.1S	R2001	SM653101251	SM33.2S
R1583	SM653101281	SM68.1S	R2002	SM653101343	SM301.0S
R1584	SM653101281	SM68.1S	R2003	SM652061024	SM2.4-0603
R1585	SM653101269	SM51.1S	R2004	SM653101251	SM33.2S
R1586	SM653101269	SM51.1S	R2005	SM653101234	SM22.1S
R1589	SM653101322	SM182.0S	R2006	SM653101489	SM10.0KS
R1590	SM653101322	SM182.0S	R2007	SM653101358	SM432.0S
R1591	SM653101269	SM51.1S	R2008	SM653101489	SM10.0KS
R1592	SM653101269	SM51.1S	R2009	SM653101401	SM1.21KS
R1593	SM653101322	SM182.0S	R2010	SM653101273	SM56.2S
R1594	SM653101322	SM182.0S	R2011	SM652181590	SM113K-50PPM
R1599	SM653101322	SM182.0S	R2012	SM168651315	SM154-1%
R1600	SM653101305	SM121.0S	R2013	SM168651315	SM154-1%
R1601	SM653101322	SM182.0S	R2015	SM653101347	SM332.0S
R1602	SM653101305	SM121.0S	R2016	168909001	900.0K-.1%500V
R1610	SM185457501	SM500-1T	R2017	SM652181590	SM113K-50PPM
R1611	SM185457501	SM500-1T	R2018	SM653101269	SM51.1S
R1700	SM653101305	SM121.0S	R2019	SM653101269	SM51.1S
R1701	SM653101305	SM121.0S	R2020	SM653101269	SM51.1S
R1702	SM653101322	SM182.0S	R2021	SM653101297	SM100.0S
R1703	SM653101322	SM182.0S	R2023	SM653101326	SM200.0S
R1704	SM653101281	SM68.1S	R2024	SM654101000	SM0S
R1705	SM653101281	SM68.1S	R2025	SM653101638	SM357.0KS
R1800	SM653101308	SM130.0S	R2026	SM654101000	SM0S
R1801	SM653101322	SM182.0S	R2027	SM653101418	SM1.82KS
R1802	SM653101322	SM182.0S	R2028	SM653101639	SM365.0KS
R1803	SM653101273	SM56.2S	R2029	SM653185107	SM100.0MS
R1804	SM653101273	SM56.2S	R2031	SM653101639	SM365.0KS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R2032	SM653101638	SM357.0KS	R2079	SM653101489	SM10.0KS
R2034	SM653101393	SM1.00KS	R2080	SM653101569	SM68.1KS
R2035	SM653101281	SM68.1S	R2081	SM653101458	SM4.75KS
R2036	SM653101642	SM392.0KS	R2082	SM653101461	SM5.11KS
R2037	SM653101642	SM392.0KS	R2083	SM653101393	SM1.00KS
R2038	SM185457503	SM50K-1T	R2084	SM653101614	SM200.0KS
R2039	SM653101251	SM33.2S	R2085	SM653101393	SM1.00KS
R2040	SM653101458	SM4.75KS	R2086	SM653101393	SM1.00KS
R2042	SM653101681	SM1.00MS	R2087	SM653101393	SM1.00KS
R2043	SM653101681	SM1.00MS	R2088	SM653101393	SM1.00KS
R2044	SM653101201	SM10.0S	R2089	SM653101393	SM1.00KS
R2046	SM653101343	SM301.0S	R2092	SM653101334	SM243.0S
R2047	SM653101393	SM1.00KS	R2095	SM653101481	SM8.25KS
R2048	SM653101489	SM10.0KS	R2097	SM653101358	SM432.0S
R2049	SM653101557	SM51.1KS	R2099	SM654101000	SM0S-B2P
R2050	SM653101347	SM332.0S	R2100	SM654101000	SM0S-B2P
R2051	SM652061820	SM82-0603	R2101	SM654101000	SM0S
R2052	SM653101422	SM2.00KS	R2102	SM654101000	SM0S
R2053	SM653101461	SM5.11KS	R2103	SM653101334	SM243.0S
R2054	SM654101000	SM0S	R2105	SM653101418	SM1.82KS
R2055	SM653101354	SM392.0S	R2106	SM653101285	SM75.0S
R2056	SM653101269	SM51.1S	R2150	SM653101347	SM332.0S
R2057	SM653101308	SM130.0S	R2151	SM185657201	SM200-3313
R2058	SM653101489	SM10.0KS	R2200	SM653101489	SM10.0KS
R2059	SM653101289	SM82.5S	R2201	SM185657500	SM500-3313
R2060	SM653101489	SM10.0KS	R2202	SM653101269	SM51.1S
R2061	SM653101443	SM3.32KS	R2203	SM185657500	SM500-3313
R2062	SM653101269	SM51.1S	R2204	SM652061181	SM180-0603
R2063	SM653101443	SM3.32KS	R2500	SM653101269	SM51.1S
R2065	SM653101416	SM1.74KS	R2501	SM653101269	SM51.1S
R2066	SM185457201	SM200-1T	R2502	SM653101489	SM10.0KS
R2067	SM653101365	SM511.0S	R2503	SM653101251	SM33.2S
R2068	SM653101443	SM3.32KS	R2504	SM653101251	SM33.2S
R2069	SM653101373	SM619.0S	R2505	SM653101489	SM10.0KS
R2070	SM653101358	SM432.0S	R2506	SM653101489	SM10.0KS
R2071	SM653101358	SM432.0S	R2507	SM653101489	SM10.0KS
R2072	SM651104392	SM3.9K-25PPM	R2508	SM653101489	SM10.0KS
R2073	SM653101461	SM5.11KS	R2509	SM653101489	SM10.0KS
R2074	SM653101461	SM5.11KS	R2510	SM653101489	SM10.0KS
R2075	SM653101461	SM5.11KS	R2511	SM653101489	SM10.0KS
R2076	SM168651315	SM154-1/oo	R2512	SM653101251	SM33.2S
R2078	SM653101602	SM150.0KS	R2513	SM653101251	SM33.2S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R2514	SM653101489	SM10.0KS	R2562	SM653101305	SM121.0S
R2515	SM653101489	SM10.0KS	R2563	SM653101305	SM121.0S
R2516	SM653101489	SM10.0KS	R2564	SM653101322	SM182.0S
R2517	SM653101489	SM10.0KS	R2565	SM653101305	SM121.0S
R2518	SM653101489	SM10.0KS	R2566	SM653101322	SM182.0S
R2519	SM653101489	SM10.0KS	R2567	SM653101322	SM182.0S
R2520	SM653101489	SM10.0KS	R2568	SM653101305	SM121.0S
R2521	SM653101489	SM10.0KS	R2569	SM653101322	SM182.0S
R2522	SM653101393	SM1.00KS	R2570	SM653101305	SM121.0S
R2523	SM653101393	SM1.00KS	R2571	SM653101326	SM200.0S
R2524	SM653101393	SM1.00KS	R2572	SM653101326	SM200.0S
R2525	SM653101393	SM1.00KS	R2573	SM653101326	SM200.0S
R2526	SM653101393	SM1.00KS	R2574	SM653101326	SM200.0S
R2527	SM653101330	SM221.0S	R2575	SM653101281	SM68.1S
R2528	SM653101393	SM1.00KS	R2576	SM653101281	SM68.1S
R2529	SM653101322	SM182.0S	R2577	SM653101281	SM68.1S
R2530	SM653101373	SM619.0S	R2578	SM653101281	SM68.1S
R2531	SM653101255	SM36.5S	R2579	SM653101314	SM150.0S
R2532	SM653101397	SM1.10KS	R2580	SM653101314	SM150.0S
R2533	SM653101230	SM20.0S	R2581	SM653101314	SM150.0S
R2534	SM653101269	SM51.1S	R2582	SM653101314	SM150.0S
R2535	SM653101269	SM51.1S	R2583	SM653101281	SM68.1S
R2536	SM653101393	SM1.00KS	R2584	SM653101281	SM68.1S
R2537	SM653101266	SM47.5S	R2585	SM653101281	SM68.1S
R2538	SM653101266	SM47.5S	R2586	SM653101281	SM68.1S
R2539	SM653101393	SM1.00KS	R2587	SM653101281	SM68.1S
R2540	SM653101285	SM75.0S	R2588	SM653101281	SM68.1S
R2541	SM653101285	SM75.0S	R2589	SM653101354	SM392.0S
R2542	SM653101326	SM200.0S	R2590	SM653101343	SM301.0S
R2544	SM653101281	SM68.1S	R2591	SM653101354	SM392.0S
R2545	SM653101281	SM68.1S	R2592	SM653101354	SM392.0S
R2546	SM653101281	SM68.1S	R2593	SM653101281	SM68.1S
R2547	SM653101326	SM200.0S	R2594	SM653101281	SM68.1S
R2548	SM653101281	SM68.1S	R2595	SM653101354	SM392.0S
R2549	SM653101326	SM200.0S	R2596	SM653101269	SM51.1S
R2550	SM653101326	SM200.0S	R2597	SM653101269	SM51.1S
R2554	SM653101305	SM121.0S	R2598	SM654101000	SM0S-2P
R2555	SM653101322	SM182.0S	R2600	SM653101322	SM182.0S
R2556	SM653101322	SM182.0S	R2601	SM653101322	SM182.0S
R2557	SM653101305	SM121.0S	R2602	SM653101269	SM51.1S
R2558	SM653101305	SM121.0S	R2603	SM653101269	SM51.1S
R2559	SM653101322	SM182.0S	R2604	SM653101322	SM182.0S
R2560	SM653101322	SM182.0S	R2605	SM653101322	SM182.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R2618	SM653101305	SM121.0S	R3006	SM653101489	SM10.0KS
R2619	SM653101322	SM182.0S	R3007	SM653101358	SM432.0S
R2620	SM653101322	SM182.0S	R3008	SM653101489	SM10.0KS
R2621	SM653101305	SM121.0S	R3009	SM653101401	SM1.21KS
R2622	SM653101281	SM68.1S	R3010	SM653101273	SM56.2S
R2623	SM653101281	SM68.1S	R3011	SM652181590	SM113K-50PPI
R2624	SM653101281	SM68.1S	R3012	SM168651315	SM154-1%
R2625	SM653101281	SM68.1S	R3013	SM168651315	SM154-1%
R2630	SM653101281	SM68.1S	R3015	SM653101347	SM332.0S
R2631	SM653101289	SM82.5S	R3016	168909001	900.0K-.1%500V
R2632	SM653101289	SM82.5S	R3017	SM652181590	SM113K-50PPM
R2633	SM653101281	SM68.1S	R3018	SM653101269	SM51.1S
R2637	SM653101343	SM301.0S	R3019	SM653101269	SM51.1S
R2640	SM653101281	SM68.1S	R3020	SM653101269	SM51.1S
R2641	SM653101281	SM68.1S	R3021	SM653101297	SM100.0S
R2700	SM653101273	SM56.2S	R3023	SM653101326	SM200.0S
R2701	SM653101273	SM56.2S	R3024	SM654101000	SM0S
R2702	SM653101308	SM130.0S	R3025	SM653101638	SM357.0KS
R2703	SM653101273	SM56.2S	R3026	SM654101000	SM0S
R2704	SM653101273	SM56.2S	R3027	SM653101418	SM1.82KS
R2705	SM653101308	SM130.0S	R3028	SM653101639	SM365.0KS
R2707	SM653101281	SM68.1S	R3029	SM653185107	SM100.0MS
R2708	SM653101281	SM68.1S	R3031	SM653101639	SM365.0KS
R2710	SM653101308	SM130.0S	R3032	SM653101638	SM357.0KS
R2711	SM653101322	SM182.0S	R3034	SM653101393	SM1.00KS
R2712	SM653101322	SM182.0S	R3035	SM653101281	SM68.1S
R2713	SM653101314	SM150.0S	R3036	SM653101642	SM392.0KS
R2714	SM653101314	SM150.0S	R3037	SM653101642	SM392.0KS
R2715	SM653101314	SM150.0S	R3038	SM185457503	SM50K-1T
R2716	SM653101314	SM150.0S	R3039	SM653101251	SM33.2S
R2717	SM653101308	SM130.0S	R3040	SM653101458	SM4.75KS
R2718	SM653101281	SM68.1S	R3042	SM653101681	SM1.00MS
R2719	SM653101281	SM68.1S	R3043	SM653101681	SM1.00MS
R2720	SM653101281	SM68.1S	R3044	SM653101201	SM10.0S
R2722	SM653101281	SM68.1S	R3046	SM653101343	SM301.0S
R2723	SM653101308	SM130.0S	R3047	SM653101393	SM1.00KS
R3000	168909001	900.0K-.1%500V	R3048	SM653101489	SM10.0KS
R3001	SM653101251	SM33.2S	R3049	SM653101557	SM51.1KS
R3002	SM653101343	SM301.0S	R3050	SM653101347	SM332.0S
R3003	SM652061024	SM2.4-0603	R3051	SM652061820	SM82-0603
R3004	SM653101251	SM33.2S	R3052	SM653101422	SM2.00KS
R3005	SM653101234	SM22.1S	R3053	SM653101461	SM5.11KS

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R3054	SM654101000	SM0S	R3106	SM653101285	SM75.0S
R3055	SM653101354	SM392.0S	R3150	SM653101347	SM332.0S
R3056	SM653101269	SM51.1S	R3151	SM185657201	SM200-3313
R3057	SM653101308	SM130.0S	R3200	SM653101489	SM10.0KS
R3058	SM653101489	SM10.0KS	R3201	SM185657500	SM500-3313
R3059	SM653101289	SM82.5S	R3202	SM653101269	SM51.1S
R3060	SM653101489	SM10.0KS	R3203	SM185657500	SM500-3313
R3061	SM653101443	SM3.32KS	R3204	SM652061181	SM180-0603
R3062	SM653101269	SM51.1S	R3500	SM653101269	SM51.1S
R3063	SM653101443	SM3.32KS	R3501	SM653101269	SM51.1S
R3065	SM653101416	SM1.74KS	R3502	SM653101305	SM121.0S
R3066	SM185457201	SM200-1T	R3503	SM653101305	SM121.0S
R3067	SM653101365	SM511.0S	R3505	SM653101322	SM182.0S
R3068	SM653101443	SM3.32KS	R3506	SM653101322	SM182.0S
R3069	SM653101373	SM619.0S	R3507	SM653101393	SM1.00KS
R3070	SM653101358	SM432.0S	R3508	SM653101393	SM1.00KS
R3071	SM653101358	SM432.0S	R3509	SM653101393	SM1.00KS
R3072	SM651104392	SM3.9K-25PPM	R3510	SM653101393	SM1.00KS
R3073	SM653101461	SM5.11KS	R3511	SM653101297	SM100.0S
R3074	SM653101461	SM5.11KS	R3512	SM653101489	SM10.0KS
R3075	SM653101461	SM5.11KS	R3513	SM653101297	SM100.0S
R3076	SM168651315	SM154-1/oo	R3514	SM653101489	SM10.0KS
R3078	SM653101602	SM150.0KS	R3515	SM653101297	SM100.0S
R3079	SM653101489	SM10.0KS	R3516	SM653101297	SM100.0S
R3080	SM653101569	SM68.1KS	R3517	SM653101397	SM1.10KS
R3081	SM653101458	SM4.75KS	R3518	SM653101230	SM20.0S
R3082	SM653101461	SM5.11KS	R3520	SM653101255	SM36.5S
R3083	SM653101393	SM1.00KS	R3521	SM653101373	SM619.0S
R3084	SM653101614	SM200.0KS	R3522	SM653101393	SM1.00KS
R3085	SM653101393	SM1.00KS	R3523	SM653101393	SM1.00KS
R3086	SM653101393	SM1.00KS	R3524	SM653101393	SM1.00KS
R3087	SM653101393	SM1.00KS	R3525	SM653101393	SM1.00KS
R3088	SM653101393	SM1.00KS	R3526	SM653101269	SM51.1S
R3089	SM653101393	SM1.00KS	R3527	SM653101269	SM51.1S
R3092	SM653101334	SM243.0S	R3529	SM653101393	SM1.00KS
R3095	SM653101481	SM8.25KS	R3530	SM653101393	SM1.00KS
R3097	SM653101358	SM432.0S	R3531	SM653101393	SM1.00KS
R3099	SM654101000	SM0S-B2P	R3532	SM653101393	SM1.00KS
R3100	SM654101000	SM0S-B2P	R3533	SM653101393	SM1.00KS
R3101	SM654101000	SM0S	R3534	SM653101285	SM75.0S
R3102	SM654101000	SM0S	R3535	SM653101285	SM75.0S
R3103	SM653101334	SM243.0S	R3536	SM653101326	SM200.0S
R3105	SM653101418	SM1.82KS	R3537	SM653101326	SM200.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R3538	SM653101281	SM68.1S	R3587	SM653101269	SM51.1S
R3539	SM653101281	SM68.1S	R3588	SM653101269	SM51.1S
R3540	SM653101281	SM68.1S	R3589	SM653101322	SM182.0S
R3541	SM653101326	SM200.0S	R3590	SM653101322	SM182.0S
R3542	SM653101281	SM68.1S	R3596	SM653101354	SM392.0S
R3543	SM653101326	SM200.0S	R3597	SM653101281	SM68.1S
R3548	SM653101305	SM121.0S	R3598	SM653101281	SM68.1S
R3549	SM653101305	SM121.0S	R3599	SM653101354	SM392.0S
R3550	SM653101322	SM182.0S	R3600	SM653101343	SM301.0S
R3551	SM653101305	SM121.0S	R3601	SM653101354	SM392.0S
R3553	SM653101322	SM182.0S	R3602	SM653101343	SM301.0S
R3554	SM653101322	SM182.0S	R3603	SM653101281	SM68.1S
R3555	SM653101305	SM121.0S	R3604	SM653101281	SM68.1S
R3556	SM653101322	SM182.0S	R3605	SM653101354	SM392.0S
R3557	SM653101322	SM182.0S	R3610	SM653101281	SM68.1S
R3558	SM653101305	SM121.0S	R3611	SM653101281	SM68.1S
R3559	SM653101322	SM182.0S	R3614	SM653101322	SM182.0S
R3560	SM653101305	SM121.0S	R3615	SM653101305	SM121.0S
R3561	SM653101305	SM121.0S	R3616	SM653101322	SM182.0S
R3562	SM653101305	SM121.0S	R3617	SM653101305	SM121.0S
R3563	SM653101322	SM182.0S	R3620	SM185457501	SM500-1T
R3564	SM653101322	SM182.0S	R3621	SM185457501	SM500-1T
R3565	SM653101314	SM150.0S	R3623	SM653101489	SM10.0KS
R3566	SM653101314	SM150.0S	R3624	SM653101489	SM10.0KS
R3567	SM653101314	SM150.0S	R3700	SM653101308	SM130.0S
R3568	SM653101314	SM150.0S	R3701	SM653101322	SM182.0S
R3569	SM653101281	SM68.1S	R3702	SM653101322	SM182.0S
R3570	SM653101281	SM68.1S	R3703	SM653101273	SM56.2S
R3571	SM653101281	SM68.1S	R3704	SM653101273	SM56.2S
R3572	SM653101281	SM68.1S	R3705	SM653101308	SM130.0S
R3573	SM653101326	SM200.0S	R3706	SM653101273	SM56.2S
R3574	SM653101326	SM200.0S	R3707	SM653101273	SM56.2S
R3575	SM653101326	SM200.0S	R3708	SM653101308	SM130.0S
R3576	SM653101326	SM200.0S	R3710	SM653101281	SM68.1S
R3577	SM653101281	SM68.1S	R3711	SM653101281	SM68.1S
R3578	SM653101281	SM68.1S	R3712	SM653101308	SM130.0S
R3579	SM653101281	SM68.1S	R3713	SM653101314	SM150.0S
R3580	SM653101281	SM68.1S	R3714	SM653101314	SM150.0S
R3581	SM653101269	SM51.1S	R3715	SM653101314	SM150.0S
R3582	SM653101269	SM51.1S	R3716	SM653101281	SM68.1S
R3585	SM653101322	SM182.0S	R3717	SM653101281	SM68.1S
R3586	SM653101322	SM182.0S	R3718	SM653101314	SM150.0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R3719	SM653101308	SM130.0S	R4051	SM652061820	SM82-0603
R4000	168909001	900.0K-.1%500V	R4052	SM653101422	SM2.00KS
R4001	SM653101251	SM33.2S	R4053	SM653101461	SM5.11KS
R4002	SM653101343	SM301.0S	R4054	SM654101000	SM0S
R4003	SM652061024	SM2.4-0603	R4055	SM653101354	SM392.0S
R4004	SM653101251	SM33.2S	R4056	SM653101269	SM51.1S
R4005	SM653101234	SM22.1S	R4057	SM653101308	SM130.0S
R4006	SM653101489	SM10.0KS	R4058	SM653101489	SM10.0KS
R4007	SM653101358	SM432.0S	R4059	SM653101289	SM82.5S
R4008	SM653101489	SM10.0KS	R4060	SM653101489	SM10.0KS
R4009	SM653101401	SM1.21KS	R4061	SM653101443	SM3.32KS
R4010	SM653101273	SM56.2S	R4062	SM653101269	SM51.1S
R4011	SM652181590	SM113K-50PPM	R4063	SM653101443	SM3.32KS
R4012	SM168651315	SM154-1%	R4065	SM653101416	SM1.74KS
R4013	SM168651315	SM154-1%	R4066	SM185457201	SM200-1T
R4015	SM653101347	SM332.0S	R4067	SM653101365	SM511.0S
R4016	168909001	900.0K-.1%500V	R4068	SM653101443	SM3.32KS
R4017	SM652181590	SM113K-50PPM	R4069	SM653101373	SM619.0S
R4018	SM653101269	SM51.1S	R4070	SM653101358	SM432.0S
R4019	SM653101269	SM51.1S	R4071	SM653101358	SM432.0S
R4020	SM653101269	SM51.1S	R4072	SM651104392	SM3.9K-25PPM
R4021	SM653101297	SM100.0S	R4073	SM653101461	SM5.11KS
R4023	SM653101326	SM200.0S	R4074	SM653101461	SM5.11KS
R4024	SM654101000	SM0S	R4075	SM653101461	SM5.11KS
R4025	SM653101638	SM357.0KS	R4076	SM168651315	SM154-1/oo
R4026	SM654101000	SM0S	R4078	SM653101602	SM150.0KS
R4027	SM653101418	SM1.82KS	R4079	SM653101489	SM10.0KS
R4028	SM653101639	SM365.0KS	R4080	SM653101569	SM68.1KS
R4029	SM653185107	SM100.0MS	R4081	SM653101458	SM4.75KS
R4031	SM653101639	SM365.0KS	R4082	SM653101461	SM5.11KS
R4032	SM653101638	SM357.0KS	R4083	SM653101393	SM1.00KS
R4034	SM653101393	SM1.00KS	R4084	SM653101614	SM200.0KS
R4036	SM653101642	SM392.0KS	R4085	SM653101393	SM1.00KS
R4037	SM653101642	SM392.0KS	R4086	SM653101393	SM1.00KS
R4038	SM185457503	SM50K-1T	R4087	SM653101393	SM1.00KS
R4040	SM653101458	SM4.75KS	R4088	SM653101393	SM1.00KS
R4042	SM653101681	SM1.00MS	R4089	SM653101393	SM1.00KS
R4043	SM653101681	SM1.00MS	R4092	SM653101334	SM243.0S
R4046	SM653101343	SM301.0S	R4095	SM653101481	SM8.25KS
R4047	SM653101393	SM1.00KS	R4097	SM653101358	SM432.0S
R4048	SM653101489	SM10.0KS	R4099	SM654101000	SM0S-B2P
R4049	SM653101557	SM51.1KS	R4100	SM654101000	SM0S-B2P
R4050	SM653101347	SM332.0S	R4101	SM654101000	SM0S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R4102	SM654101000	SM0S	R4538	SM653101322	SM182.0S
R4103	SM653101334	SM243.0S	R4539	SM653101322	SM182.0S
R4105	SM653101418	SM1.82KS	R4540	SM653101322	SM182.0S
R4106	SM653101285	SM75.0S	R4544	SM653101322	SM182.0S
R4150	SM653101347	SM332.0S	R4546	SM653101305	SM121.0S
R4151	SM185657201	SM200-3313	R4547	SM653101322	SM182.0S
R4200	SM653101489	SM10.0KS	R4548	SM653101305	SM121.0S
R4201	SM185657500	SM500-3313	R4549	SM653101305	SM121.0S
R4202	SM653101269	SM51.1S	R4550	SM653101305	SM121.0S
R4203	SM185657500	SM500-3313	R4551	SM653101322	SM182.0S
R4204	SM652061181	SM180-0603	R4552	SM653101326	SM200.0S
R4502	SM653101330	SM221.0S	R4553	SM653101326	SM200.0S
R4503	SM653101393	SM1.00KS	R4554	SM653101326	SM200.0S
R4504	SM653101322	SM182.0S	R4555	SM653101326	SM200.0S
R4505	SM653101393	SM1.00KS	R4556	SM653101281	SM68.1S
R4507	SM653101251	SM33.2S	R4557	SM653101281	SM68.1S
R4508	SM653101489	SM10.0KS	R4558	SM653101281	SM68.1S
R4509	SM653101489	SM10.0KS	R4559	SM653101281	SM68.1S
R4510	SM653101489	SM10.0KS	R4560	SM653101314	SM150.0S
R4511	SM653101489	SM10.0KS	R4561	SM653101314	SM150.0S
R4512	SM653101489	SM10.0KS	R4562	SM653101314	SM150.0S
R4513	SM653101489	SM10.0KS	R4563	SM653101314	SM150.0S
R4514	SM653101489	SM10.0KS	R4564	SM653101281	SM68.1S
R4515	SM653101251	SM33.2S	R4565	SM653101281	SM68.1S
R4516	SM653101251	SM33.2S	R4566	SM653101281	SM68.1S
R4517	SM653101489	SM10.0KS	R4567	SM653101281	SM68.1S
R4518	SM653101285	SM75.0S	R4568	SM653101322	SM182.0S
R4519	SM653101285	SM75.0S	R4569	SM653101322	SM182.0S
R4520	SM653101326	SM200.0S	R4570	SM653101269	SM51.1S
R4521	SM653101326	SM200.0S	R4571	SM653101269	SM51.1S
R4522	SM653101305	SM121.0S	R4572	SM653101322	SM182.0S
R4523	SM653101326	SM200.0S	R4573	SM653101322	SM182.0S
R4524	SM653101326	SM200.0S	R4576	SM653101269	SM51.1S
R4525	SM653101281	SM68.1S	R4577	SM653101269	SM51.1S
R4526	SM653101281	SM68.1S	R4578	SM653101305	SM121.0S
R4527	SM653101281	SM68.1S	R4579	SM653101322	SM182.0S
R4528	SM653101281	SM68.1S	R4580	SM653101322	SM182.0S
R4533	SM653101305	SM121.0S	R4581	SM653101305	SM121.0S
R4534	SM653101322	SM182.0S	R4583	SM653101251	SM33.2S
R4535	SM653101322	SM182.0S	R4584	SM654101000	SM0S-2P
R4536	SM653101305	SM121.0S	R4600	SM653101273	SM56.2S
R4537	SM653101305	SM121.0S	R4601	SM653101273	SM56.2S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R4602	SM653101308	SM130.0S	R5036	SM653101297	SM100.0S
R4603	SM653101273	SM56.2S	R5038	SM653101673	SM825.0KS
R4604	SM653101273	SM56.2S	R5039	SM653101269	SM51.1S
R4605	SM653101308	SM130.0S	R5040	SM653101418	SM1.82KS
R4607	SM653101281	SM68.1S	R5041	SM653101269	SM51.1S
R4608	SM653101281	SM68.1S	R5042	SM653101418	SM1.82KS
R4610	SM653101322	SM182.0S	R5045	SM653101369	SM562.0S
R4611	SM653101322	SM182.0S	R5049	SM653101369	SM562.0S
R4620	SM653101308	SM130.0S	R5051	SM653101461	SM5.11KS
R5000	SM653101251	SM33.2S	R5052	SM653101509	SM16.2KS
R5001	SM653101234	SM22.1S	R5053	SM185457203	SM20K-1T
R5002	SM653101201	SM10.0S	R5054	SM653101509	SM16.2KS
R5003	SM653101251	SM33.2S	R5055	SM185457203	SM20K-1T
R5004	SM653101251	SM33.2S	R5056	SM653101443	SM3.32KS
R5005	SM653101585	SM100.0KS	R5057	SM654101000	SM0S
R5006	168909001	900.0K-.1%500V	R5060	SM654101000	SM0S
R5007	SM653101297	SM100.0S	R5061	SM653101443	SM3.32KS
R5008	SM653101418	SM1.82KS	R5062	SM653101443	SM3.32KS
R5010	168909001	900.0K-.1%500V	R5064	SM654101000	SM0S
R5011	SM653101269	SM51.1S	R5066	SM654101000	SM0S
R5012	SM653101418	SM1.82KS	R5067	SM653101443	SM3.32KS
R5013	SM653101401	SM1.21KS	R5068	SM653101461	SM5.11KS
R5014	SM653101377	SM681.0S	R5071	SM653101269	SM51.1S
R5015	SM653185107	SM100.0MS	R5072	SM653101269	SM51.1S
R5016	SM168659006	SM111.1K-1/oo	R5073	SM653101418	SM1.82KS
R5017	SM653101506	SM15.0KS	R5074	SM653101418	SM1.82KS
R5018	SM653101514	SM18.2KS	R5075	SM653101369	SM562.0S
R5020	SM653101297	SM100.0S	R5076	SM653101369	SM562.0S
R5021	SM653101354	SM392.0S	R5077	SM653101509	SM16.2KS
R5022	SM653101281	SM68.1S	R5078	SM185457203	SM20K-1T
R5023	SM653101650	SM475.0KS	R5079	SM653101509	SM16.2KS
R5024	SM653101665	SM681.0KS	R5080	SM185457203	SM20K-1T
R5025	SM653101489	SM10.0KS	R5081	SM653101443	SM3.32KS
R5026	SM653101585	SM100.0KS	R5082	SM654101000	SM0S
R5027	SM653101251	SM33.2S	R5084	SM654101000	SM0S
R5028	SM653101285	SM75.0S	R5086	SM653101443	SM3.32KS
R5029	SM652110904	SM900K-5/oo	R5087	SM653101461	SM5.11KS
R5030	SM653101297	SM100.0S	R5088	SM653101443	SM3.32KS
R5031	SM653101365	SM511.0S	R5089	SM654101000	SM0S
R5032	SM653101489	SM10.0KS	R5091	SM654101000	SM0S
R5033	SM653101281	SM68.1S	R5093	SM653101443	SM3.32KS
R5034	SM653101201	SM10.0S	R5094	SM653101461	SM5.11KS
R5035	SM653101362	SM475.0S	R5095	SM653101269	SM51.1S

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
R5096	SM653101269	SM51.1S	R5146	SM653101269	SM51.1S
R5097	SM653101418	SM1.82KS	R5147	SM653101269	SM51.1S
R5099	SM653101369	SM562.0S	R5148	SM653101297	SM100.0S
R5100	SM653101326	SM200.0S	R5150	SM653101297	SM100.0S
R5101	SM653101269	SM51.1S	R5160	SM168651315	SM154-1/oo
R5103	SM653101509	SM16.2KS	R5161	SM168651315	SM154-1/oo
R5104	SM653101326	SM200.0S	R5201	SM653101269	SM51.1S
R5106	SM653101322	SM182.0S	R6000	SM653101251	SM33.2S
R5107	SM653101461	SM5.11KS	R6001	SM168659007	SM3.0K-1/oo
R5108	SM185457203	SM20K-1T	R6002	SM168659297	SM100-1/oo
R5109	SM653101322	SM182.0S	R6003	SM168659297	SM100-1/oo
R5110	SM653101461	SM5.11KS	R6004	SM653101347	SM332.0S
R5111	SM653101461	SM5.11KS	R6005	SM653101397	SM1.10KS
R5112	SM653101443	SM3.32KS	R6006	SM653101251	SM33.2S
R5113	SM654101000	SM0S	R6007	SM653101322	SM182.0S
R5115	SM654101000	SM0S	R6008	SM653101397	SM1.10KS
R5117	SM653101443	SM3.32KS	R6009	SM653101373	SM619.0S
R5118	SM653101461	SM5.11KS	R6010	SM653101461	SM5.11KS
R5119	SM653101465	SM5.62KS	R6011	SM653101461	SM5.11KS
R5120	SM653101465	SM5.62KS	R6012	SM653101308	SM130.0S
R5121	SM653101461	SM5.11KS	R6013	SM653101354	SM392.0S
R5122	SM653101465	SM5.62KS	R6014	SM168659007	SM3.0K-1/oo
R5123	SM653101465	SM5.62KS	R6015	SM168659007	SM3.0K-1/oo
R5125	SM653101305	SM121.0S	R6016	SM168659004	SM900-1/oo
R5126	SM168651297	SM100-1%MM	R6017	SM168659297	SM100-1/oo
R5127	SM168651297	SM100-1%MM	R6018	SM653101450	SM3.92KS
R5129	SM185457502	SM5K-1T	R6019	SM653101397	SM1.10KS
R5130	SM653101569	SM68.1KS	R6020	SM168659007	SM3.0K-1/oo
R5131	SM653101450	SM3.92KS	R6021	SM653101234	SM22.1S
R5132	SM653101681	SM1.00MS	R6022	SM653101297	SM100.0S
R5133	SM653101461	SM5.11KS	R6023	SM653101297	SM100.0S
R5134	SM653101461	SM5.11KS	R7000	SM653101289	SM82.5S
R5135	SM653101461	SM5.11KS	R7001	SM653101308	SM130.0S
R5136	SM653101481	SM8.25KS	R7002	SM653101308	SM130.0S
R5137	SM653101443	SM3.32KS	R7003	SM653101269	SM51.1S
R5139	SM653101397	SM1.10KS	R7004	SM653101289	SM82.5S
R5140	SM653101393	SM1.00KS	R7005	SM653101450	SM3.92KS
R5141	SM653101461	SM5.11KS	R7006	SM653101450	SM3.92KS
R5142	SM653101461	SM5.11KS	R7007	SM653101450	SM3.92KS
R5143	SM653101269	SM51.1S	R7008	SM653101450	SM3.92KS
R5144	SM653101269	SM51.1S	RL1000	430430004	RL-RP1-12
R5145	SM653101269	SM51.1S	RL1001	430430004	RL-RP1-12

Schematics, Layouts

PART: F9384-31

DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
RL1002	430430004	RL-RP1-12	TP770	454340002	2x1-ST-M-NW
RL1003	430490005	RL-RK1-12	TP800	454340002	2x1-ST-M-NW
RL1004	430430004	RL-RP1-12	TP1001	454312004	2x2-ST-M-NW
RL1005	430490005	RL-RK1-12	TP1500	454313010	2x5-ST-M-NW
RL1006	430430004	RL-TK1-12	TP2001	454312004	2x2-ST-M-NW
RL2000	430430004	RL-RP1-12	TP2500	454313010	2x5-ST-M-NW
RL2001	430430004	RL-RP1-12	TP2501	454312010	2x5-ST-M-NW
RL2002	430430004	RL-RP1-12	TP3001	454312004	2x2-ST-M-NW
RL2003	430490005	RL-RK1-12	TP4001	454312004	2x2-ST-M-NW
RL2004	430430004	RL-RP1-12	TP4500	454313010	2x5-ST-M-NW
RL2005	430490005	RL-RK1-12	TP5000	454340002	2x1-ST-M-NW
RL2006	430430004	RL-TK1-12	TP5500	454313010	2x5-ST-M-NW
RL3000	430430004	RL-RP1-12	TP6000	454710002	2x1-RT-M-NW
RL3001	430430004	RL-RP1-12	U114	C-PAD-010-4	C-PAD-010-4
RL3002	430430004	RL-RP1-12	U336	SM201174011	SM10EL11
RL3003	430490005	RL-RK1-12	U337	SM201174011	SM10EL11
RL3004	430430004	RL-RP1-12	U338	SM201174011	SM10EL11
RL3005	430490005	RL-RK1-12	U339	SM201174011	SM10EL11
RL3006	430430004	RL-TK1-12	U340	SM201174001	SM10EL01
RL4000	430430004	RL-RP1-12	U360	SM201174031	SM10EL31
RL4001	430430004	RL-RP1-12	U361	SM201174031	SM10EL31
RL4002	430430004	RL-RP1-12	U364	SM207970057	SM10EL57
RL4003	430490005	RL-RK1-12	U700	SM205108016	SM24LC16B
RL4004	430430004	RL-RP1-12	U701	SM207970057	SM10EL57
RL4005	430490005	RL-RK1-12	U702	SM207970057	SM10EL57
RL4006	430430004	RL-TK1-12	U703	SM200178002	SM74HCT02
RL5000	430490003	RL-TQ2-12	U704	SM201574058	SM10EL58
RL5001	430430004	RL-RP1-12	U726	SM205618594	SM74HC594-PS
S1	SM654101000	SM0S-2P	U1041	SM201174011	SM10EL11
TC1000	F9384-7	9384-7	U1045	SM201174005	SM10EL05
TC2000	F9384-7	9384-7	U1046	SM201174005	SM10EL05
TC3000	F9384-7	9384-7	U1047	SM201174005	SM10EL05
TC4000	F9384-7	9384-7	U1048	SM201174005	SM10EL05
TP201	454313010	2x5-ST-M-NW	U1054	SM201174011	SM10EL11
TP202	454313010	2x5-ST-M-NW-	U1056	SM201174011	SM10EL11
TP203	454313010	2x5-ST-M-NW-	U1057	SM201174011	SM10EL11
TP700	454340002	2x1-ST-M-NW	U1500	SM206884623	SM74ABT623
TP710	454340002	2x1-ST-M-NW	U1501	SM205701070	SRAM128Kx8-70
TP720	454340002	2x1-ST-M-NW	U1502	MDX622	MDX622A
TP730	454340002	2x1-ST-M-NW	U1503	HAD621	HAD621A
TP740	454340002	2x1-ST-M-NW	U1504	SM201174011	SM10EL11
TP750	454340002	2x1-ST-M-NW	U1505	SM208470347	SMLF347
TP760	454340002	2x1-ST-M-NW	U1506	SM208470347	SMLF347


Schematics, Layouts

PART: F9384-31


DESC : 4 CHAN,1GHZ,1GS/S ACQUISITION BOARD

Location	Part Number	Description	Location	Part Number	Description
U1508	SM208591336	SMLM336-5	U3516	SM201174011	SM10EL11
U1509	SM208470353	SMLF353	U3517	SM201174011	SM10EL11
U1510	SM200470573	SM74LVT573	U3519	SM201174011	SM10EL11
U1511	SM200470573	SM74LVT573	U3520	SM208470347	SMLF347
U1530	SM206980056	SM100EL56	U3521	SM205618594	SM74HC594-PS
U2500	SM206884623	SM74ABT623	U3530	SM206980056	SM100EL56
U2501	SM205701070	SRAM128Kx8-70	U3540	SM206980056	SM100EL56
U2502	MDX622	MDX622A	U3541	SM201174011	SM10EL11
U2503	HAD621	HAD621A	U3542	SM201174011	SM10EL11
U2504	SM207288800	SMDAC8800	U4500	SM206884623	SM74ABT623
U2505	SM208470347	SMLF347	U4501	SM205701070	SRAM128Kx8-70
U2506	SM200170032	SM74F32	U4502	MDX622	MDX622A
U2507	SM207970139	SM74F139	U4503	HAD621	HAD621A
U2511	SM205618594	SM74HC594-PS	U4504	SM208470347	SMLF347
U2513	SM201174005	SM10EL05	U4510	SM201174005	SM10EL05
U2514	SM201174005	SM10EL05	U4511	SM201174005	SM10EL05
U2515	SM201174005	SM10EL05	U4512	SM201174005	SM10EL05
U2516	SM201174005	SM10EL05	U4513	SM201174005	SM10EL05
U2517	SM201174011	SM10EL11	U4514	SM201174011	SM10EL11
U2518	SM201174011	SM10EL11	U4515	SM201174011	SM10EL11
U2520	SM201174011	SM10EL11	U4517	SM201174011	SM10EL11
U2521	SM208470347	SMLF347	U4520	SM200470573	SM74LVT573
U2522	SM207288800	SMDAC8800	U4521	SM200470573	SM74LVT573
U2523	SM206980056	SM100EL56	U4522	SM200170032	SM74F32
U2524	SM201174011	SM10EL11	Y700	311210000	OSC-18D10MHz
U2530	SM206980056	SM100EL56	Y5001	SM311414318	SM14.31818MHz
U2540	SM206980056	SM100EL56			
U2541	SM201174011	SM10EL11			
U2542	SM201174011	SM10EL11			
U3453	SM206980056	SM100EL56			
U3500	SM206884623	SM74ABT623			
U3501	SM205701070	SRAM128Kx8-70			
U3502	MDX622	MDX622A			
U3503	HAD621	HAD621A			
U3504	SM201174011	SM10EL11			
U3505	SM208470347	SMLF347			
U3506	SM208470347	SMLF347			
U3507	SM207288800	SMDAC8800			
U3512	SM201174005	SM10EL05			
U3513	SM201174005	SM10EL05			
U3514	SM201174005	SM10EL05			
U3515	SM201174005	SM10EL05			


Schematics, Layouts

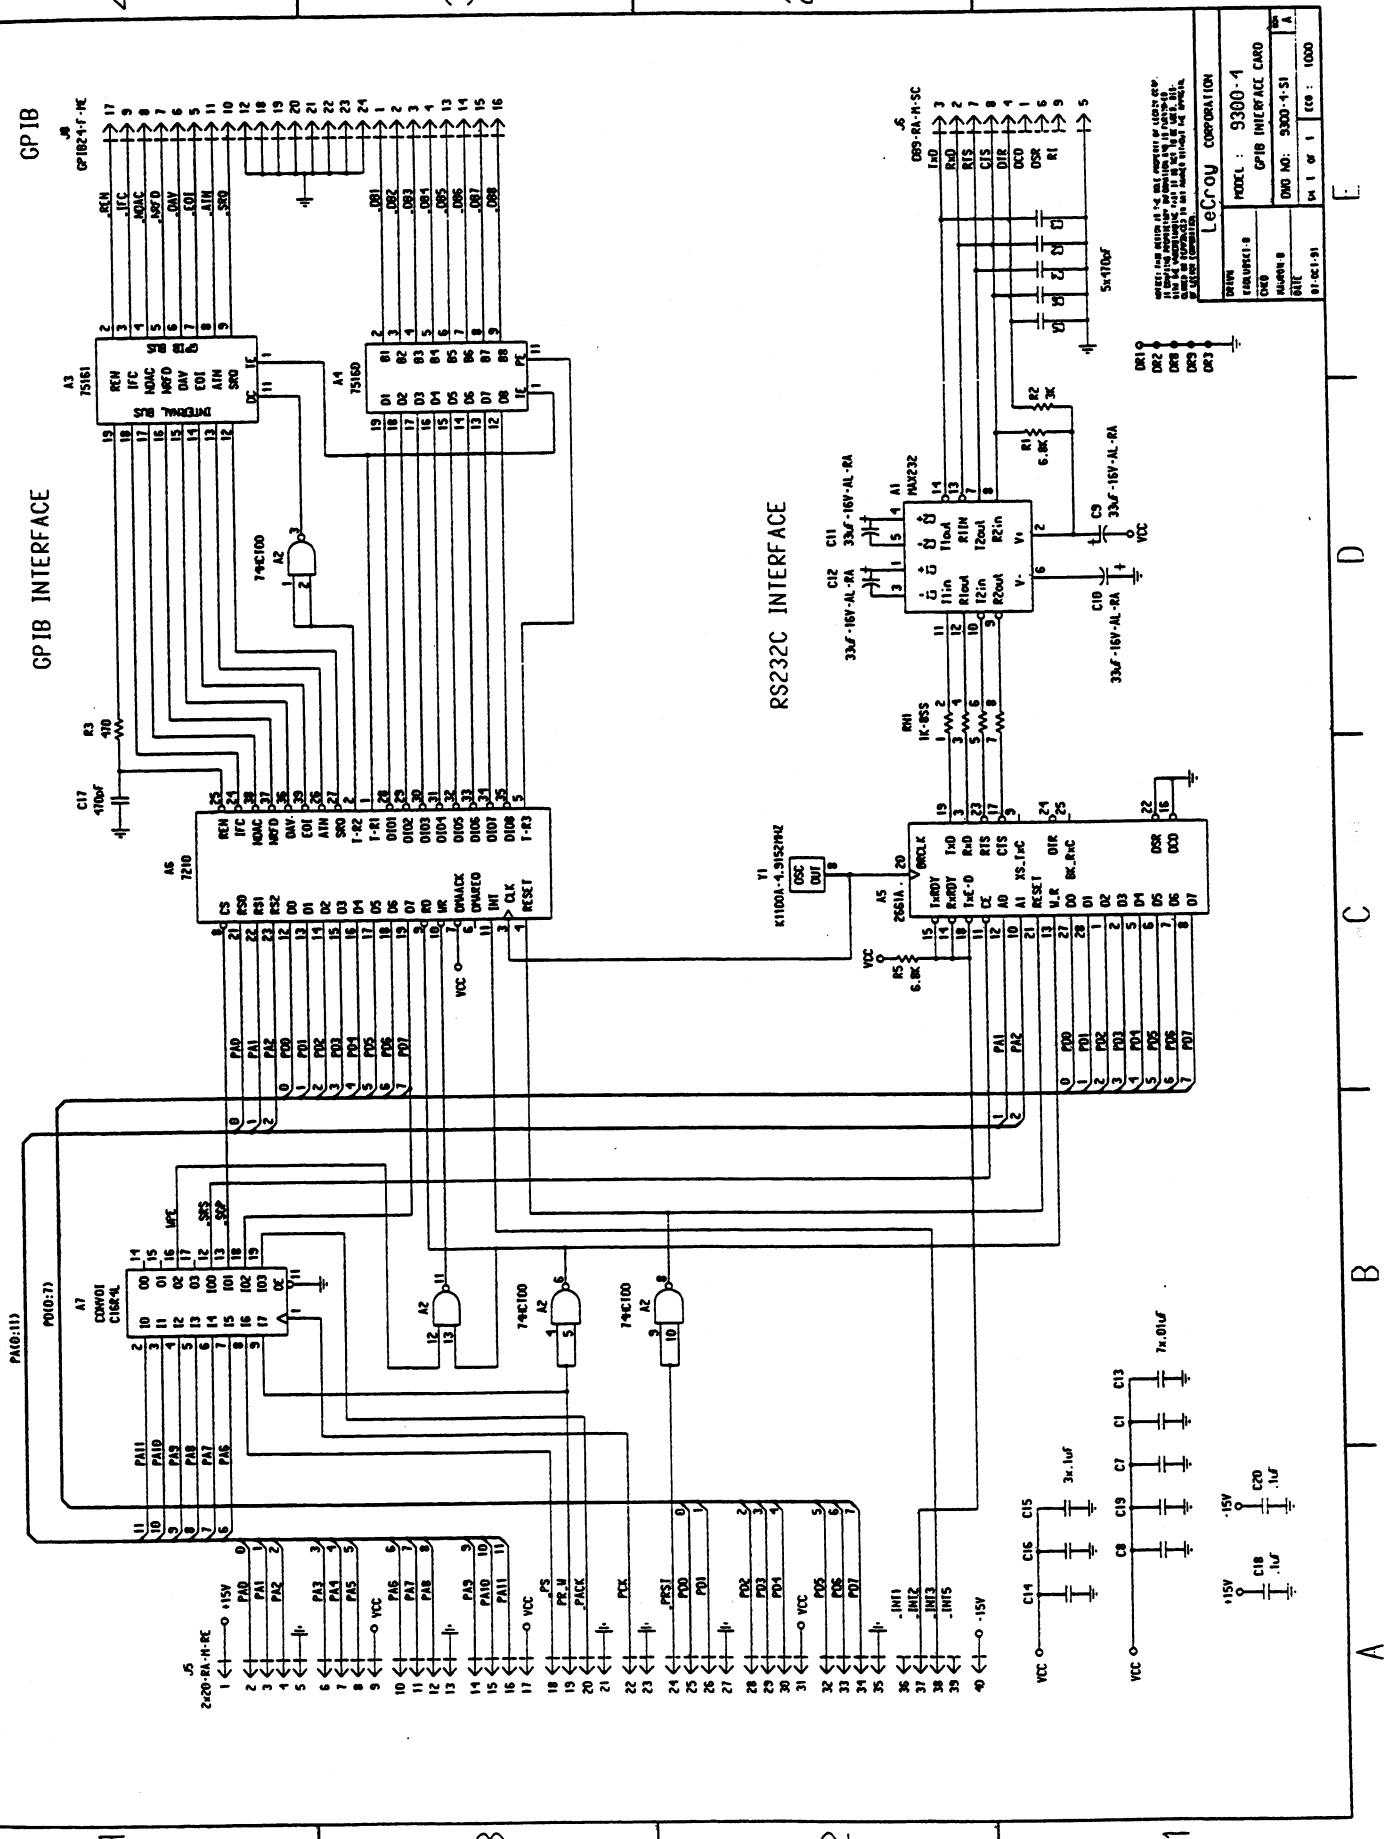

Schematics, Layouts

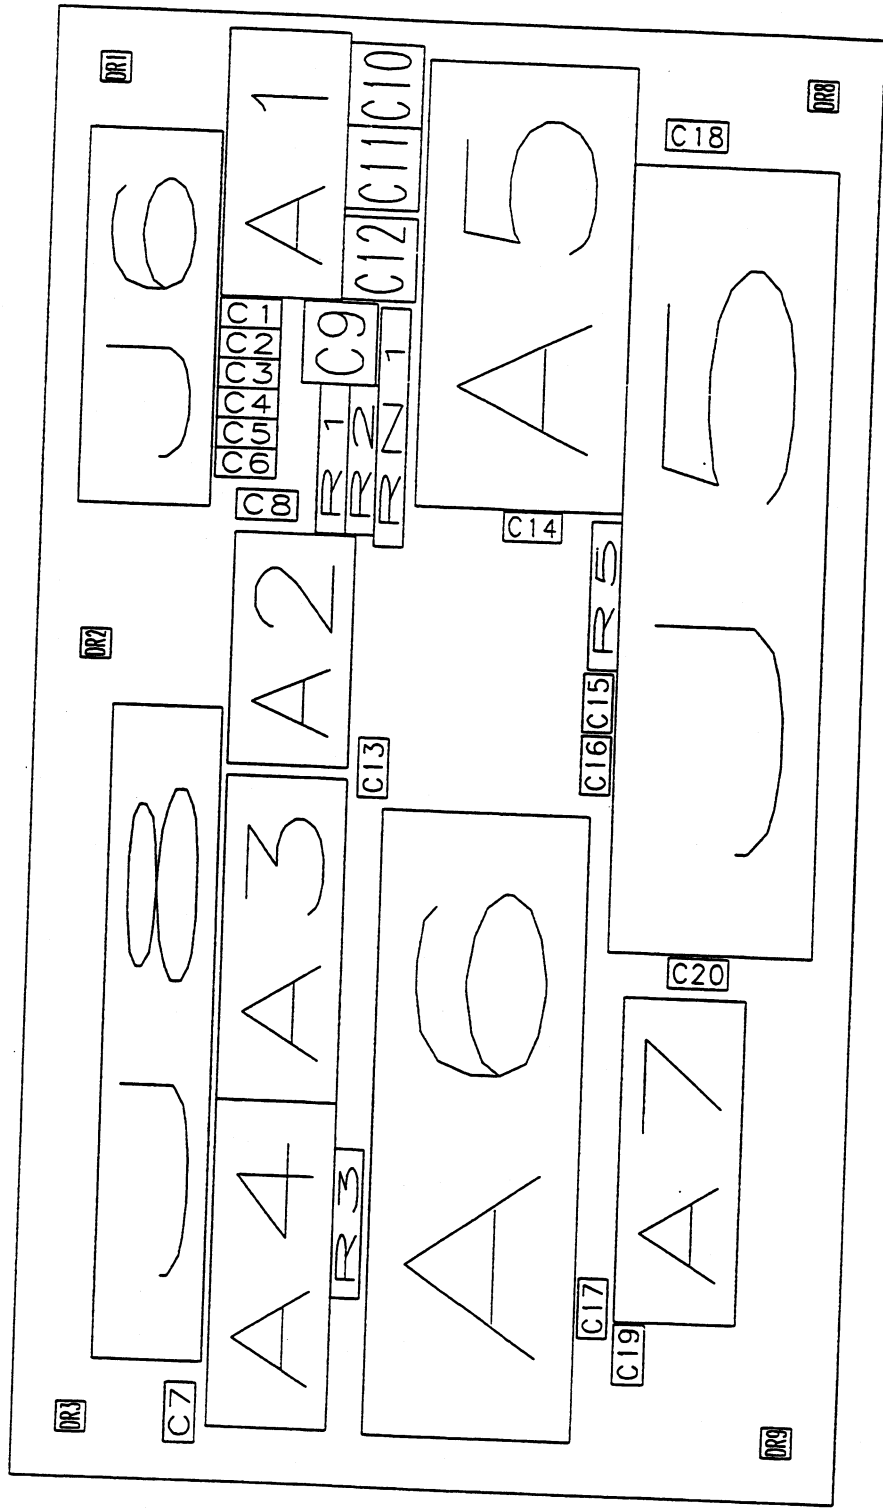


9300-4 REV: D

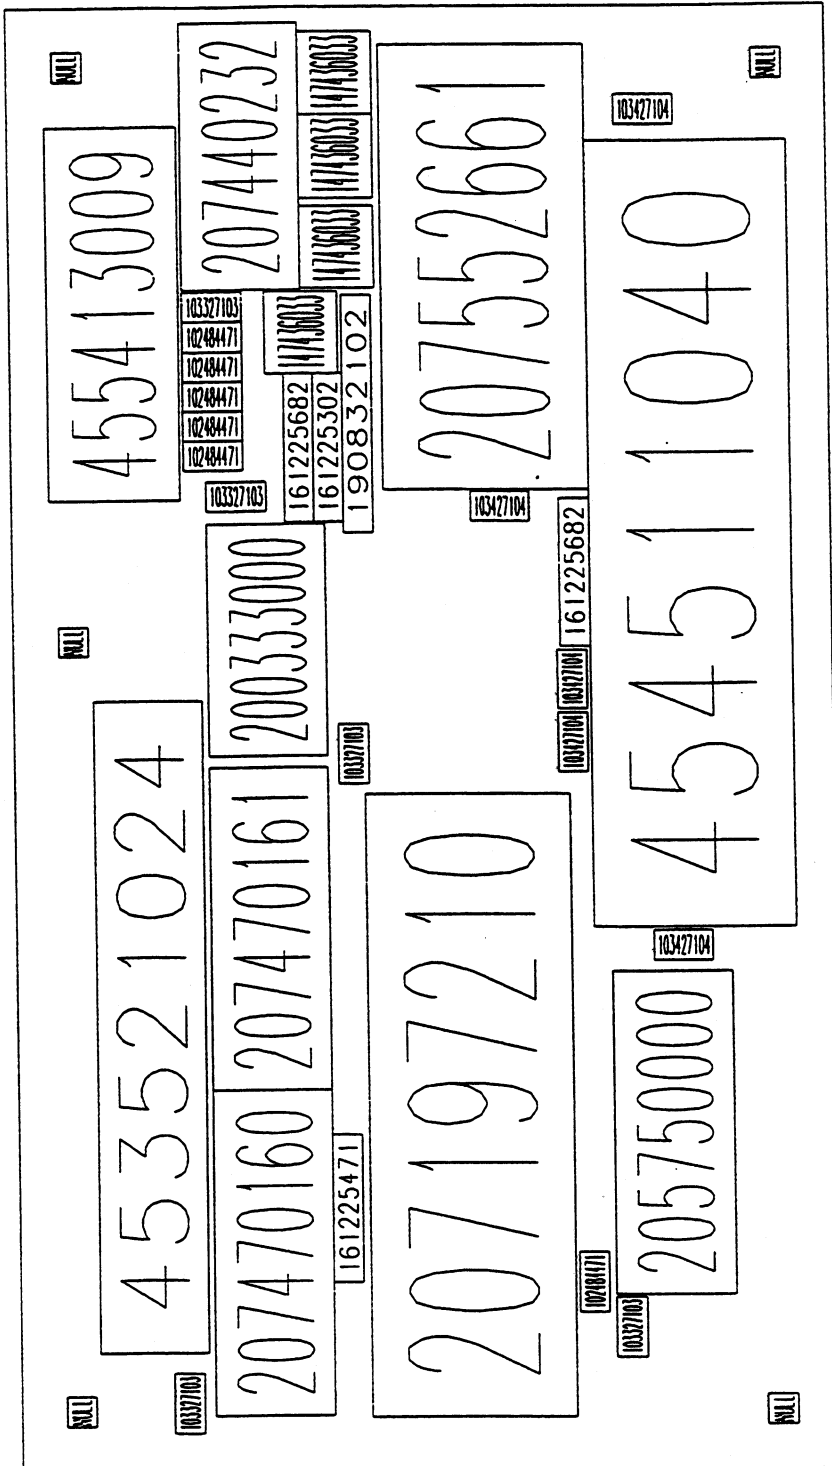

9300-4 REV : D

Schematics, Layouts

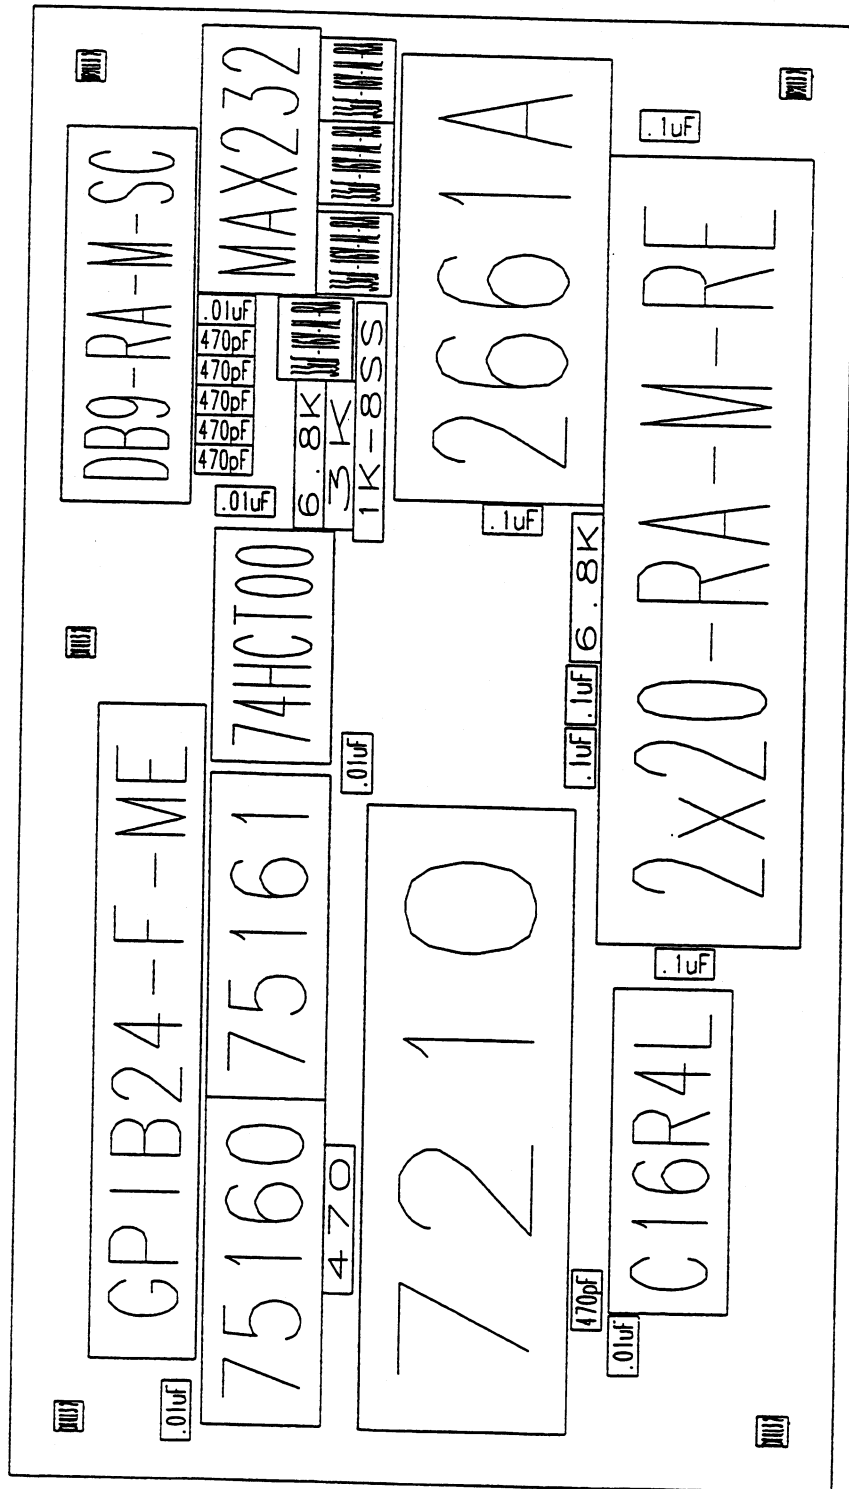

9300-4 REV:D

Schematics, Layouts

PART: F9300-4

DESC : GPIB & RS232 Card

Location	Part Number	Description	Location	Part Number	Description
A1	207440232	MAX232	C11	147436033	33uF-16V
A2	200333000	74HCT00	C12	147436033	33uF-16V
A3	207470161	75161	C13	103327103	01uF
A4	207470160	75160	C14	103427104	.1uF
A5	207552661	2661A	C15	103427104	.1uF
A6	207197210	7210	C16	103427104	.1uF
A7	205750000	C16R4L	C17	102484471	470pF
C1	103327103	.01uF	C18	103427104	.1uF
C2	102484471	470pF	C19	103327103	.01uF
C3	102484471	470pF	C20	103427104	.1uF
C4	102484471	470pF	J5	454511040	2x20-RA-M-RE
C5	102484471	470pF	J6	455413009	DB9-RA-M-SC
C6	102484471	470pF	J8	453521024	GPIB24-F-ME
C7	103327103	.01uF	R1	161225682	6.8K
C8	103327103	.01uF	R2	161225302	3K
C9	147436033	33uF-16V	R3	161225471	470
C10	147436033	33uF-16V	R5	161225682	6.8K
			RN1	190832102	1K-8SS


Schematics, Layouts

3

2


1

A B C D E

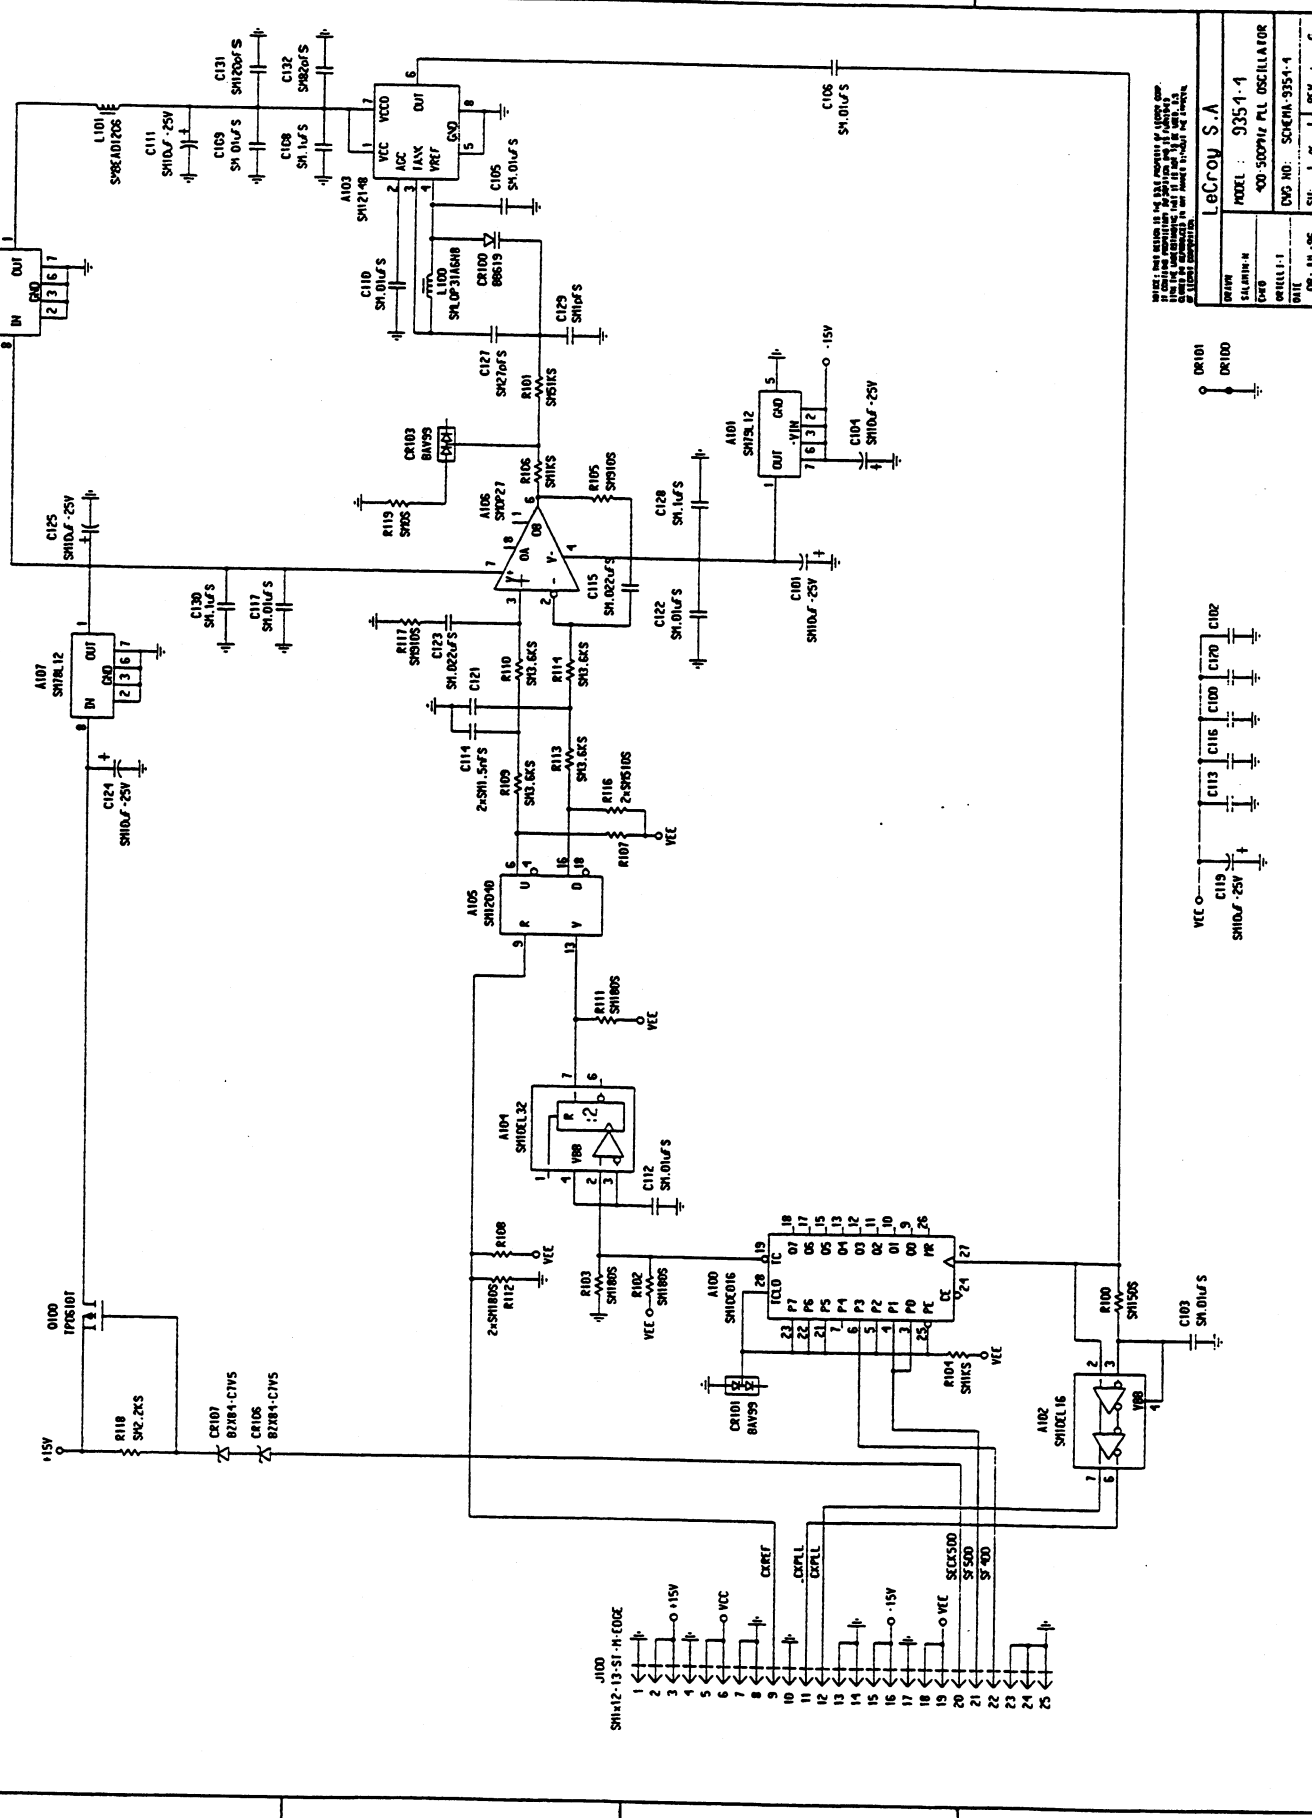


DO NOT RETURN TO THE SELLER UNTIL YOU HAVE BEEN ADVISED BY THE MANUFACTURER THAT THE PRODUCT IS ACCEPTABLE FOR REUSE.


DATE	DESIGNER	LECROY S.A.
08-JUL-96	SKALAHIN	MODEL : 9351-1
	FRAN	400-500MHz PLL OSCILLATOR
	WHELLI	DWG NO: SCHEMA-9351-1
		SR : 1 of 1 REV : 0




J100
SH12-13-S1-H-EDGE

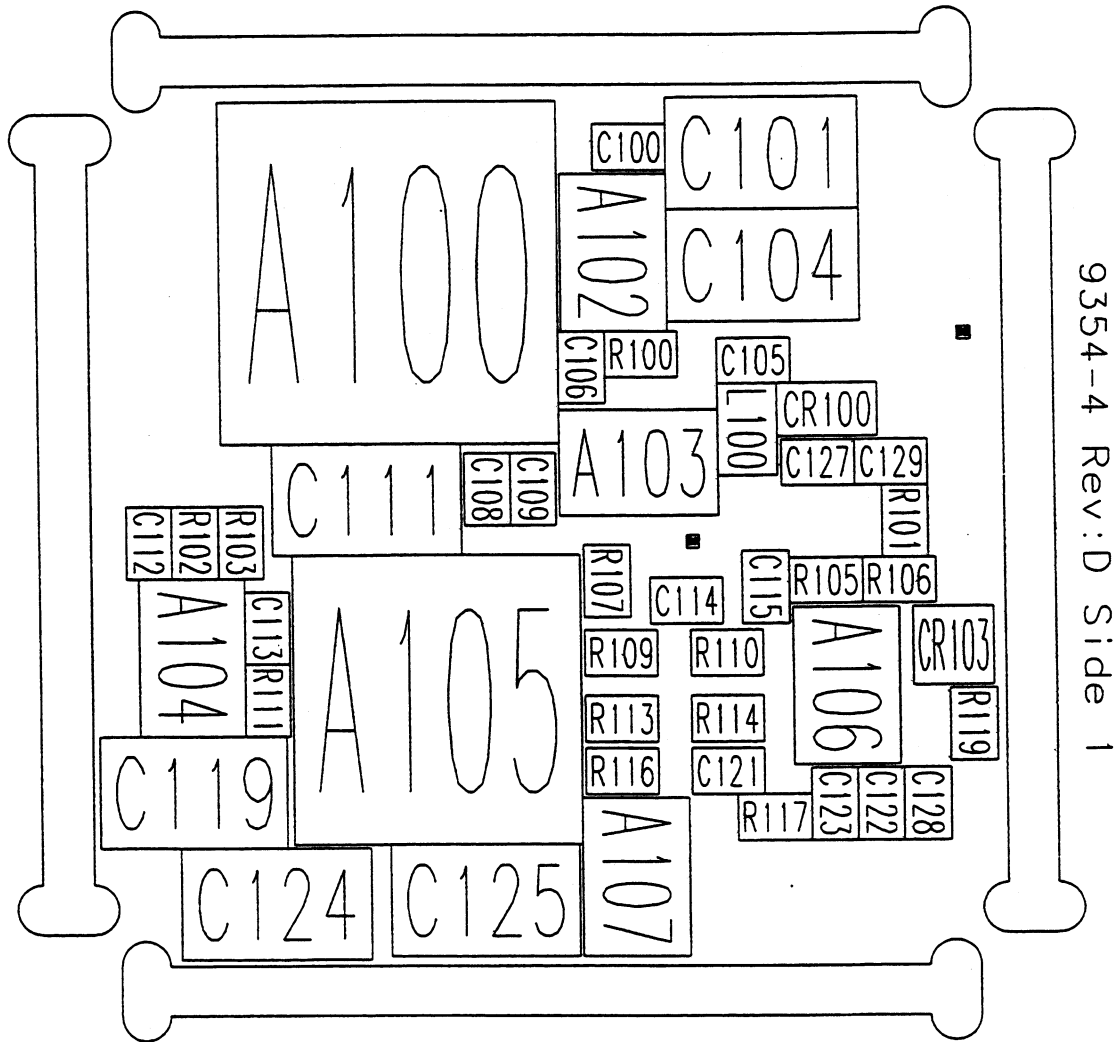


Schematics, Layouts

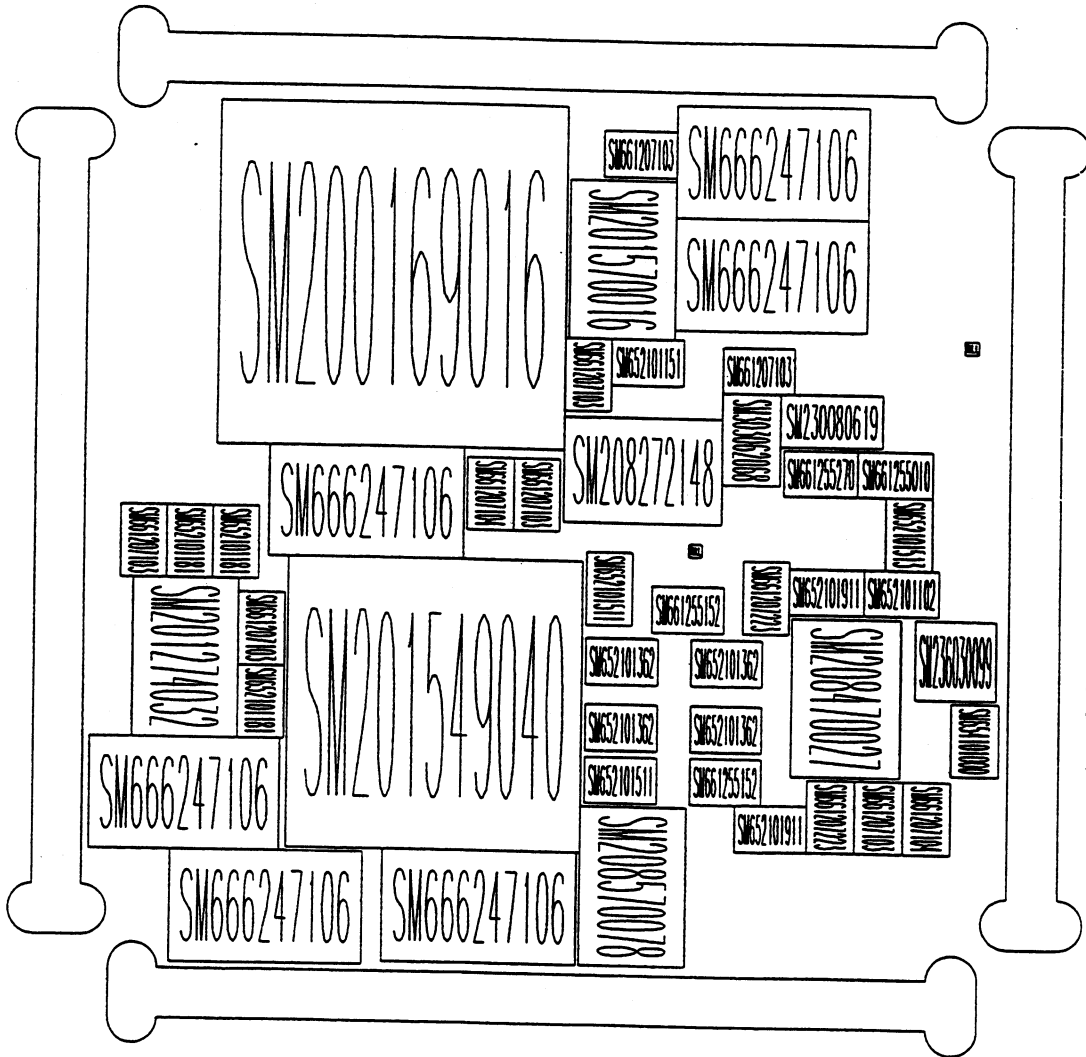


9354-4 Rev: D Side 1

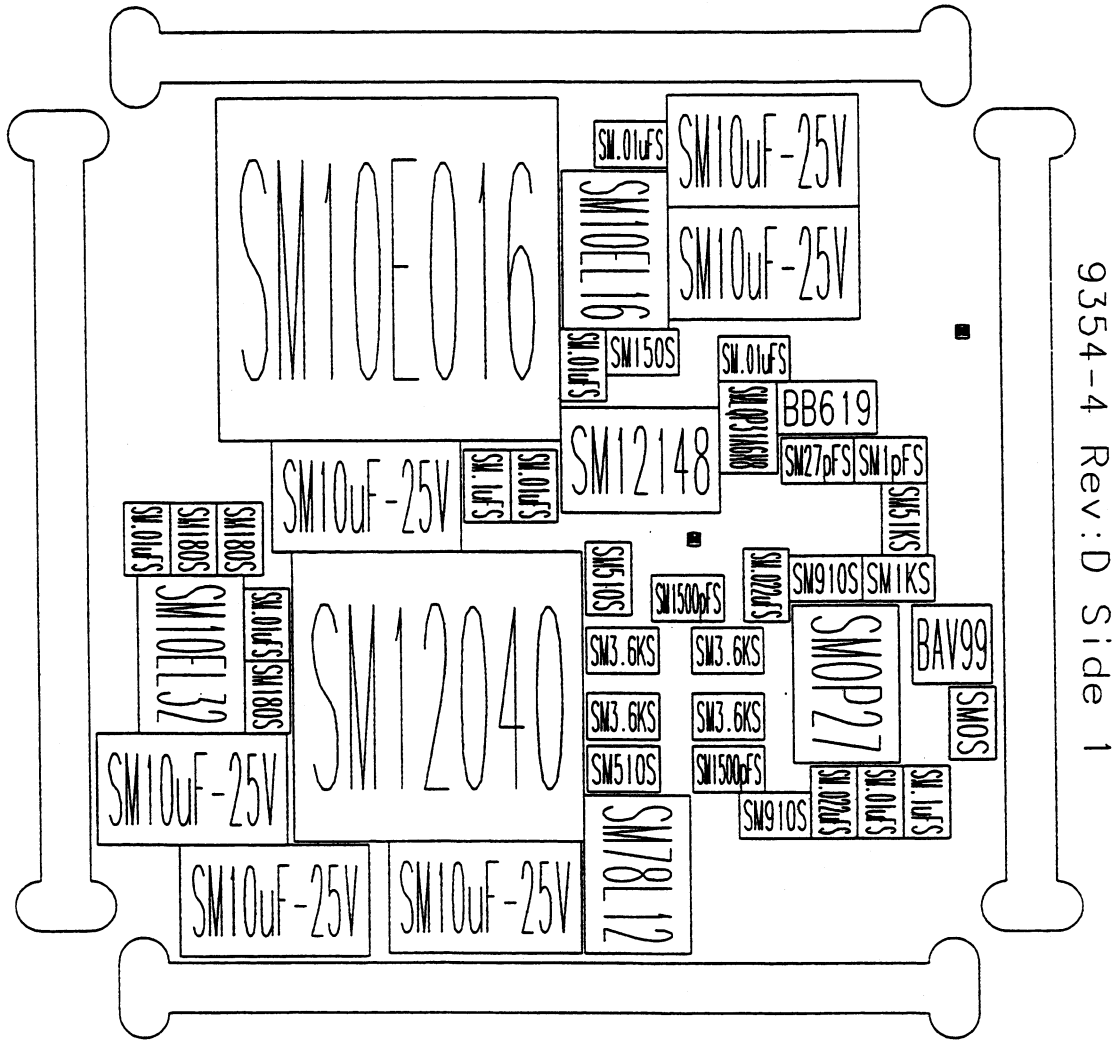

Schematics, Layouts

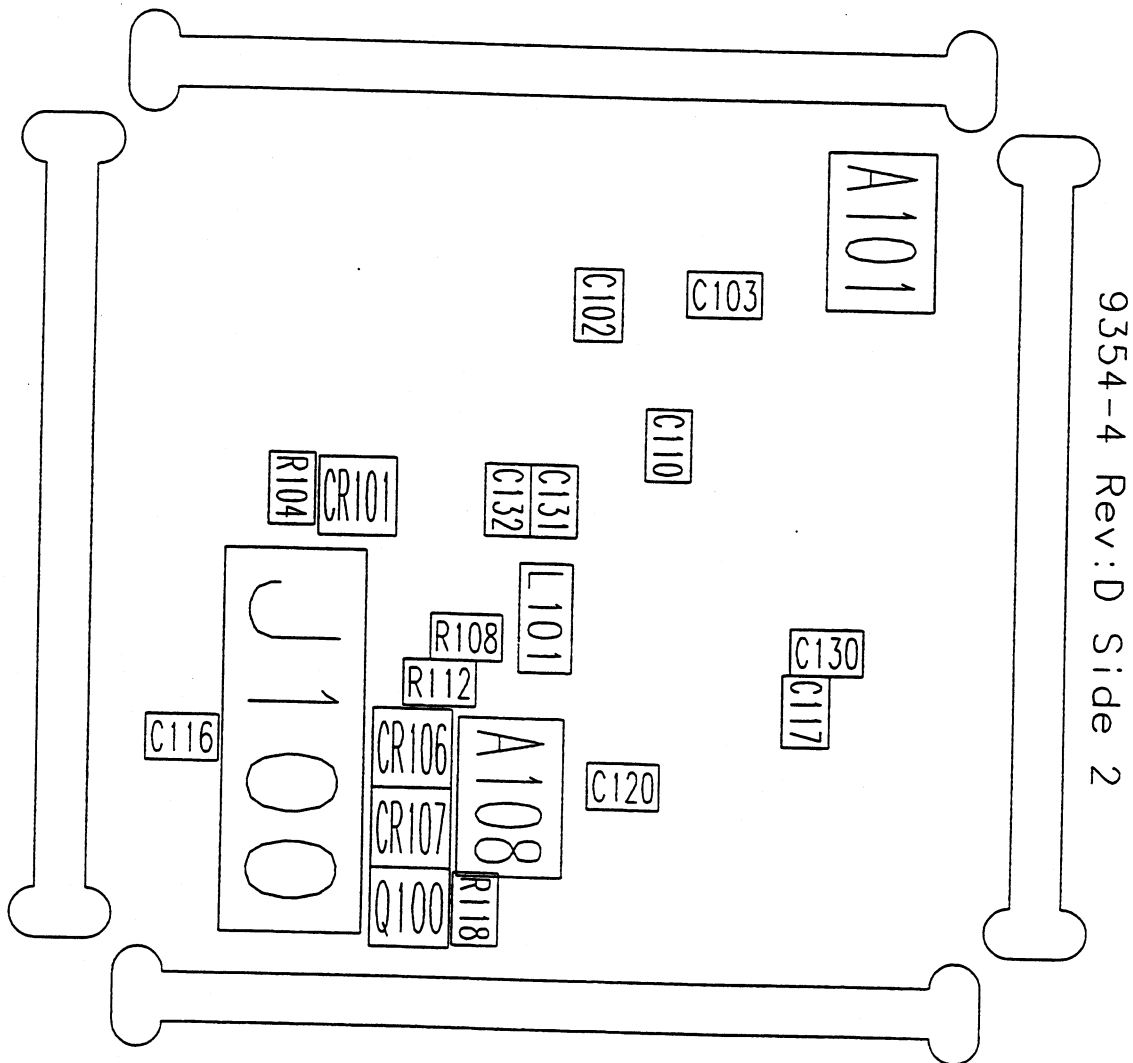

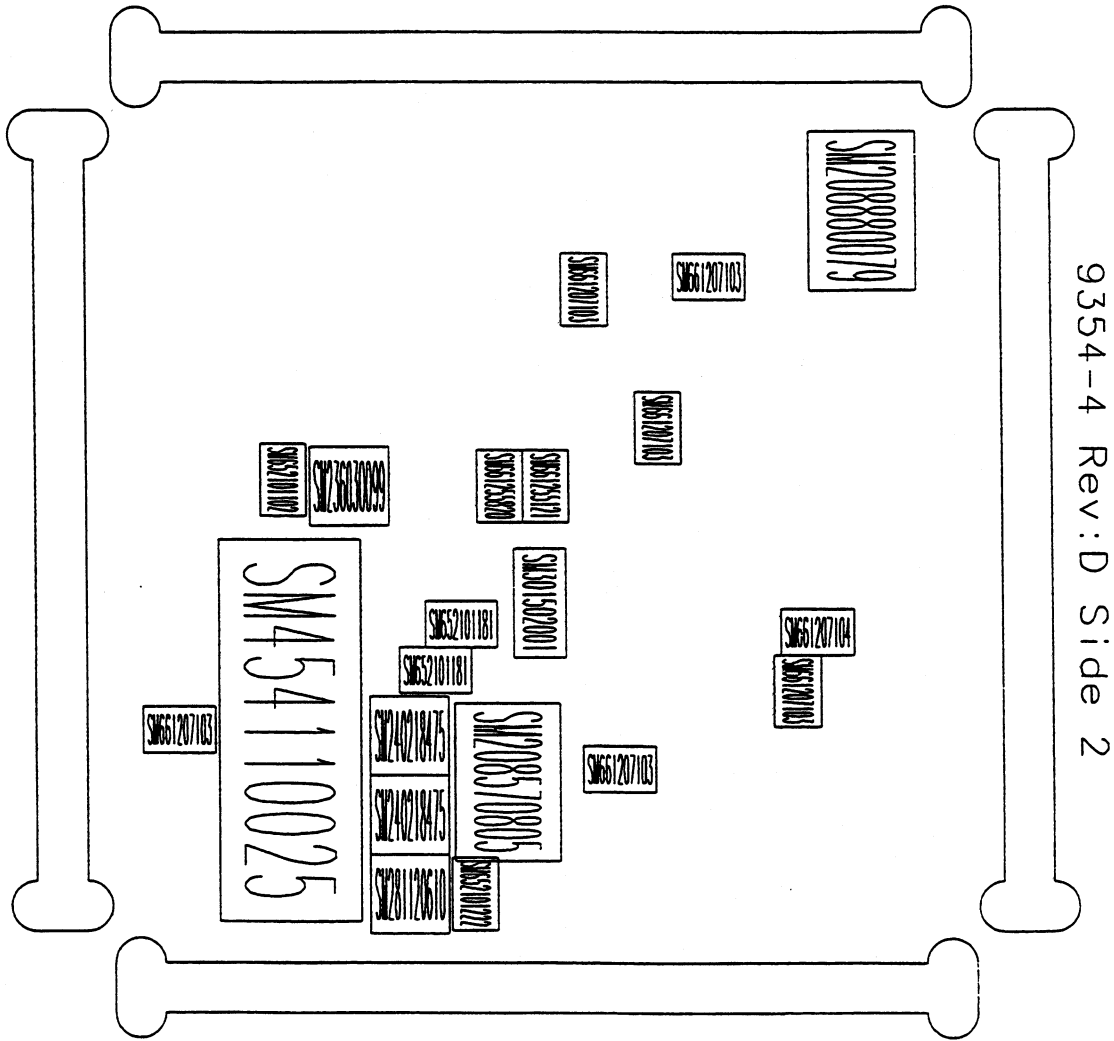

Schematics, Layouts

PART: F9354-4

DESC : Time Base Card

Location	Part Number	Description	Location	Part Number	Description
A100	SM200169016	SM10E016	C127	SM661255270	SM27pFS
A101	SM208880079	SM79L12	C128	SM661207104	SM.1uFS
A102	SM201570016	SM10EL16	C129	SM661255010	SM1pFS
A103	SM208272148	SM12148	C130	SM661207104	SM.1uFS
A104	SM201274032	SM10EL32	C131	SM661255121	SM120pFS
A105	SM201549040	SM12040	C132	SM661255820	SM82pFS
A106	SM208470027	SMOP27	CR100	SM230080619	BB619
A107	SM208570078	SM78L12	CR101	SM236030099	BAV99
A108	SM208570805	SM78L05	CR103	SM236030099	BAV99
C100	SM661207103	SM.01uFS	CR106	SM240218475	BZX84-C7V5
C101	SM666247106	SM10uF-25V	CR107	SM240218475	BZX84-C7V5
C102	SM661207103	SM.01uFS	J100	SM454110025	SM1x12
C103	SM661207103	SM.01uFS	L100	SM303062068	SMLQP31A6N8
C104	SM666247106	SM10uF-25V	L101	SM301502001	SMBEAD1206
C105	SM661207103	SM.01uFS	Q100	SM281120610	TP0610T
C106	SM661207103	SM.01uFS	R100	SM652101151	SM150S
C108	SM661207104	SM.1uFS	R101	SM652101513	SM51KS
C109	SM661207103	SM.01uFS	R102	SM652101181	SM180S
C110	SM661207103	SM.01uFS	R103	SM652101181	SM180S
C111	SM666247106	SM10uF-25V	R104	SM652101102	SM1KS
C112	SM661207103	SM.01uFS	R105	SM652101911	SM910S
C113	SM661207103	SM.01uFS	R106	SM652101102	SM1KS
C114	SM661255152	SM1500pFS	R107	SM652101511	SM510S
C115	SM661207223	SM.022uFS	R108	SM652101181	SM180S
C116	SM661207103	SM.01uFS	R109	SM652101362	SM3.6KS
C117	SM661207103	SM.01uFS	R110	SM652101362	SM3.6KS
C119	SM666247106	SM10uF-25V	R111	SM652101181	SM180S
C120	SM661207103	SM.01uFS	R112	SM652101181	SM180S
C121	SM661255152	SM1500pFS	R113	SM652101362	SM3.6KS
C122	SM661207103	SM.01uFS	R114	SM652101362	SM3.6KS
C123	SM661207223	SM.022uFS	R116	SM652101511	SM510S
C124	SM666247106	SM10uF-25V	R117	SM652101911	SM910S
C125	SM666247106	SM10uF-25V	R118	SM652101222	SM2.2KS
			R119	SM654101000	SM0S

Schematics, Layouts

3

2

1

A B C D E

4

3




2

1

J1
COMOx10-S1-F-PF
C10 D00
C9 D01
C8 D02
C7 D03
C6 D04
C5 D05
C4 D06
C3 D07


J1
S1
S2
S3
S4
S5
S6
S7
S8
S9
S10
S11
S12
S13

J1
B1
B2
B3
B4
B5
B6
B7
B8
B9
B10

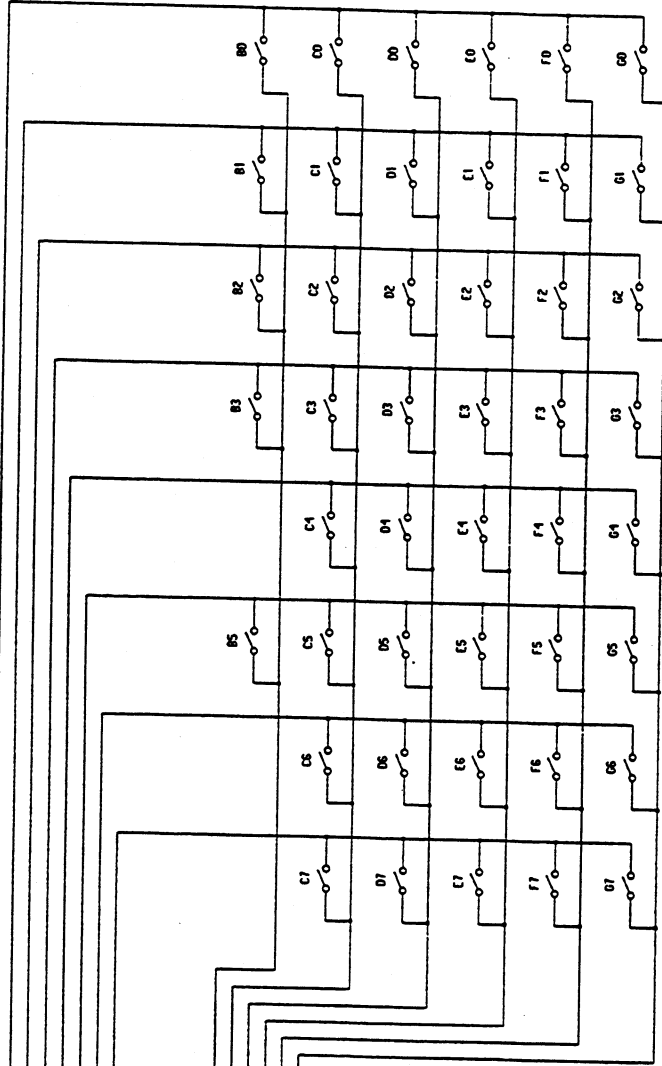

THIS DRAWING IS THE PROPERTY OF LECTROY S.A. IT IS TO BE USED ONLY FOR THE PROJECT AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

LECTROY S.A.	
PROJ. N°	9602-5
DESIGN N°	KEYPAD SCHEMATIC
REV. N°	001-1
DATE	0000-00-00
APP. A	REV. B

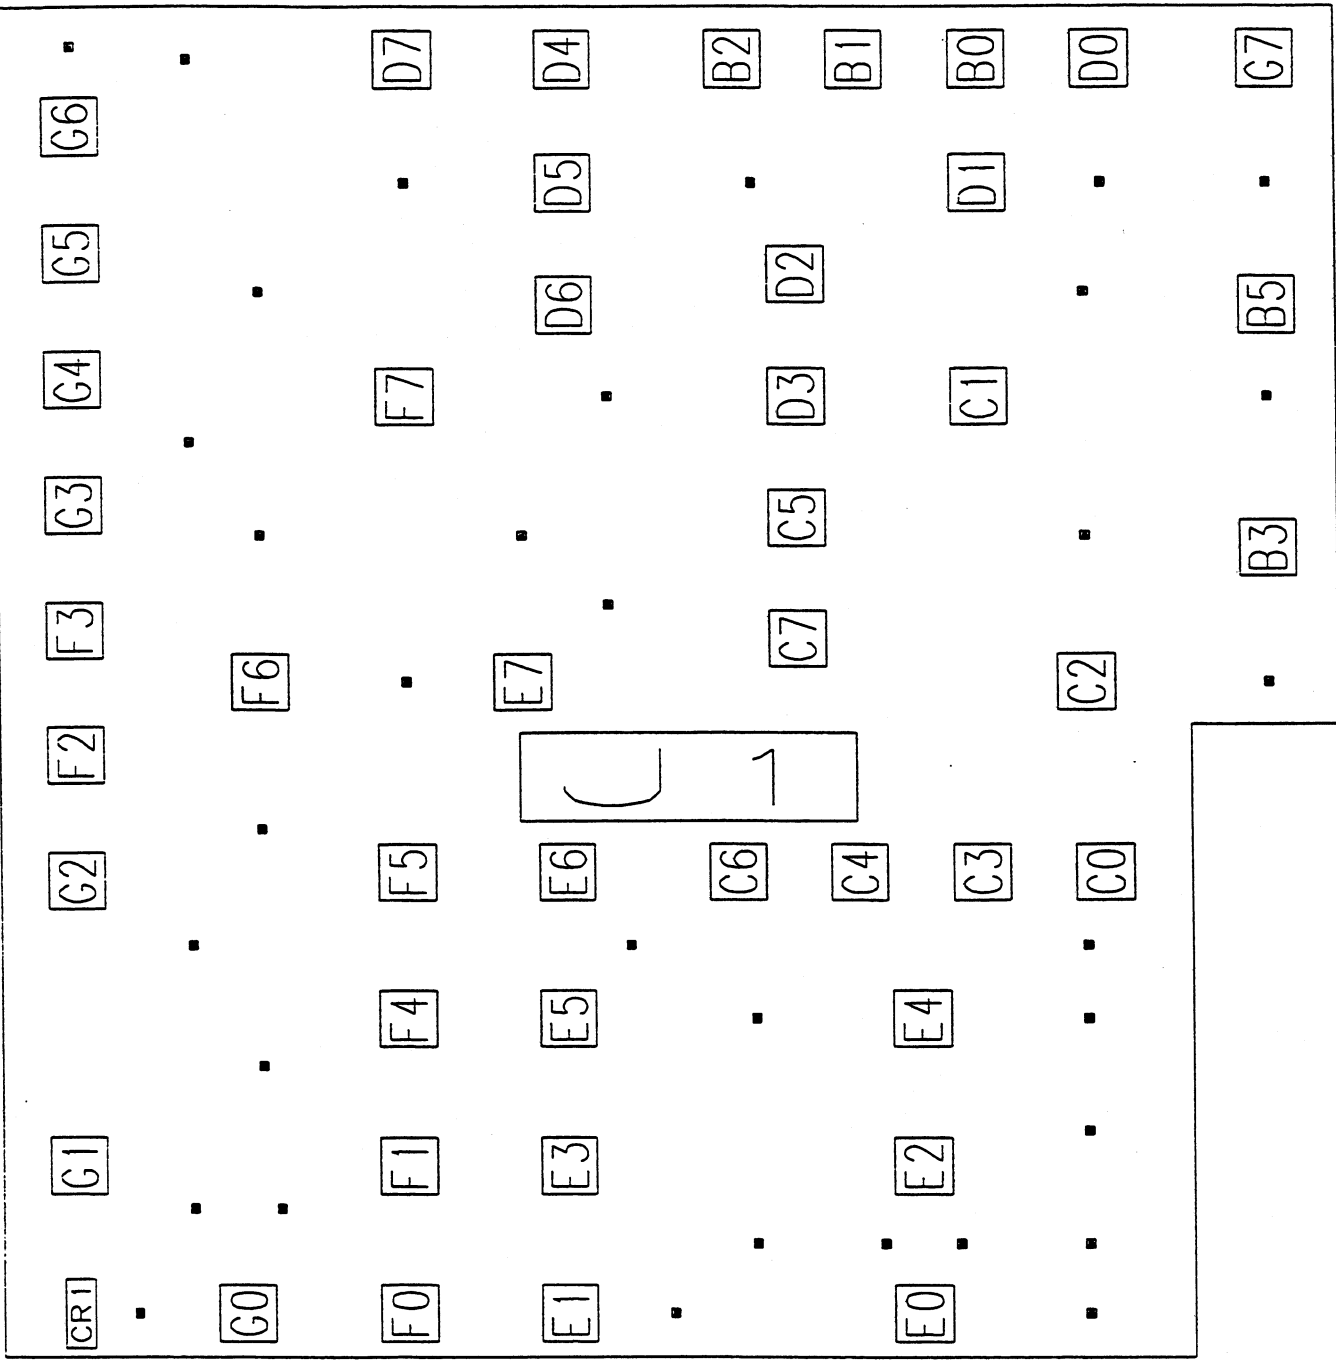

9602-5 Rev:C

Schematics, Layouts

3

2


1

A B C D E

ENCODERS MATRIX

13x ENCOD-2BIT (* = WITH DETENT)
34x BAWS2

K32 and K10
not mounted

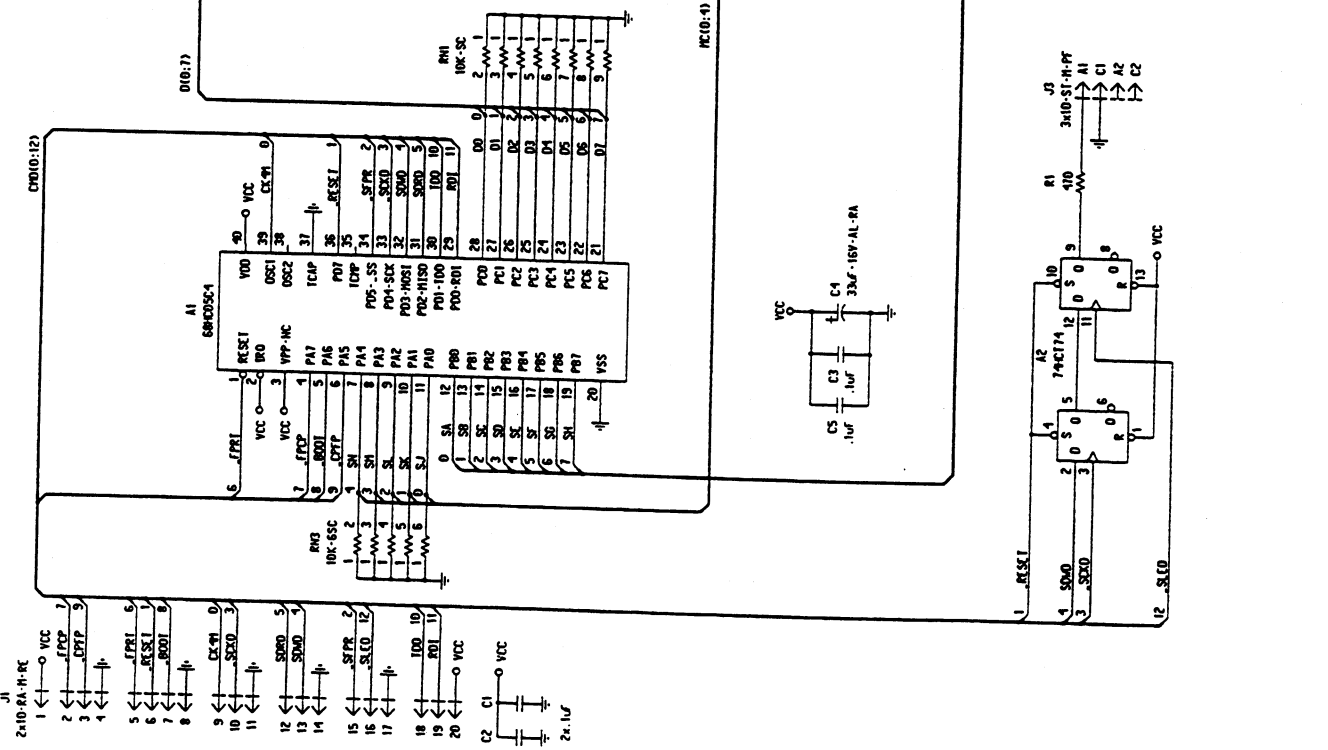

NOTE: THE DESIGN AND ALL RIGHTS OF INVENTION ARE RESERVED BY TELECROY S.A. FOR THE FRONT PANEL. THE FRONT PANEL IS NOT TO BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF TELECROY S.A.

DRAWN	MODEL :	9604-5
CHECKED	FOR CHANNEL FRONT PANEL	
DATE	DOC NO :	SD/CA-9604-5
	REV :	1 OF 1
	REV :	C
Telecroy S.A.		

3

2

1


A

B

C


D


E

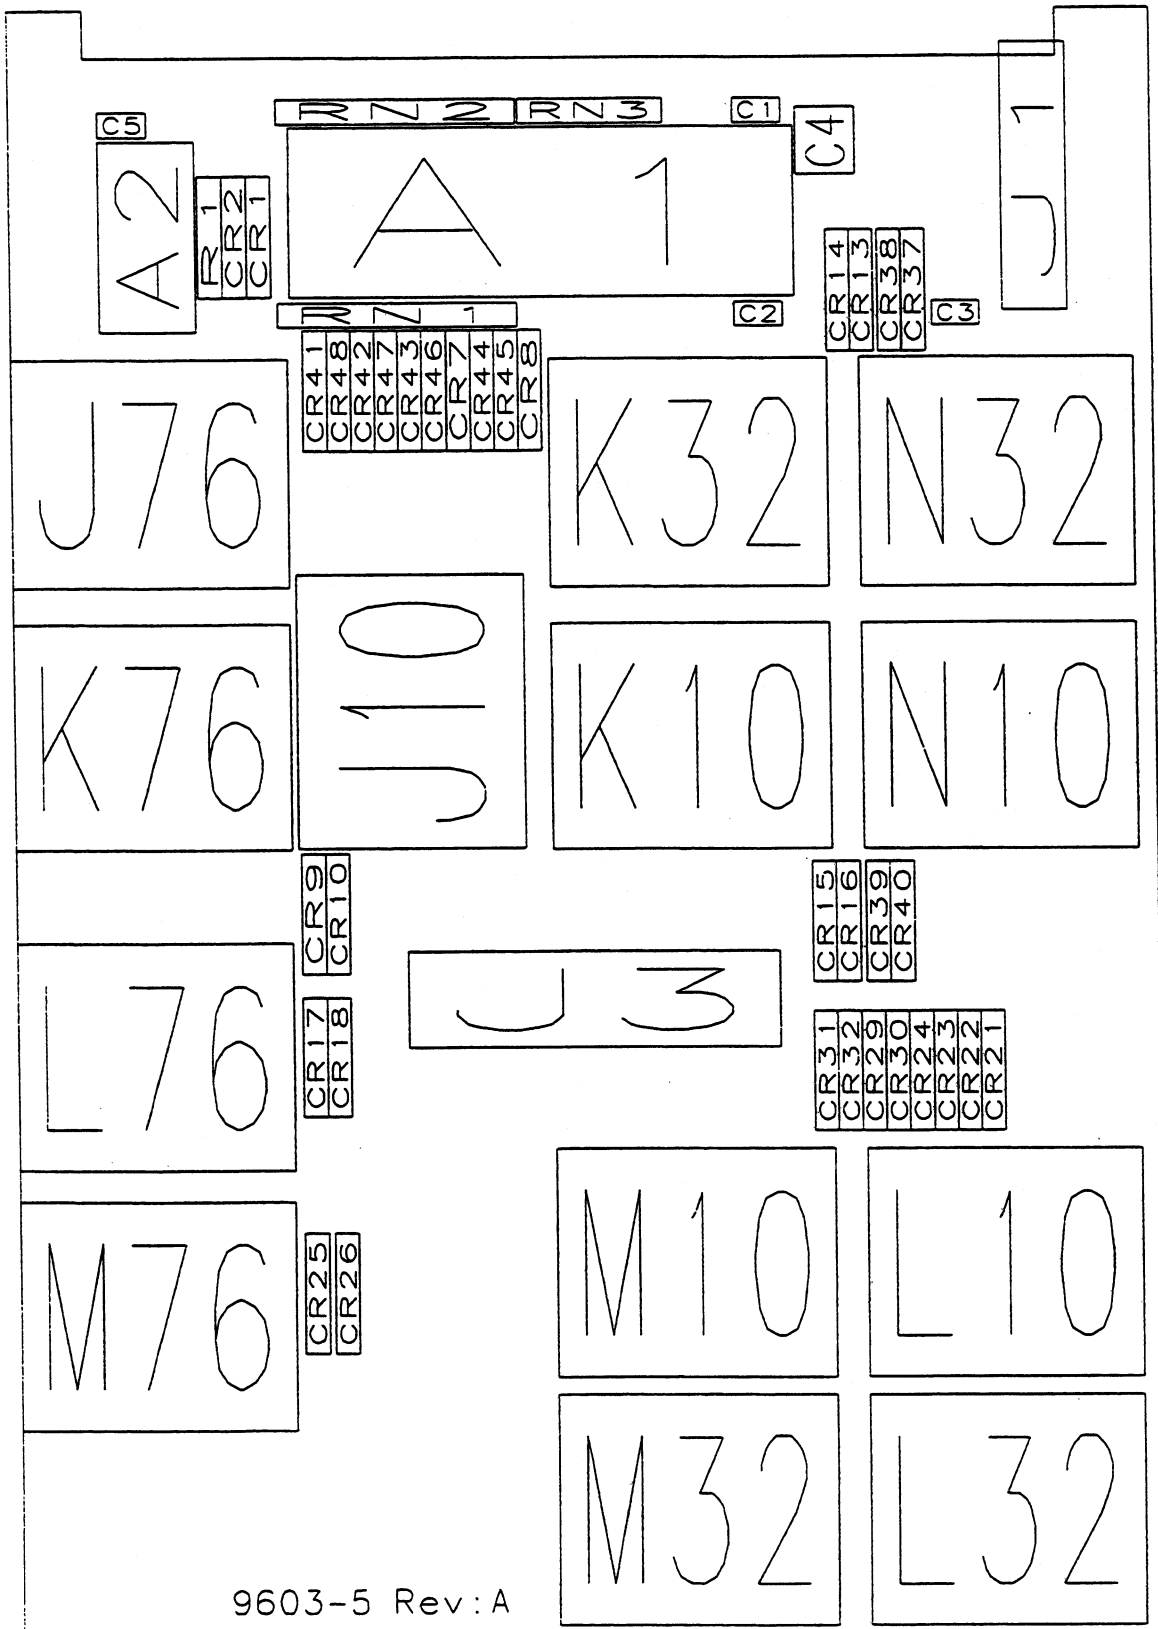

9603-5 Rev: A

Schematics, Layouts

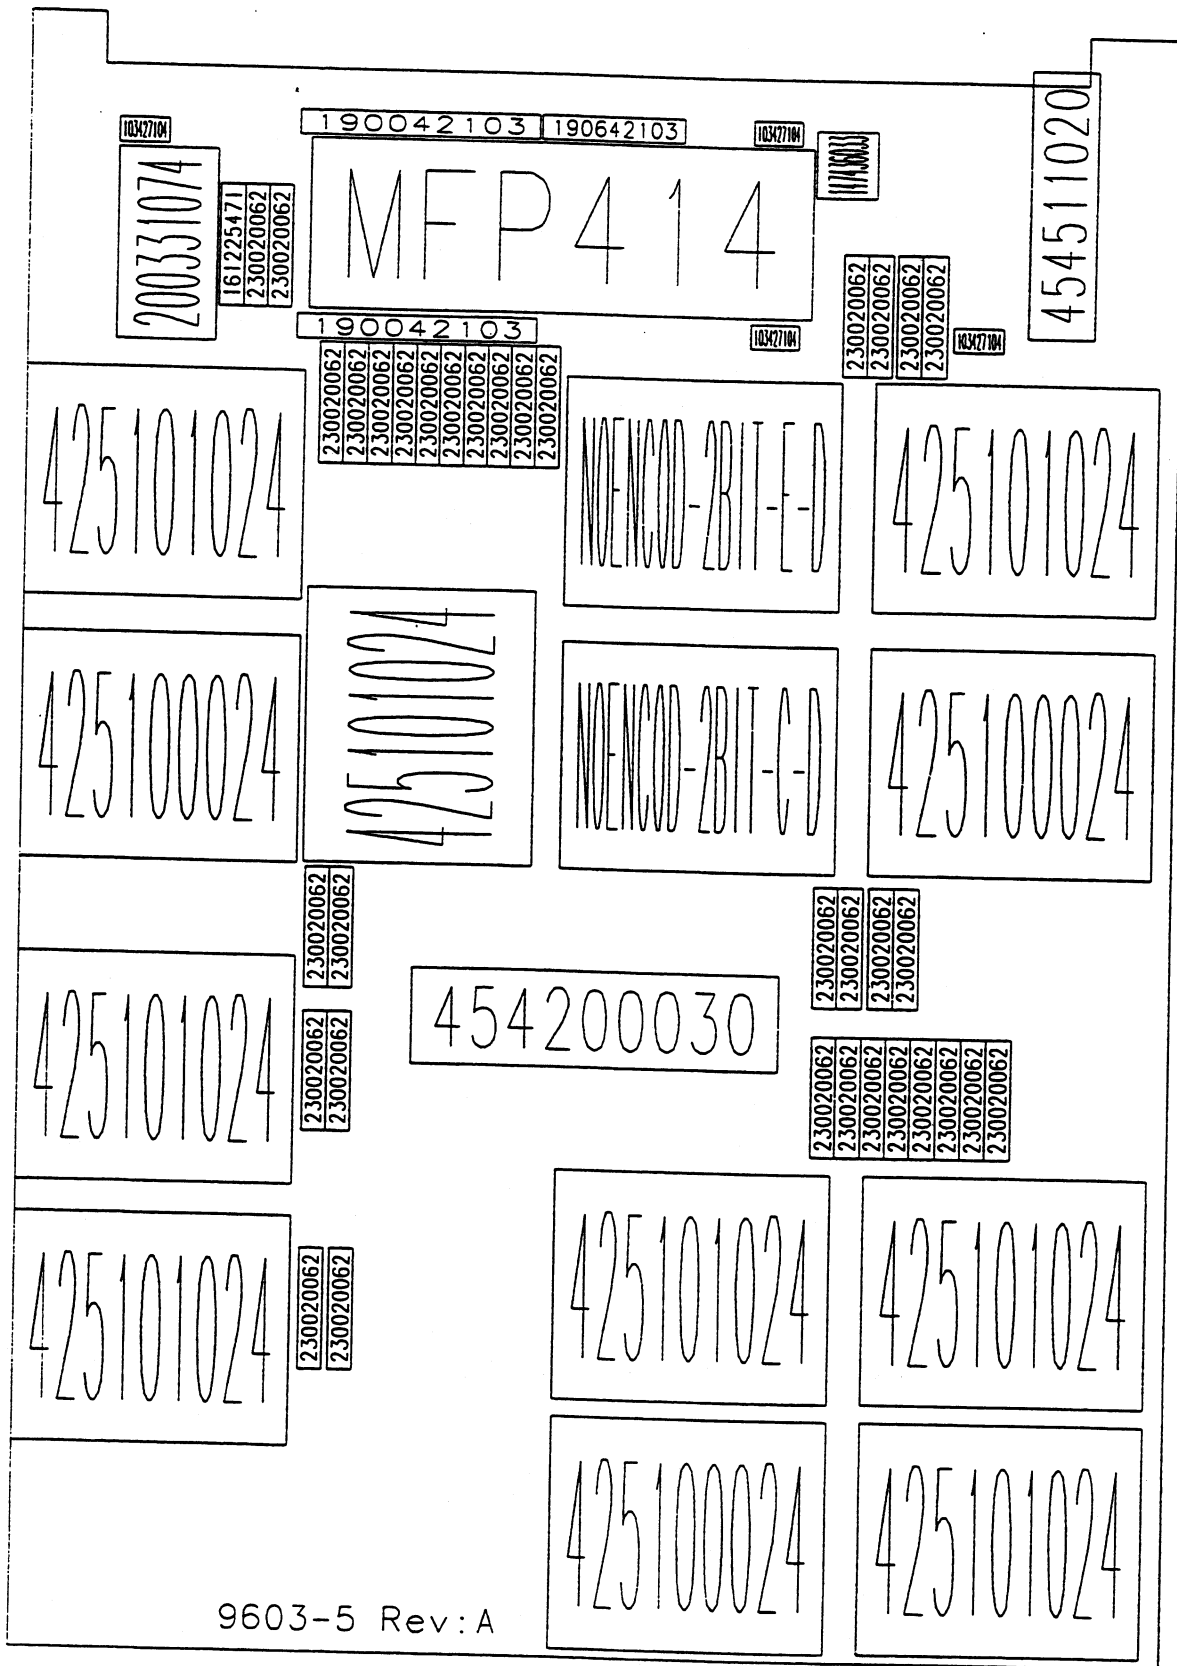

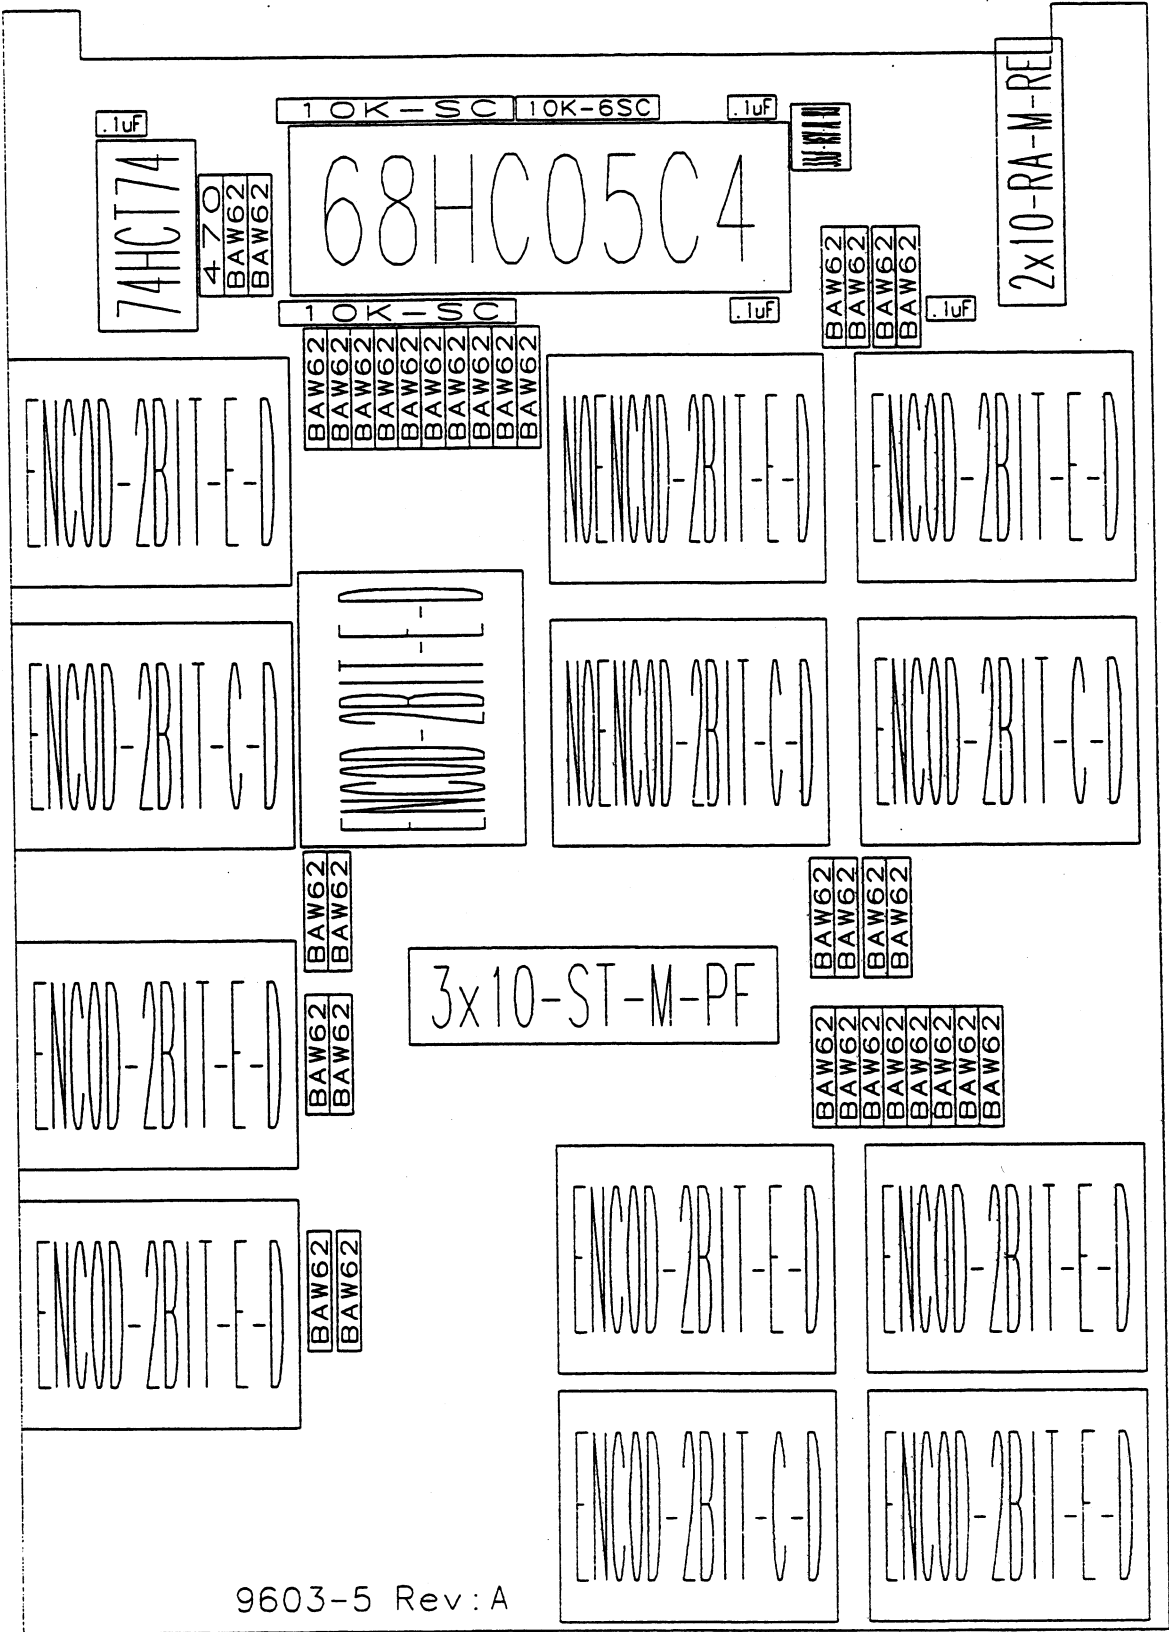

9603-5 Rev:A

Schematics, Layouts

PART: F9602-5



DESC : Front Panel Keypad

Location	Part Number	Description
CR1	SMLEDP7019	HLMP_7019
J1	3x10-ST-F	CONN3x10-ST-F

PART: F9604-5

DESC : Front Panel

Location	Part Number	Description	Location	Part Number	Description
A1	MFP414	68HC05C4	CR37	230020062	BAW62
A2	200331074	74HCT74	CR38	230020062	BAW62
C1	103427104	.1uF	CR39	230020062	BAW62
C2	103427104	.1uF	CR40	230020062	BAW62
C3	103427104	.1uF	CR41	230020062	BAW62
C4	147436033	33uF-16V	CR42	230020062	BAW62
C5	103427104	.1uF	CR43	230020062	BAW62
CR1	230020062	BAW62	CR44	230020062	BAW62
CR2	230020062	BAW62	CR45	230020062	BAW62
CR7	230020062	BAW62	CR46	230020062	BAW62
CR8	230020062	BAW62	CR47	230020062	BAW62
CR9	230020062	BAW62	CR48	230020062	BAW62
CR10	230020062	BAW62	J1	454511020	2x10-RA-M-RE
CR13	230020062	BAW62	J3	454200030	3x10-ST-M-PF
CR14	230020062	BAW62	J10	425101024	ENCOD-2BIT
CR15	230020062	BAW62	J76	425101024	ENCOD-2BIT
CR16	230020062	BAW62	K76	425100024	ENCOD-2BIT
CR17	230020062	BAW62	L10	425101024	ENCOD-2BIT
CR18	230020062	BAW62	L32	425101024	ENCOD-2BIT
CR21	230020062	BAW62	L76	425101024	ENCOD-2BIT
CR22	230020062	BAW62	M10	425101024	ENCOD-2BIT
CR23	230020062	BAW62	M32	425100024	ENCOD-2BIT
CR24	230020062	BAW62	M76	425101024	ENCOD-2BIT
CR25	230020062	BAW62	N10	425100024	ENCOD-2BIT
CR26	230020062	BAW62	N32	425101024	ENCOD-2BIT
CR29	230020062	BAW62	R1	161225471	470
CR30	230020062	BAW62	RN1	190042103	10K-SC
CR31	230020062	BAW62	RN2	190042103	10K-SC
CR32	230020062	BAW62	RN3	190642103	10K-6SC

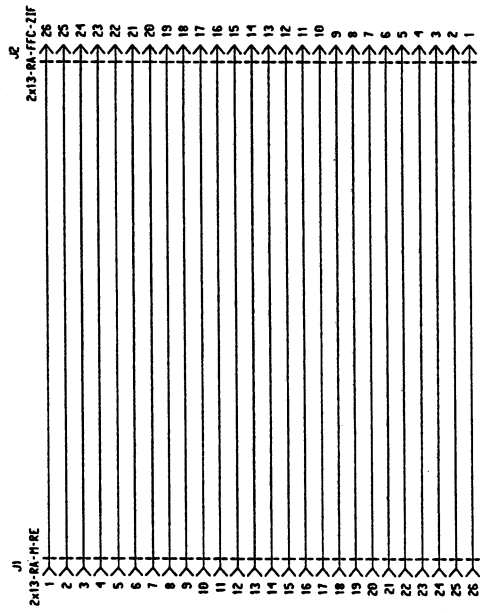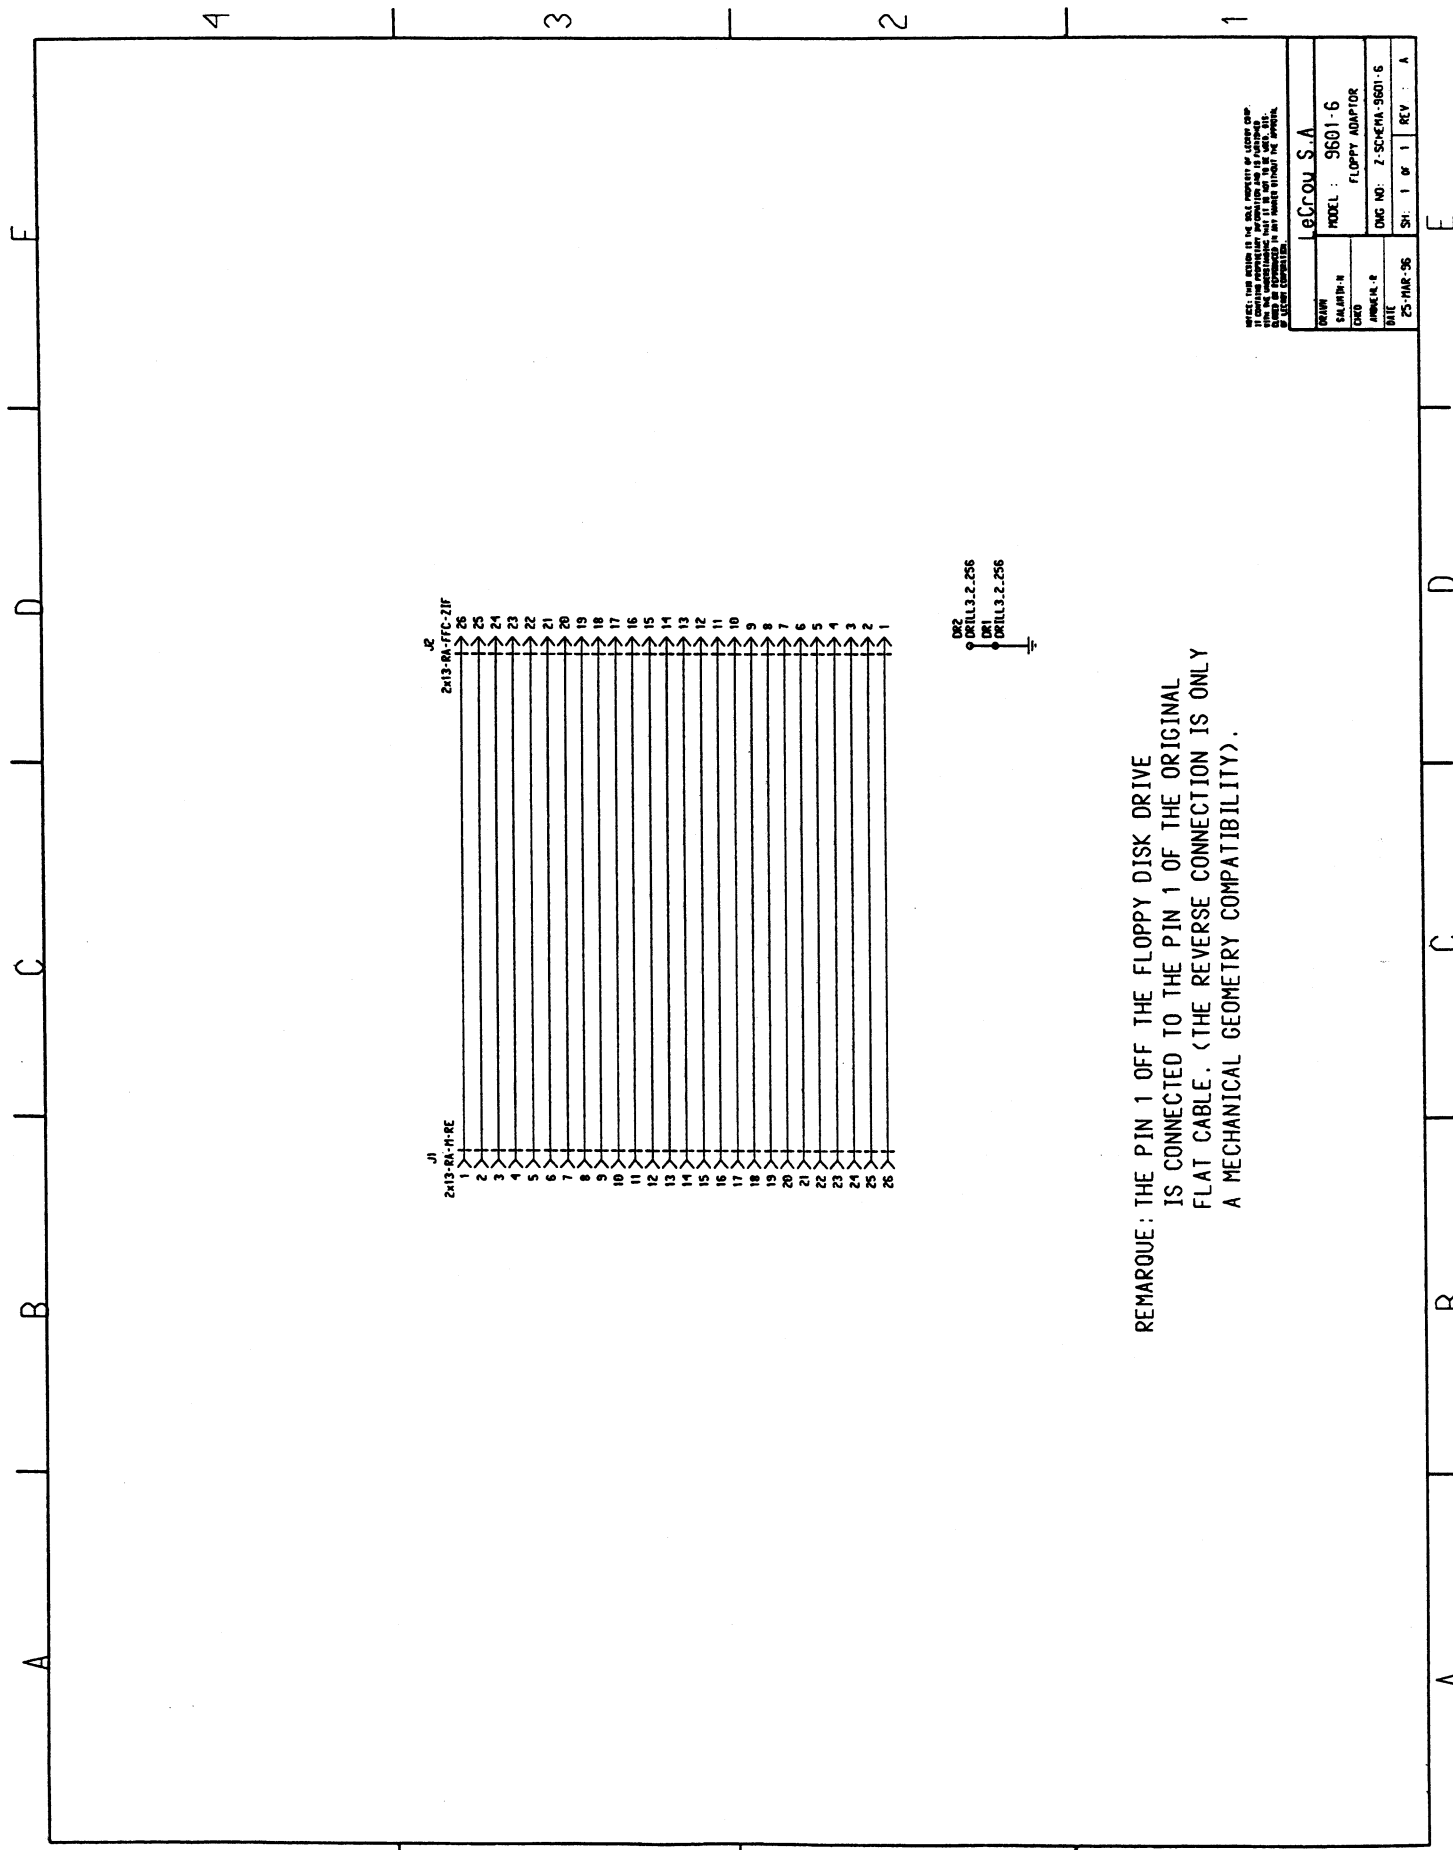


REMARQUE: THE PIN 1 OFF THE FLOPPY DISK DRIVE IS CONNECTED TO THE PIN 1 OF THE ORIGINAL FLAT CABLE. (THE REVERSE CONNECTION IS ONLY A MECHANICAL GEOMETRY COMPATIBILITY).

NOTICE: THIS DRAWING IS THE PROPERTY OF ECRON S.A. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED. ANY REPRODUCTION OR USE FOR OTHER PURPOSES IS STRICTLY PROHIBITED.

DESIGN	ECRON S.A.
REALISATION	MODEL : 9601-6
OBJET	FLOPPY ADAPTOR
REVISION	DWG NO: Z-SCHEMA-9601-6
DATE	SP. 1 01 REV. A

Schematics, Layouts

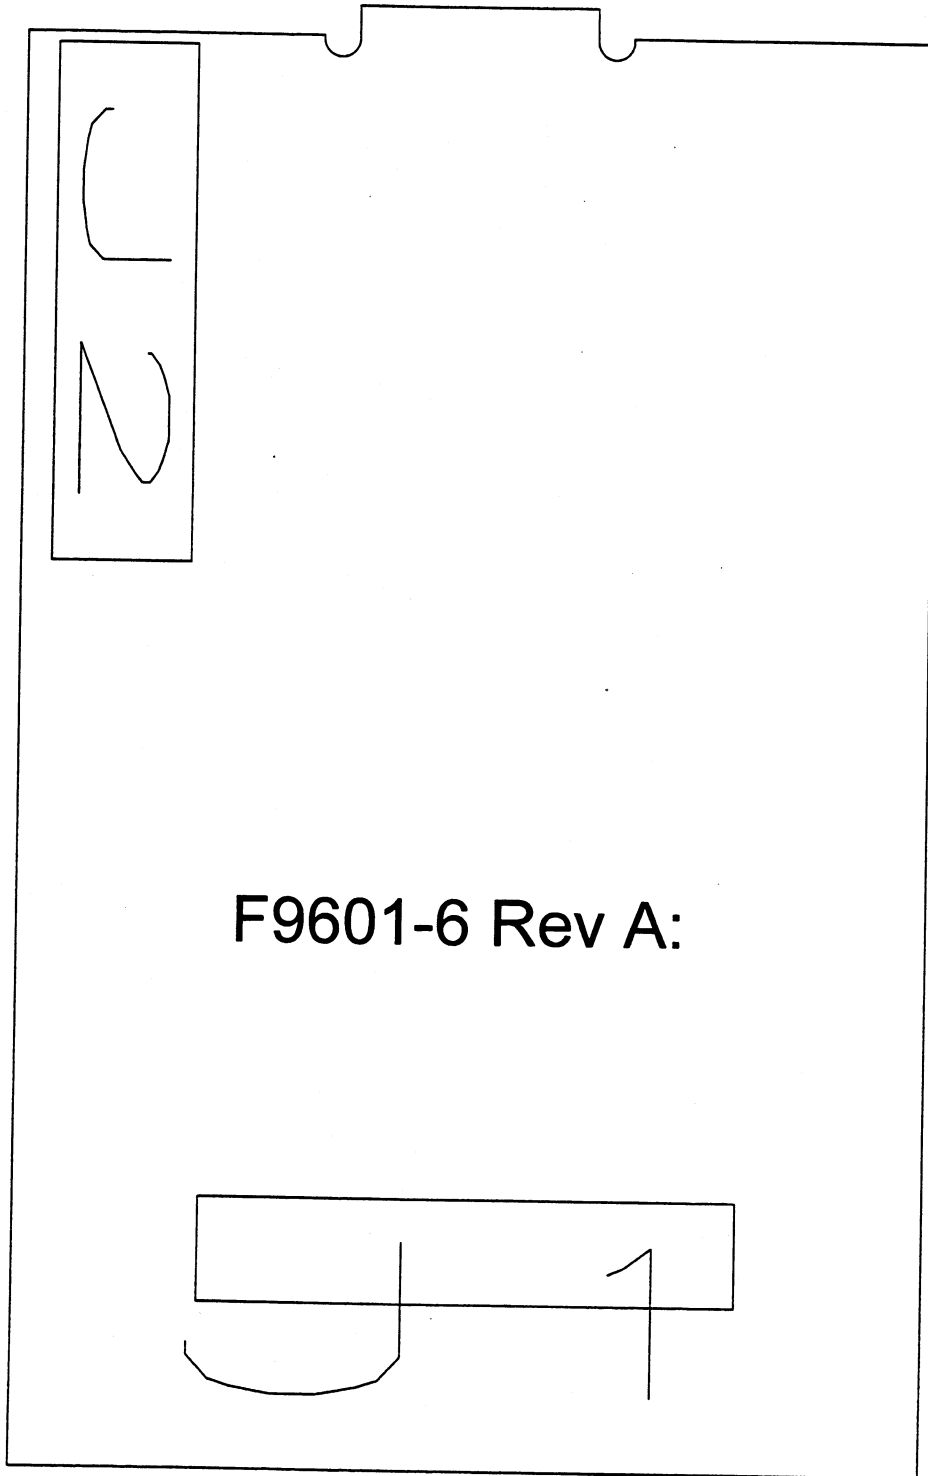

453411026

F9601-6 Rev A:


454511026

Schematics, Layouts


2X13-RA-FFC-ZIF

F9601-6 Rev A:

~~2X13-RA-M-RE~~

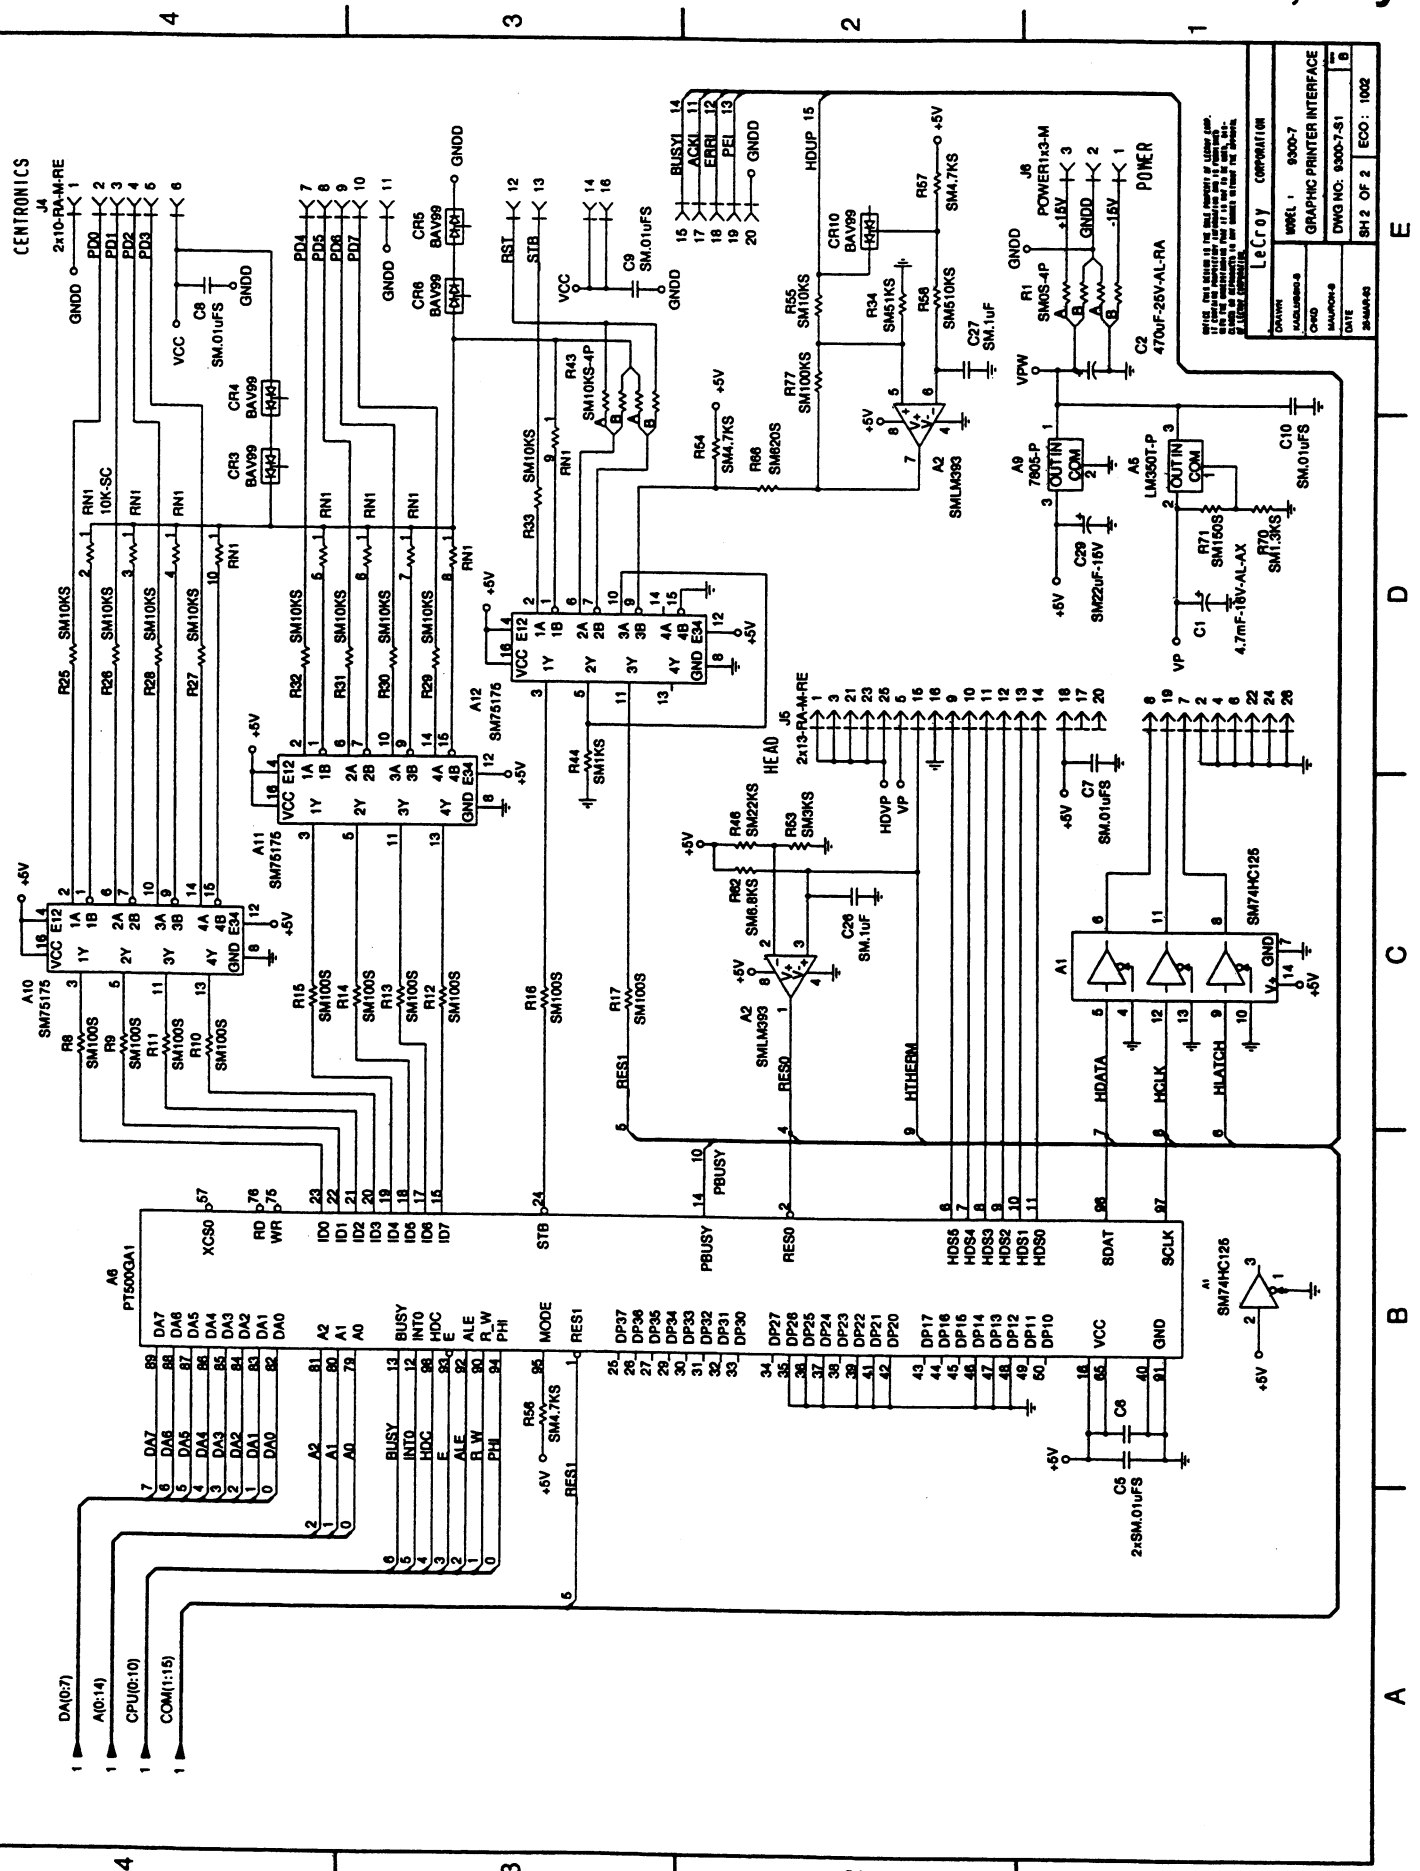


Schematics, Layouts

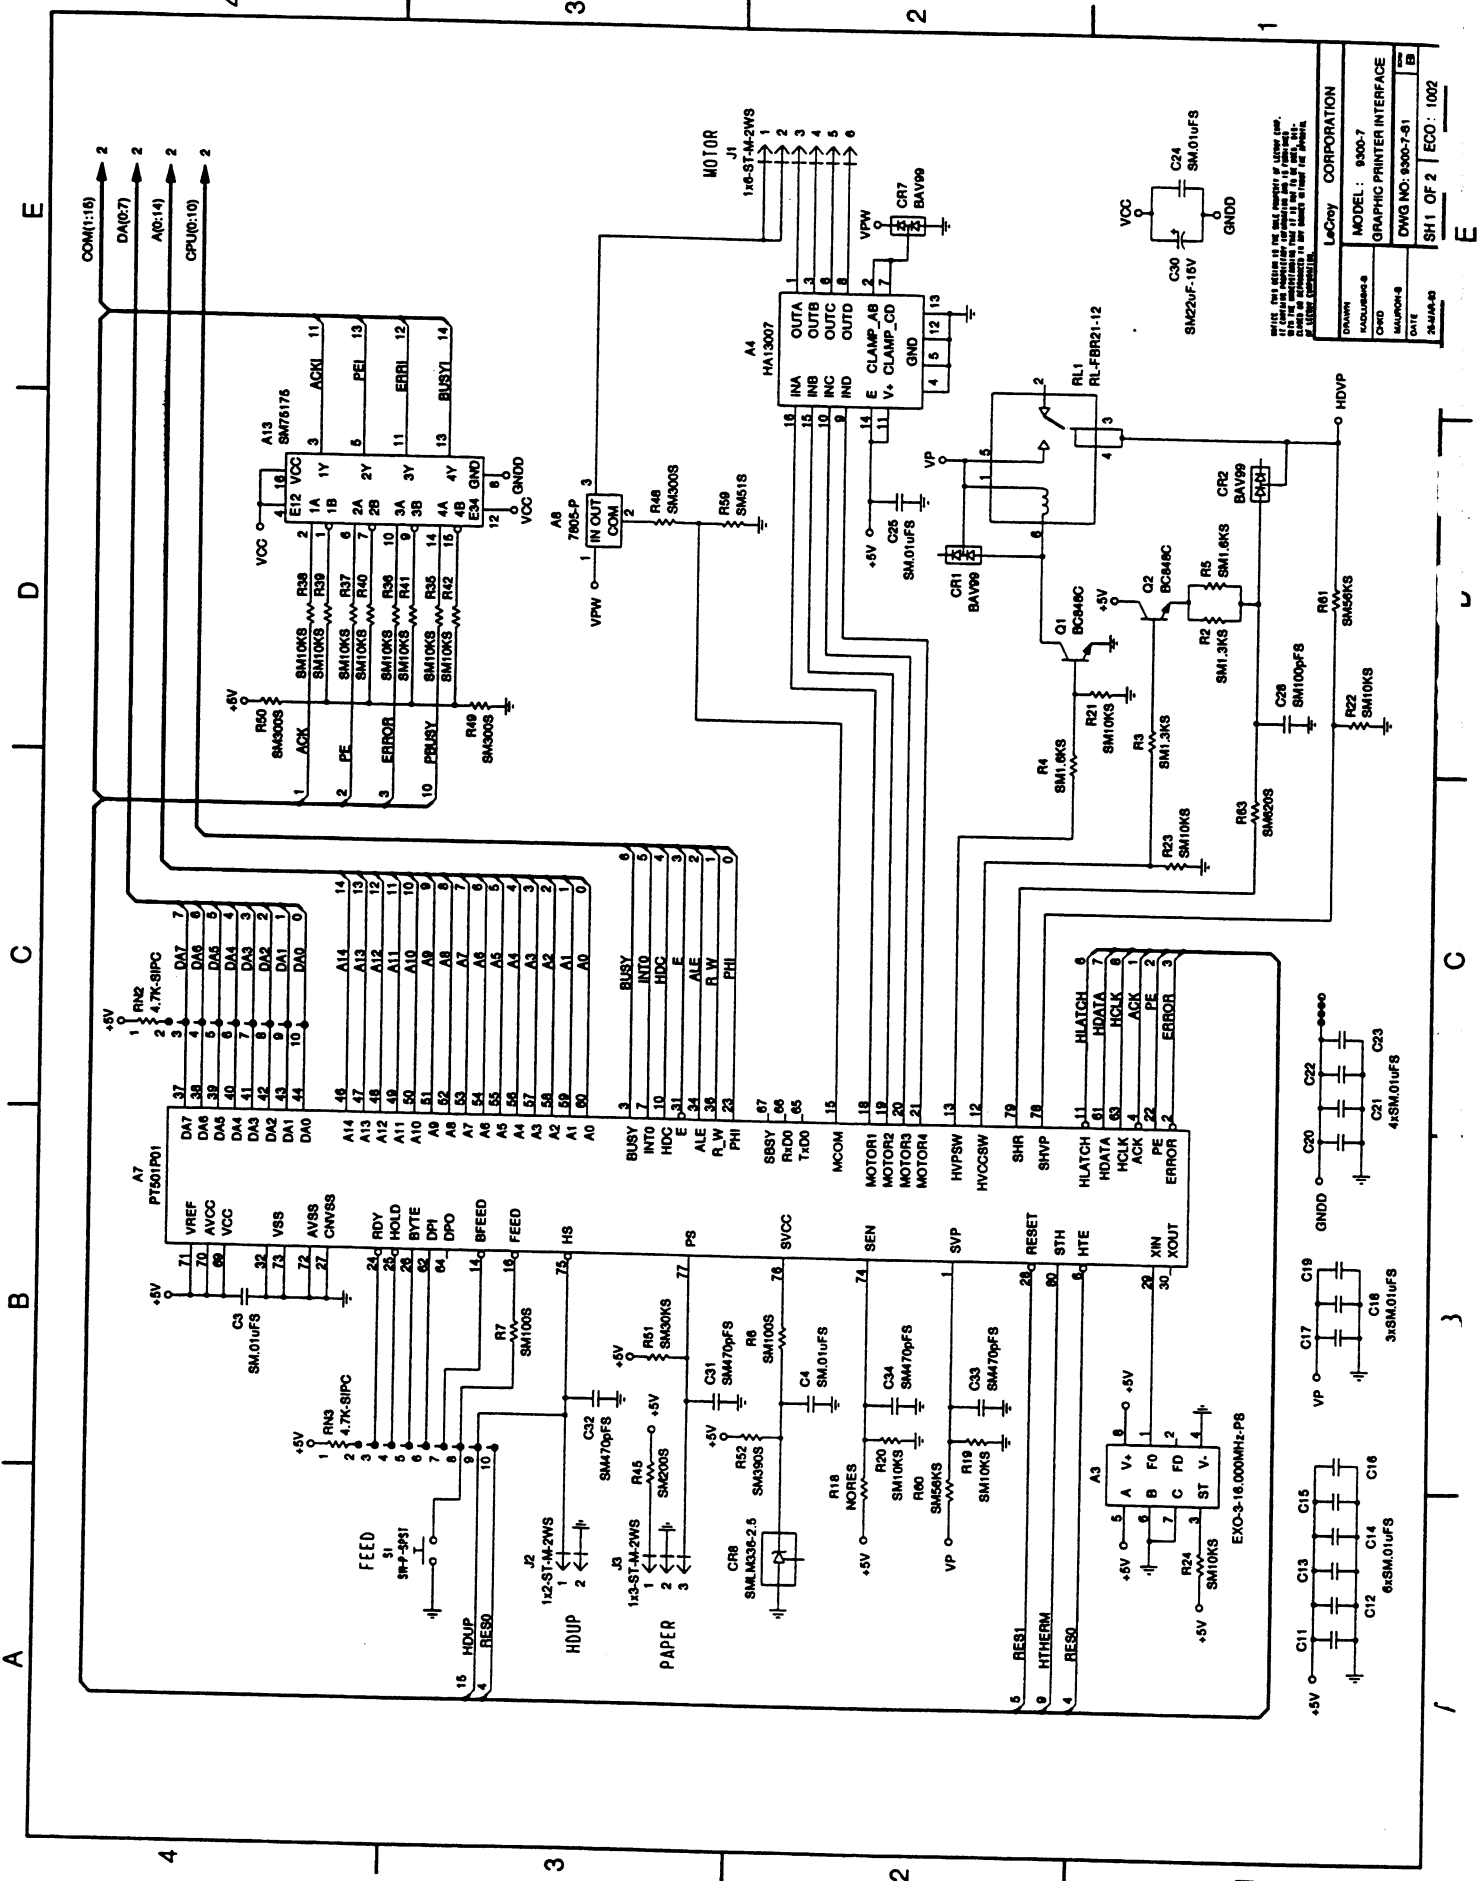


PLEASE REFER TO THE BULK ORDERING OF LITERATURE.
 THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE.
 ALL RIGHTS RESERVED.

LeCroy CORPORATION
 MODEL: 9300-7
 GRAPHIC PRINTER INTERFACE
 DWG NO: 9300-7-91
 SH1 OF 2 | ECO: 1002

9300-7 Rev:C

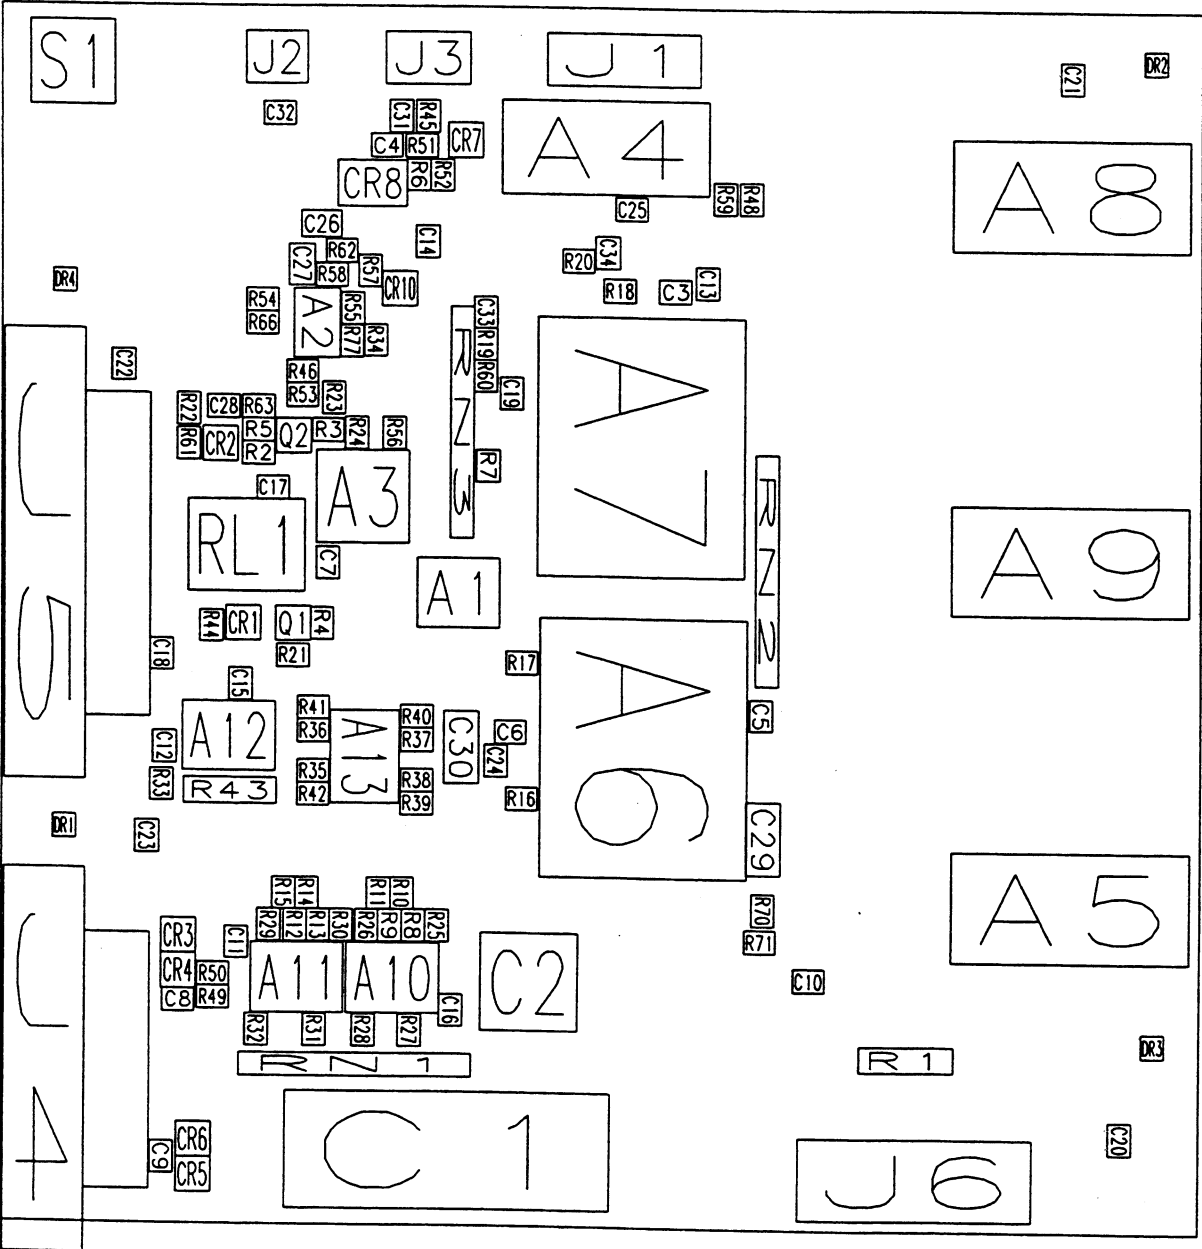

Schematics, Layouts

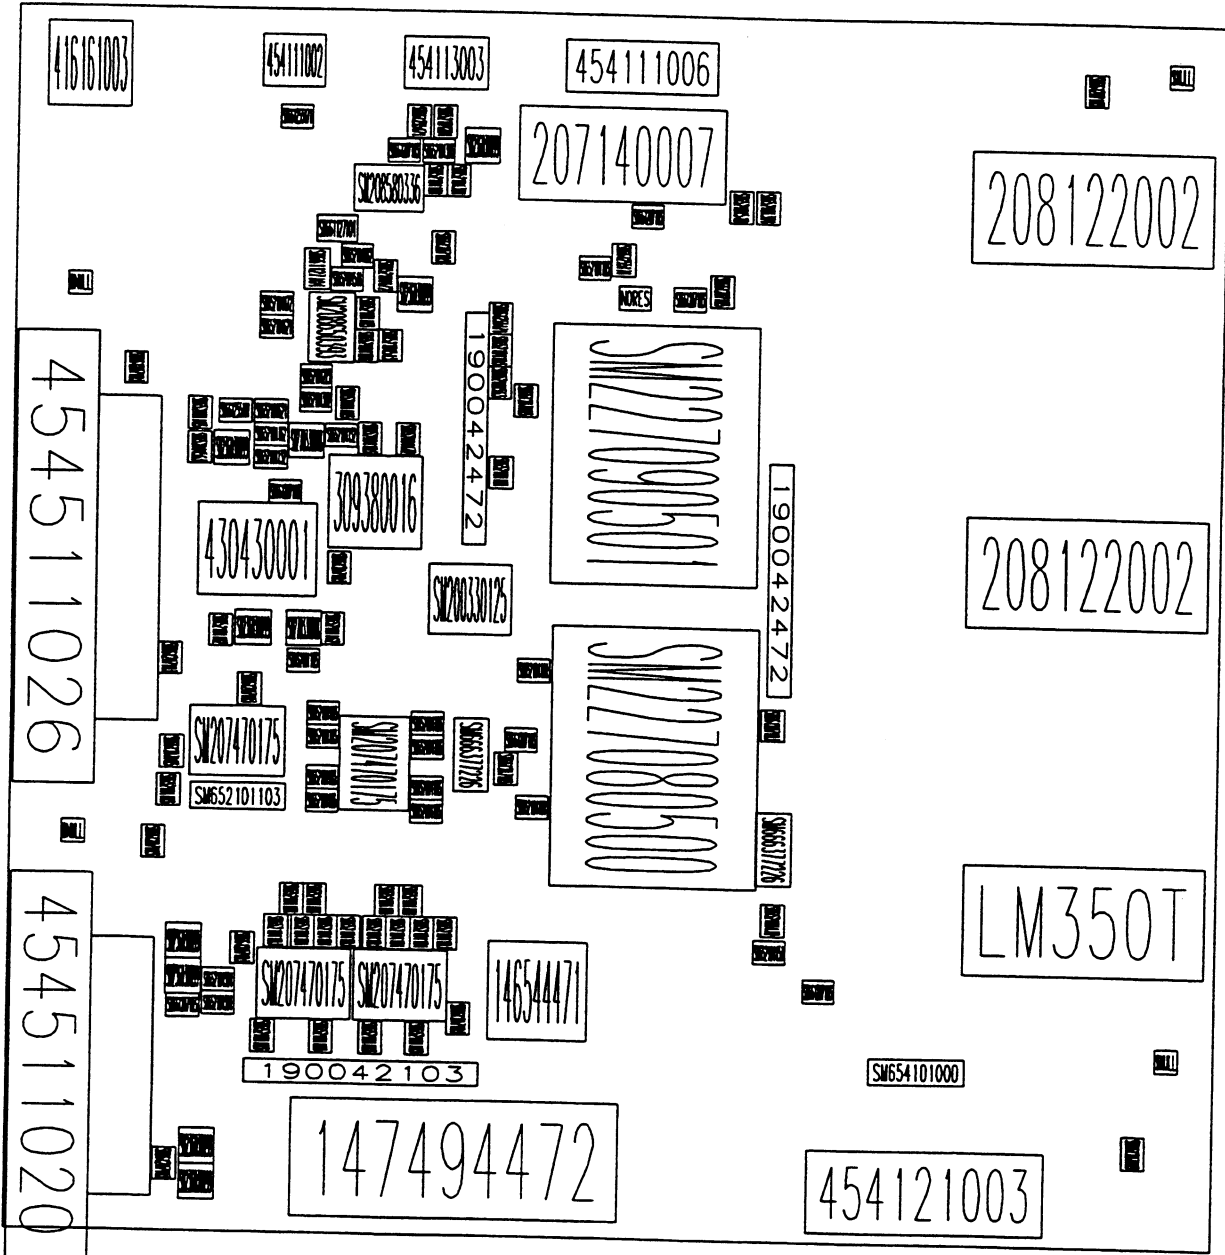

9300-7 Rev:C

Schematics, Layouts

PART: F9300-7

DESC : Printer Controller

Location	Part Number	Description	Location	Part Number	Description
A1	SM200330125	SM74HC125-PS			
A2	SM208650393	SMLM393	C31	SM661255471	SM470pFS
A3	309380016	16.000MHZ	C32	SM661255471	SM470pFS
A4	207140007	HA13007	C33	SM661255471	SM470pFS
A5	208590350	LM350T-P	C34	SM661255471	SM470pFS
A6	SM227080500	PT500GA1	CR1	SM236030099	BAV99
A7	SM227090501	PT502P01	CR2	SM236030099	BAV99
A8	208122002	7805-P	CR3	SM236030099	BAV99
A9	208122002	7805-P	CR4	SM236030099	BAV99
A10	SM207470175	SM75175	CR5	SM236030099	BAV99
A11	SM207470175	SM75175	CR6	SM236030099	BAV99
A12	SM207470175	SM75175	CR7	SM236030099	BAV99
A13	SM207470175	SM75175	CR8	SM208580336	SMLM336-2.5
C1	147494472	4.7mF-16V	CR10	SM236030099	BAV99
C2	146544471	470uF-25V	J1	454111006	1x6-ST-M-2WS
C3	SM661207103	SM.01uFS	J2	454111002	1x2-ST-M-2WS
C4	SM661207103	SM.01uFS	J3	454113003	1x3-ST-M-2WS
C5	SM661207103	SM.01uFS	J4	454511020	2x10-RA-M-RE
C6	SM661207103	SM.01uFS	J5	454511026	2x13-RA-M-RE
C7	SM661207103	SM.01uFS	J6	454121003	POWER1x3-M
C8	SM661207103	SM.01uFS	J7	454115003	1x3-ST-M-FLPN
C9	SM661207103	SM.01uFS	Q1	SM270330848	BC848C
C10	SM661207103	SM.01uFS	Q2	SM270330848	BC848C
C11	SM661207103	SM.01uFS	R1	SM654101000	SM0S-4P
C12	SM661207103	SM.01uFS	R2	SM652101132	SM1.3KS
C13	SM661207103	SM.01uFS	R3	SM652101132	SM1.3KS
C14	SM661207103	SM.01uFS	R4	SM652101162	SM1.6KS
C15	SM661207103	SM.01uFS	R5	SM652101162	SM1.6KS
C16	SM661207103	SM.01uFS	R6	SM652101101	SM100S
C17	SM661207103	SM.01uFS	R7	SM652101101	SM100S
C18	SM661207103	SM.01uFS	R8	SM652101101	SM100S
C19	SM661207103	SM.01uFS	R9	SM652101101	SM100S
C20	SM661207103	SM.01uFS	R10	SM652101101	SM100S
C21	SM661207103	SM.01uFS	R11	SM652101101	SM100S
C22	SM661207103	SM.01uFS	R12	SM652101101	SM100S
C23	SM661207103	SM.01uFS	R13	SM652101101	SM100S
C24	SM661207103	SM.01uFS	R14	SM652101101	SM100S
C25	SM661207103	SM.01uFS	R15	SM652101101	SM100S
C26	SM661127104	SM.1uF	R16	SM652101101	SM100S
C27	SM661127104	SM.1uF	R17	SM652101101	SM100S
C28	SM661255101	SM100pFS	R19	SM652101103	SM10KS
C29	SM666377226	SM22uF-15V	R20	SM652101103	SM10KS
C30	SM666377226	SM22uF-15V	R21	SM652101103	SM10KS



PART: F9300-7

DESC : Printer Controller


Location	Part Number	Description	Location	Part Number	Description
R22	SM652101103	SM10KS	R49	SM652101301	SM300S
R23	SM652101103	SM10KS	R50	SM652101301	SM300S
R24	SM652101103	SM10KS	R51	SM652101303	SM30KS
R25	SM652101103	SM10KS	R52	SM652101391	SM390S
R26	SM652101103	SM10KS	R53	SM652101302	SM3KS
R27	SM652101103	SM10KS	R54	SM652101472	SM4.7KS
R28	SM652101103	SM10KS	R55	SM652101103	SM10KS
R29	SM652101103	SM10KS	R56	SM652101472	SM4.7KS
R30	SM652101103	SM10KS	R57	SM652101472	SM4.7KS
R31	SM652101103	SM10KS	R58	SM652101514	SM510KS
R32	SM652101103	SM10KS	R59	SM652101510	SM51S
R33	SM652101103	SM10KS	R60	SM652101563	SM56KS
R34	SM652101513	SM51KS	R61	SM652101563	SM56KS
R35	SM652101103	SM10KS	R62	SM652101682	SM6.8KS
R36	SM652101103	SM10KS	R63	SM652101621	SM620S
R37	SM652101103	SM10KS	R66	SM652101621	SM620S
R38	SM652101103	SM10KS	R67	SM652101472	SM4.7KS
R39	SM652101103	SM10KS	R70	SM652101132	SM1.3KS
R40	SM652101103	SM10KS	R71	SM652101151	SM150S
R41	SM652101103	SM10KS	R77	SM652101104	SM100KS
R42	SM652101103	SM10KS	RL1	430430001	RL-FBR21-12
R43	SM652101103	SM10KS	RN1	190042103	10K-SC
R44	SM652101102	SM1KS	RN2	190042472	4.7K-SIPC
R45	SM652101201	SM200S	RN3	190042472	4.7K-SIPC
R46	SM652101223	SM22KS	S1	416161003	SW-P-SPST
R48	SM652101301	SM300S			

PART: F9601-6


DESC : Floppy Disk Interface

Location	Part Number	Description
J1	454511026	2x13-RA-M-RE
J2	453411026	2x13-RA-FFC-ZIF

Schematics, Layouts

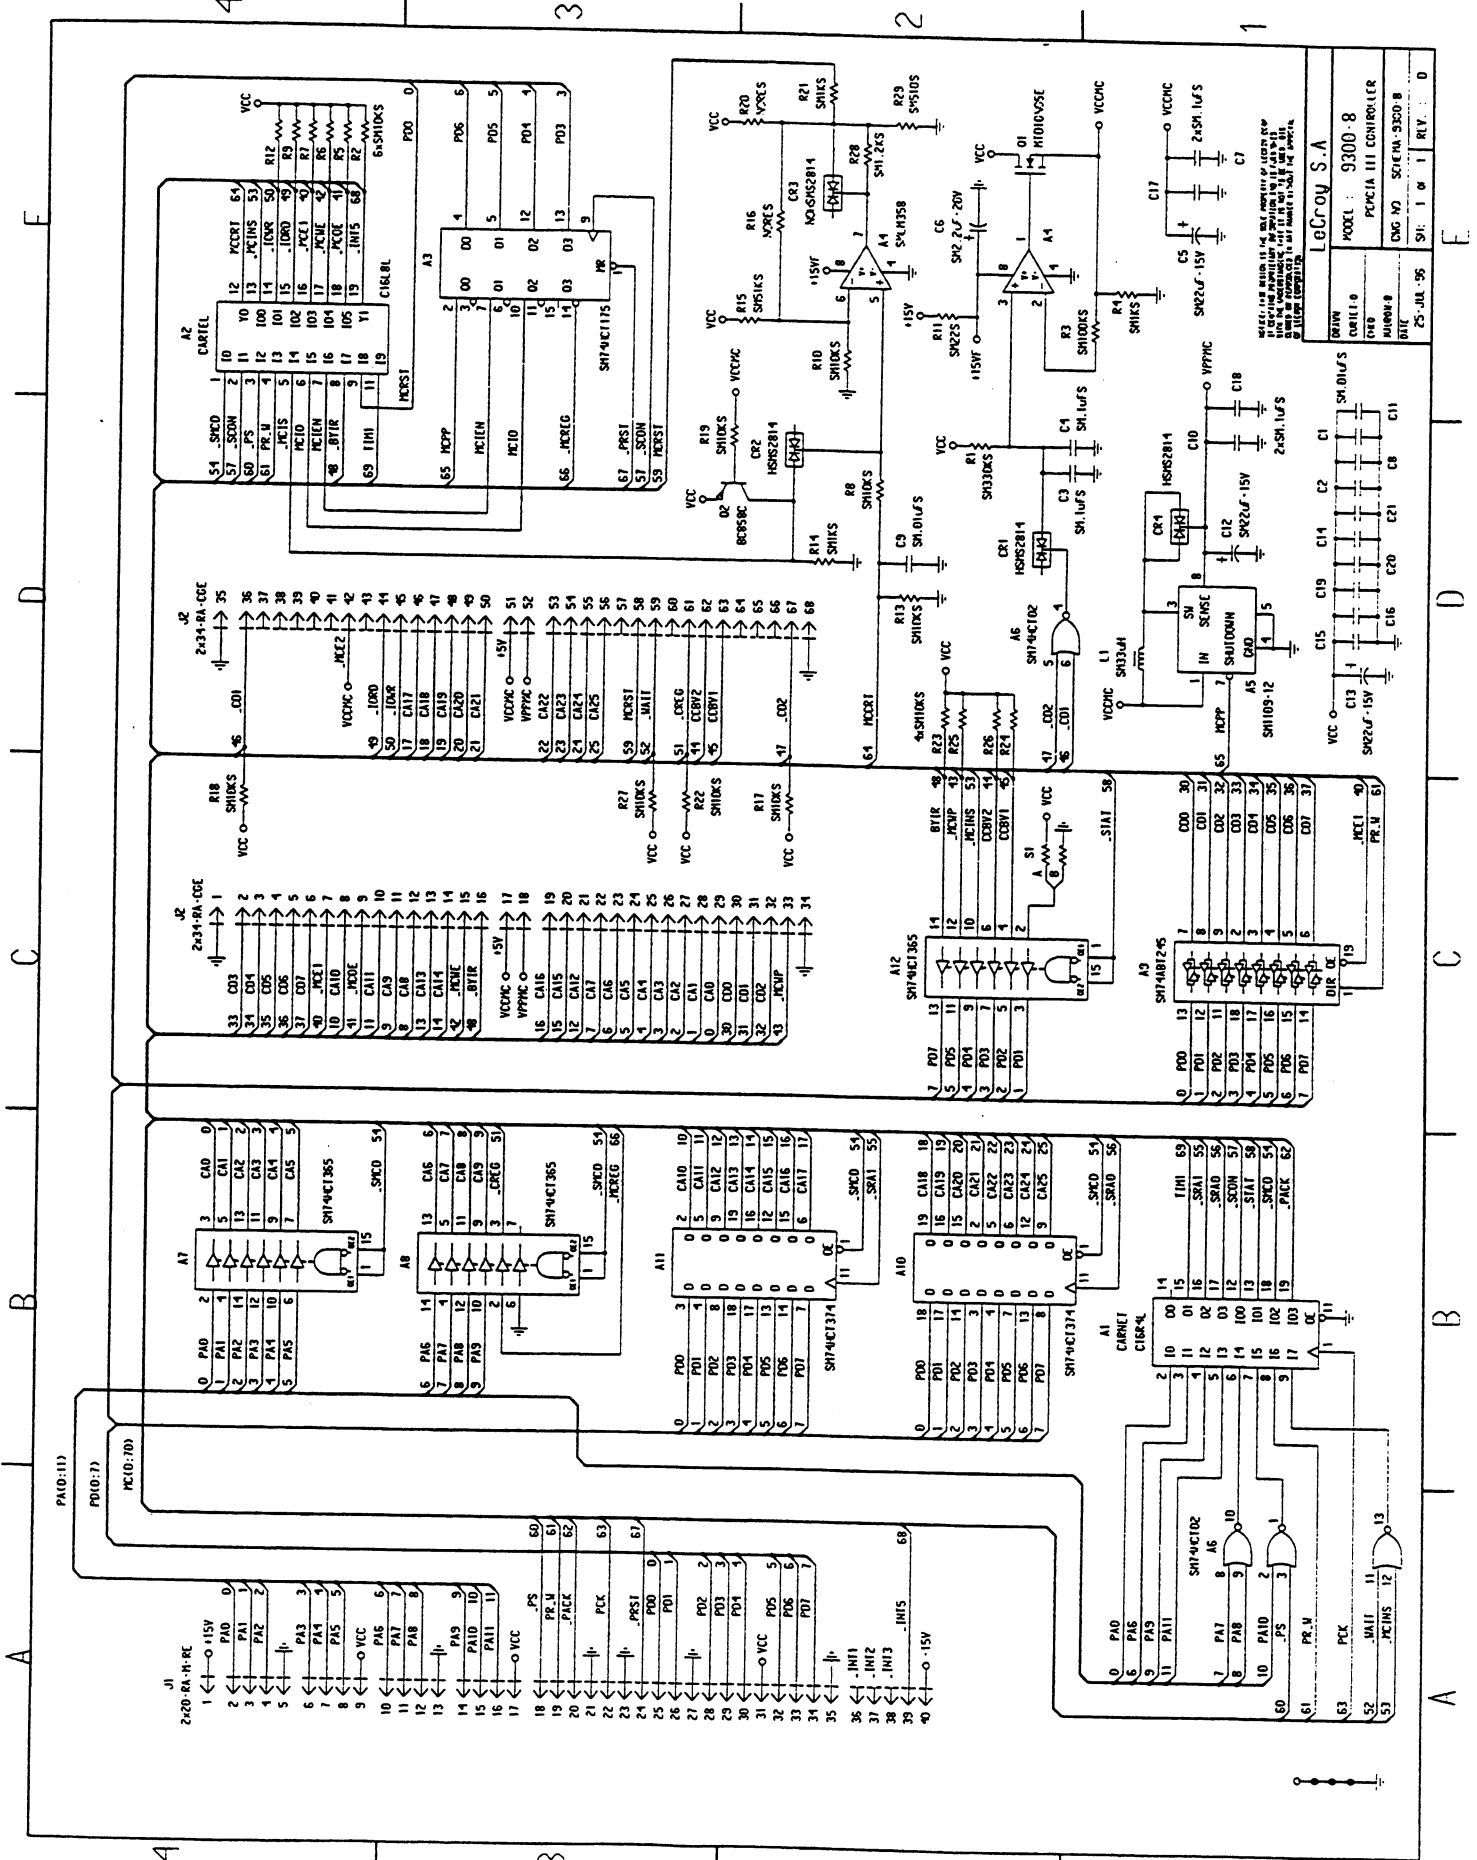


Schematics, Layouts

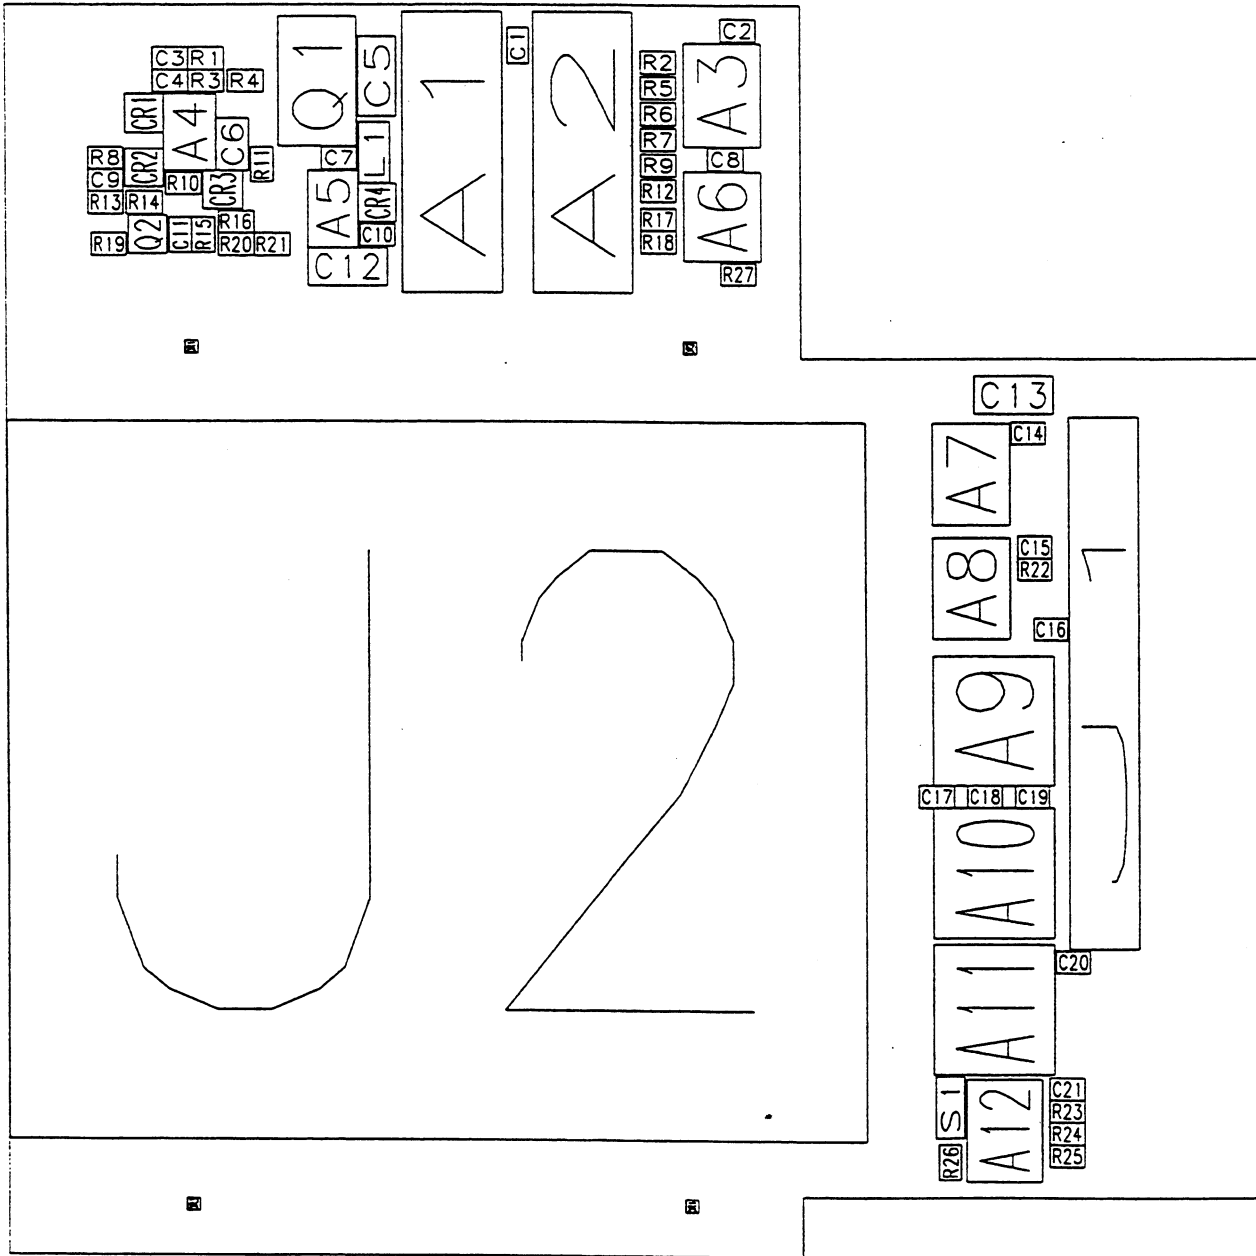


9300-8 Rev:B

Schematics, Layouts

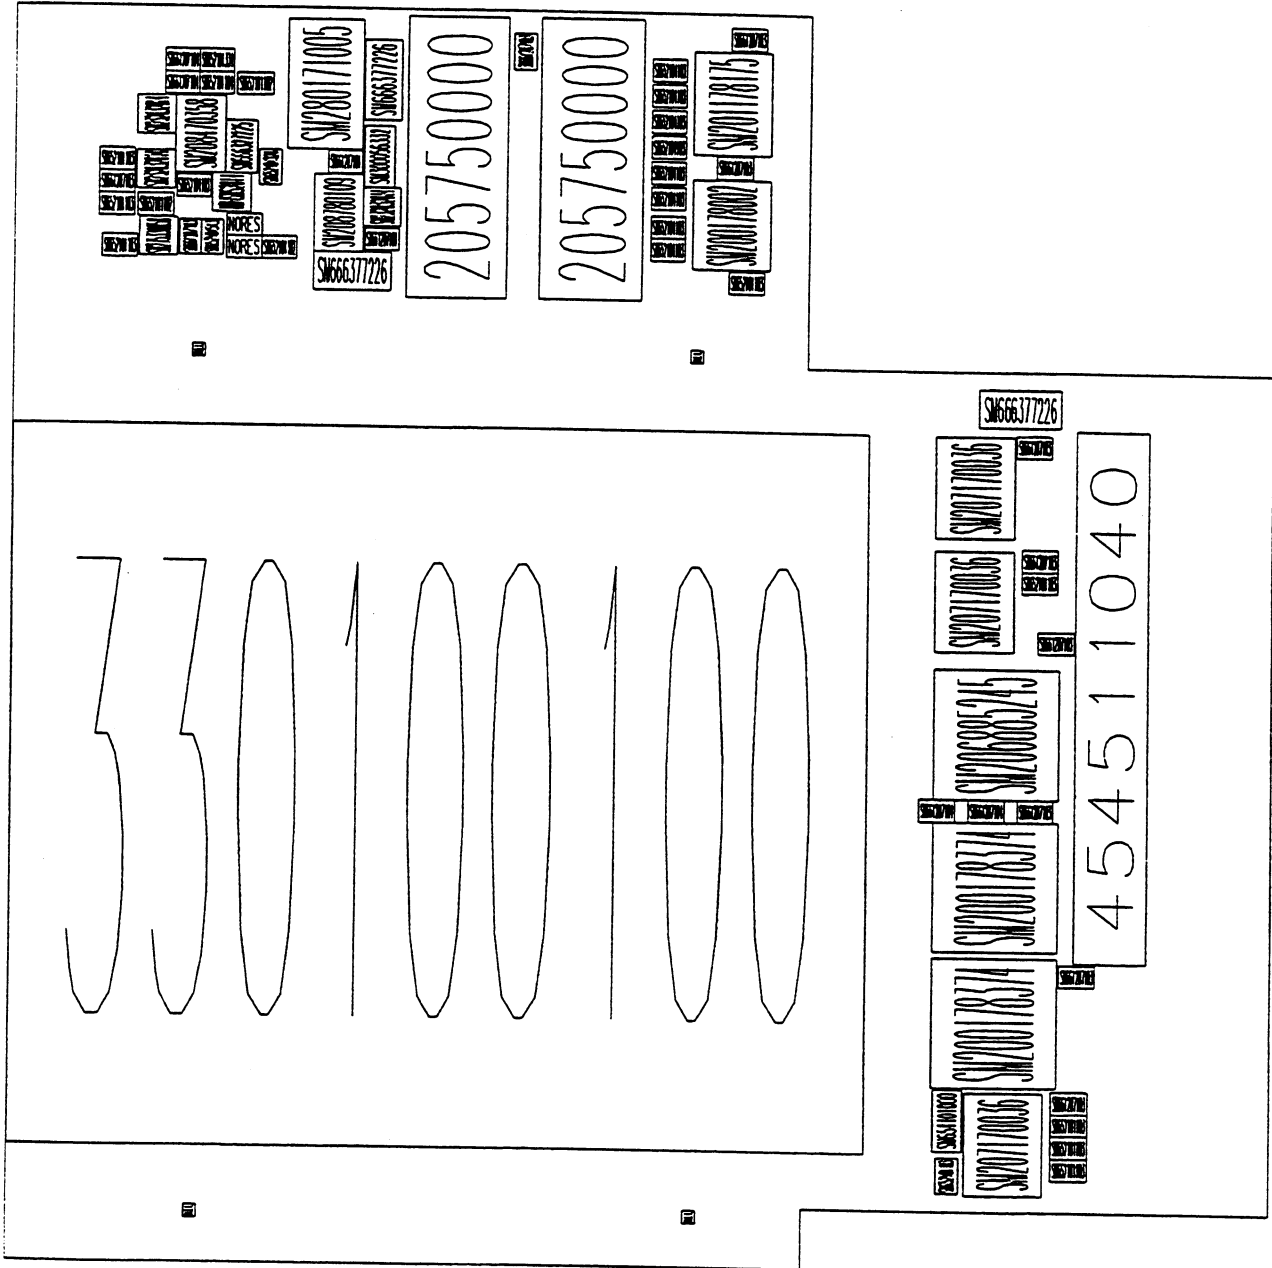

9300-8 Rev:B

Schematics, Layouts

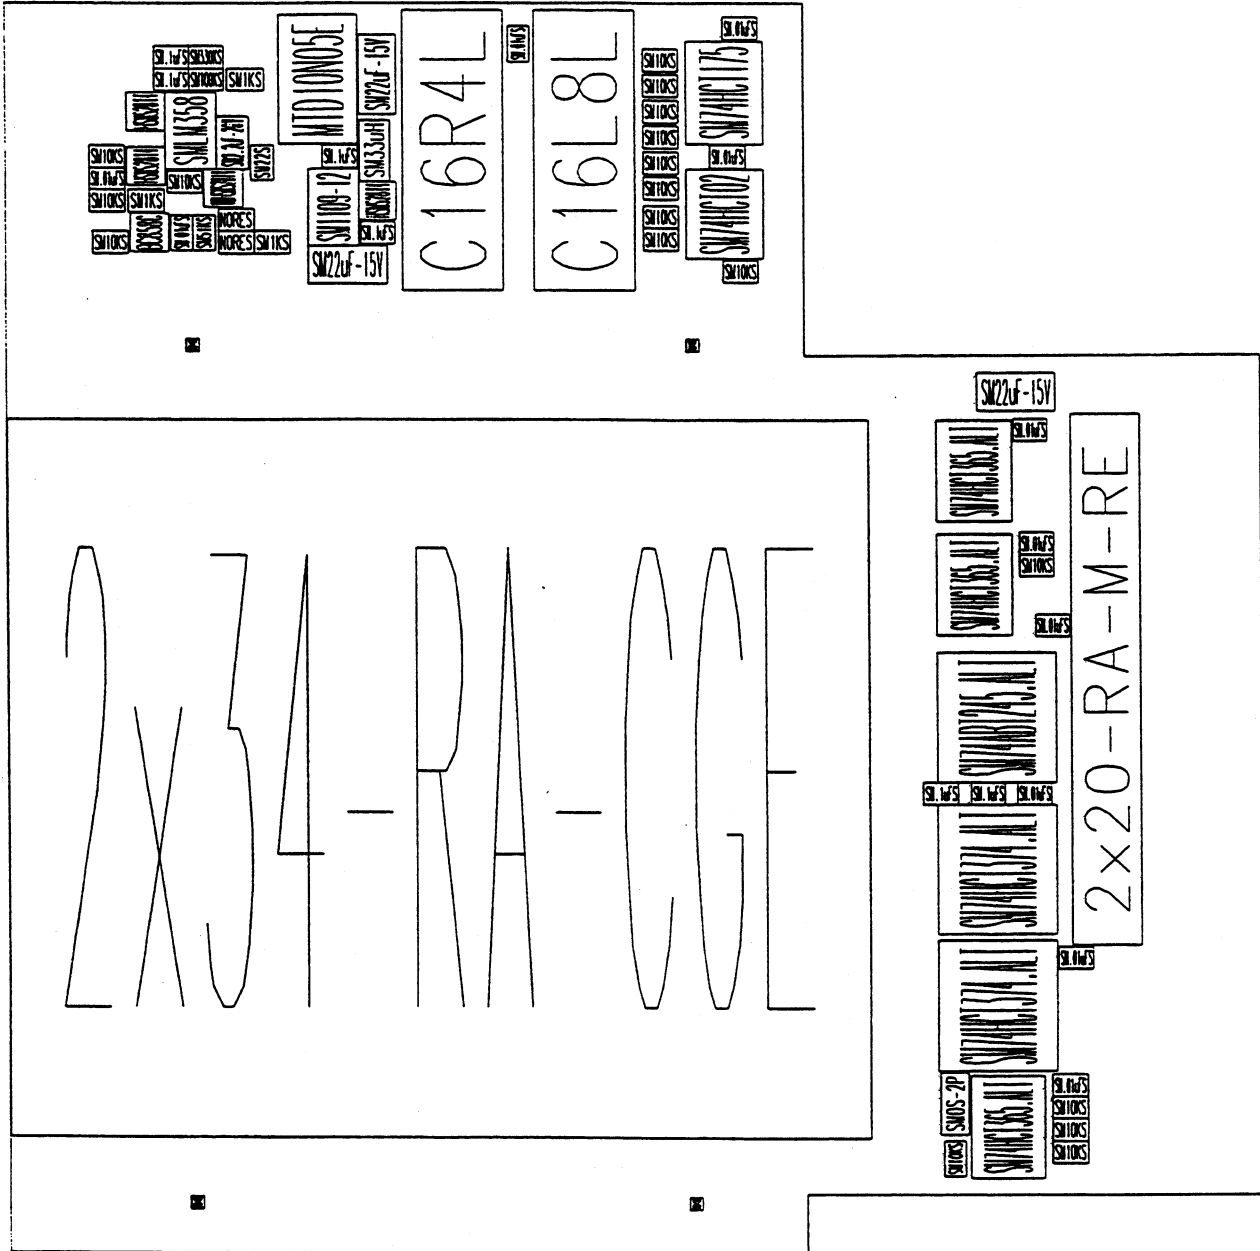

9300-8 Rev:B


Schematics, Layouts

PART: F9300-8

DESC : Hard Disk Interface

Location	Part Number	Description	Location	Part Number	Description
A1	205750000	C16R4L	CR2	SM232032814	HSMS2814
A2	205750000	C16L8L	CR4	SM232032814	HSMS2814
A3	SM201178175	SM74HCT175	J1	454511040	2x20-RA-M-RE
A4	SM208470358	SMLM358	J2	330100100	2x34-RA-CGE
A5	SM208780109	SM1109-12	L1	SM300056332	SM33uH
A6	SM200178002	SM74HCT02	Q1	SM280171005	MTD10N05E
A7	SM207170036	SM74HCT365	Q2	SM275330858	BC858C
A8	SM207170036	SM74HCT365	R1	SM652101334	SM330KS
A9	SM206885245	SM74ABT245	R2	SM652101103	SM10KS
A10	SM200178374	SM74HCT374	R3	SM652101104	SM100KS
A11	SM200178374	SM74HCT374	R4	SM652101102	SM1KS
A12	SM207170036	SM74HCT365	R5	SM652101103	SM10KS
C1	SM661207103	SM.01uFS	R6	SM652101103	SM10KS
C2	SM661207103	SM.01uFS	R7	SM652101103	SM10KS
C3	SM661207104	SM.1uFS	R8	SM652101103	SM10KS
C4	SM661207104	SM.1uFS	R9	SM652101103	SM10KS
C5	SM666377226	SM22uF-15V	R10	SM652101103	SM10KS
C6	SM666327225	SM2.2uF-20V	R11	SM652101220	SM22S
C7	SM661207104	SM.1uFS	R12	SM652101103	SM10KS
C8	SM661207103	SM.01uFS	R13	SM652101103	SM10KS
C9	SM661207103	SM.01uFS	R14	SM652101102	SM1KS
C10	SM661207104	SM.1uFS	R15	SM652101513	SM51KS
C11	SM661207103	SM.01uFS	R17	SM652101103	SM10KS
C12	SM666377226	SM22uF-15V	R18	SM652101103	SM10KS
C13	SM666377226	SM22uF-15V	R19	SM652101103	SM10KS
C14	SM661207103	SM.01uFS	R21	SM652101102	SM1KS
C15	SM661207103	SM.01uFS	R22	SM652101103	SM10KS
C16	SM661207103	SM.01uFS	R23	SM652101103	SM10KS
C17	SM661207104	SM.1uFS	R24	SM652101103	SM10KS
C18	SM661207104	SM.1uFS	R25	SM652101103	SM10KS
C19	SM661207103	SM.01uFS	R26	SM652101103	SM10KS
C20	SM661207103	SM.01uFS	R27	SM652101103	SM10KS
C21	SM661207103	SM.01uFS	R28	SM652101122	SM1.2KS
CR1	SM232032814	HSMS2814	R29	SM652101511	SM510S
			S1	SM654101000	SM0S-2P

Schematics, Layouts

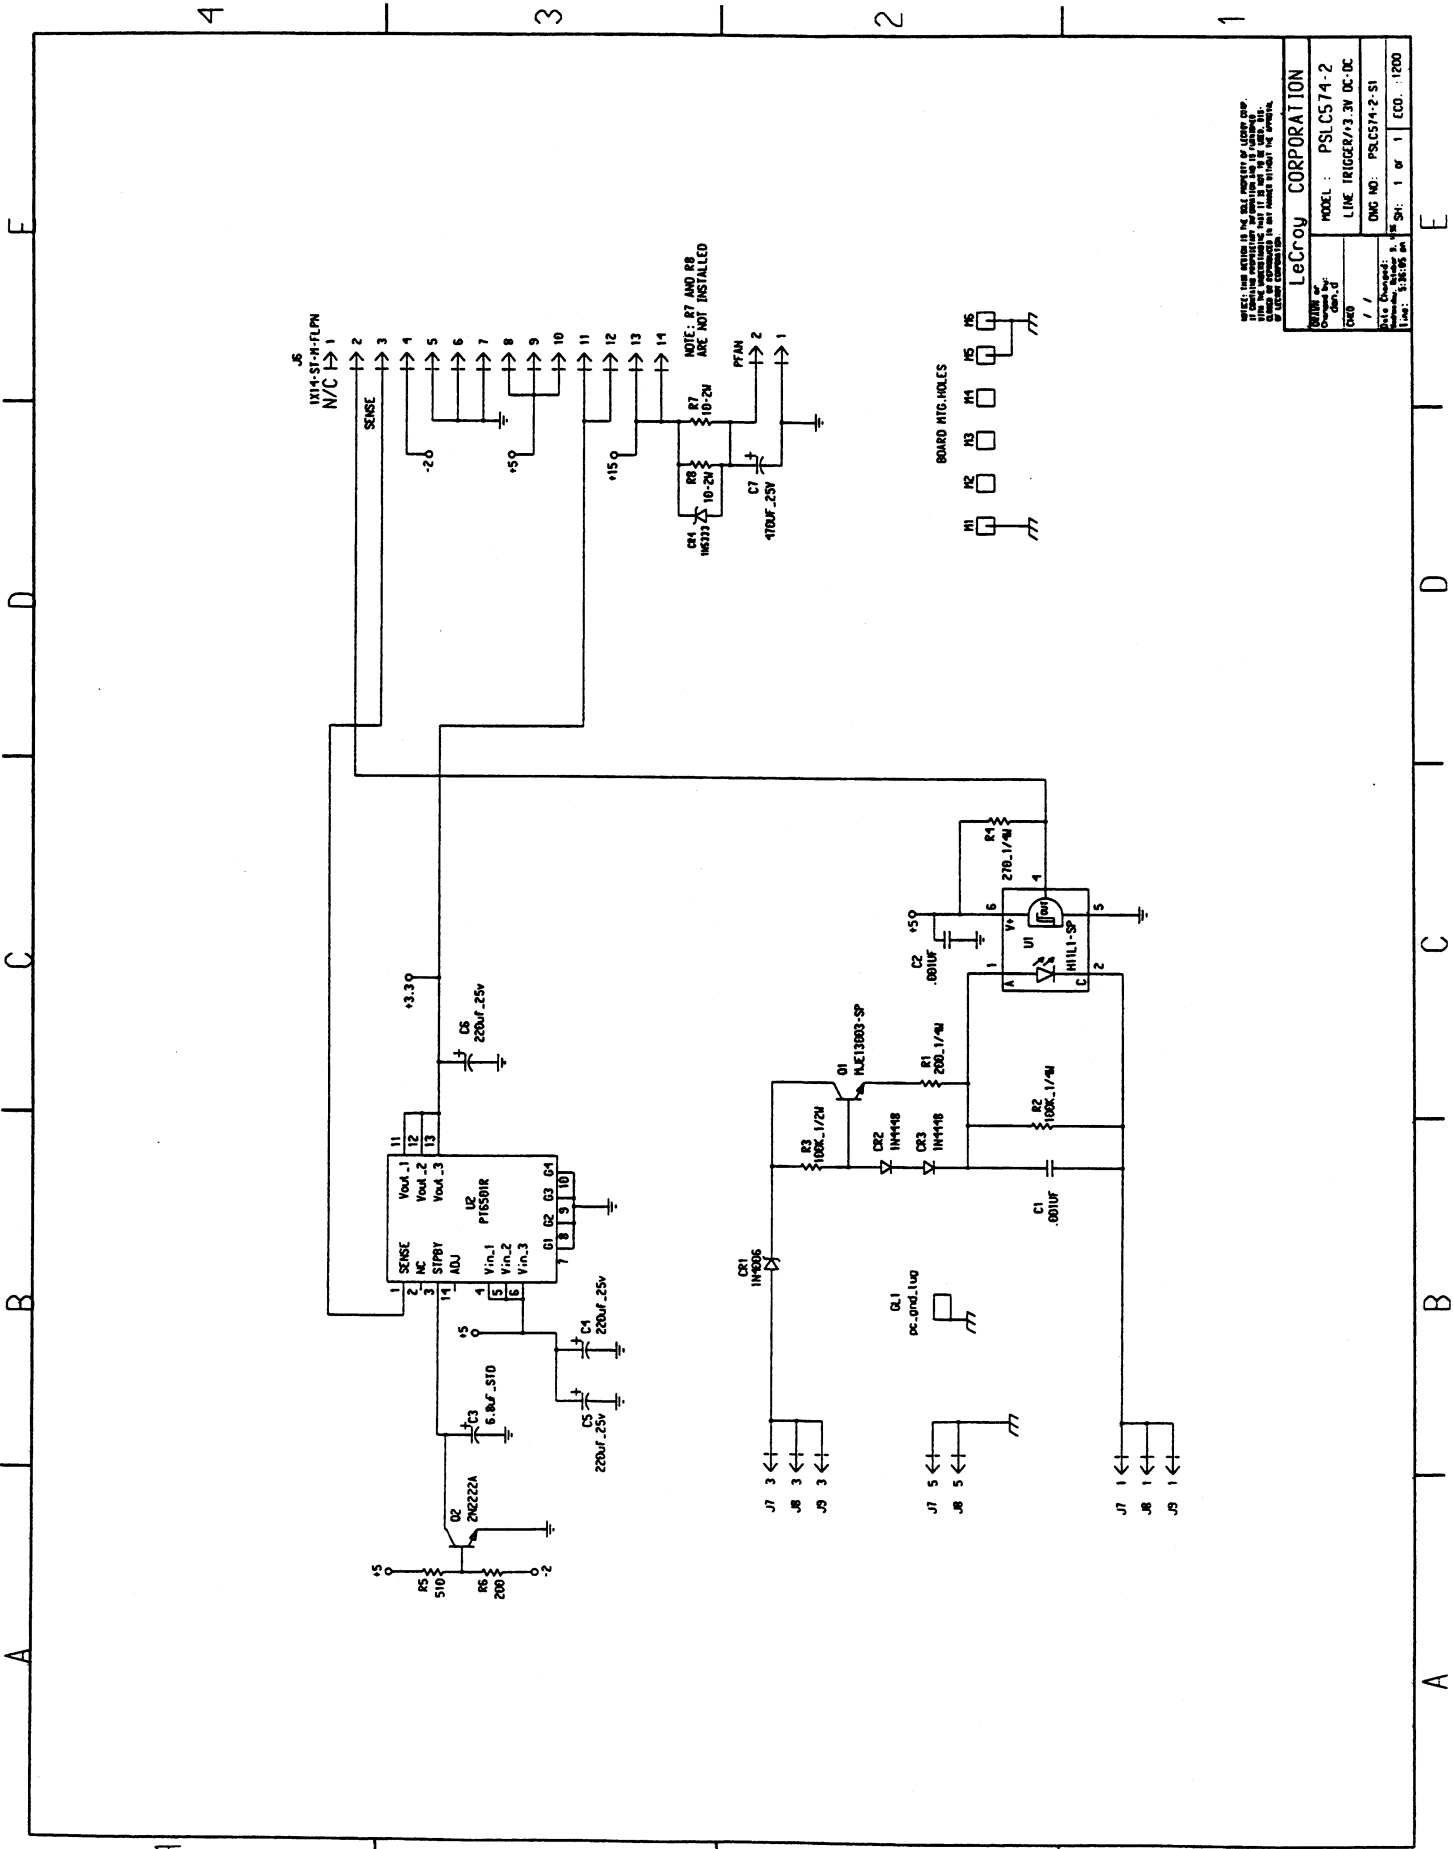


NOTE: THIS DRAWING IS THE SOLE PROPERTY OF LECOY CORP. IT IS TO BE USED ONLY FOR THE MANUFACTURE OF THE PRODUCT SPECIFIED HEREIN. ANY REPRODUCTION OR USE OF THIS DRAWING FOR OTHER THAN THE ABOVE SPECIFIED PURPOSES IS STRICTLY PROHIBITED. ANY VIOLATION WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.


DATE	REV.	BY	APP.
11/15/88	1	J. J.	J. J.
LECOY CORPORATION			
MODEL	PSLCS74-2		
LINE	TRIGGER/3.3V DC-DC		
DWG NO.	PSLCS74-2-S1		
REV.	1 of 1		
ECO.	1200		

Schematics, Layouts

PSLC574-2 Rev A:

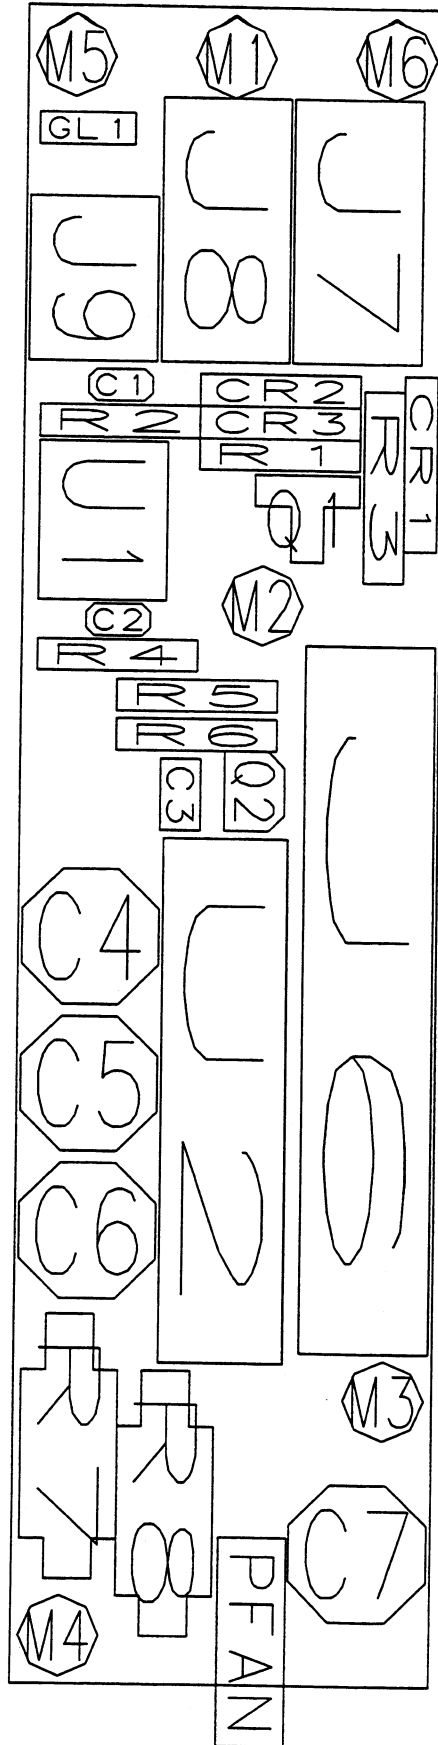


PSLC574-2 Rev A:

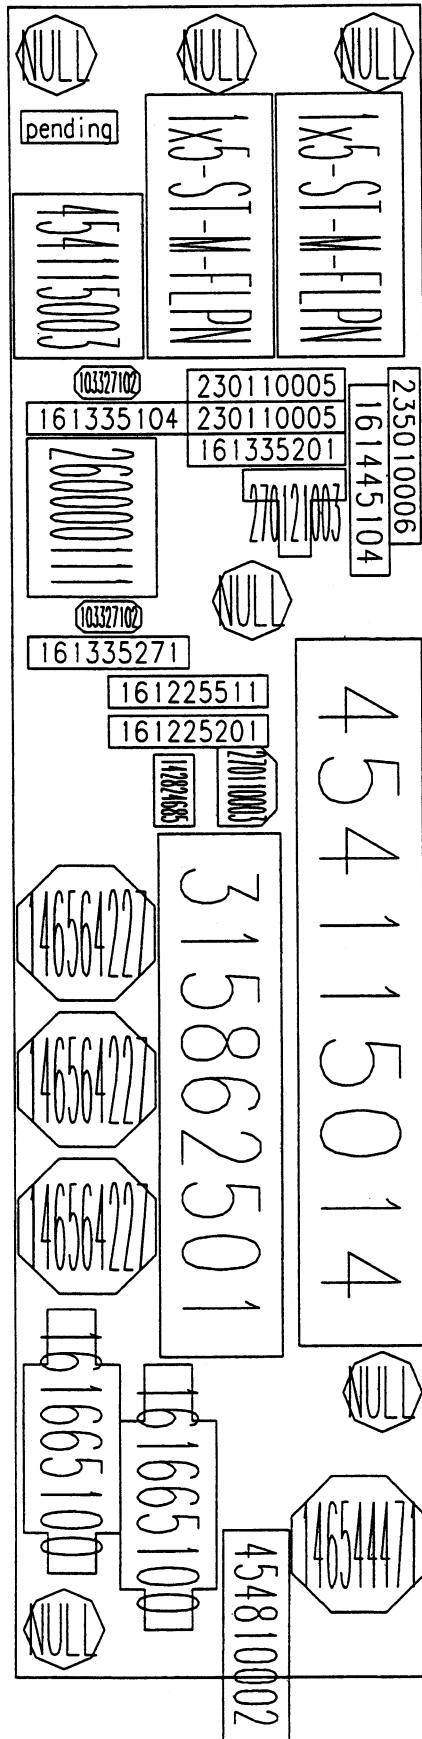

Schematics, Layouts

PSLC574-2 Rev A:

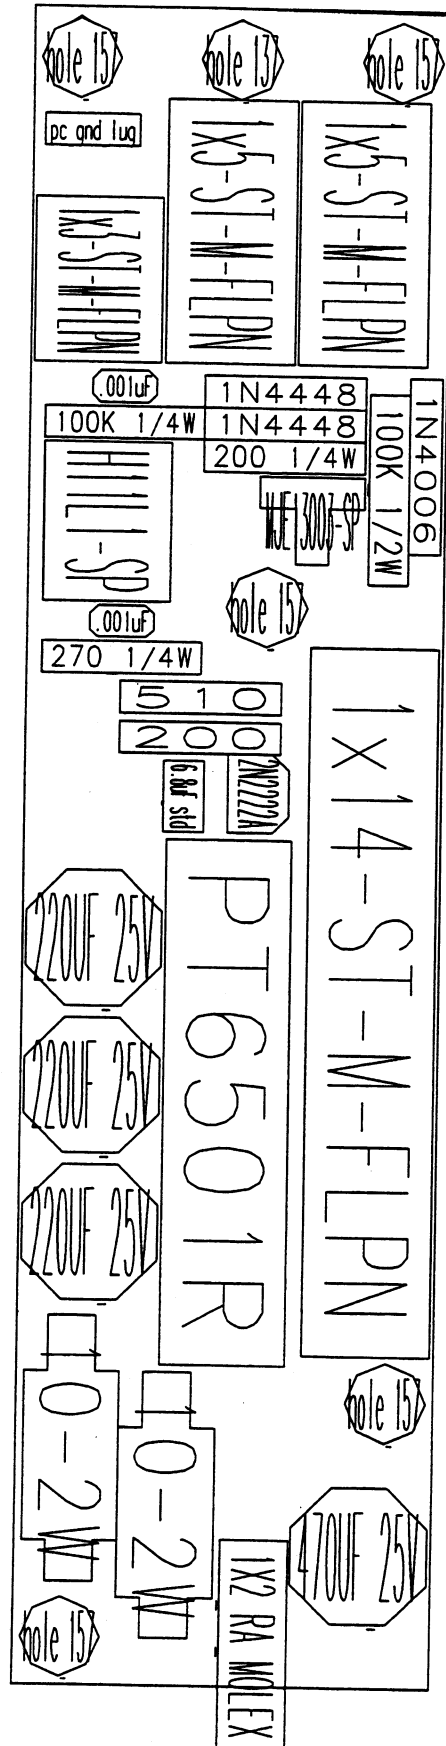


Schematics, Layouts

PART: PSLC574-2

DESC : Hard Disk Interface

Location	Part Number	Description
C1	106435102	.001UF
C2	106435102	.001UF
C3	142824685	6.8 UF
C4	146564227	220 UF
C5	146564227	220 UF
C6	146564227	220 UF
C7	146544471	470 UF
CR1	235010006	1N4006
CR2	230110005	1N4448
CR3	230110005	1N4448
CR4	240035333	1N5333A
GL1	510140002	AMP 63525-1
J6	454115014	41671 26-48-1145
J7	454115103	41671 26-48-1055
J8	454115103	41671 26-48-1055
J9	454115003	41671 26-48-1035
PFAN	454810002	7395 22-05-7028
Q1	270121003	MJE13003
Q2	270110003	PN2222A
R1	161335201	200 OHM
R2	161335104	100 K
R3	161445104	100 K
R4	161335271	270 OHMS
R5	161225511	510 OHMS
R6	161225201	200 OHMS
U1	260000111	H11L1
	315826501	PT6501N
	455021008	02-06-1103
	455123002	02-06-1103
	590001022	7/30 BLK 22
	590221022	7/30 RED 22


Schematics, Layouts

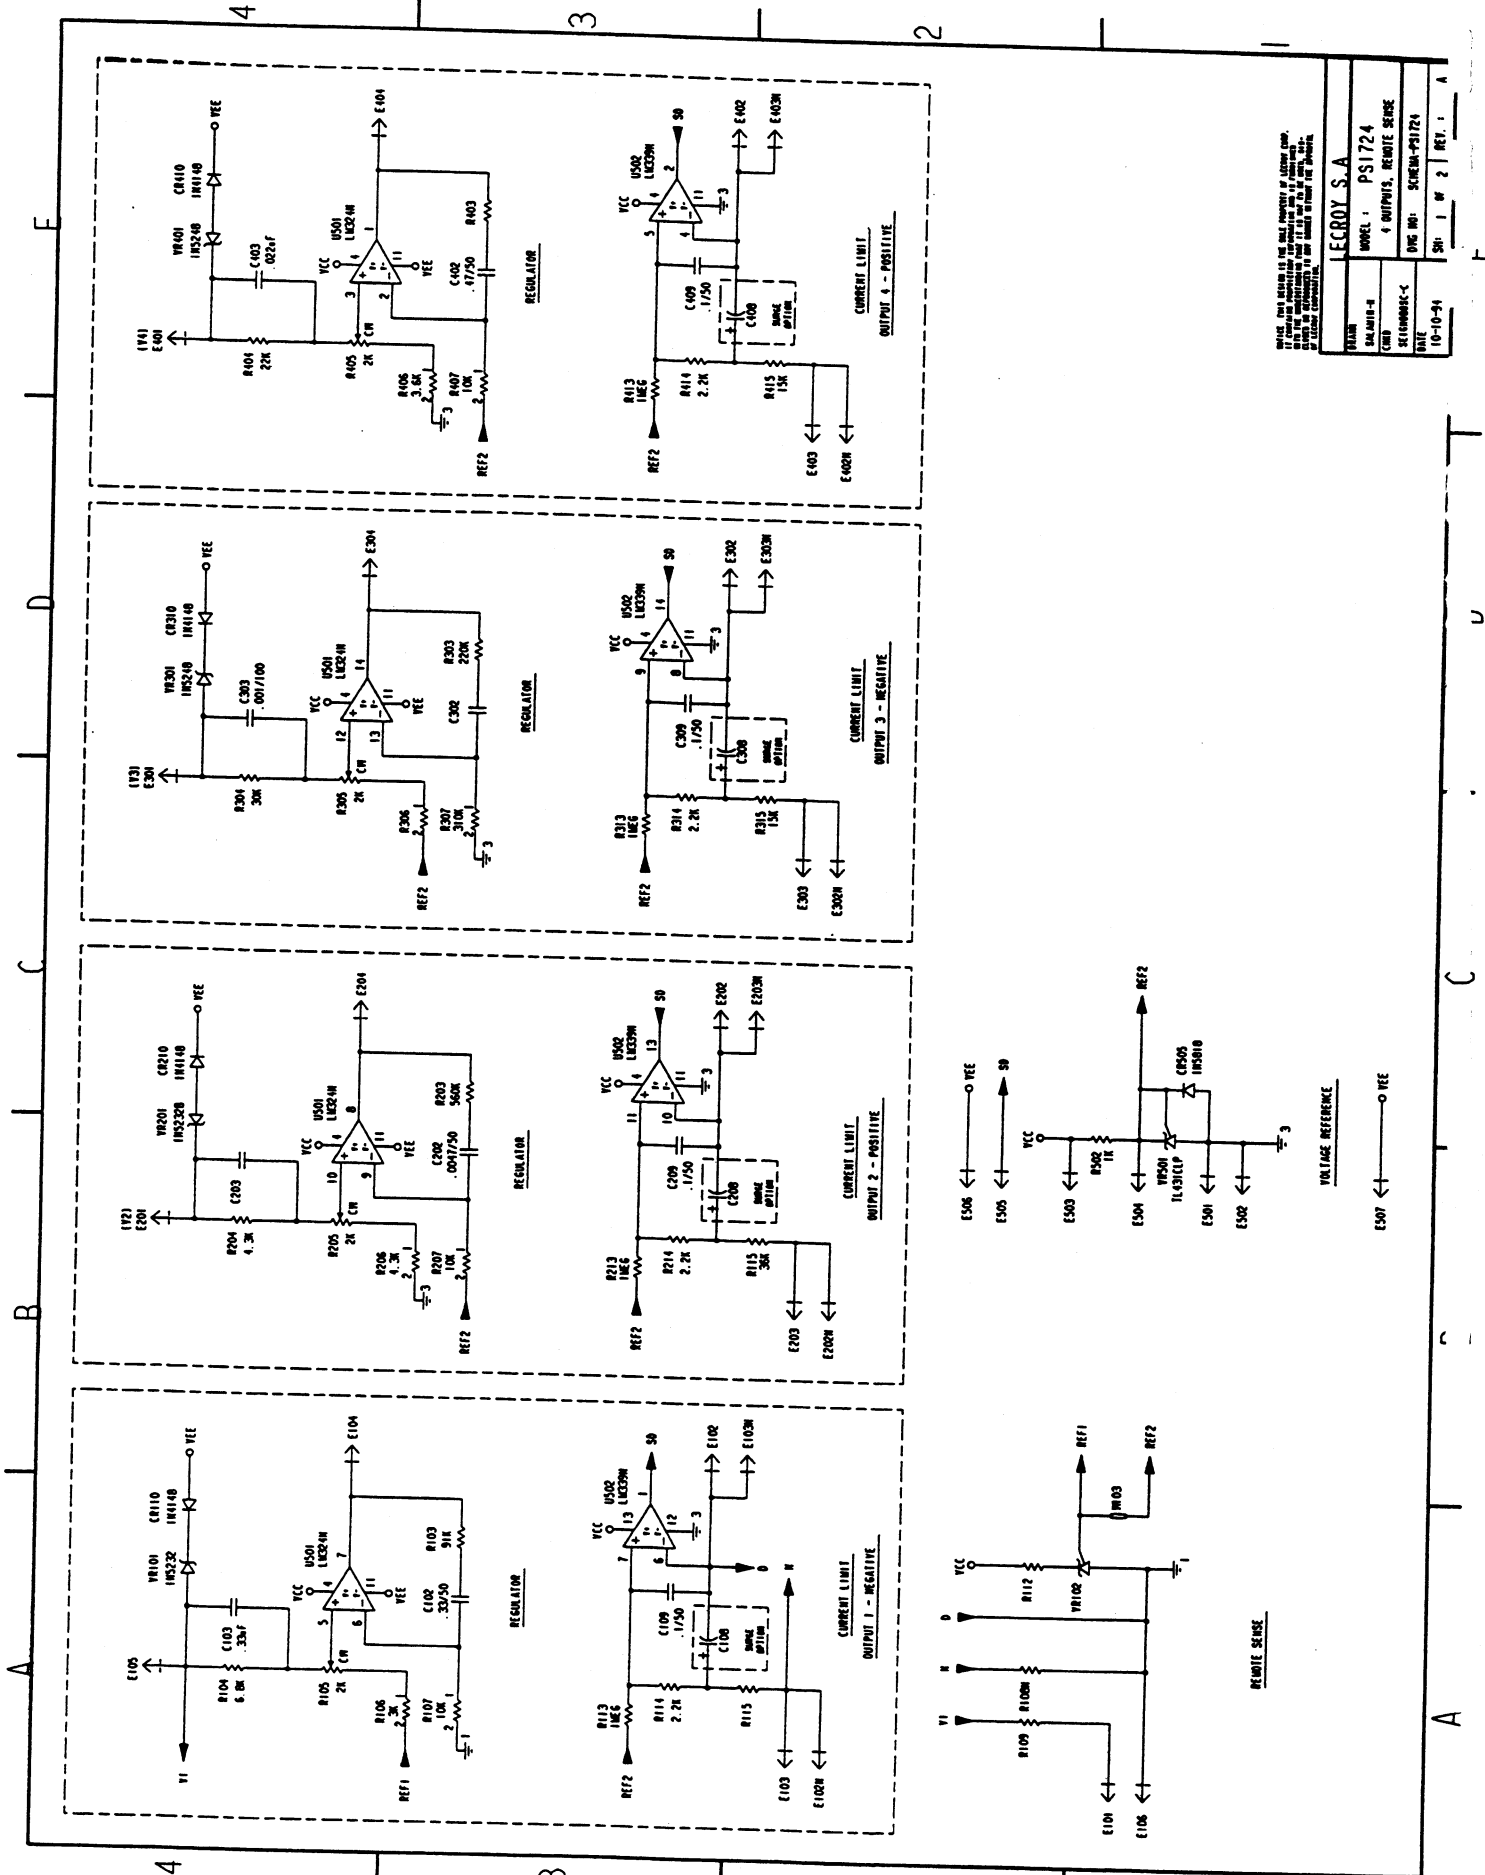

PLEASE NOTE: THIS SCHEMATIC IS THE PROPERTY OF ECGROY S.A. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF ECGROY S.A.


ITEM	ECGROY S.A.
MODEL	PS1724
REV	4 OUTPUTS, REMOTE SENSE
SCHEMATIC-C	
DATE	10-10-91
SH. 1	# 2 REV. 1 A

Schematics, Layouts

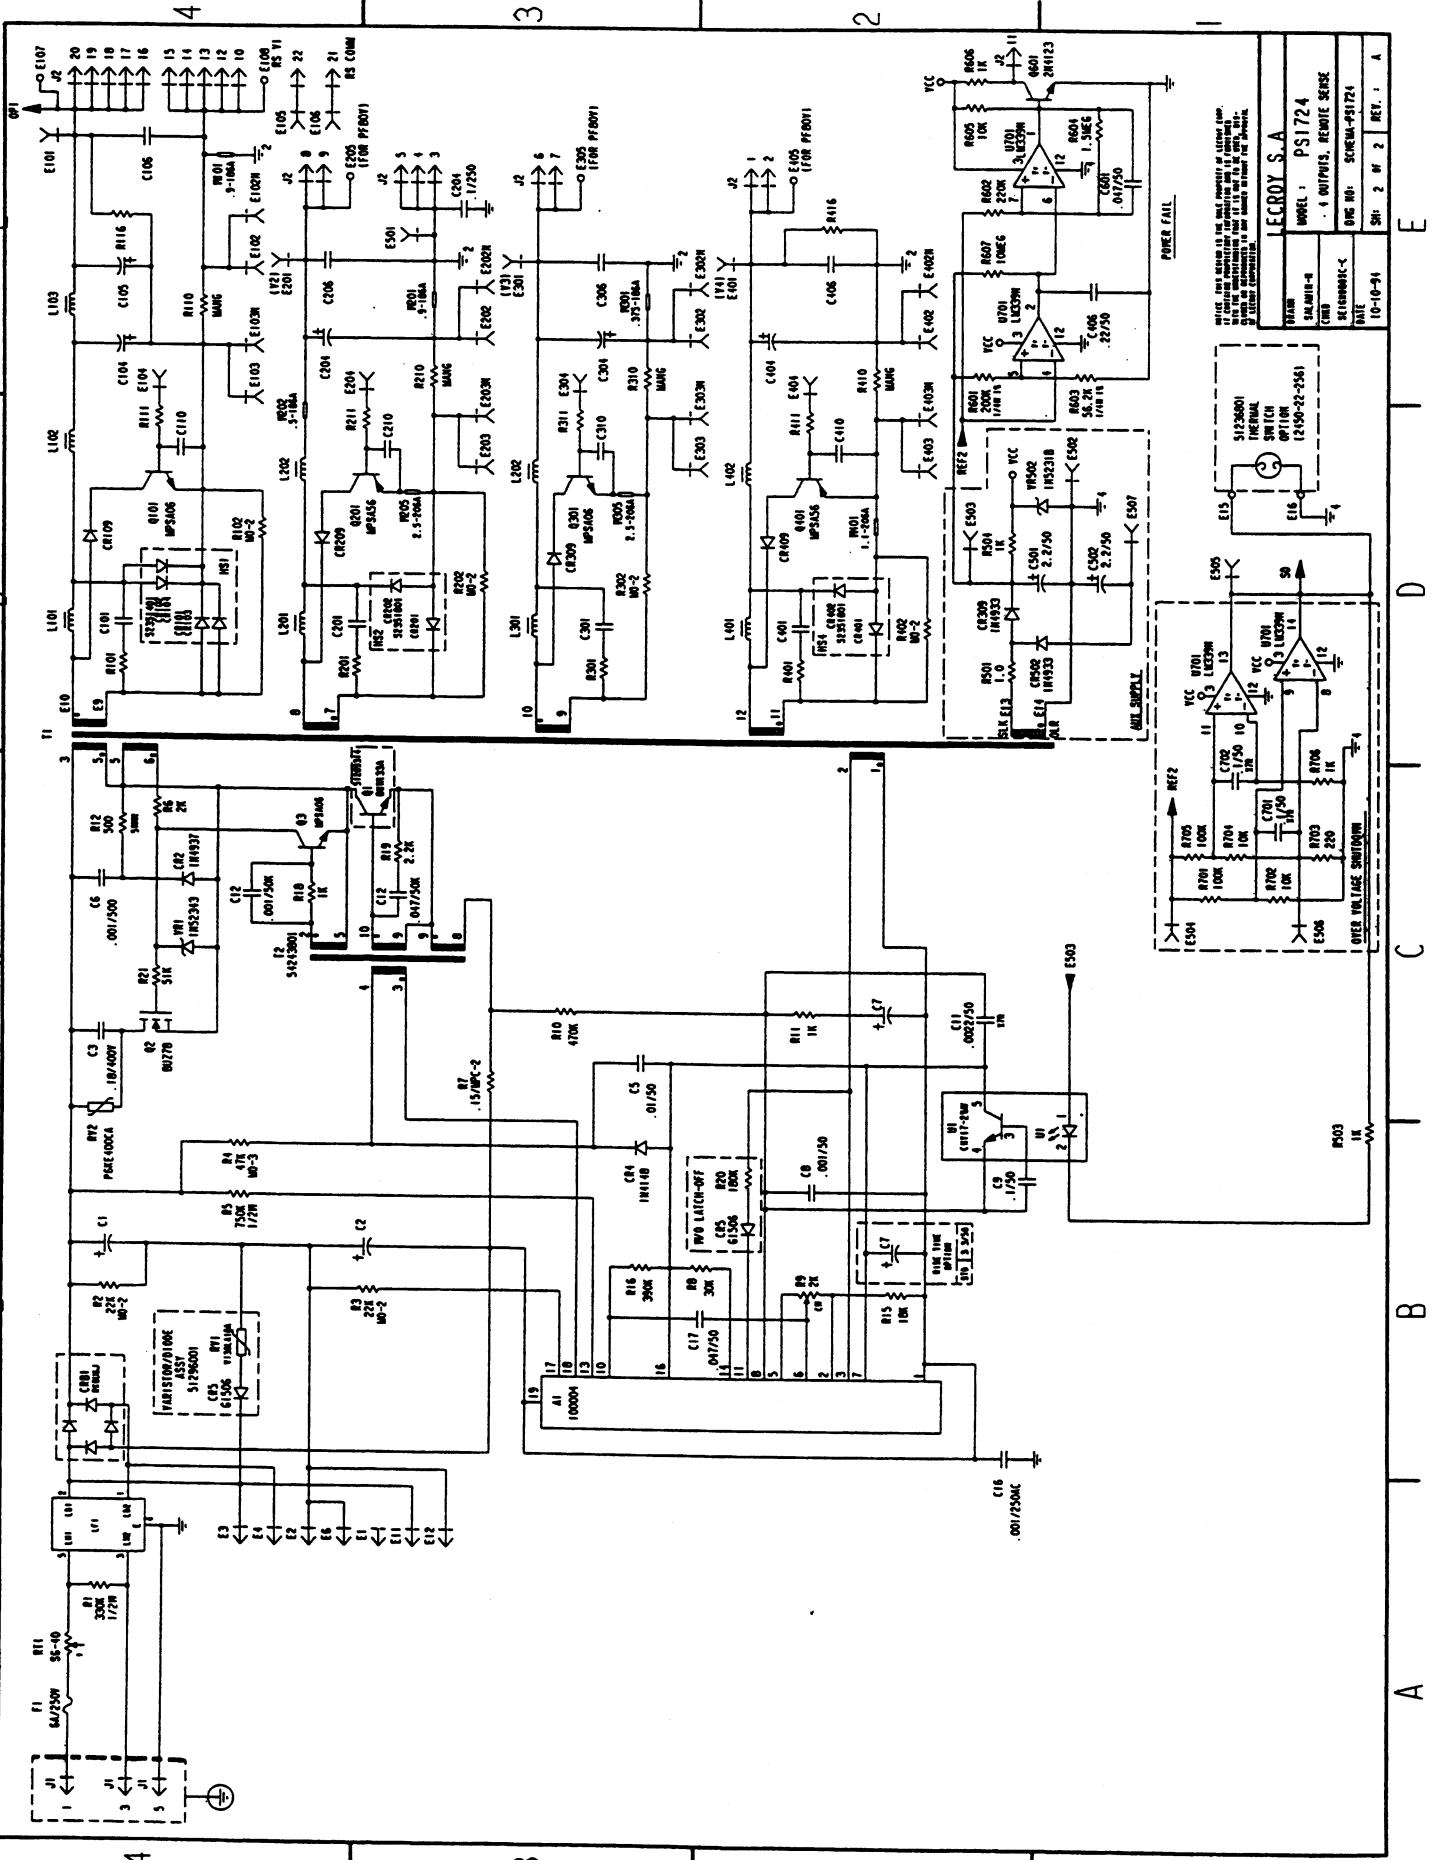


EGROY S.A.			
MODEL:	PSI724		
VERSION:	4		
REVISION:	-		
DATE:	10-10-91		
DRG NO.:	SCHEM-P51724		
SHEET:	2	OF	2
REV.:	A		


NOTE: THE SCHEMATIC IS THE PROPERTY OF EGROY S.A. THE MANUFACTURER OF THE EQUIPMENT. THE SCHEMATIC IS TO BE USED FOR THE EQUIPMENT ONLY. THE SCHEMATIC IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF EGROY S.A.

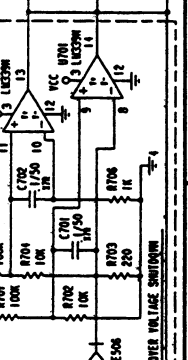

Schematics, Layouts

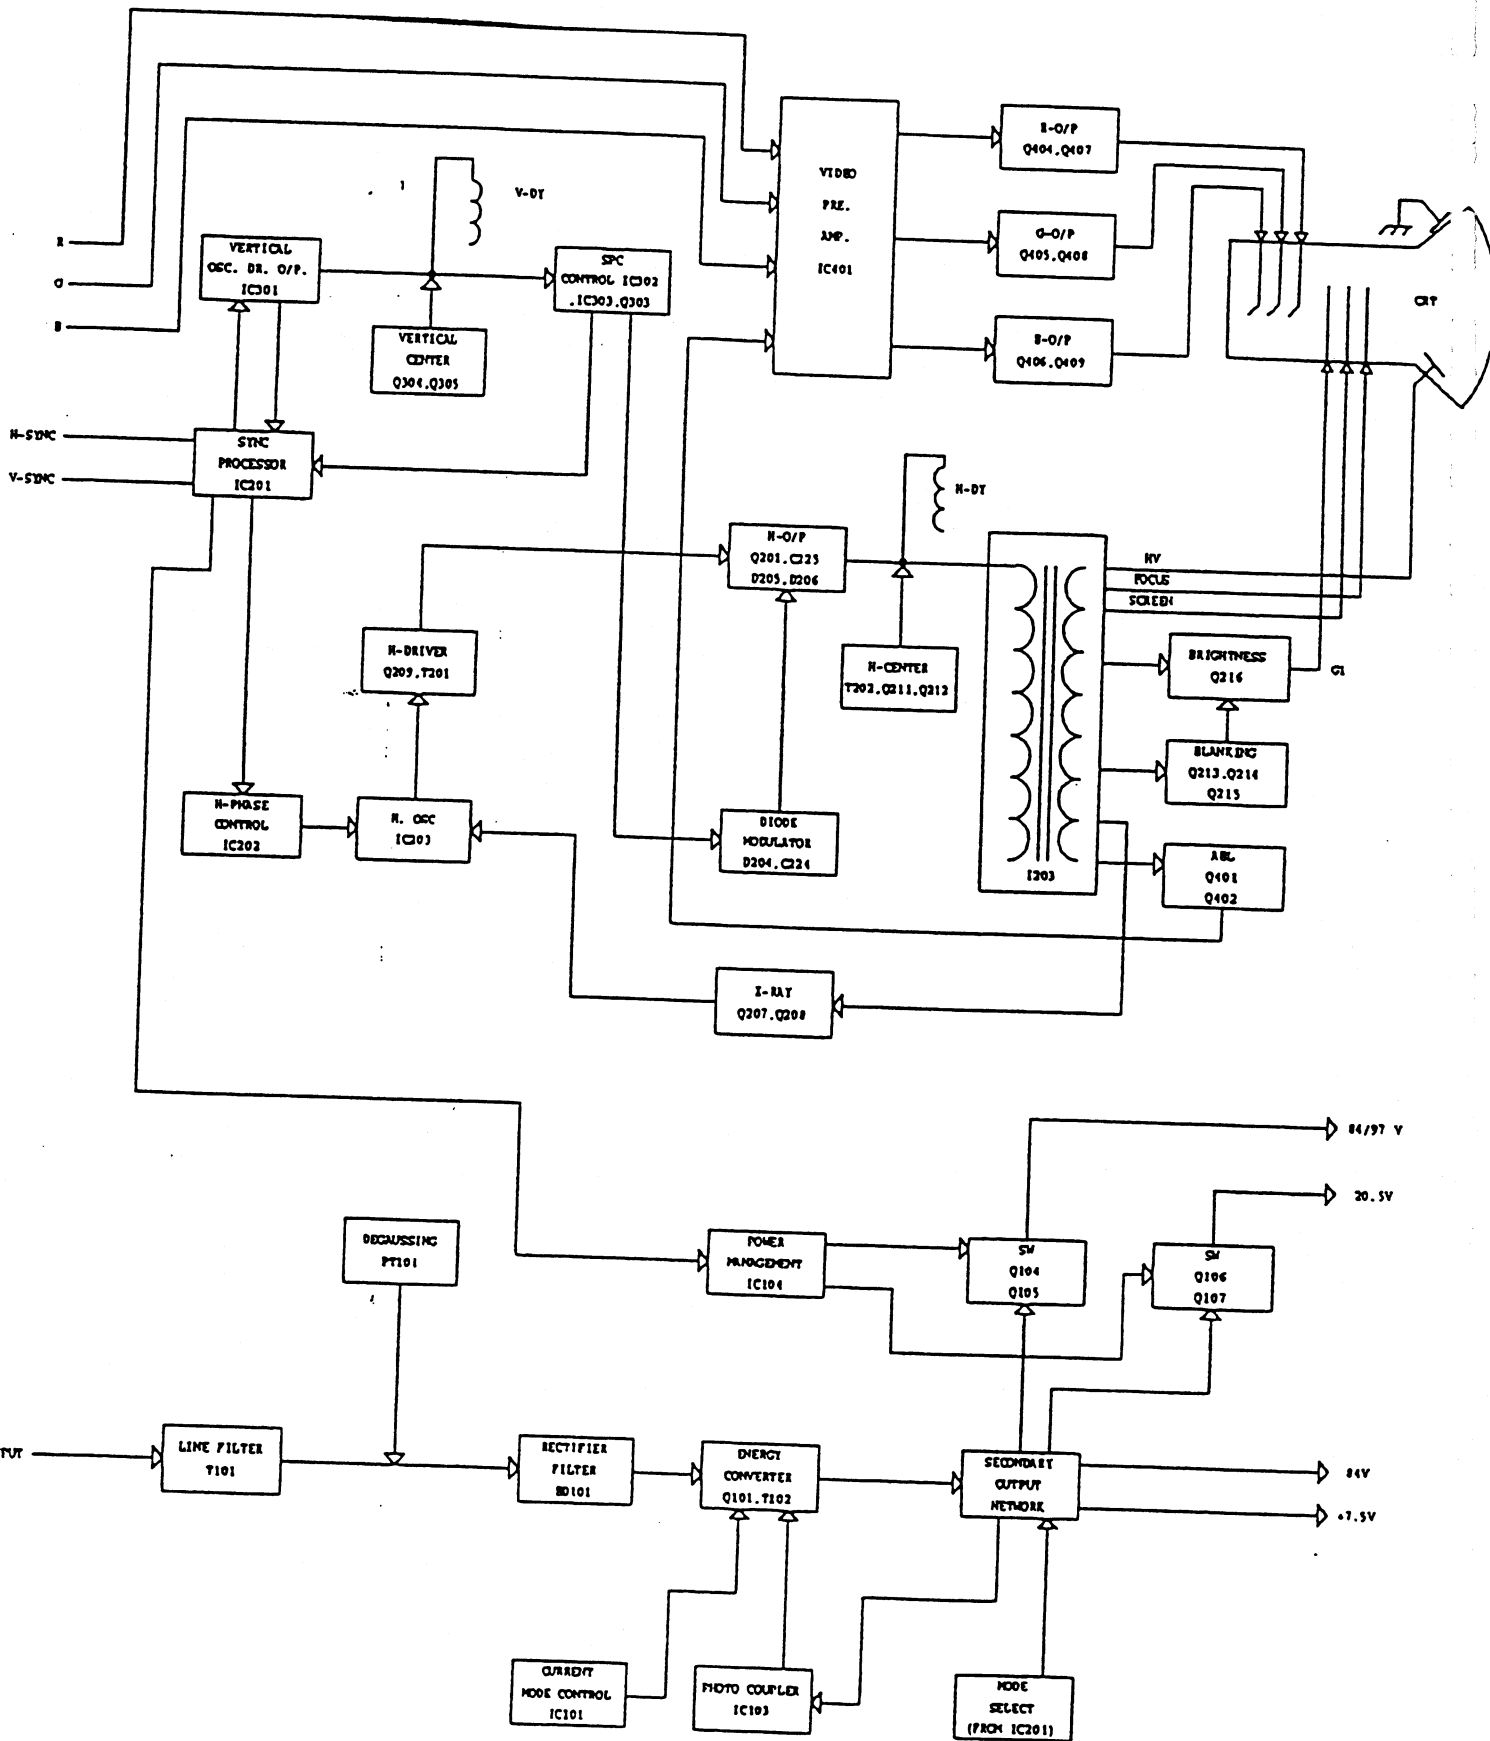

Schematics, Layouts

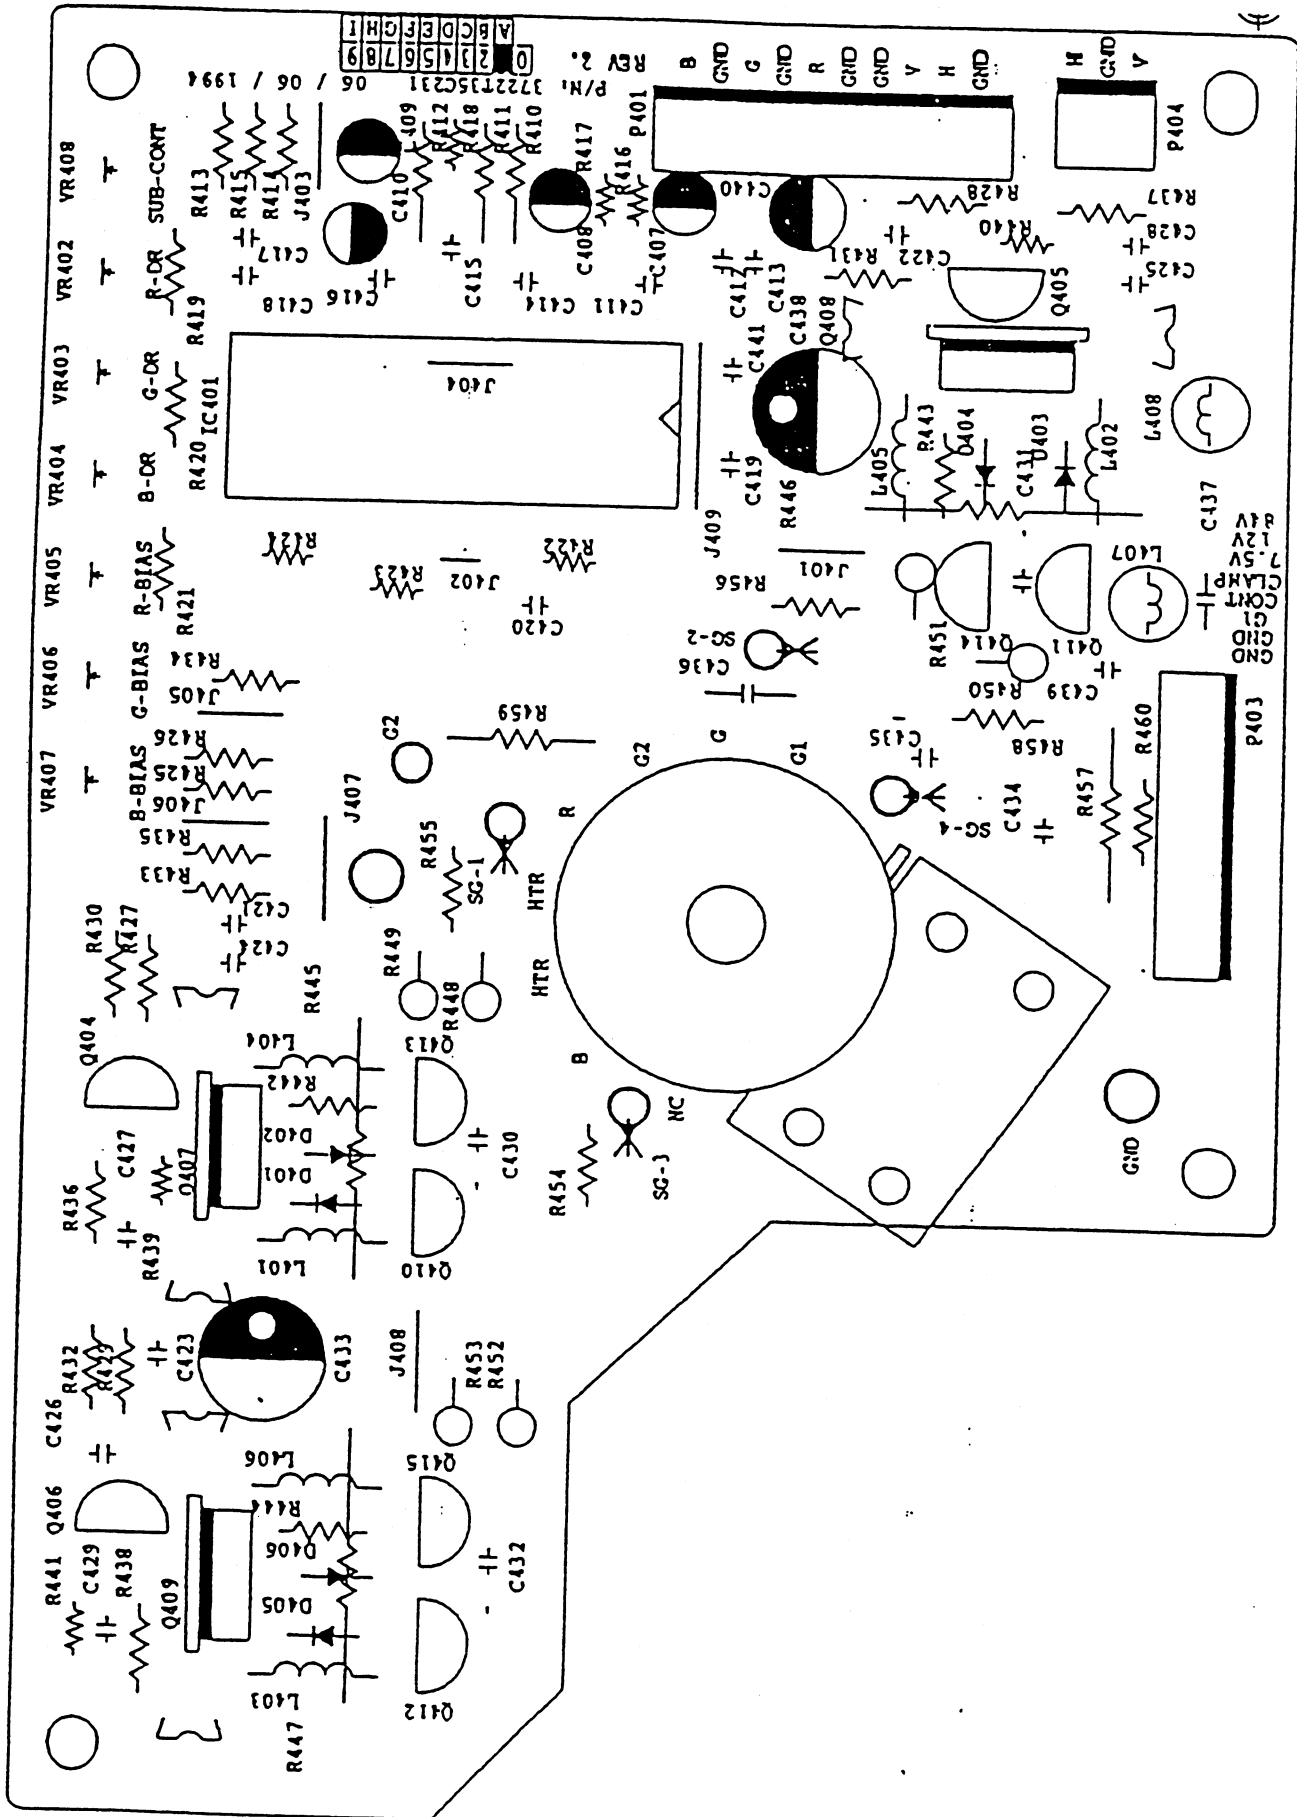

CD-1035E, EM Video Board

Schematics, Layouts

PART: CD9600 DESC : Color Display CRT Samsung M23LCD32X02

Main Board Sync Processing Circuit

IC201	WT8041	D311	1N4148
D301	1N4148	D312	1N4148
D302	1N4148	D313	1N4148
D303	1N4148	D314	1N4148
D304	1N4148		
D305	1N4148		
D310	1N4148		

Main Board Horizontal Deflection Circuit

IC202	74LS123	D205	FR306
IC203	MC1391P	D206	FR306
IC302	LM358	D207	FR104
IC303	LM393	D208	FR104
Q201	2SC945/1815	D215	1N4148
Q202	2SA733/1015	D216	1N4148
Q203	2SA733/1015	C213	2200P, 50V
Q204	2SC945/1815	C222	1.8 μ 250V
Q209	2SC1213A	C225	5100P, 1.6KV
Q210	2SC5129	C226	3900P, 400V
Q211	2SC2236	T201	EI-19 34501901239
Q212	2SA966	T202	EI-19 34501902146
Q301	2SC945/1815	T203	FBT 34710100952
Q302	2SC945/1815	L201	8.7 μ H, 36080106330
D201	1N4148	L202	300 μ H, 36080111431
D202	1N4148	L301	1.4Mh, 36080105732
D203	FR104		
D204	HER305/306		

Main Board High Voltage Circuit

Q207	2SA733/1015	D217	1N4148
Q208	2SC945/1815		
Q213	2SC945/1815		
Q214	2SC945/1815		
Q215	2SC945/1815		
Q216	BF421/423		
Q401	2SA733/1015		
Q402	2SC945/1815		
D209	FR104		
D210	FR104		
D211	1N4148		
D212	1N4148		
D214	Z, 5.1v		

Schematics, Layouts

PART: CD9600

DESC : Color Display

Main Board Vertical Deflection Circuit


IC301	TDA1675A	D306	1N4148
Q304	2SC2236	D307	1N4002, FR104
Q305	2SA966	D309	1N4148
Q306	2SC945/1815		

Main Board Power Supply & Saving

IC101	CS3842A	D103	PR1002
IC102	TL431	D104	31DF2
IC103	4N35T	D105	31DF4
IC104	WT8048	D106	31DF4
IC105	7805	D107	31DF4
IC402	7812	D108	31DF4
Q101	2SK1404	D109	31DF4
Q102	2SB861	D114	1N4148
Q103	2SC2235	D115	1N4148
Q104	2SB861	D116	1N4148
Q105	2SC2235	D117	FR104
Q106	TIP42C	D118	1N4148
Q107	2SC1213A	D119	1N4148
Q110	2SC945/1815	T101	40Mh, 34504000844
BD101	PB405	T102	34504000844
D101	FR157	FS101	3.0A,250V

Video Board

IC401	LM1203	Q413	BF423
Q404	2SC1906	Q414	BF423
Q405	2SC1906	Q415	BF423
Q406	2SC1906	D401	1N4148
Q407	KSC3953	D402	1N4148
Q408	KSC3953	D403	1N4148
Q409	KSC3953	D404	1N4148
Q410	BF422	D405	1N4148
Q411	BF422	D406	1N4148
Q412	BF422		



10. Connecting the LC574A

10.1 Introduction

LeCroy oscilloscopes are supplied with a list of plotters and printers known to work with them.

This list is not final, so any suggestions are welcome.

HP plotter responses to some RS-232 configuration commands have been evolved.

Consequently, the LC574A generation DSO support HP plotters of two types, 7470A and 7550A. The only difference lies in the RS-232 initialization codes. They may however, despite these changes, work with HPGL compatible plotters from other manufacturers. If the HPGL data is used as input for a CAD or word processing system, it might be necessary to remove the data preceding the in command.

Before connecting a plotter to a LC574A, do not forget to select the appropriate settings in the printer setup menu and the GPIB & RS-232 setup menu.

GPIB & RS232

Remote
Control from
GPIB **RS232**

RS232 Mode
7-bit
8-bit

Parity
none
odd even

Stop bits
1 2

Baud Rate
300 1200
2400 4800
9600 19200

GPIB Device
Talk Only

HARDCOPY

output to
Flpy
HDD
GPIB
RS232
Centronics

page Feed
OFF On

protocol
DeskJet col
DeskJet b/w
TIFF
TIFF color
BMP



RS-232 connection

The following settings are assumed for the scope.


Baud rate : 9600
Character : 8 bits
Parity : none
Stop bits : 1

Any exceptions will be mentioned.

RS 232 interface

Pin 1 : DCD
2 : RD
3 : TD
4 : DTR
5 : GND
6 : DSR
7 : RTS
8 : CTS
9 : RI

A cable with the following pin out can be used in almost every case:

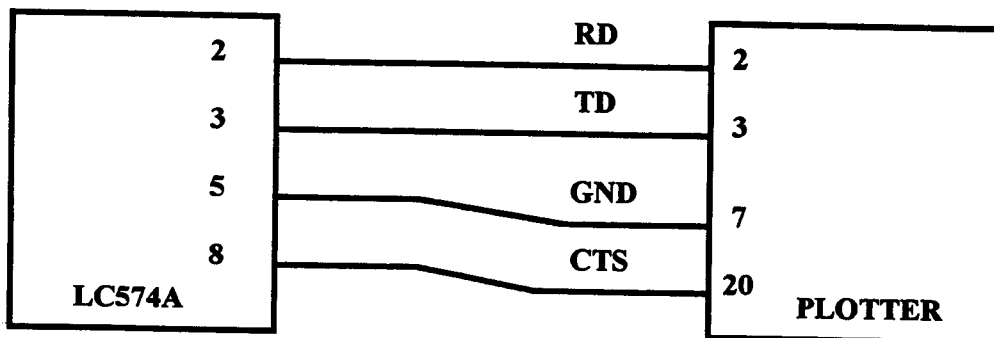

The cable has D25 connector with male pins on the plotter side, and a D9 connector with female pins on the LC574A oscilloscope side.

GPIB Connection

To have a plot done through GPIB initiated with the front panel screen dump push button, you must set the LC574A in talk only mode by selecting remote control from RS-232, and the plotter in listen only mode.

If a computer controls the GPIB Bus, both the scope and the plotter must be set in addressed mode (remote control from GPIB).

Remark: the listen only mode does not work on some old HP plotters such as HP7585B or HP7475. The plotter must be set to listener before being able to receive any commands, which is a violation of the GPIB standard.

10.2 Plotters

10.2.1 HP 7470A Plotter

Switch settings:

- RS-232 Connection:
 - S1 and S2 : 0 0
 - Y/D : D
 - A4/US : User selectable
 - B4 to B1 : 1 0 1 0
- GPIB listen only:
 - A4/US : User selectable
 - 16 to 1 : 1 1 1 1 1
- GPIB Addressed:
 - A4/US : User selectable
 - 16 to 1 : 0 0 1 1 1

10.2.2 HP 7550A Plotter

Responses to some ESC characters commands are not the same in this plotter as in older HP models like the 7470A. In fact, ESC sequences of commands which give excellent results in the 7470A can prevent any handshake in RS-232. Problems of this kind have been reported in the case of ESC.R and ESC.@ commands. When combined with ESC.I and ESC.N, ESC.@ breaks up all handshakes.

RS-232 configuration:

- Enter into display 5 (HP-IB MONITOR...).
- Select STANDARD OF STANDARD/ENHANCED.
- Enter into SERIAL sub-menu (display 6)
- For DATA_FLOW, select REMOTE. Either STANDALONE or EAVESDROP may be chosen.
- Enter into display 7 (DUPLEX, PARITY, BAUD).
- Select FULL duplex.
- Configuration PARITY and BAUD rate to the same values as on the DSO.

Do not start a plot while a sheet of paper is being loaded!

GPIB configuration:

If the scope is in TALK ONLY, the plotter must be in LISTEN ONLY.
Selection will be done at display 5.

Note : It seems that the plotter must be powered off, then on again, to take any configuration change into account.



10.2.3 Hitachi 672 Graph Plotter (or NSA 672)

As this plotter is compatible with the 7470A, select this mode on the plotter menu page.

Switch settings

- RS-232 Connection:

Sw. A, 1 and 2	:1 1 (ISO A3) or (ISO A4).
Sw. A, 3 to 8	:1 0 1 1 0 1
Sw. B	:1 1 1 1

Note : When switches are set to ISO A4, the pen must be manually repositioned at the top of the page (or plotter reset by powering it off and on) before loading a new sheet of paper.

10.3 Printers

Interfacing is possible through RS-232, GPIB and Centronics.

10.3.1 Centronics Printers

Most printers use a Centronics parallel connection which makes direct connection possible to the LC574A using the F9300-6 Centronics interface board. If a serial to parallel converter is used, in the printer setup menu select device type Epson, and remote control from RS-232.

RS-232 Remote control port settings:

Baud rate	: 9600 or 19200
Characters length (bits):	8
Parity	: none
Number of stop bits	: 1

The following printers and printer switch positions have been tested via serial to parallel adapter.

	Switch 1	Switch 2
1. Epson LQ-1000	1, 2, 3, 4 : ON	2, 6, 7 : ON
2. Diconix 150P	1 : ON	2, 6, 7 : ON
3. HP-ThinkJet 2225C	2, 4, 5 : ON	
4. HP-DeskJet 550 C	all down	6 up for 19200 bauds

Note: all Epson and Epson Compatible printers are likely to work if the switches are set properly, (Some experimentation may be required).

Some available serial to parallel converters need power through the RS-232 lines. Do not use them, as we do not guarantee that the serial port is able to furnish enough power.

10.3.2 RS-232 Printers

10.3.2.1 Epson FX80

It is possible to use the standard RS-232 cable. Such a printer has the optional RS-232 interface " #8143 " installed. The configuration that follows is valid for the default scope setting. The standard cable is usable.

In the particular case of an FX850:

- the main switches SW1 SW2 remain at the factory configuration

SW1	:	1	2	3	4	5	6	7	8
		OFF	OFF	ON	OFF	OFF	ON	ON	ON
SW2	:	1	2	3	4				
		ON	OFF	OFF	OFF				

- the 8143 switches are set to:

1	2	3	4	5	6	7	8
ON	OFF	OFF	OFF	n/a	OFF	OFF	ON

- the 8143 jumpers remain at the factory settings:

J1	J2	J3	J4	J5	JC	JNOR	JRVE	JF	JX
OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF

Note: Epson printers only support XON/XOFF support handshake if they have a print buffer. Such printer are : FX, FX+, JX-80, LQ-800/1000, EX-800 and LQ-25000. Otherwise, use DTR/RTS handshake.


10.3.2.2 Citizen 120D

To use this printer with the default RS-232 setting and default printer setting of the LC574A, select the following switch configuration:

DIP switch bank 1 : all OFF except 3 and 8
DIP switch bank 2 : all OFF.

10.3.2.3 HP LaserJet

Make sure that page feed is ON in the plotter menu to use the LaserJet. It is advisable to start out in single density with a size of A5. Then, depending upon the internal buffer size on the LaserJet, the image size and/or density can be increased. At one point, the internal buffer size of the DSO is also reached. The image is simply truncated, indicating that either density or size have to be reduced.

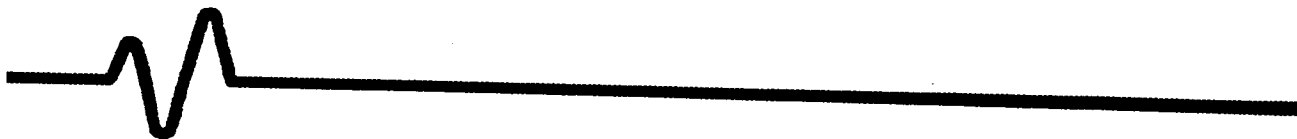

10.3.2.4 HP ThinkJet

To use printer with the default RS-232 setting and with the default cable select the following switch configuration:

- Mode switch:

1	2	3	4			5	6	7	8
0	0	0	0	:	11" page length	0	0	0	0
			1	:	12" page length				

- RS-232 switch:

1		2	3		4	5
1		0	0		0	0

(use DTR handshake) (8bits, parity none) (9600 bauds)

Note : it may be possible that old ThinkJet recognize only the Epson protocol. If it is the case use the Epson.

10.3.2.5 HP DeskJet 550C

The standard cable is usable. The printer has been tested at 19200 bauds with the following configuration :

Switch 1 or Bank A : all down

Switch 2 or Bank B : 6 up for 19200 bauds, all the other down

10.3.2.6 Brother Printers

The Brother M-1509 and M-1709 have been tested with a serial connection. On the oscilloscope select "Epson FX-80 or compatible printer".

The switch settings are identical for both the printers:

- SW1	:	1	2	3	4	5	6	7	8
		ON	ON	ON	OFF	ON	n/a	n/a	ON
- SW1	:	1	2	3	4	5	6	7	8
		←		ALL OFF				→	
- SW1	:	1	2	3	4	5	6	7	8
		OFF	OFF	OFF	OFF	11" : OFF	OFF	ON	OFF
						12" : ON			

10.3.3 GPIB Printers

10.3.3.1 HP QuietJet

Make sure the dip switches on the backplane of the printer are set to

- SRQ enable: 0

- GPIB listen only:
Listen always: 1
A5 to A1: 0 0 1 1 1

- GPIB Addressed:
Listen always: 0
A5 to A1: 0 0 1 1 1

10.3.3.2 HP ThinkJet (HP 2225A)

Make sure the dip switches on the backplane of the printer are set to

- SRQ Enable: 0
- GPIB listen only:
Listen always 1
A5 to A1: 0 0 1 1 1

- GPIB Addressed:
Listen always: 0
A5 to A1: 0 0 1 1 1

10.3.3.3 HP PaintJet (black/white only)

Make sure the dip switches near the GPIB connector are set to:

- GPIB Listen only:

NORM/SCS: NORM
A3 to A1: 1 1 1
PC8/ROM8: N/A
ENG/MET: has to match paper size ENG = 11" MET = 12"

- GPIB addressed:

NORM/SCS: NORM
A3 to A1: any combination except 1 1 1 (correspond to add. 0-6)
PC8/ROM8: N/A
ENG/MET: has to match paper size ENG = 11" MET = 12"



10.4 Information on GPIB

10.4.1 Introduction

This section is a simple description of the GPIB interface as an aid to understanding the interface in the LC574A DSO: it is not intended as a complete specification of the system.

The GPIB system is designed for the interaction of a number of devices, which may transmit or receive information as required. The system includes data lines over which the actual data are sent, bus management lines for control, and handshake lines to ensure correct acceptance of data at the right destination.

The main features of the bus are summarized below:

Maximum number of devices 15

Maximum bus length 20 meters or
2 meters per device, whichever is less.

Connection star or chain

Note that more than half of any connected devices must be powered up, even if they will not be used.

Data lines	8 DIO	1 to 8
Handshake lines	DAV NRFD NDAC	Data available Not ready for data not data accepted
Bus management lines	EOI IFC SRQ ATN REN	End or identity Interface clear Service request Attention Remote enable
Active level	+0.4 V	
Inactive level	+3,3 V	

Note that all signal lines are active low, and that they are wire ORed to allow participation by all devices.

In addition, there are 8 ground lines, making a total of 24 lines.

LeCroy Corporate Headquarters

700 Chestnut Ridge Road
Chestnut Ridge, NY 10977-6499
USA

Phone: (914) 425 2000
FAX: (914) 425 8967
<http://www.lecroy.com>

LeCroy European Manufacturing:

LeCroy SA
2, Chemin Pré-de-la-Fontaine
CH-1217 Meyrin 1 - Geneva
Switzerland

Phone: (41) 22 719 21 11
FAX: (41) 22 782 39 15

Service Throughout the World

LeCroy Ltd
28 Blacklands Way
Abingdon, Oxon OX14 1DY
England

Phone: (44) 1235 533 114
FAX: (44) 1235 528 796

LeCroy S.a.r.l.
1, Avenue de l'Atlantique
Les Ulis 91976 Courtaboeuf
France

Phone: (33) 1 69 18 83 20
FAX: (33) 1 69 07 40 42

LeCroy Europe GmbH
Mannheimer Str. 175
D-69123 Heidelberg
Germany

Phone: (49) 6221 827 00
FAX: (49) 6221 834 655

LeCroy Japan Corporation
Zaiken Bldg 6th Floor
19-3, 2-Chome
Sasazuka, Shibuya-Ku
Tokyo 151 Japan

Phone: (81) 3 3376 9400
FAX: (81) 3 3376 9587

LeCroy Japan Corporation
Nokao Royal Bldg 6F
2-14-10, Miyahara, Yodogawa-ku
Osaka 532, Japan

Phone: (81) 6 396 0961
FAX: (81) 6 396 0962

Copyright © February 1998

LeCroy is a registered trademark of LeCroy Corporation. All rights reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.

LeCroy