

8

7

6

5



4

3


2

1


REVISIONS					
REV	ECN#	ZONE	DESCRIPTION	NAME	DATE
A	PRODUCTION RELEASE PER ECN 20100127	D. YOUNG	10/01/2010
B	CP121275	CHANGE RELEASE PER CP121275	V. VADUVA	09/14/2012

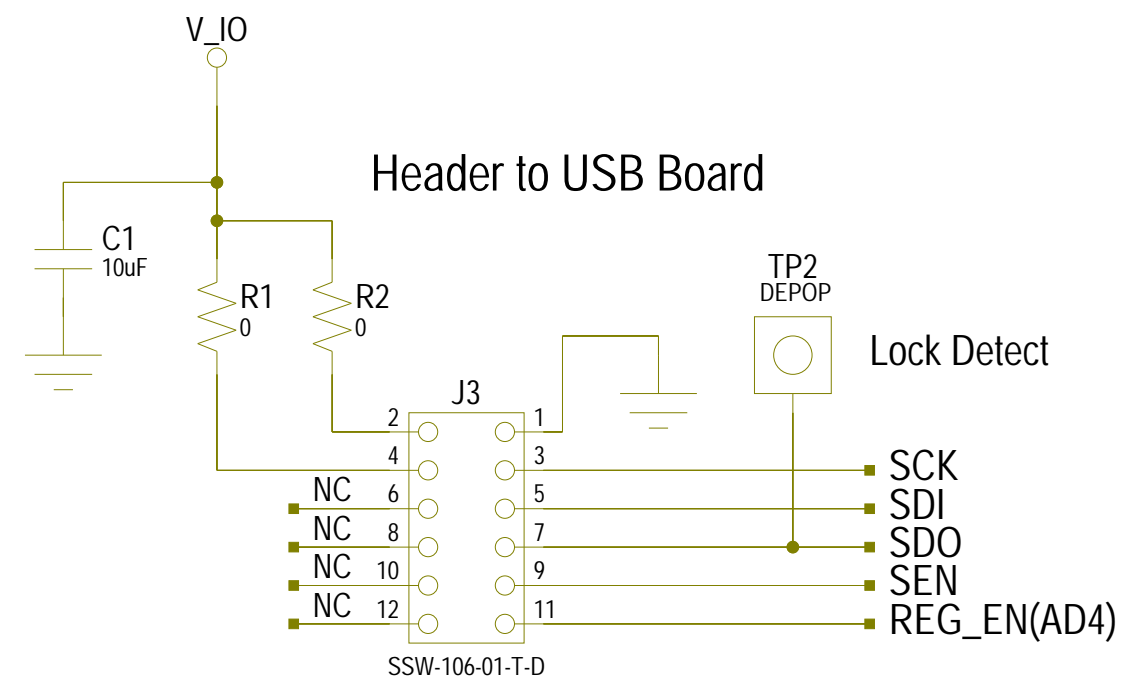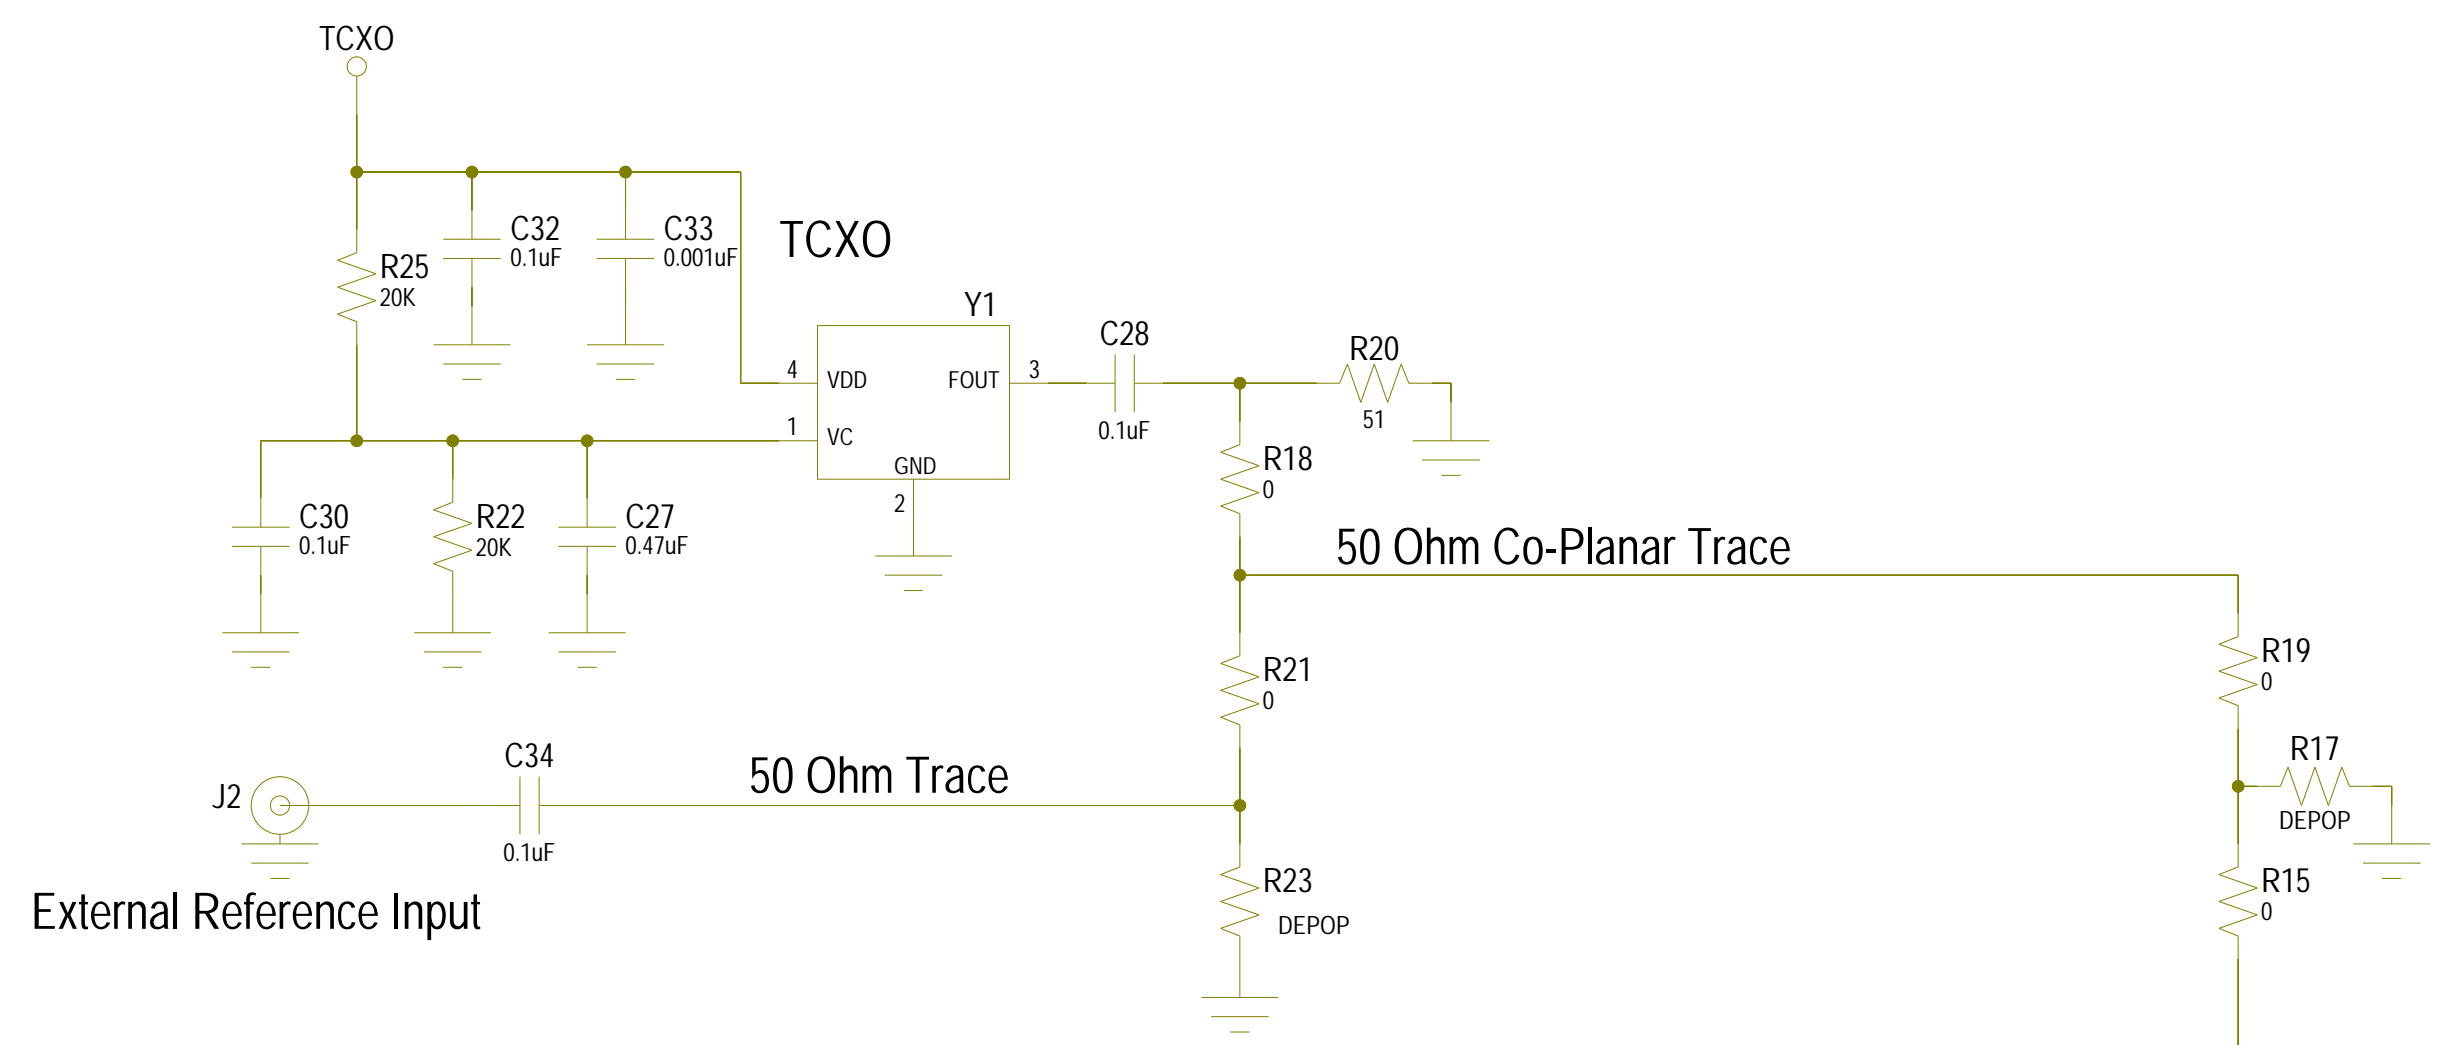

NOTICE OF PROPRIETARY PROPERTY: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE THE PROPRIETARY PROPERTY OF HITTITE MICROWAVE CORPORATION. IT MAY NOT BE COPIED OR USED IN ANY MANNER NOR MAY ANY OF THE INFORMATION OR UPON IT BE USED FOR ANY PURPOSE, WITHOUT THE EXPRESSED WRITTEN CONSENT OF AN AUTHORIZED AGENT OF HITTITE MICROWAVE CORPORATION.

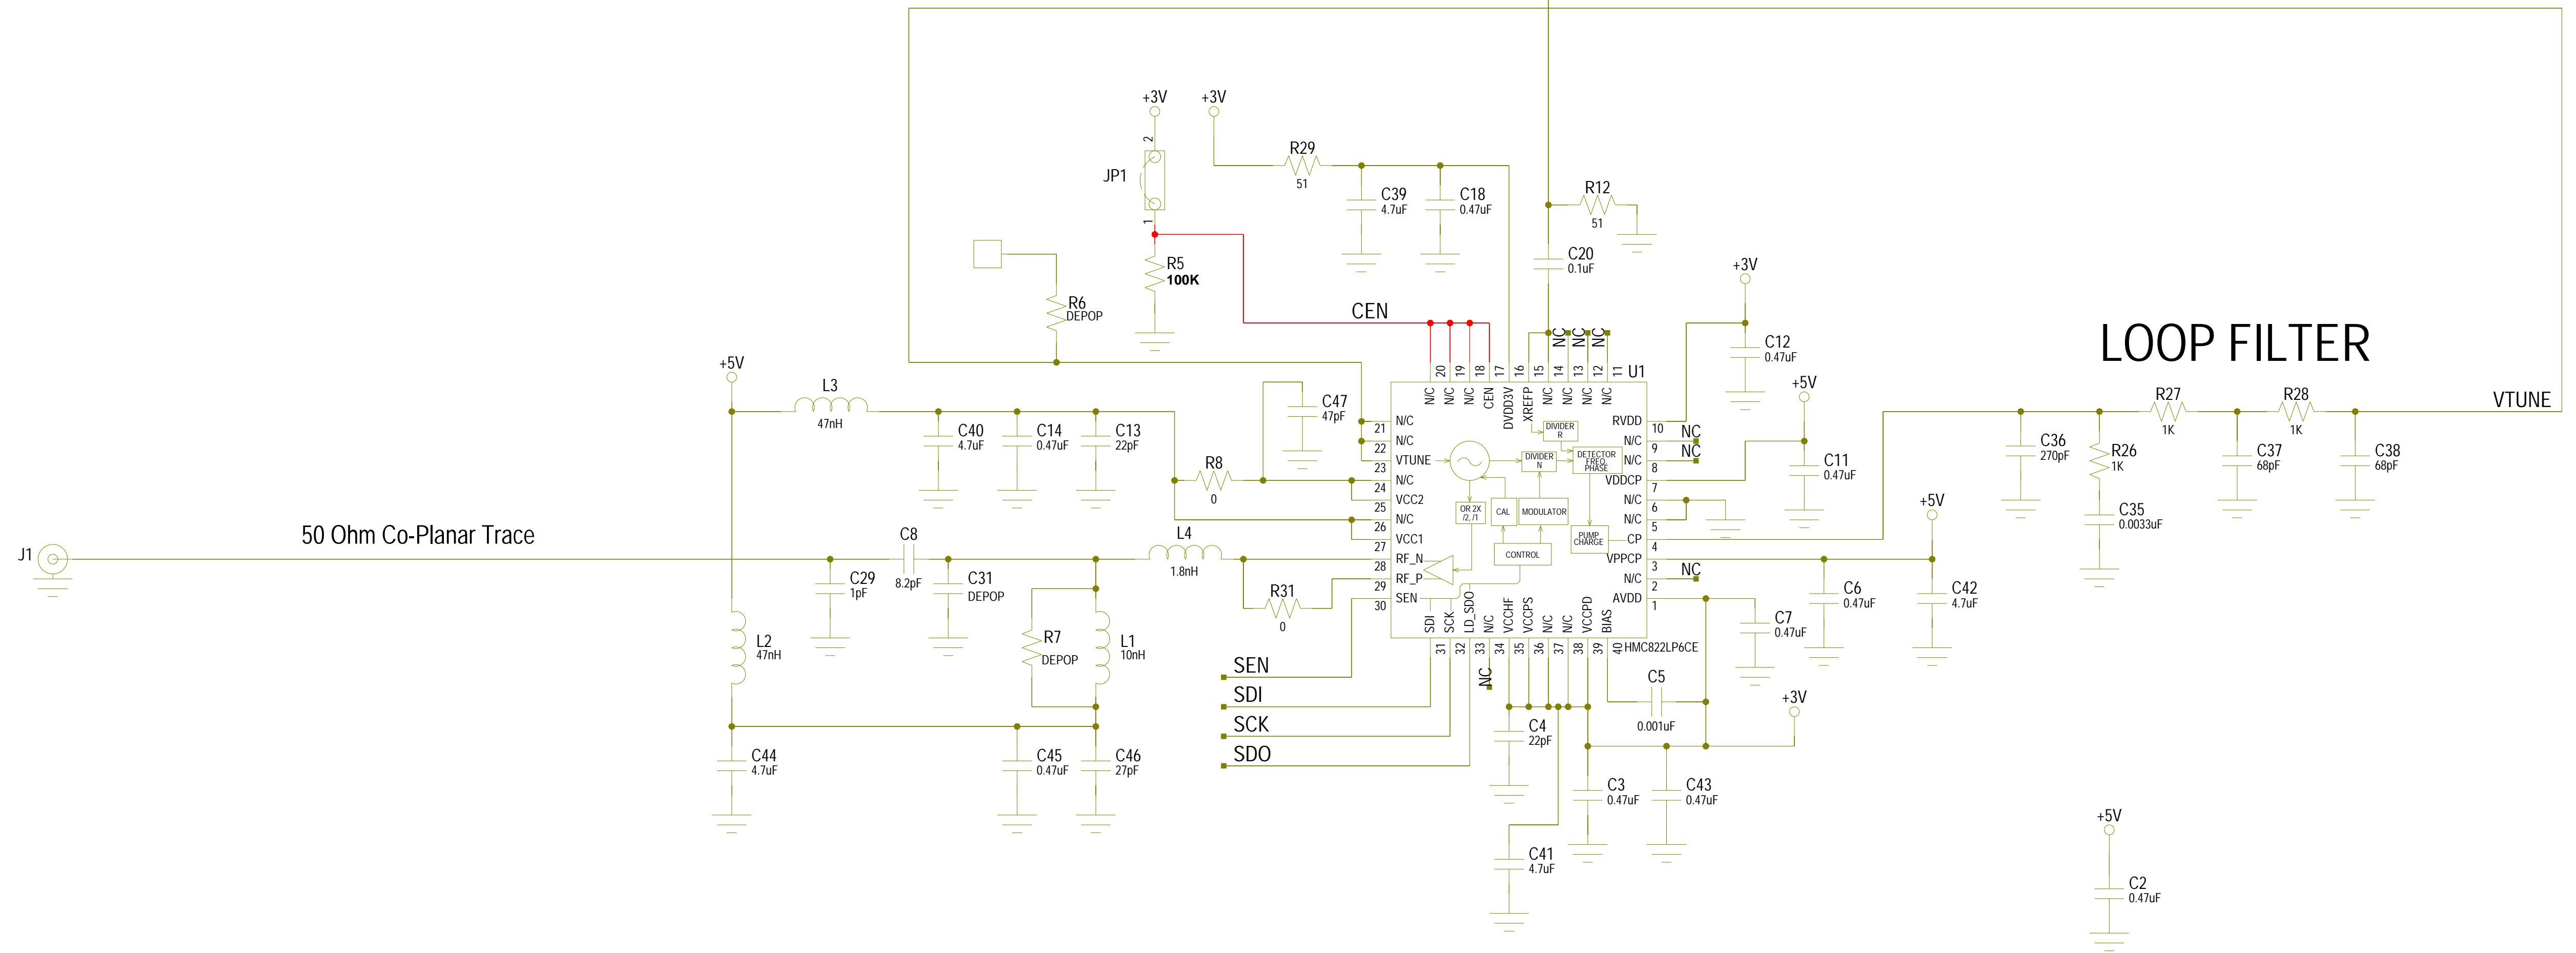

HMC822 2xFO Integrated PLL & VCO Eval



HITTITE MICROWAVE CORPORATION 20 Alpha Rd Chelmsford, MA 01824					
TITLE SCH, CUSTOMER EVALUATION PLL & VCO 2 X FO					
PROJECT					
DRAWING #: 129275			SHEET 1 OF 2		REV
DRAWN BY: D.YOUNG			DATE: 10/01/2010		CODE ID NO: 1CN88
			SIZE: D		REV: B
19-10-2012_14:48					

8

7

6


5

4

3

2

1

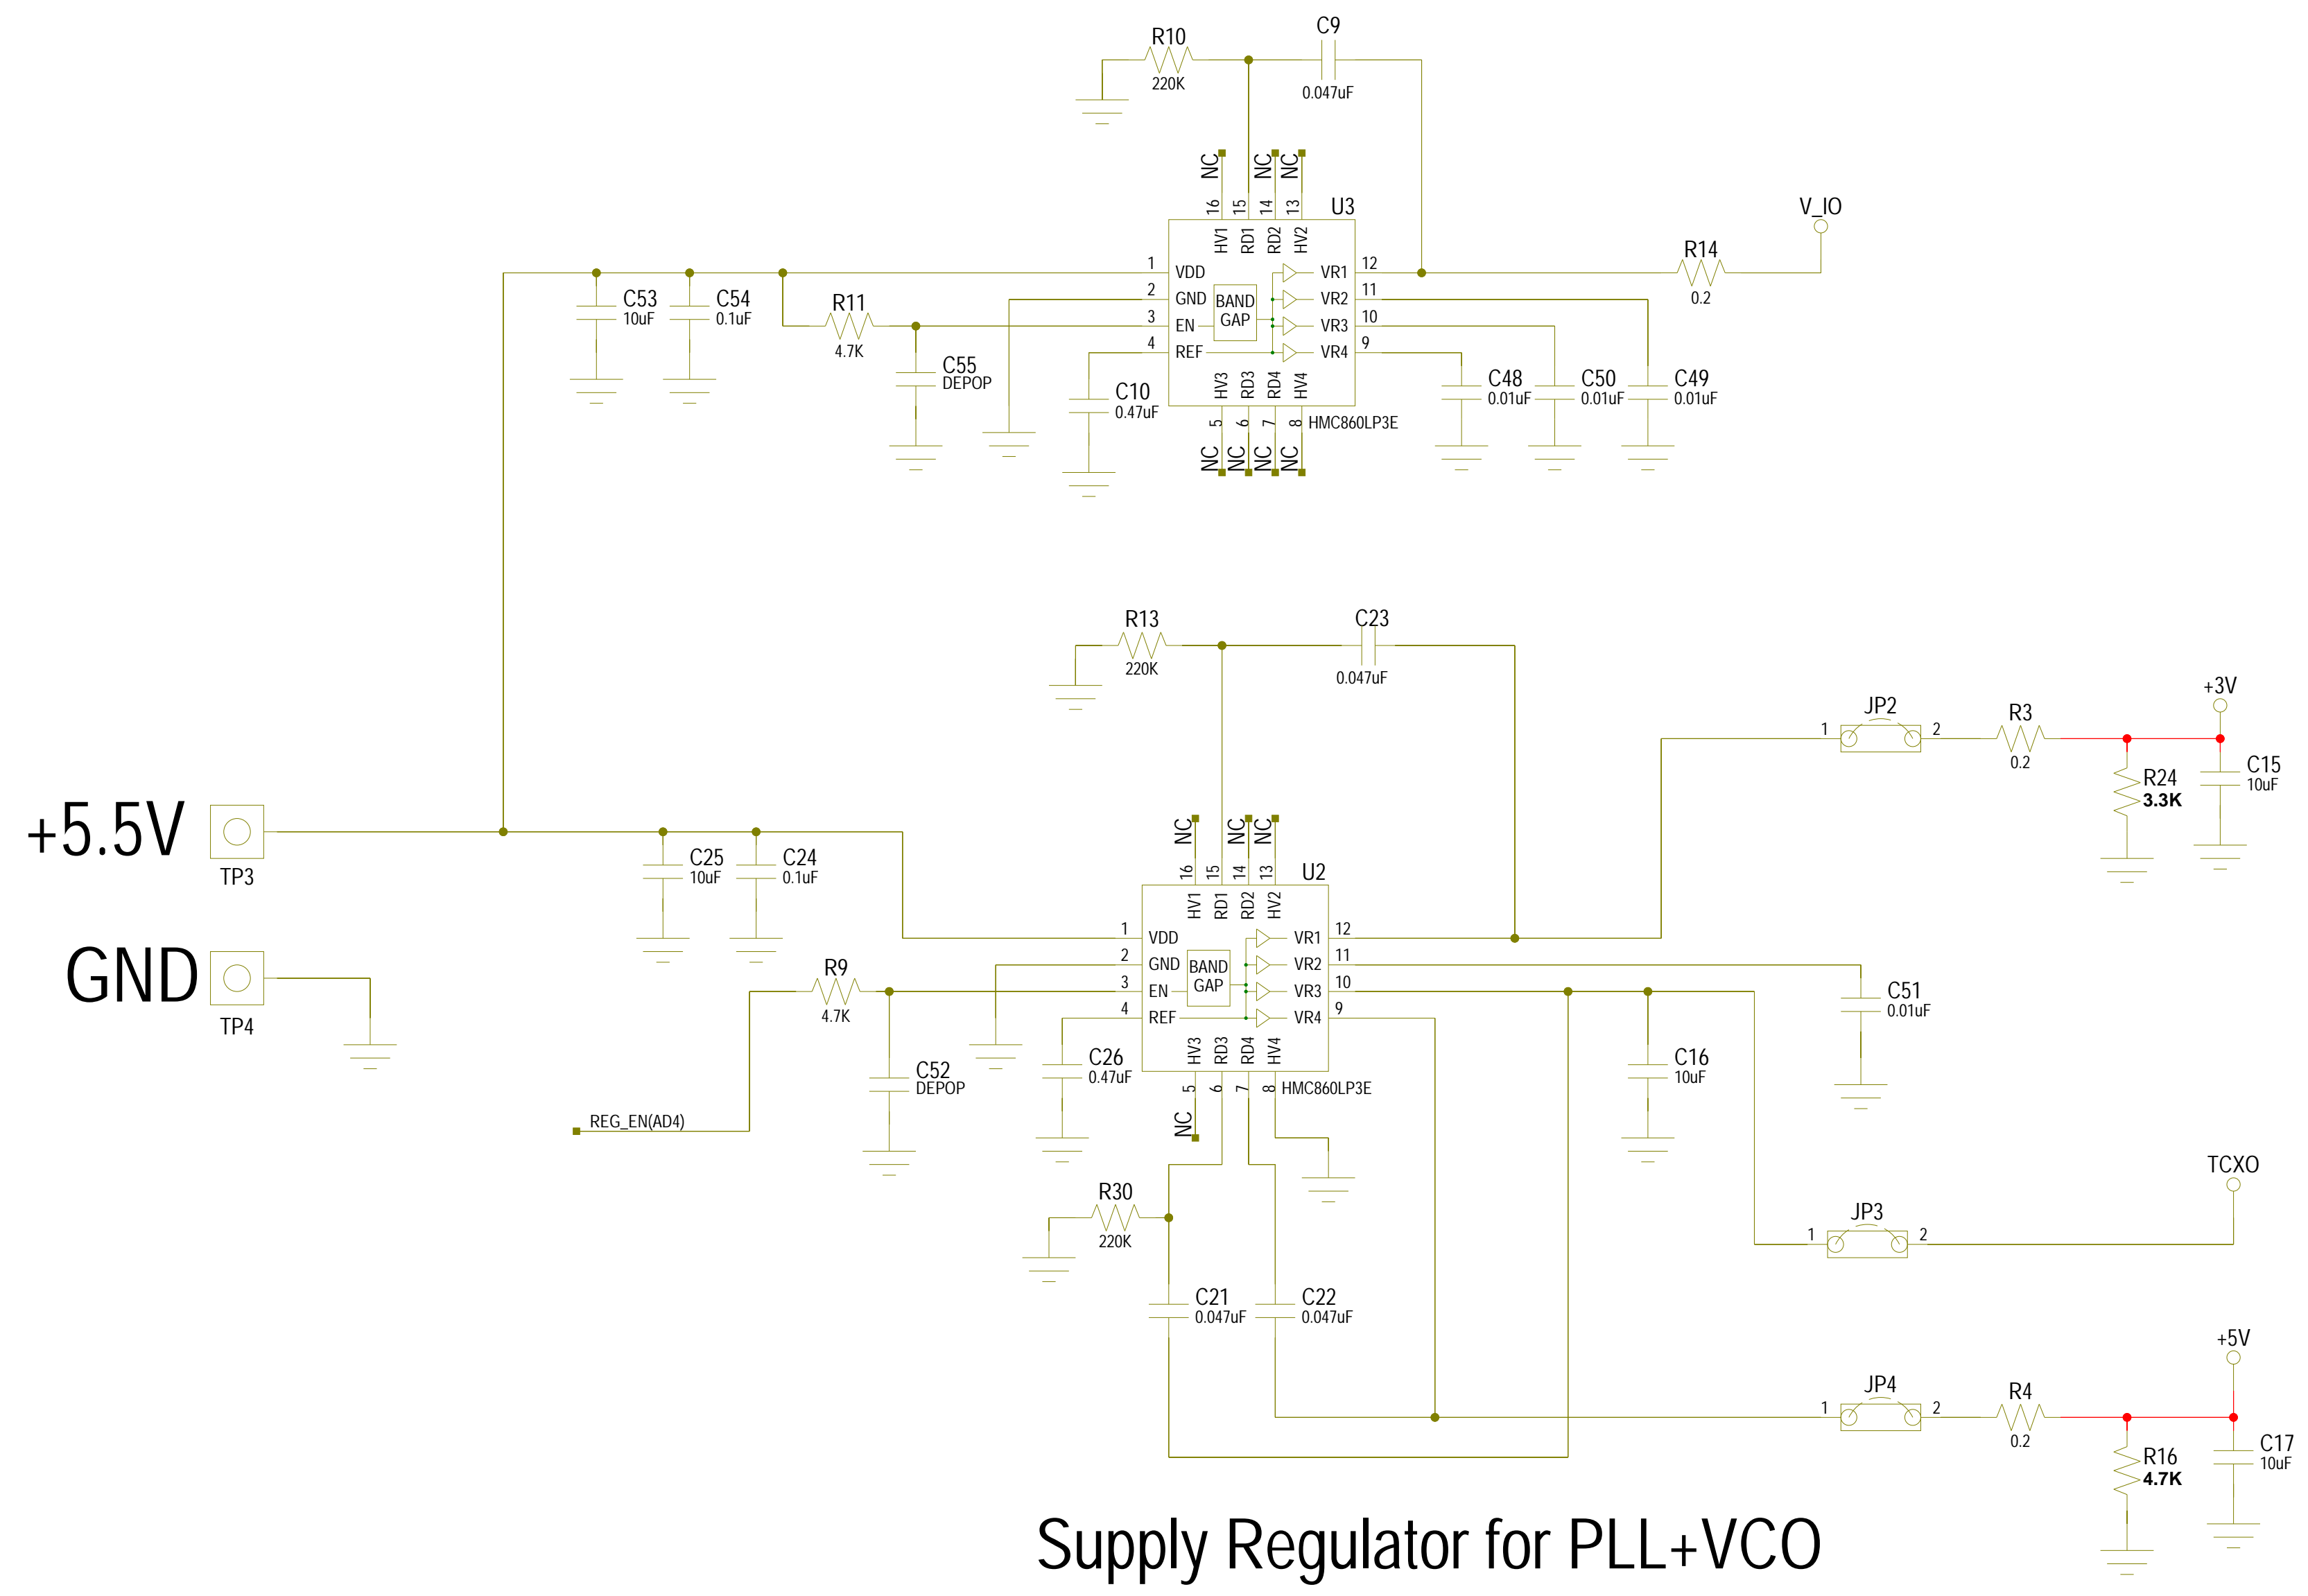

Supply Regulator for PLL+VCO

A recommended design practice is to connect the regulator Enable Pin #3 through a 4.7kOhm resistor to the system microcontroller/FPGA for power management control
 Small series resistors required in VR1 and VR4 output paths, as shown