REVISIONS			
REV	DESCRIPTION	APPR	DATE

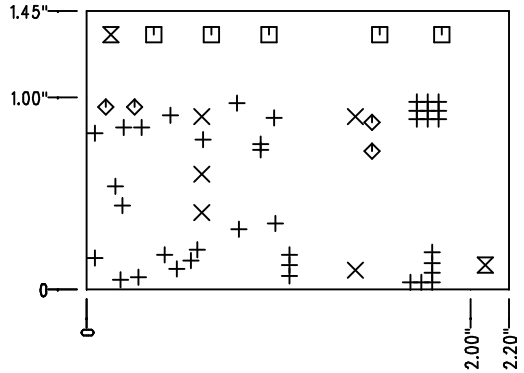

SIZE	QTY	SYM	PLTD
15	38	+	PLTD
43	5	×	PLTD
94	5	□	PLTD
35	4	◇	PLTD
70	2	⧖	NPLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4. 4 OZ. COPPER (FINISH) ON OUTER LAYERS AND 2 OZ. COPPER (FINISHED) ON INNER LAYERS.
   THICKNESS .062 +/-.006 TOTAL OF 4 LAYERS.
   FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
   HOLE LOCATION TOLERANCES ARE +/-.003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:



FAB DRAWING

APPROVALS		
	INIT	DATE
DRAWN		
CHECK		
DESIGN	JUNE WU	10/5/00
ENGR	KURK M.	10/5/00
SCALE = NONE		

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408)432-1900

TITLE: -36 to -72 Vin to Isolated 5V/2A 3.3V/3A supply

SIZE	DEMO	REV.
A	DC373A LT1725EGN	A

DES-230413 SHT 1 of 1