

# **ITU-T G.8262 Compliance Test Results for the LMK05028 Digital PLL Network Synchronizer**

Arvind Sridhar

## **ABSTRACT**

The LMK05028 is an ultra-low jitter clock synchronizer with integrated EEPROM targeted for communication and industrial applications. This document details the LMK05028's compliance to the ITU-T G.8262 (timing characteristics of a synchronous Ethernet equipment slave clock) standard.

## **Contents**

|    |                                  |    |
|----|----------------------------------|----|
| 1  | Introduction .....               | 3  |
| 2  | Wander Generation.....           | 4  |
| 3  | Wander Transfer .....            | 10 |
| 4  | Wander Tolerance.....            | 14 |
| 5  | Jitter Tolerance .....           | 16 |
| 6  | Phase Transient Generation ..... | 20 |
| 7  | Holdover .....                   | 26 |
| 8  | Free-Run Accuracy .....          | 29 |
| 9  | Pull-In and Hold-In .....        | 29 |
| 10 | Conclusion .....                 | 29 |
| 11 | Appendix.....                    | 30 |
| 12 | References .....                 | 32 |

## **List of Figures**

|    |                                                                                                                                     |    |
|----|-------------------------------------------------------------------------------------------------------------------------------------|----|
| 1  | Test Setup for Wander Generation.....                                                                                               | 4  |
| 2  | Wander Generation (MTIE) for EEC-Option 1 .....                                                                                     | 5  |
| 3  | Wander Generation MTIE Option 1, G.8262 EEC Option 1 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 10 Hz..... | 5  |
| 4  | Wander Generation MTIE Option 1, G.8262 EEC Option 1 Results, Tested at Temperature of 85°C With DPLL Bandwidth of 10 Hz .....      | 6  |
| 5  | Wander Generation (TDEV) for EEC-Option 1 With Constant Temperature .....                                                           | 7  |
| 6  | Wander Generation TDEV G.8262 EEC Option 1 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 5 Hz.....            | 7  |
| 7  | Wander Generation (MTIE) for EEC-Option 2 With Constant Temperature .....                                                           | 8  |
| 8  | Wander Generation MTIE ITU-T G.8262 EEC Option 2 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 0.1 Hz .....   | 8  |
| 9  | Wander Generation (TDEV) for EEC-Option 2 With Constant Temperature .....                                                           | 9  |
| 10 | Wander Generation TDEV G.8262 EEC Option 2 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 0.1 Hz .....         | 9  |
| 11 | Test Setup for Wander Transfer.....                                                                                                 | 10 |
| 12 | Wander Transfer EEC Option 1 With Max DPLL Bandwidth of 10 Hz .....                                                                 | 11 |
| 13 | Wander Transfer EEC Option 2 With Max DPLL Bandwidth of 0.1 Hz .....                                                                | 12 |
| 14 | Input Wander Tolerance (TDEV) for EEC-Option 2 .....                                                                                | 13 |
| 15 | Wander Transfer for EEC-Option 2 (Maximum Output Wander When Input Wander Meets ).....                                              | 13 |
| 16 | Test Setup for Wander Tolerance.....                                                                                                | 14 |

|    |                                                                                                    |    |
|----|----------------------------------------------------------------------------------------------------|----|
| 17 | Input Wander Tolerance (MTIE) for EEC-Option 1 .....                                               | 15 |
| 18 | Lower Limit of Maximum Tolerable Sinusoidal Input Wander for EEC-Option 1 .....                    | 15 |
| 19 | Input Wander Tolerance (TDEV) for EEC-Option 2 .....                                               | 16 |
| 20 | Test Setup for Jitter Tolerance .....                                                              | 16 |
| 21 | 1G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2.....           | 17 |
| 22 | 10G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2 .....         | 18 |
| 23 | Test Setup for Phase Transient Generation .....                                                    | 20 |
| 24 | Maximum Phase Transient at the Output Due to Reference Switching for EEC-Option 1 .....            | 21 |
| 25 | Short-Term Phase Transient Result .....                                                            | 21 |
| 26 | MTIE at the Output Due to Reference Switching/Rearrangement Operations for EEC-Option 2 .....      | 22 |
| 27 | Short-Term Phase Transient Option 2 .....                                                          | 22 |
| 28 | Test Setup for Phase Transient Generation With Signal Interruption .....                           | 23 |
| 29 | Phase Transient With Signal Interruptions Results .....                                            | 24 |
| 30 | Test Setup for Phase Discontinuity .....                                                           | 25 |
| 31 | Phase Discontinuity Results .....                                                                  | 25 |
| 32 | Phase Discontinuity Option 2 Results .....                                                         | 26 |
| 33 | Permissible Phase Error for an EEC-Option 1 Under Holdover Operation at Constant Temperature ..... | 27 |
| 34 | Holdover Option 1 Result .....                                                                     | 27 |
| 35 | Holdover Option 2 Result .....                                                                     | 28 |
| 36 | Alternate Test Setup to Measure Phase Transient Response Accurately .....                          | 30 |
| 37 | Phase Transient Result.....                                                                        | 31 |
| 38 | Frequency Transient Result.....                                                                    | 31 |

#### List of Tables

|    |                                                                                            |    |
|----|--------------------------------------------------------------------------------------------|----|
| 1  | ITU-T G.8262 Compliance Summary .....                                                      | 3  |
| 2  | Input Wander Tolerance (TDEV) for EEC-Option 2 .....                                       | 13 |
| 3  | Lower Limit of Maximum Tolerable Sinusoidal Input Wander for EEC-Option 1 .....            | 15 |
| 4  | 1G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 & EEC-Option 2.....     | 17 |
| 5  | 10G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2 ..... | 18 |
| 6  | 25G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2 ..... | 18 |
| 7  | 1G Test Conditions .....                                                                   | 18 |
| 8  | 10G Test Conditions .....                                                                  | 19 |
| 9  | 25G Test Conditions .....                                                                  | 19 |
| 10 | Transient Response Specifications During Holdover.....                                     | 28 |
| 11 | Pull-In Results .....                                                                      | 29 |
| 12 | Hold-In Results .....                                                                      | 29 |

#### Trademarks

All trademarks are the property of their respective owners.

## 1 Introduction

This document contains the summary of the test setups and measured silicon results highlighting compliance to ITU-T G.826 (Timing characteristics of a synchronous Ethernet equipment slave clock) standard. Testing was performed using the Calnex Rb/GPS frequency reference and Calnex Paragon-T hardware. Other test hardware was used as required for the measurements.


The device-under-test (LMK05028) was configured using Texas Instruments' TICS Pro Silicon EVM Programming Tool. Unless specified otherwise, the LMK05028 Digital PLL loop bandwidth for EEC-Option 1 was set to 10 Hz and for EEC-Option 2 to 0.1 Hz.

**Table 1. ITU-T G.8262 Compliance Summary**

| SECTION                           | DESCRIPTION                                                                                                  | EEC OPT 1<br>(SECTION IN<br>G.8262) | EEC OPT 2<br>(SECTION IN<br>G.8262) | COMPLIANT |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|-----------|
| <b>WANDER GENERATION</b>          |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 2.1</a>       | MTIE EEC Option 1; Must not exceed MTIE mask                                                                 | 8.1.1                               |                                     | Yes       |
| <a href="#">Section 2.2</a>       | TDEV EEC Option 1; Must not exceed TDEV mask                                                                 | 8.1.1                               |                                     | Yes       |
| <a href="#">Section 2.3</a>       | MTIE EEC Option 2; Must not exceed MTIE mask                                                                 |                                     | 8.1.2                               | Yes       |
| <a href="#">Section 2.3</a>       | TDEV EEC Option 2; Must not exceed TDEV mask                                                                 |                                     | 8.1.2                               | Yes       |
| <b>WANDER TRANSFER</b>            |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 3.1</a>       | Transfer Function of the PLL for EEC Option 1 and EEC Option 2; Must meet bandwidth requirements             | 10.1                                | 10.2                                | Yes       |
| <a href="#">Section 3.2</a>       | Wander Transfer TDEV G.8262 for EEC Option 2; Must not exceed TDEV mask                                      |                                     | 10.2                                | Yes       |
| <b>WANDER TOLERANCE</b>           |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 4.1</a>       | Wander Tolerance EEC Option 1; Must tolerate at least input wander defined by MTIE/TDEV mask                 | 9.1.1                               |                                     | Yes       |
| <a href="#">Section 4.2</a>       | Wander Tolerance EEC Option 2; Must tolerate at least input wander defined by TDEV mask                      |                                     | 9.1.2                               | Yes       |
| <b>JITTER TOLERANCE</b>           |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 5.1</a>       | Jitter Tolerance for EEC Option 1 and EEC Option 2; Must tolerate jitter defined by UI mask                  | 9.2.1                               | 9.2.1                               | Yes       |
| <b>PHASE TRANSIENT GENERATION</b> |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 6.1</a>       | Short Term Phase Transient EEC Option 1; Must not exceed limits set by standard                              | 11.1.1                              |                                     | Yes       |
| <a href="#">Section 6.2</a>       | Short Term Phase Transient EEC Option 2; Must not exceed MTIE mask set by standard                           |                                     | 11.1.2<br>11.4.2                    | Yes       |
| <a href="#">Section 6.3</a>       | Phase Transient Generation with Signal Interruptions EEC Option 1; Must not exceed phase variation limit     | 11.3.1                              |                                     | Yes       |
| <a href="#">Section 6.4</a>       | Phase Discontinuity EEC Option 1; Must not exceed phase variation limits                                     | 11.4.1                              |                                     | Yes       |
| <a href="#">Section 6.5</a>       | Phase Discontinuity EEC Option 2; Must not exceed MTIE mask set by standard                                  |                                     | 11.4.2                              | Yes       |
| <b>HOLDOVER PERFORMANCE</b>       |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 7.1</a>       | Holdover EEC Option 1; Must not exceed TIE mask set by standard                                              | 11.2.1                              |                                     | Yes       |
| <a href="#">Section 7.2</a>       | Holdover EEC Option 2; Must meet TIE mask set by standard                                                    |                                     | 11.2.2                              | Yes       |
| <b>FREE-RUN ACCURACY</b>          |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 8.1</a>       | Free-run Accuracy EEC Option 1 and Option 2; Must not exceed $\pm 4.6$ ppm                                   | 6.1                                 | 6.2                                 | Yes       |
| <b>PULL-IN AND HOLD-IN</b>        |                                                                                                              |                                     |                                     |           |
| <a href="#">Section 9</a>         | Pull-in and Hold-in EEC Option 1 and Option 2; Minimum pull-in range and hold-in range must be $\pm 4.6$ ppm | 7.1.1                               | 7.1.2<br>7.2.2                      | Yes       |

## 2 Wander Generation

The following tests measure the amount of wander generated by the LMK05028. For these tests, the setup shown in [Figure 1](#) was used.

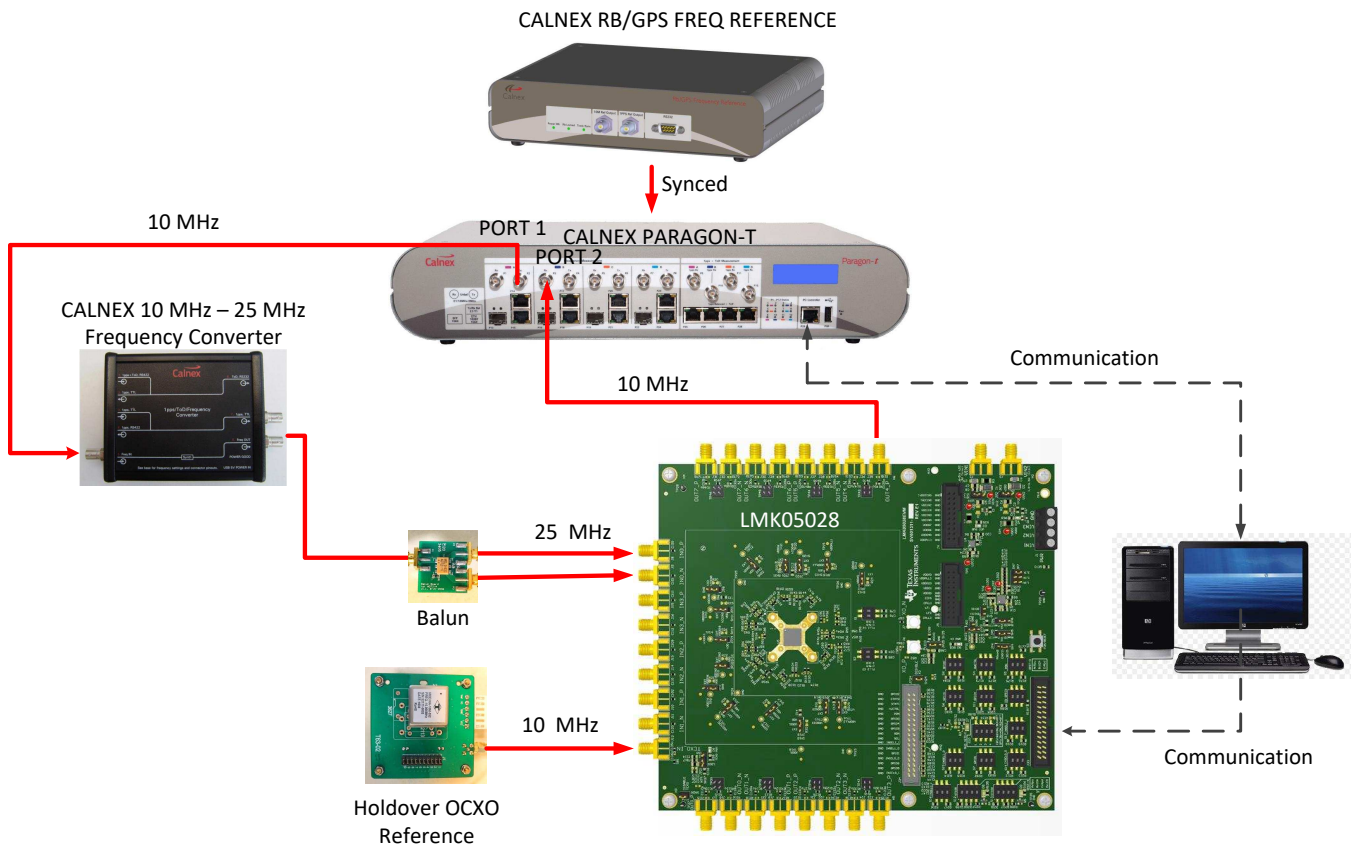

**Figure 1. Test Setup for Wander Generation**

### 2.1 Wander Generation MTIE Option 1, G.8262 EEC Option 1

While the DPLL is locked to an input clock that is wander-free, it will not generate wander that exceeds the MTIE mask shown in [Figure 2](#) (Figure 1 in the G.8262 specification). There is no noise modulation applied to the input for this test. The LMK05028 passed the Wander Generation MTIE Option 1, G.8262 EEC Option 1 requirement as shown in [Figure 3](#) and [Figure 4](#).

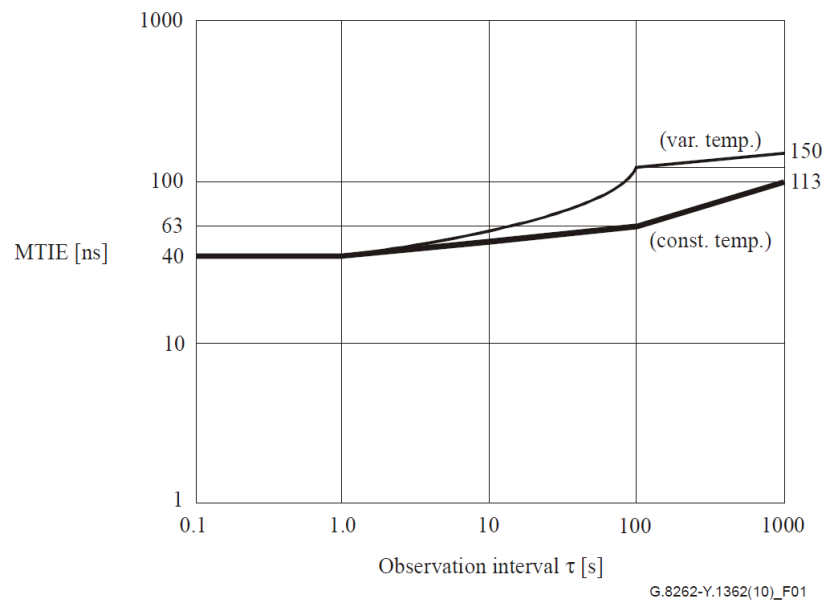


Figure 2. Wander Generation (MTIE) for EEC-Option 1


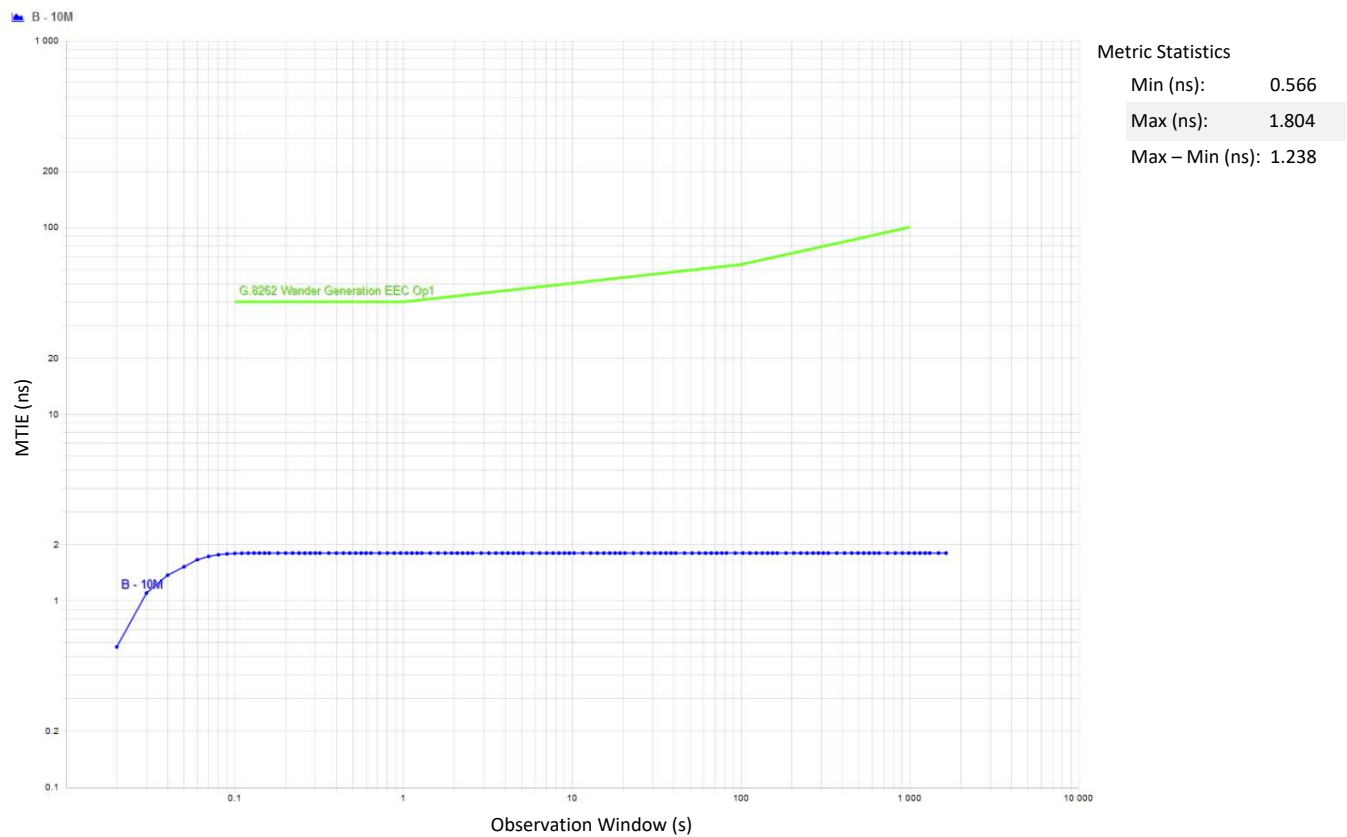


Figure 3. Wander Generation MTIE Option 1, G.8262 EEC Option 1 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 10 Hz

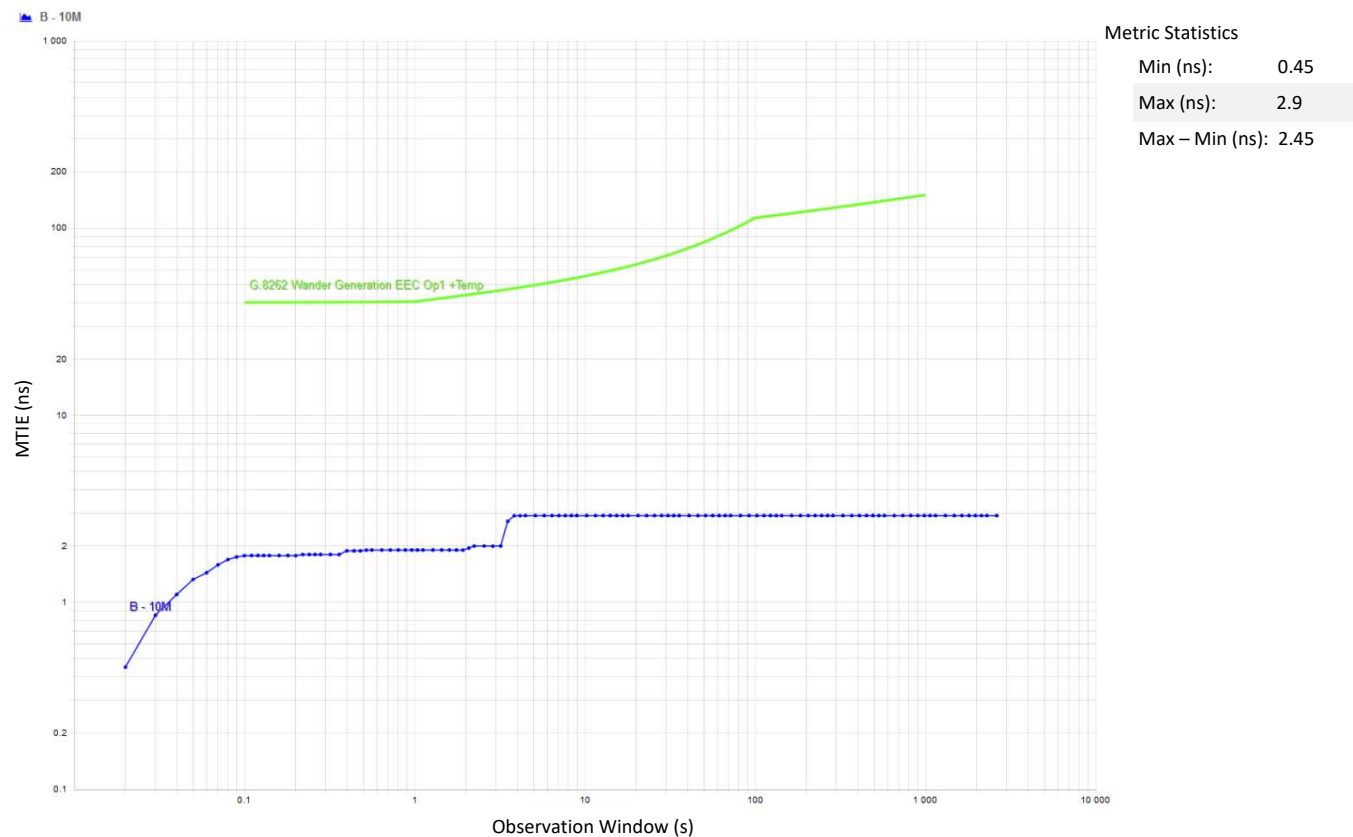

**Figure 4. Wander Generation MTIE Option 1, G.8262 EEC Option 1 Results, Tested at Temperature of 85°C With DPLL Bandwidth of 10 Hz**

## 2.2 Wander Generation TDEV G.8262 EEC Option 1

While the DPLL is locked to an input clock signal that is wander-free, it will not generate wander that exceeds the TDEV mask shown in [Figure 5](#) (Figure 2 in the G.8262 specification). The LMK05028 passed the Wander Generation TDEV G.8262 EEC Option 1 requirement as shown in [Figure 6](#).

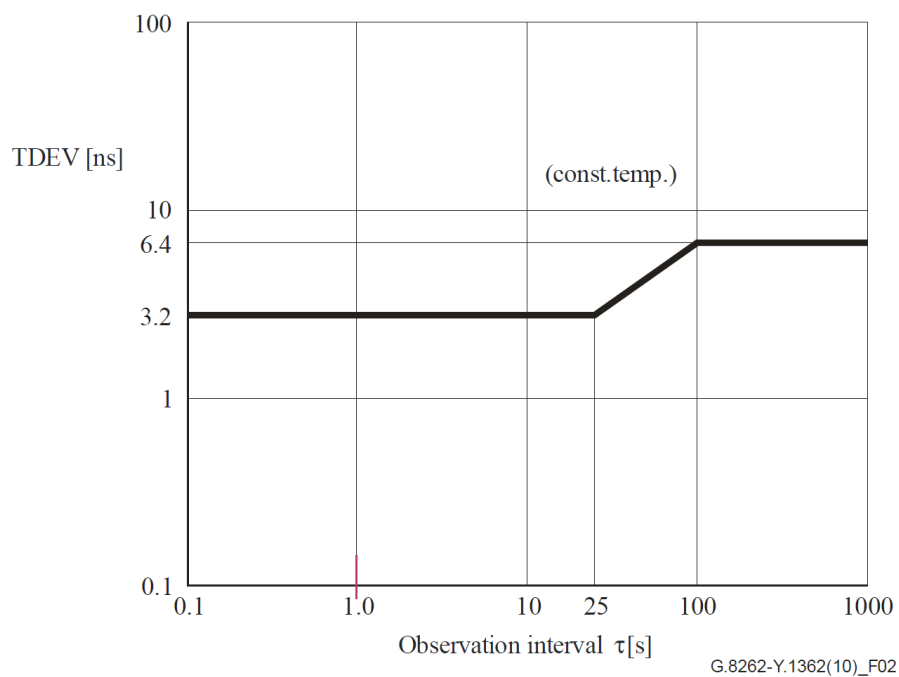


Figure 5. Wander Generation (TDEV) for EEC-Option 1 With Constant Temperature


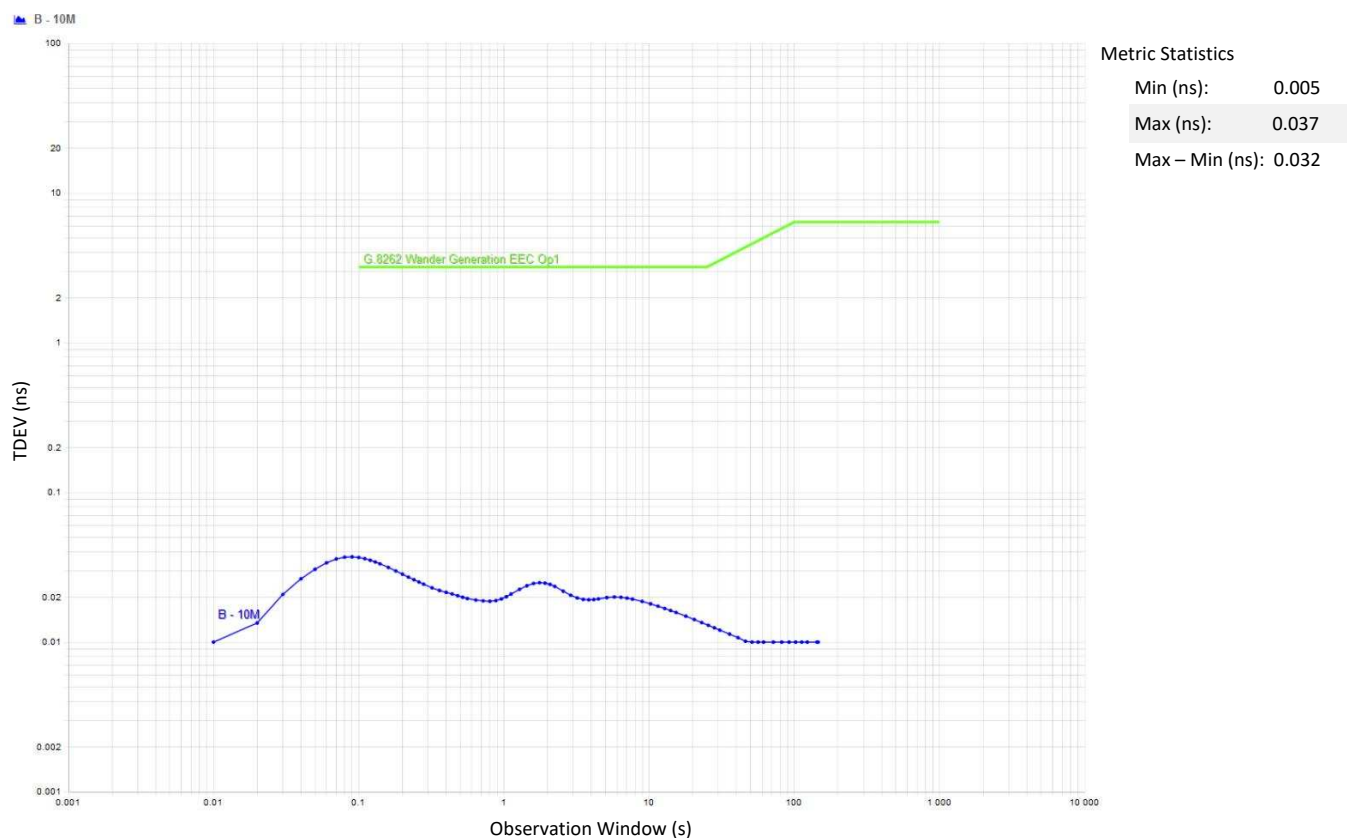



Figure 6. Wander Generation TDEV G.8262 EEC Option 1 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 5 Hz

### 2.3 Wander Generation MTIE Stratum ITU-T G.8262 EEC Option 2

While the DPLL is locked to an input clock signal that is wander-free, it will not generate wander that exceeds the MTIE mask shown in [Figure 7](#) (Figure 3 in the G.8262 specification). The LMK05028 passed the Wander Generation MTIE Stratum ITU-T G.8262 EEC Option 2 requirement as shown in [Figure 8](#).

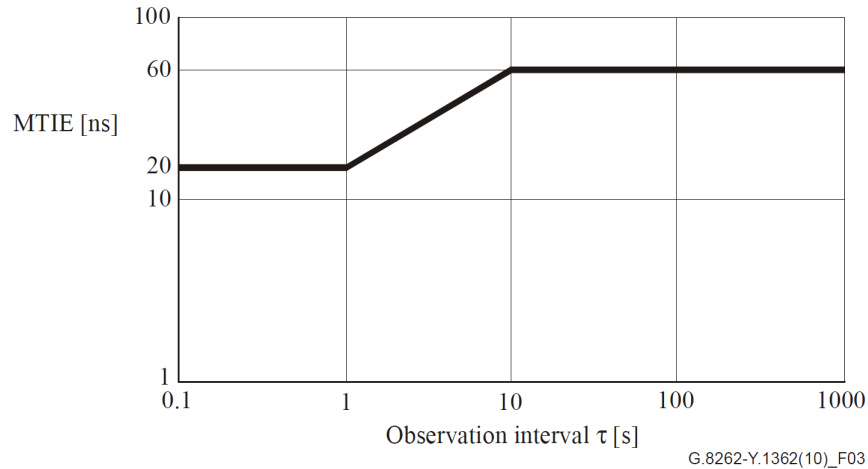


**Figure 7. Wander Generation (MTIE) for EEC-Option 2 With Constant Temperature**

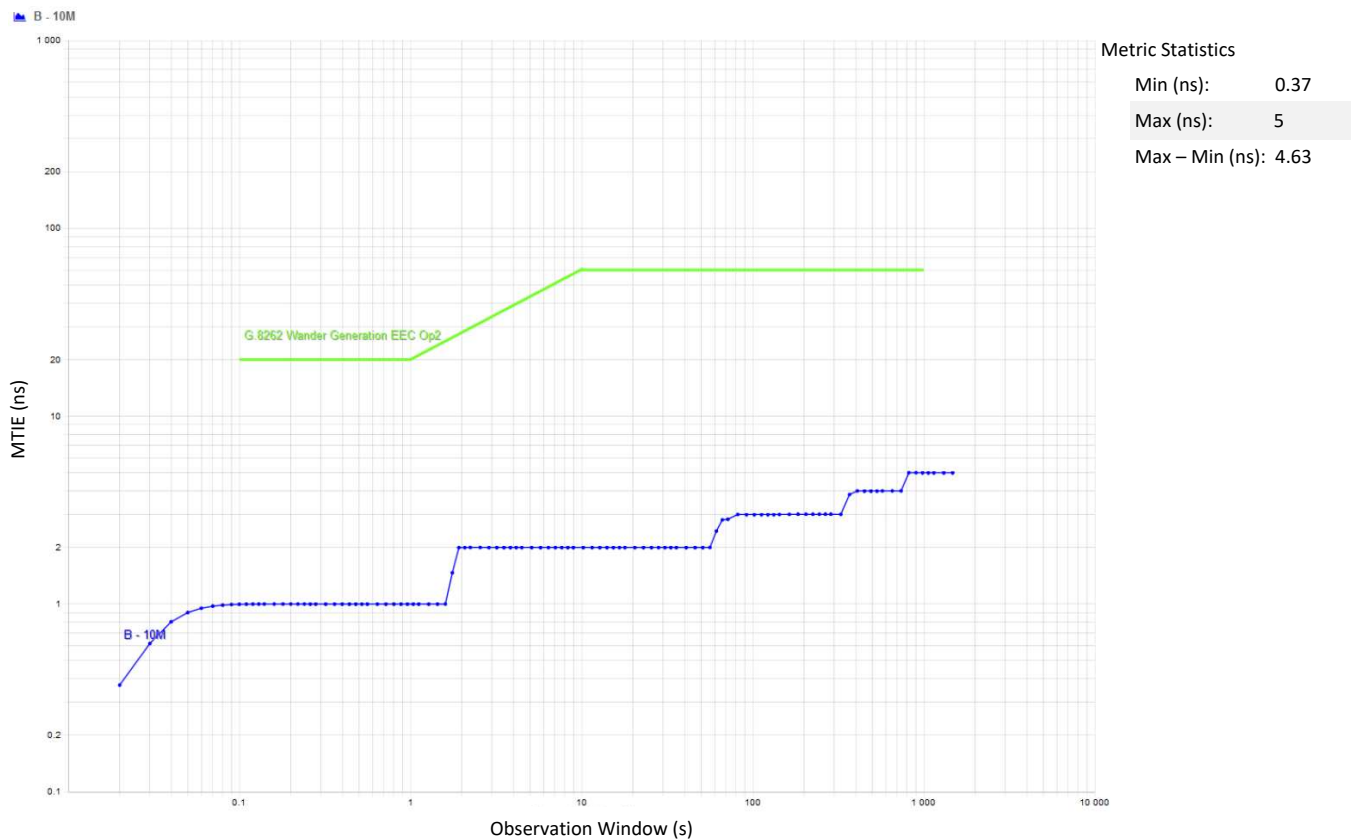


**Figure 8. Wander Generation MTIE ITU-T G.8262 EEC Option 2 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 0.1 Hz**

## 2.4 Wander Generation TDEV G.8262 EEC Option 2

While the DPLL is locked to an input clock signal that is wander-free, it will not generate wander that exceeds the TDEV mask shown in Figure 9 (Figure 4 in the G.8262 specification). The LMK05028 passed the Wander Generation TDEV G.8262 EEC Option 2 requirement as shown in Figure 10.

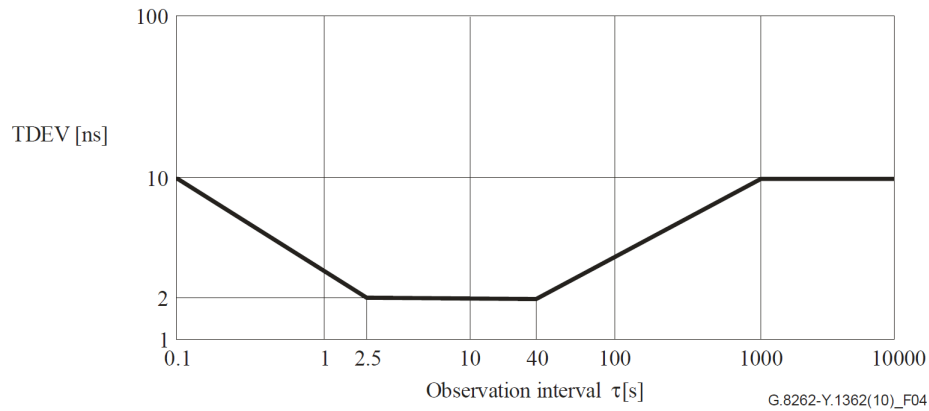

**Figure 9. Wander Generation (TDEV) for EEC-Option 2 With Constant Temperature**

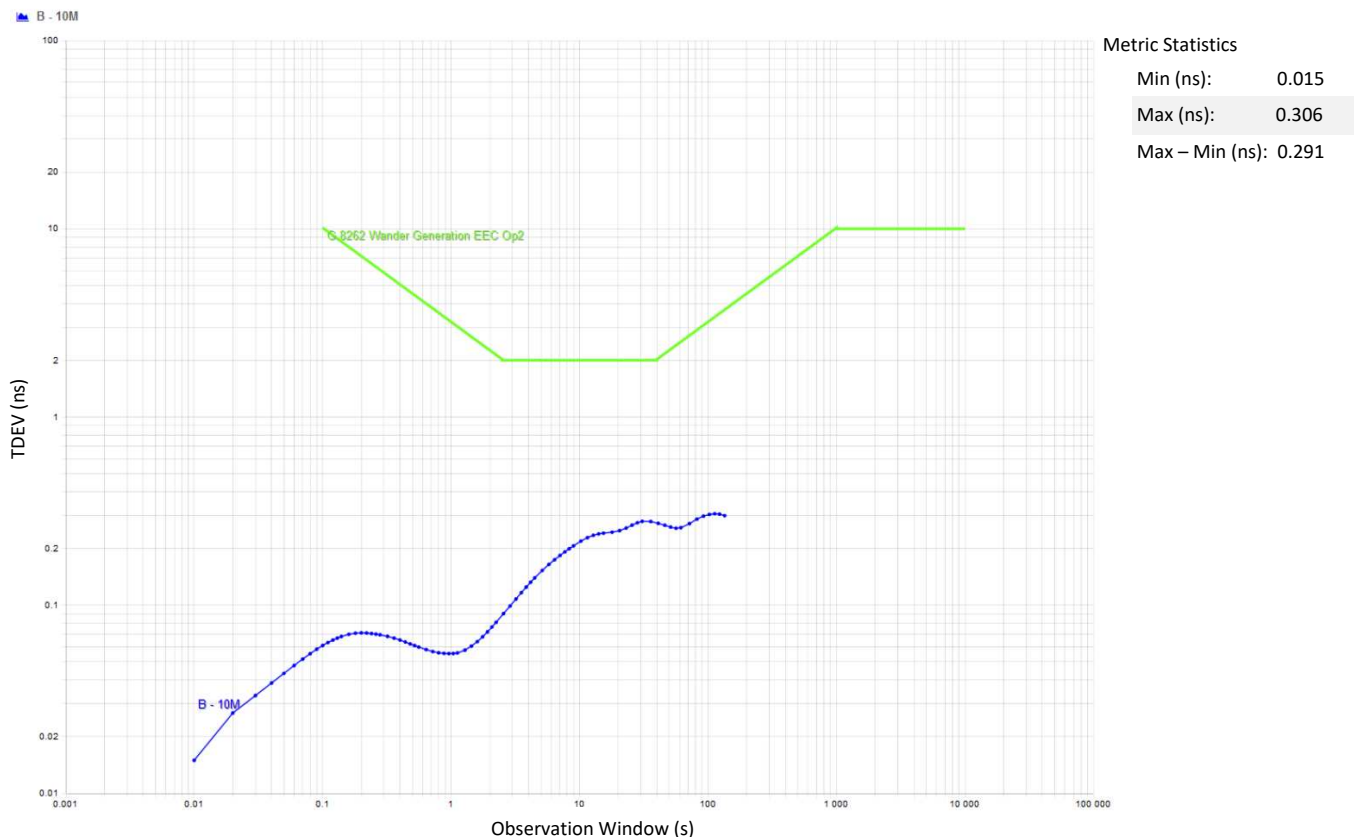

**Figure 10. Wander Generation TDEV G.8262 EEC Option 2 Results, Tested at Constant Room Temperature With DPLL Bandwidth of 0.1 Hz**

### 3 Wander Transfer

The following tests measure the wander transfer of the LMK05028. For these tests, the setup shown in Figure 11 was used.

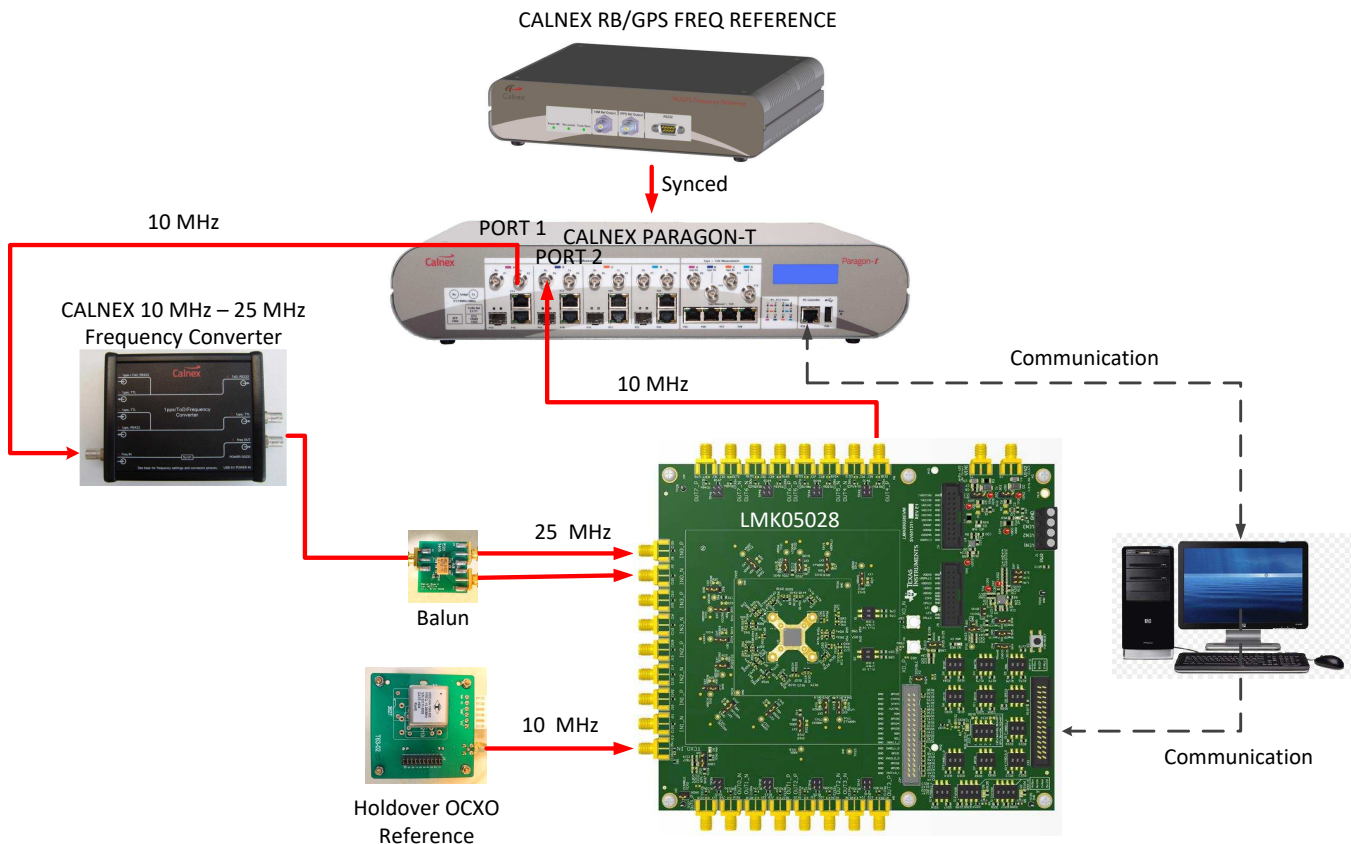


Figure 11. Test Setup for Wander Transfer

#### 3.1 Transfer Function of the PLL for Option 1 and Option 2

Wander transfer is determined by the DPLL loop BW and peaking. For Option 1, the DPLL loop bandwidth was set to 10 Hz and for Option 2, the DPLL loop bandwidth was set to 0.1 Hz. Both Option 1 and Option 2 require <0.2 dB of peaking. The LMK05028 meets the requirements for the transfer function of the PLL for EEC Option 1 and Option 2 as shown in Figure 12 and Figure 13. The results show a close match between expected bandwidth and measured bandwidth on LMK05028. For Option 1, the expected bandwidth is 10 Hz and the measured bandwidth is around 10 Hz. For Option 2, the expected bandwidth is 0.1 Hz and the measured bandwidth is around 0.1 Hz.


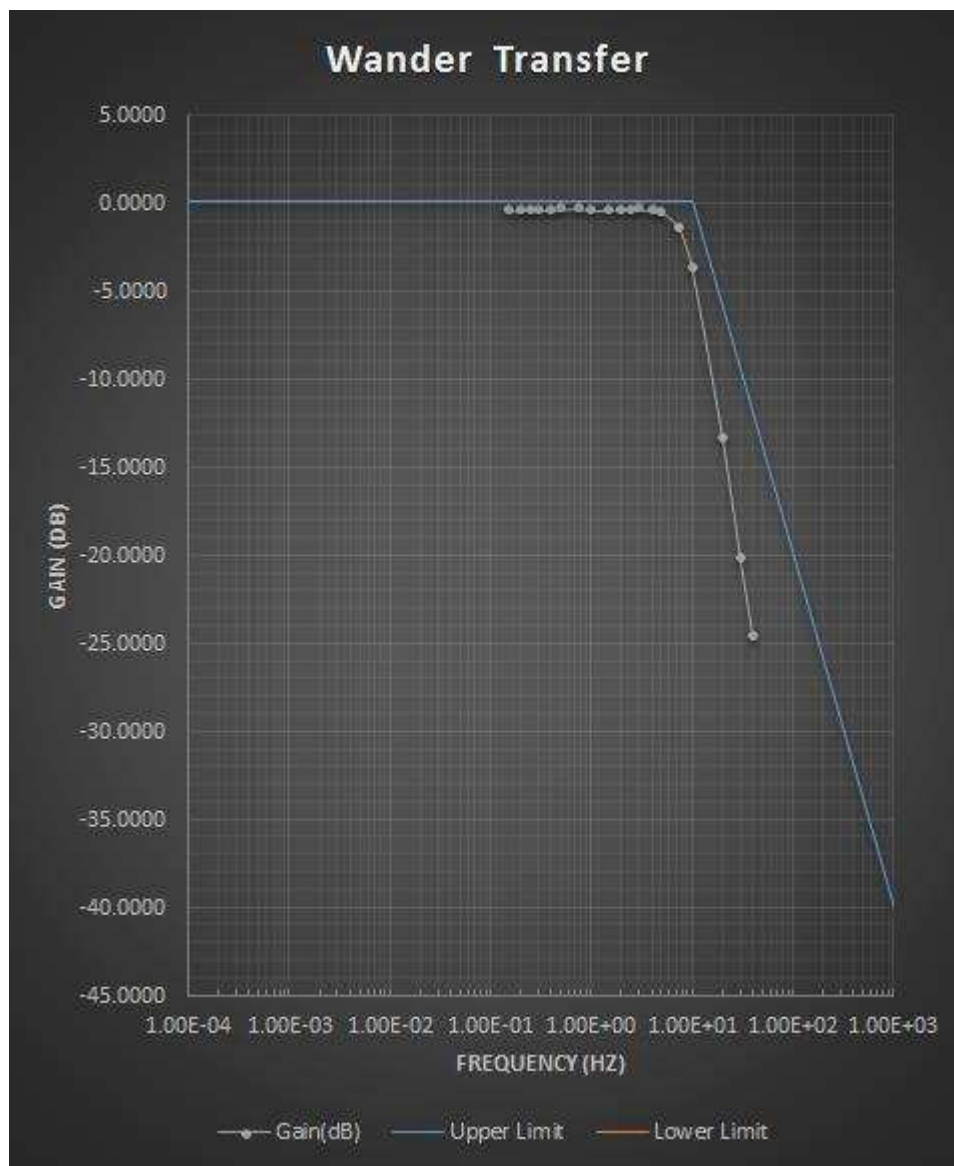


Figure 12. Wander Transfer EEC Option 1 With Max DPLL Bandwidth of 10 Hz

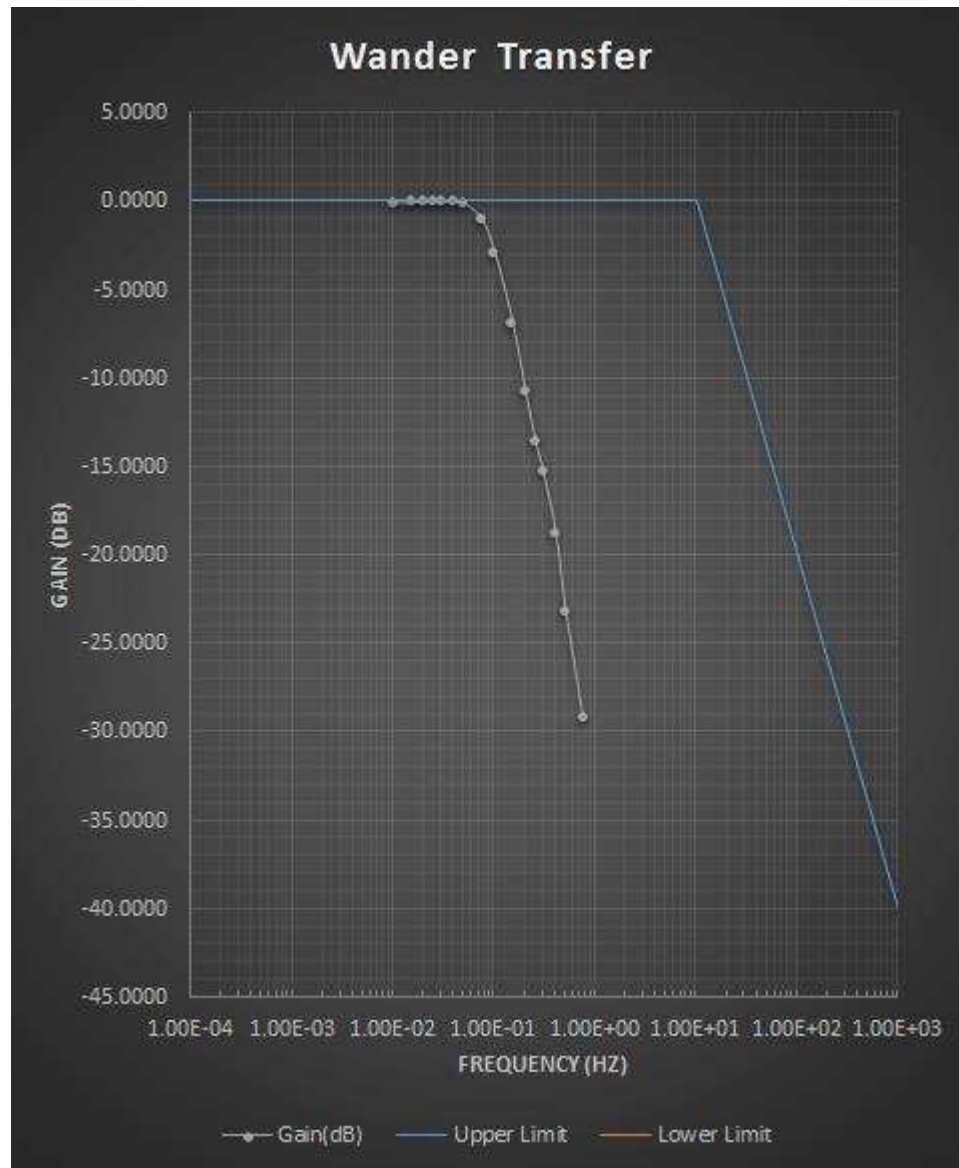

**Figure 13. Wander Transfer EEC Option 2 With Max DPLL Bandwidth of 0.1 Hz**

### 3.2 Wander Transfer TDEV G.8262 Option 2

The process for this specification is to measure the output wander (TDEV) when the device is locked to a clock that has wander as defined by the TDEV mask shown in [Figure 14](#) (Figure 8 in the G.8262 specification) and [Table 2](#) (Table 10 in the G.8262 specification) and to ensure that the TDEV output is below the mask shown in [Figure 15](#) (Figure 11 in the G.8262 specification). Results from [Section 3.1](#) offer sufficient information regarding the bandwidth of the DPLL to state that the LMK05028 meets the requirements for wander transfer TDEV G.8262 Option 2.

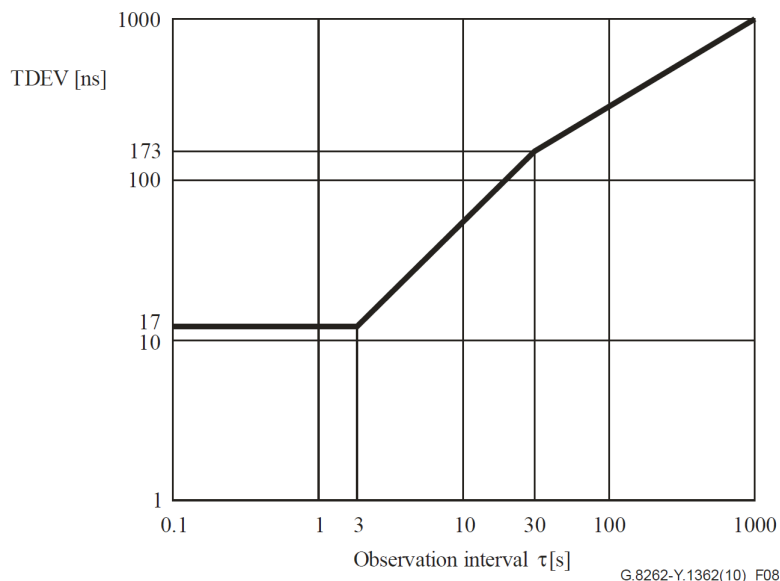


Figure 14. Input Wander Tolerance (TDEV) for EEC-Option 2

Table 2. Input Wander Tolerance (TDEV) for EEC-Option 2

| TDEV LIMIT (ns)             | OBSERVATION INTERVAL $\tau$ (s) |
|-----------------------------|---------------------------------|
| 17                          | $0.1 < \tau \leq 3$             |
| $5.77 \times \tau$          | $3 < \tau \leq 30$              |
| $31.6325 \times \tau^{0.5}$ | $30 < \tau \leq 1000$           |


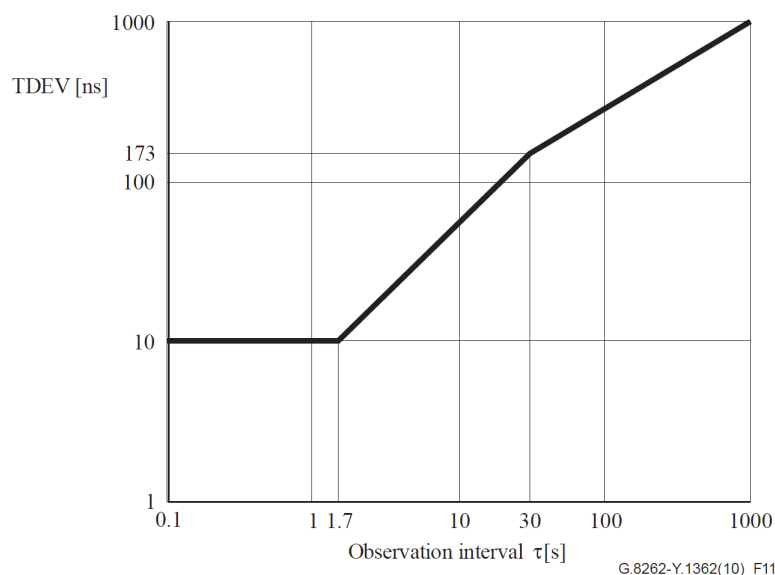


Figure 15. Wander Transfer for EEC-Option 2 (Maximum Output Wander When Input Wander Meets Figure 14)

## 4 Wander Tolerance

The following tests measure the wander tolerance of the LMK05028. For these tests, the same general setup, shown in [Figure 16](#), was used.

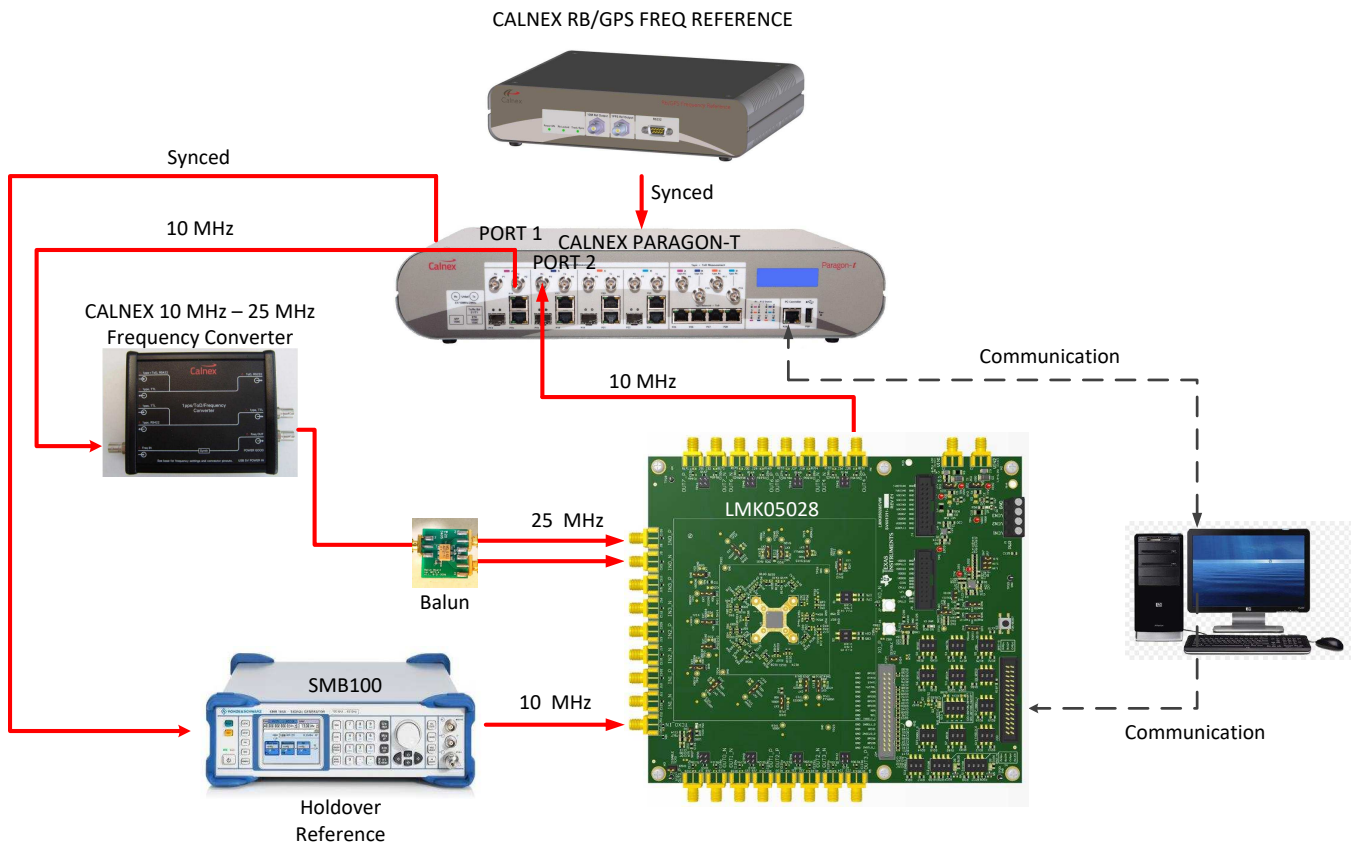


**Figure 16. Test Setup for Wander Tolerance**

### 4.1 Wander Tolerance G.8262 Option 1

A PLL that is locked to an input clock must be able to tolerate the wander defined in [Figure 17](#) (Figure 5 in the G.8262 specification). The definition of tolerance is such that the device will not trigger any alarms while locked to such an input clock and it will be able to pull-in to such as input clock. Test signals with a sinusoidal phase variation can be used, according to the levels in [Table 3](#) (Table 9 in the G.8262 specification), to check conformance to the mask in [Figure 17](#) (Figure 5 in the G.8262 specification).

Test signals with sinusoidal phase variation according to levels shown in [Table 3](#) were introduced using the Calnex Paragon-T box. There were no amplitude, frequency, or missing clock cycle alarms flagged by the LMK05028 DUT (10-Hz loop bandwidth). The device stayed locked and was able to pull-in to the input clock throughout the duration of this test. The LMK05028 showed a passing result for the wander tolerance G.8262 Option 1 specification.

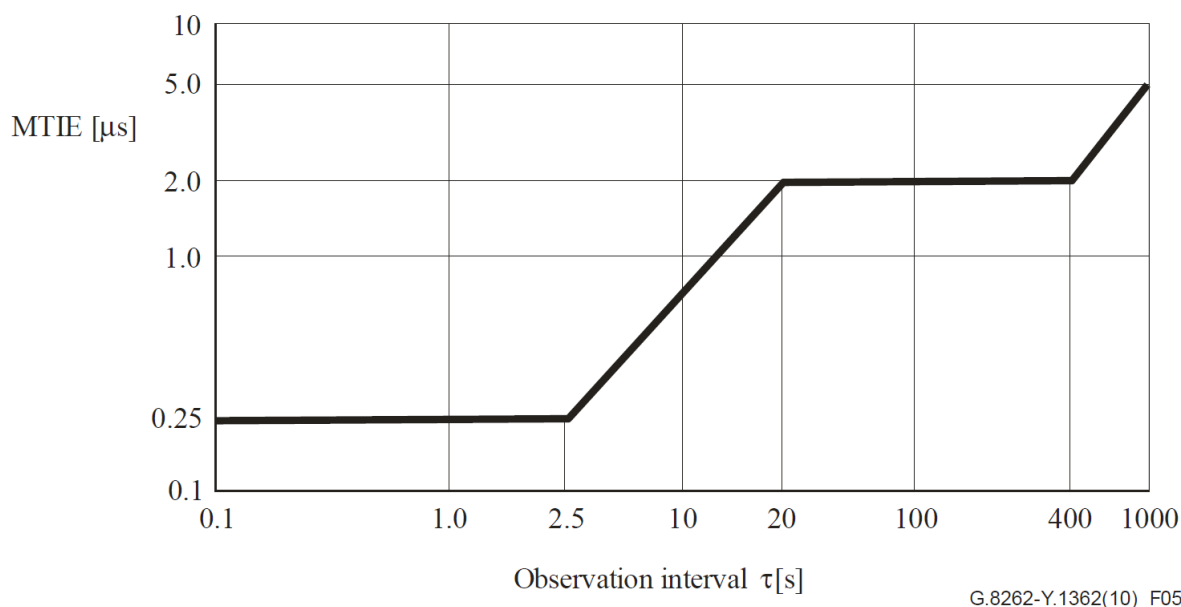


**Figure 17. Input Wander Tolerance (MTIE) for EEC-Option 1**

**Table 3. Lower Limit of Maximum Tolerable Sinusoidal Input Wander for EEC-Option 1<sup>(1)</sup>**

| PEAK-TO-PEAK WANDER AMPLITUDE |            |            | WANDER FREQUENCY |             |             |            |            |
|-------------------------------|------------|------------|------------------|-------------|-------------|------------|------------|
| $A_1$ (μs)                    | $A_2$ (μs) | $A_3$ (μs) | $f_4$ (mHz)      | $f_3$ (mHz) | $f_2$ (mHz) | $f_1$ (Hz) | $f_0$ (Hz) |
| 0.25                          | 2          | 5          | 0.32             | 0.8         | 16          | 0.13       | 10         |

(1) The resultant requirements are shown in [Figure 18](#)

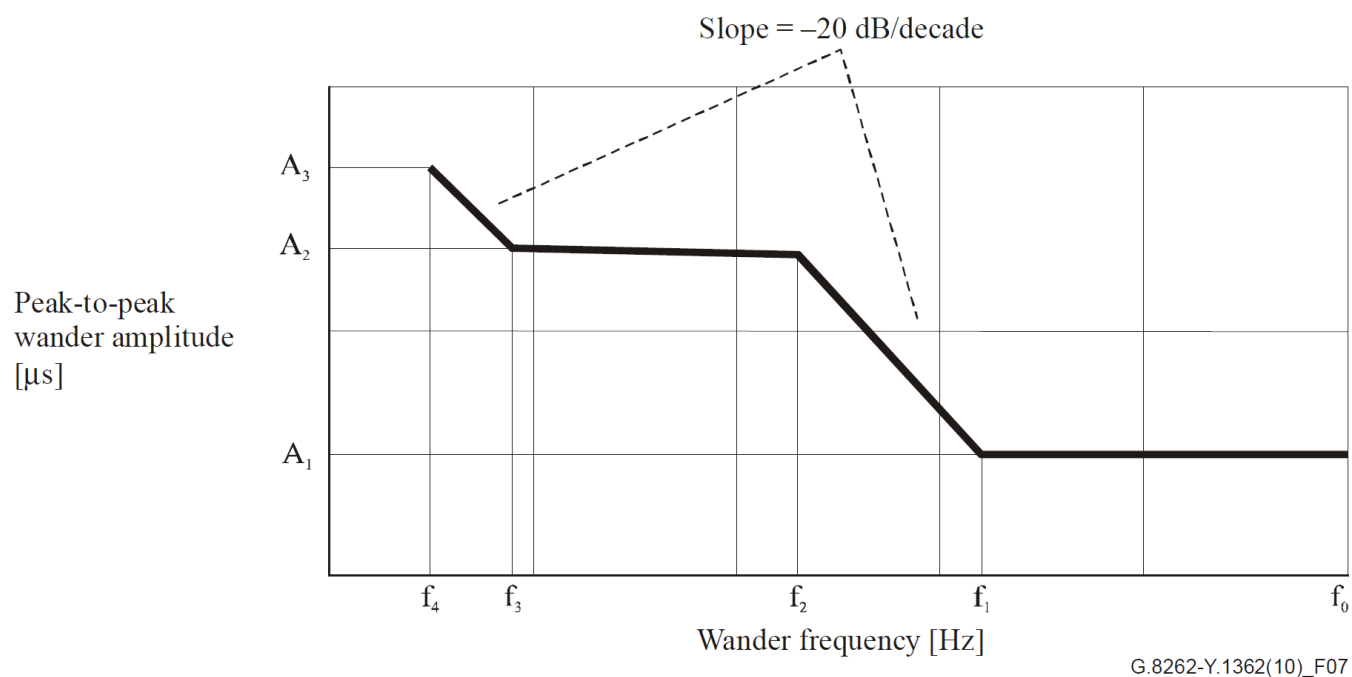

**Figure 18. Lower Limit of Maximum Tolerable Sinusoidal Input Wander for EEC-Option 1**

## 4.2 Wander Tolerance G.8262 Option 2

A PLL that is locked to an input clock must be able to tolerate the wander defined in Figure 19 (Figure 8 in the G.8262 specification). The definition of tolerance is such that the device will not trigger any alarms while locked to such an input clock and it will be able to pull-in to such as input clock. Test signals with sinusoidal phase variation according to levels shown in Figure 19 (Table 9 in the G.8262 specification) were introduced using the Calnex Paragon-T box for this test, too. There were no amplitude, frequency, or missing clock cycle alarms flagged by the LMK05028 DUT (0.1-Hz loop bandwidth), and the device stayed locked and was able to pull-in to the input clock throughout the duration of this test. The LMK05028 showed a passing result for the wander tolerance G.8262 Option 2 specification.

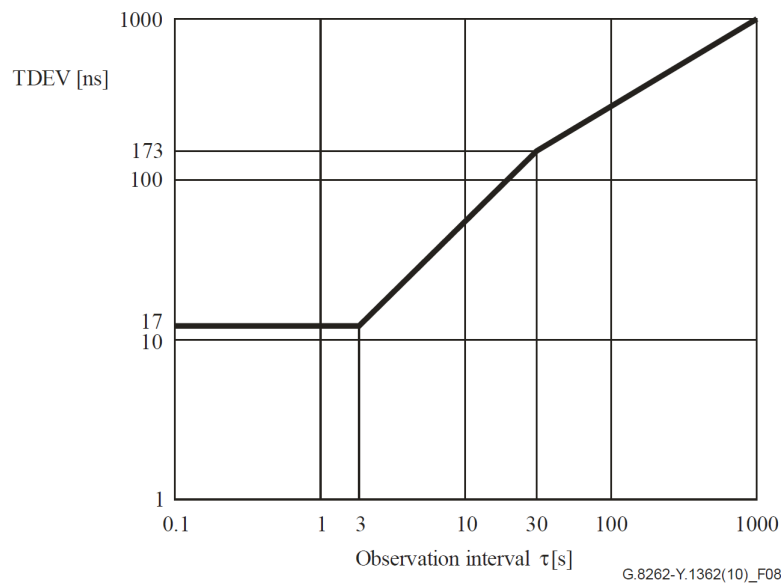


Figure 19. Input Wander Tolerance (TDEV) for EEC-Option 2

## 5 Jitter Tolerance

The following tests measure the jitter tolerance of the LMK05028. For these tests, the setup shown in Figure 20 was used.


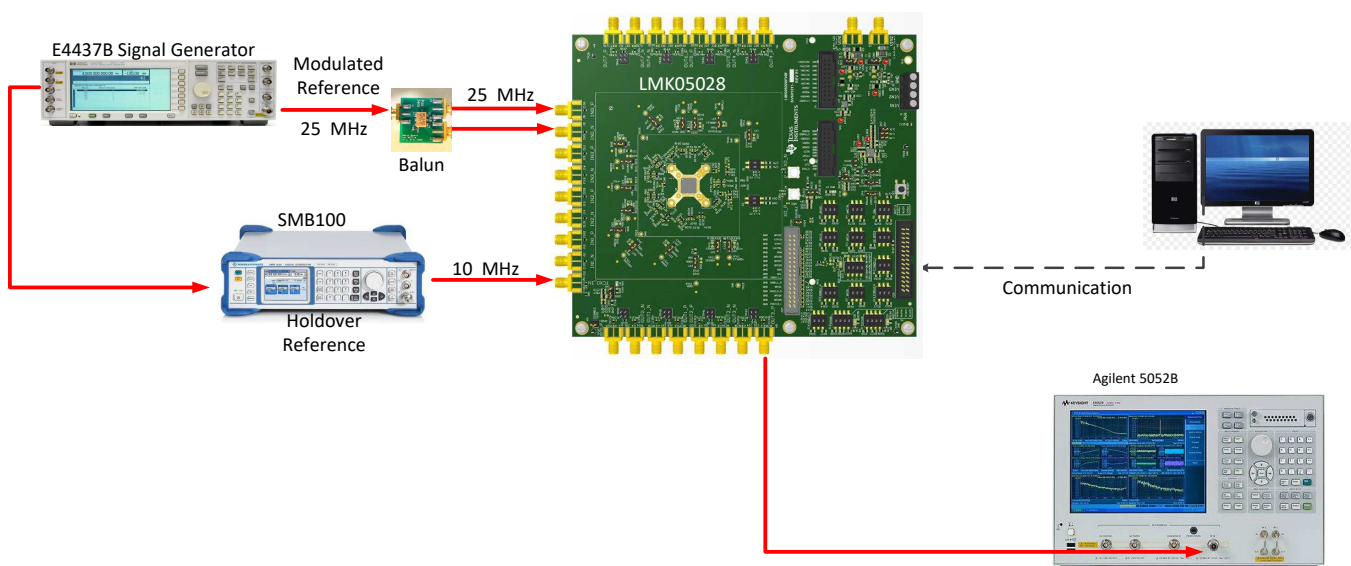


Figure 20. Test Setup for Jitter Tolerance

## 5.1 Jitter Tolerance G.8262 Option 1 and Option 2

A PLL that is locked to an input clock must be able to tolerate the jitter defined in [Figure 21](#) (Figure 9 in the G.8262 specification) and [Figure 22](#) (Figure 10 in the G.8262 specification). The definition of tolerance is that the device will not trigger any alarms while locked to such an input clock and that it will be able to pull-in to such an input clock. For Option 1, LMK05028 DPLL loop bandwidth was set to 10 Hz. For Option 2, the DPLL loop bandwidth was set to 0.1 Hz. For this test, the modulation frequency and frequency deviation was applied on the E4437B.

In compliance with the jitter tolerance spec requirement, the reference clock to LMK05028 (generated using E4437B) was modulated. The LMK05028 met the jitter tolerance requirements per the standard. The LMK05028 did not trigger any alarms, stayed locked to the reference and there was no observed degradation to the integrated RMS (12 kHz – 20 MHz) phase jitter of the output clock (156.25 MHz). The integrated RMS phase jitter was <250 fs (max) for the duration for this test.

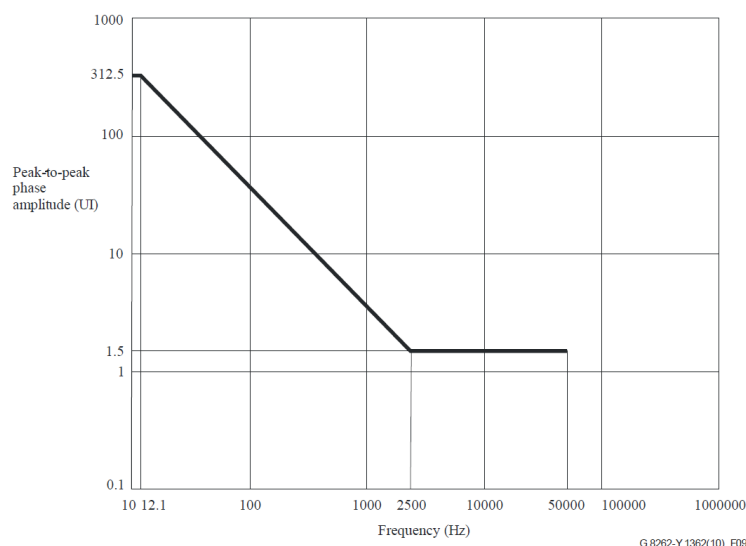


**Figure 21. 1G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2**

**Table 4. 1G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 & EEC-Option 2<sup>(1)</sup>**

| PEAK-PEAK JITTER AMPLITUDE (UI) | FREQUENCY f (Hz) |
|---------------------------------|------------------|
| 312.5                           | 10 < f ≤ 12.1    |
| 3750 f <sup>-1</sup>            | 12.1 < f ≤ 2.5k  |
| 1.5                             | 2.5k < f ≤ 50k   |

(1) 1G includes 1000BASE-KX, -SX, -LX; multi-lane interfaces are for further study.

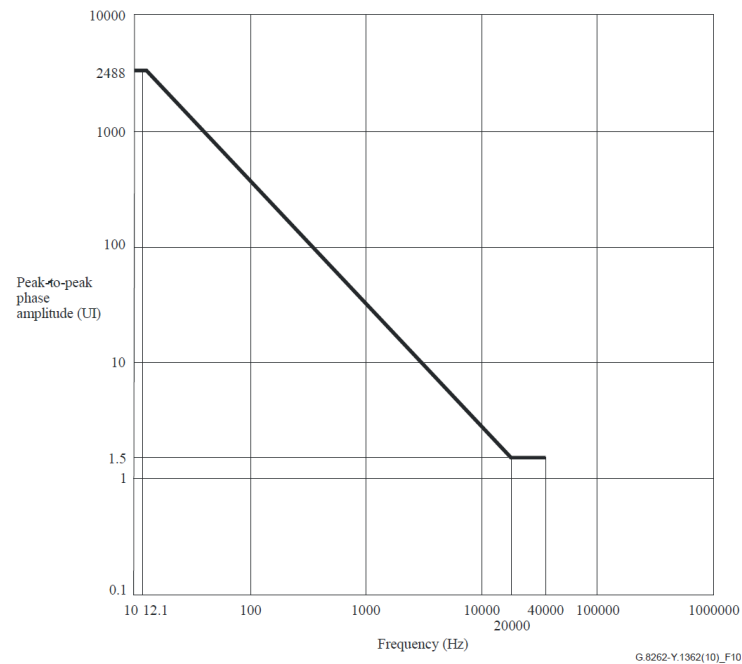

**Figure 22. 10G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2**

**Table 5. 10G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2<sup>(1)</sup>**

| PEAK-PEAK JITTER AMPLITUDE (UI) | FREQUENCY f (Hz) |
|---------------------------------|------------------|
| 2488                            | 10 < f ≤ 12.1    |
| 3000 f <sup>-1</sup>            | 12.1 < f ≤ 20k   |
| 1.5                             | 20k < f ≤ 40k    |

(1) 10G includes 10GBASE-SR/LR/ER, 10GBASE-LRM, 10GBASE-SW/LW/EW and multi-lane interfaces consisting of 10G lanes including 40GBASE-KR4/CR4/SR4/LR4 and 100GBASE-CR10/SR10.

**Table 6. 25G Synchronous Ethernet Wideband Jitter Tolerance for EEC-Option 1 and EEC-Option 2<sup>(1)</sup>**

| PEAK-PEAK JITTER AMPLITUDE (UI) | FREQUENCY f (Hz) |
|---------------------------------|------------------|
| 6445                            | 10 < f ≤ 11.17   |
| 72000 f <sup>-1</sup>           | 11.17 < f ≤ 20k  |
| 3.6                             | 20k < f ≤ 100k   |

(1) 25G includes multi-lane interfaces consisting of 25G lanes including 100GBASE-LR4/ER4.

**Table 7. 1G Test Conditions**

| MOD FREQUENCY (Hz) | PK-PK PHASE AMPLITUDE (UI) | FREQ DEVIATION (Hz) |
|--------------------|----------------------------|---------------------|
| 10                 | 312.5                      | 0.245               |
| 12.1               | 312.5                      | 0.296               |
| 100                | 40                         | 0.314               |
| 1000               | 4                          | 0.314               |
| 2500               | 1.5                        | 0.294               |
| 10000              | 1.5                        | 1.178               |

**Table 7. 1G Test Conditions (continued)**

| MOD FREQUENCY (Hz) | PK-PK PHASE AMPLITUDE (UI) | FREQ DEVIATION (Hz) |
|--------------------|----------------------------|---------------------|
| 50000              | 1.5                        | 5.890               |

**Table 8. 10G Test Conditions**

| MOD FREQUENCY (Hz) | PK-PK PHASE AMPLITUDE (UI) | FREQ DEVIATION (kHz) |
|--------------------|----------------------------|----------------------|
| 10                 | 2488                       | 0.195                |
| 12.1               | 2488                       | 0.236                |
| 100                | 300                        | 0.235                |
| 1000               | 30                         | 0.235                |
| 2500               | 12                         | 0.235                |
| 20000              | 1.5                        | 1.885                |
| 40000              | 1.5                        | 3.770                |

**Table 9. 25G Test Conditions**

| MOD FREQUENCY (Hz) | PK-PK PHASE AMPLITUDE (UI) | FREQ DEVIATION (kHz) |
|--------------------|----------------------------|----------------------|
| 10                 | 6455                       | 0.202                |
| 11.17              | 6455                       | 0.226                |
| 100                | 720                        | 0.226                |
| 1000               | 72                         | 0.226                |
| 2500               | 28.8                       | 0.226                |
| 20000              | 3.6                        | 0.226                |
| 100000             | 3.6                        | 1.131                |

## 6 Phase Transient Generation

The following tests measure the phase transient of the LMK05028. For these tests, the setup shown in Figure 23 was used.

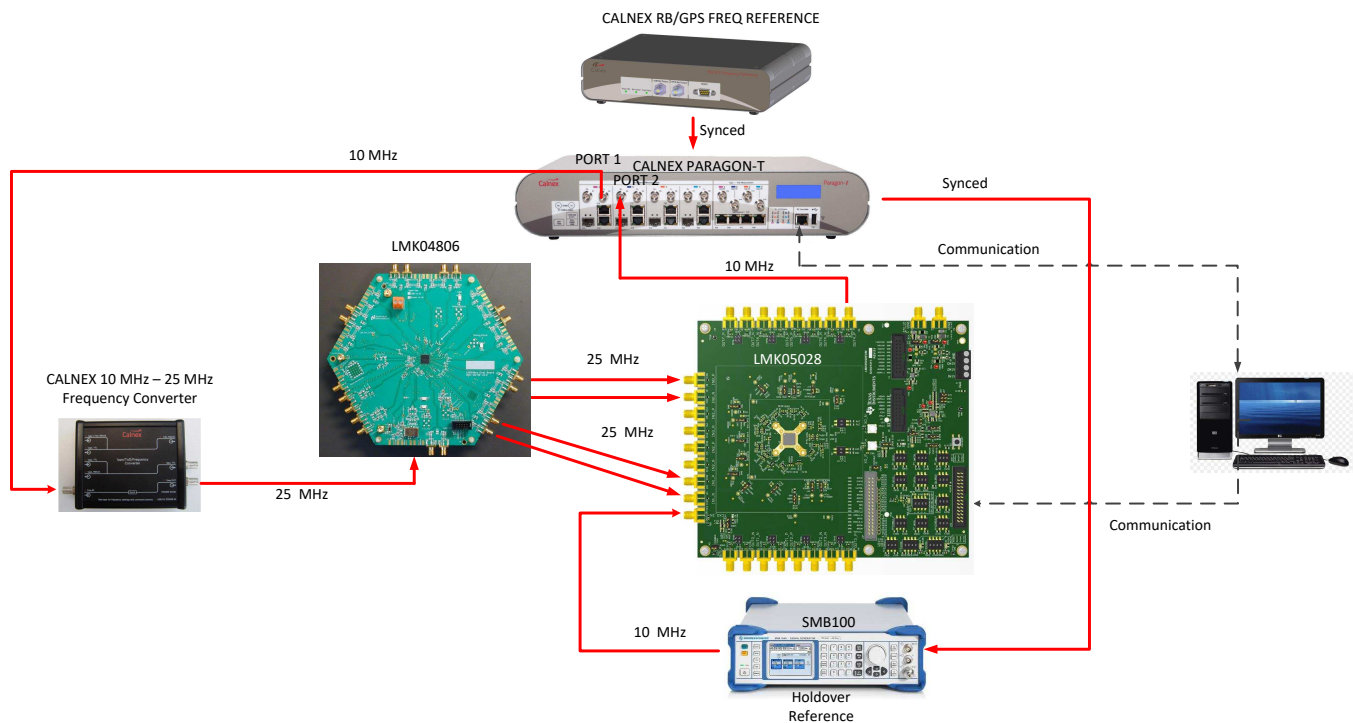


Figure 23. Test Setup for Phase Transient Generation

### 6.1 Short-Term Phase Transient Response G.8262 Option 1

For this test, the device is forced into holdover for 15 seconds by performing a manual switch from a valid active clock input (IN0) to another input with no valid signal (IN1), then the holdover state is exited by manually switching back to the valid active clock input. The test is completed after an entry into holdover and exit from holdover has taken place within 15 seconds. The output phase variation, relative to the input reference before it was lost, is bounded by the following requirements.

The phase error should not exceed  $\Delta t + 5 \times 10^{-8} \times S$  seconds over any period  $S$  up to 15 seconds.  $\Delta t$  represents two phase jumps that may occur during the transition into and out of holdover state which both should not exceed 120 ns with a temporary frequency offset of no more than 7.5 ppm. The resultant overall requirements is summarized in Figure 24 (Figure 12 in the G.8262 specification). This figure is intended to depict the worst-case phase movement attributable to an EEC reference clock switch.

The LMK05028 passed the requirements for short-term phase transient response. No significant *phase hits* were observed during holdover entry and exit using LMK05028.

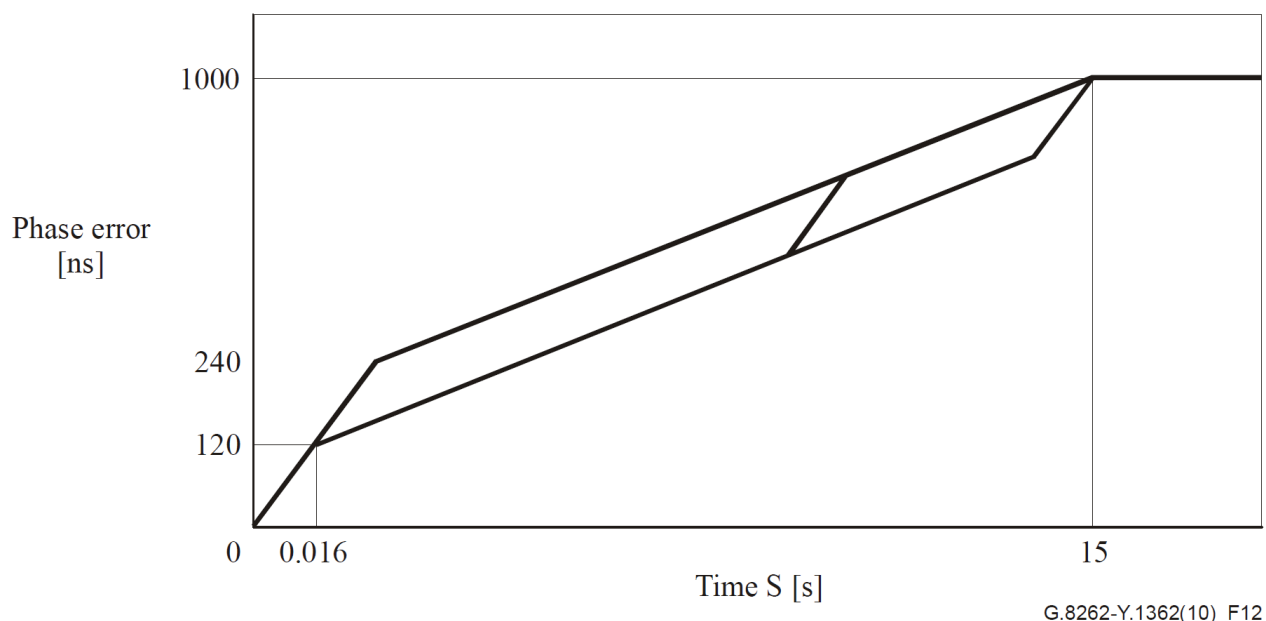


Figure 24. Maximum Phase Transient at the Output Due to Reference Switching for EEC-Option 1

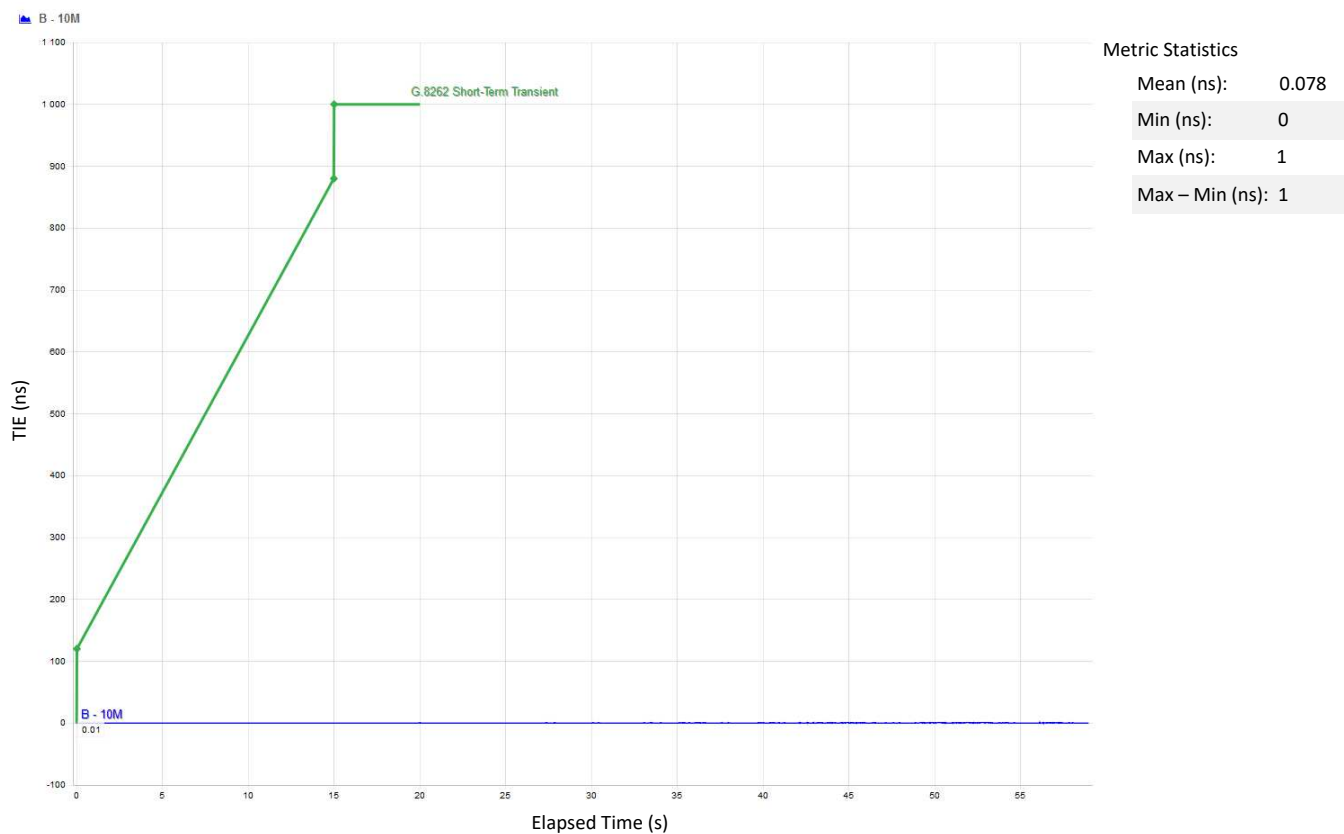


Figure 25. Short-Term Phase Transient Result

## 6.2 Short-Term Phase Transient Response G.8262 Option 2

For this test, the device is forced into holdover for 15 seconds by performing a manual switch from a valid active clock input (IN0) to another input with no valid signal (IN1), then the holdover state is exited by manually switching back to the valid active clock input. The test is completed after an entry into holdover and exit from holdover has taken place within 15 seconds. The output will not exceed the MTIE requirement of Figure 26 (Figure 14 in the G.8262 specification).

The above MTIE data captures the phase transient at the output of LMK05028 during multiple reference clock switchover events, displaying a passing result. The resolution of Calnex equipment is limited to 1 ns for MTIE. The unique phase cancellation scheme implemented in LMK05028 allows for a phase transient <100 ps which cannot be measured accurately using this setup. Refer to Section 11 for an alternate setup to measure the phase transient response of LMK05028 more accurately during reference switchover events.

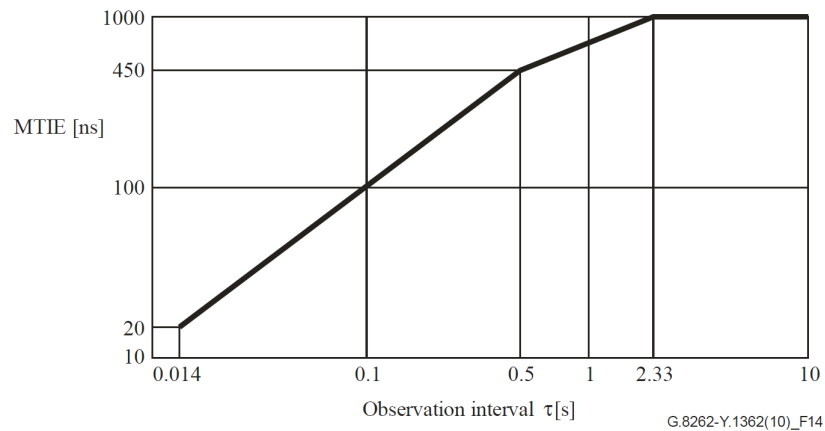


Figure 26. MTIE at the Output Due to Reference Switching/Rearrangement Operations for EEC-Option 2


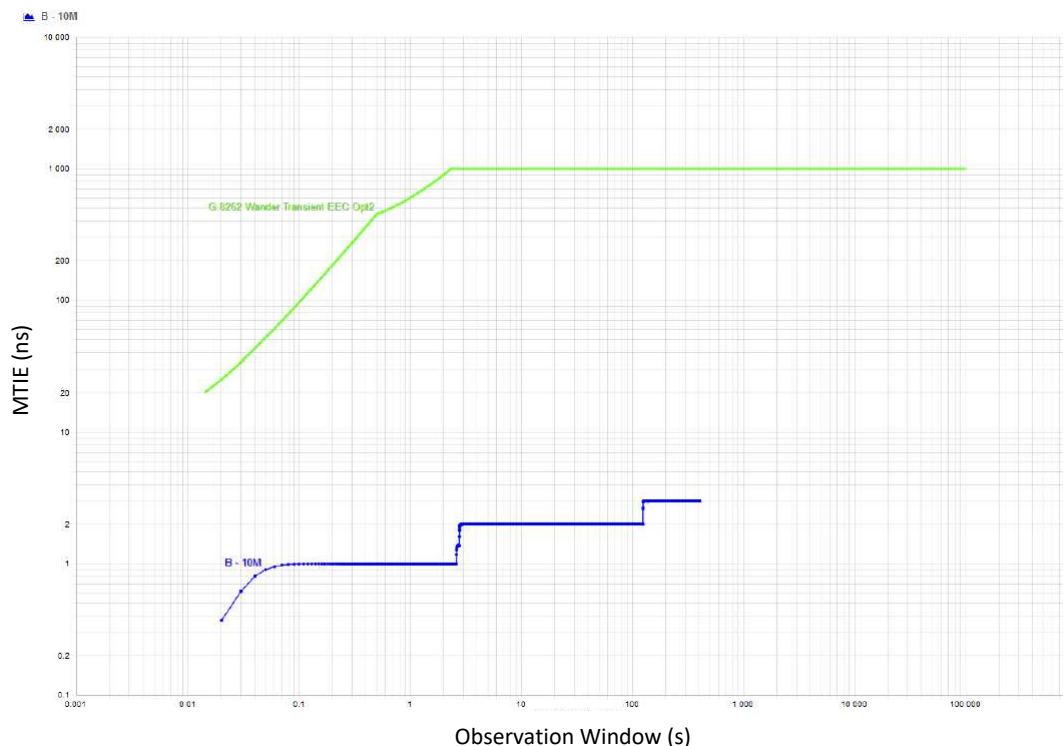


Figure 27. Short-Term Phase Transient Option 2


### 6.3 Phase Transient Generation With Signal Interruptions G.8262 EEC Option 1

The passing condition for this specification is that an input interruption that does not force a switchover does not cause an output phase transient greater than 120 ns with a maximum frequency offset of 7.5 ppm in a period of 16 ms. For this setup, a pulse generator was inserted into the general setup as in [Figure 28](#). An 8110A pulse generator is used to generate a gapped clock and was set to generate 25 MHz with 1 pulse missing every 2048 clock cycles. This gapped clock was used as reference to LMK05028 and the LMK05028 output was monitored for phase transients.

The LMK05028 passed the requirements for the phase transient generation with signal interruptions G.8262 EEC Option 1. There were no significant phase hits (meets compliance requirements) during operation of the device while receiving a gapped clock as reference.

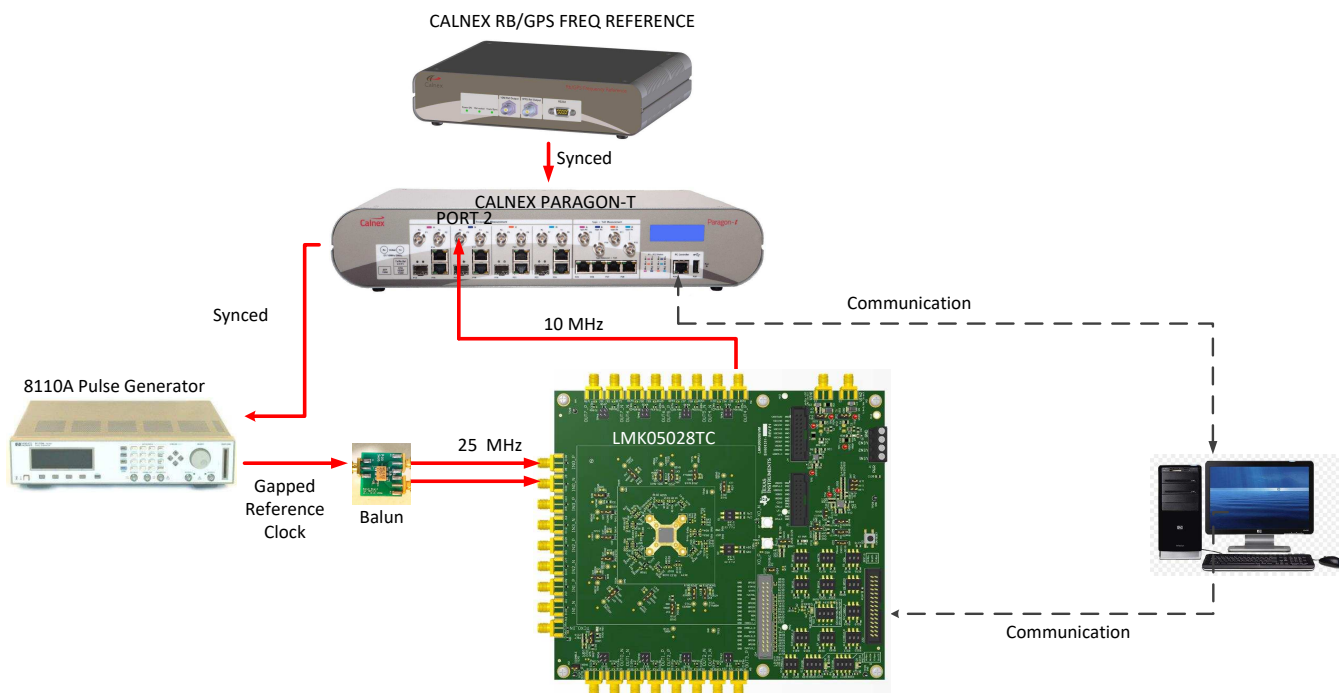

**Figure 28. Test Setup for Phase Transient Generation With Signal Interruption**

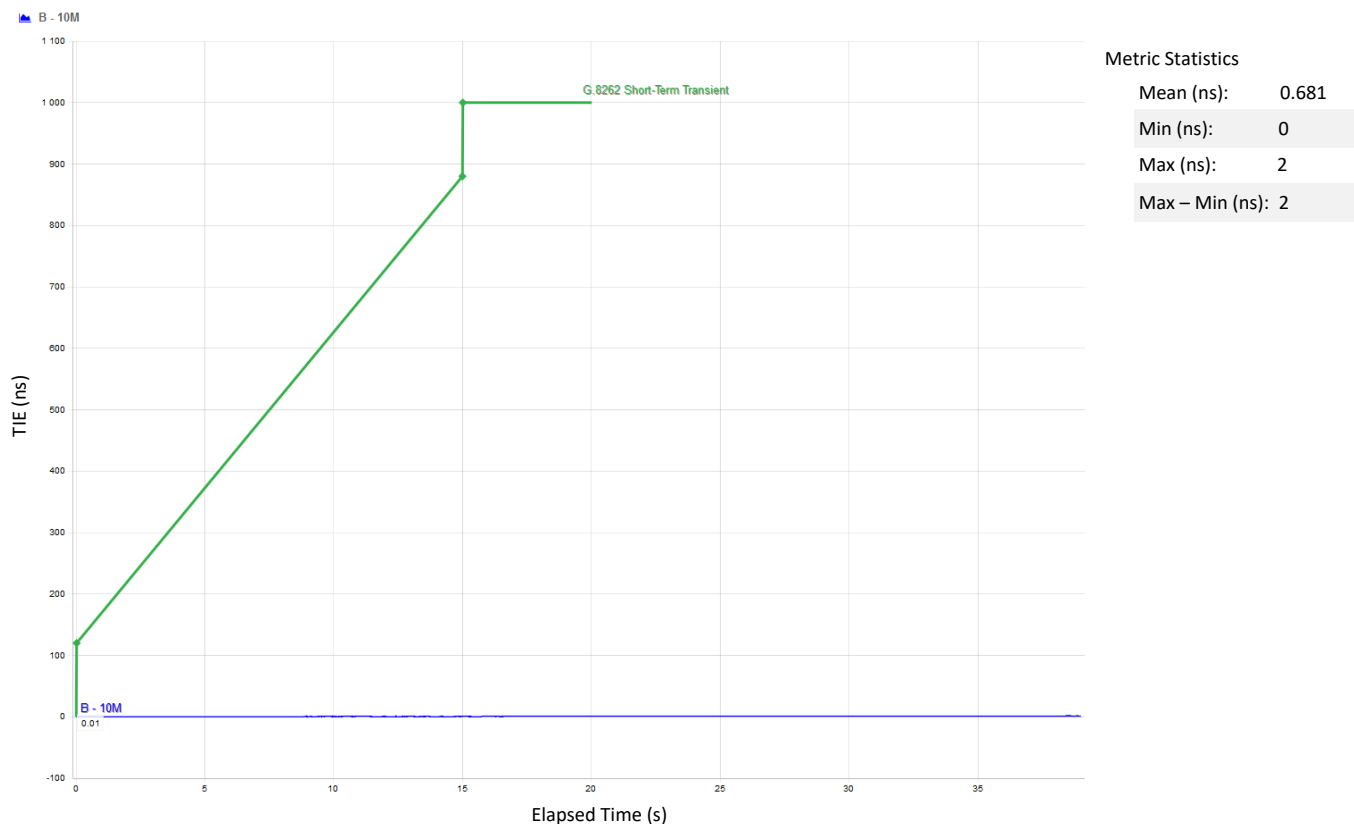

**Figure 29. Phase Transient With Signal Interruptions Results**

#### 6.4 Phase Discontinuity G.8262 Option 1

Passing this test requires that switching between two input clocks of the same frequency but with different phases does not cause an output phase transient greater than what is outlined in Section 11.4.1 of the G.8262 specification. The setup for this test (shown in [Figure 30](#)) is as follows:

- There are two inputs that are 180 degrees out of phase going into the DUT
- The output is measured to ensure that the objective is met

The TIE data for phase discontinuity during reference switchover G.8262 EEC Option 1 (shown in [Figure 31](#)) indicates compliance to the standard.

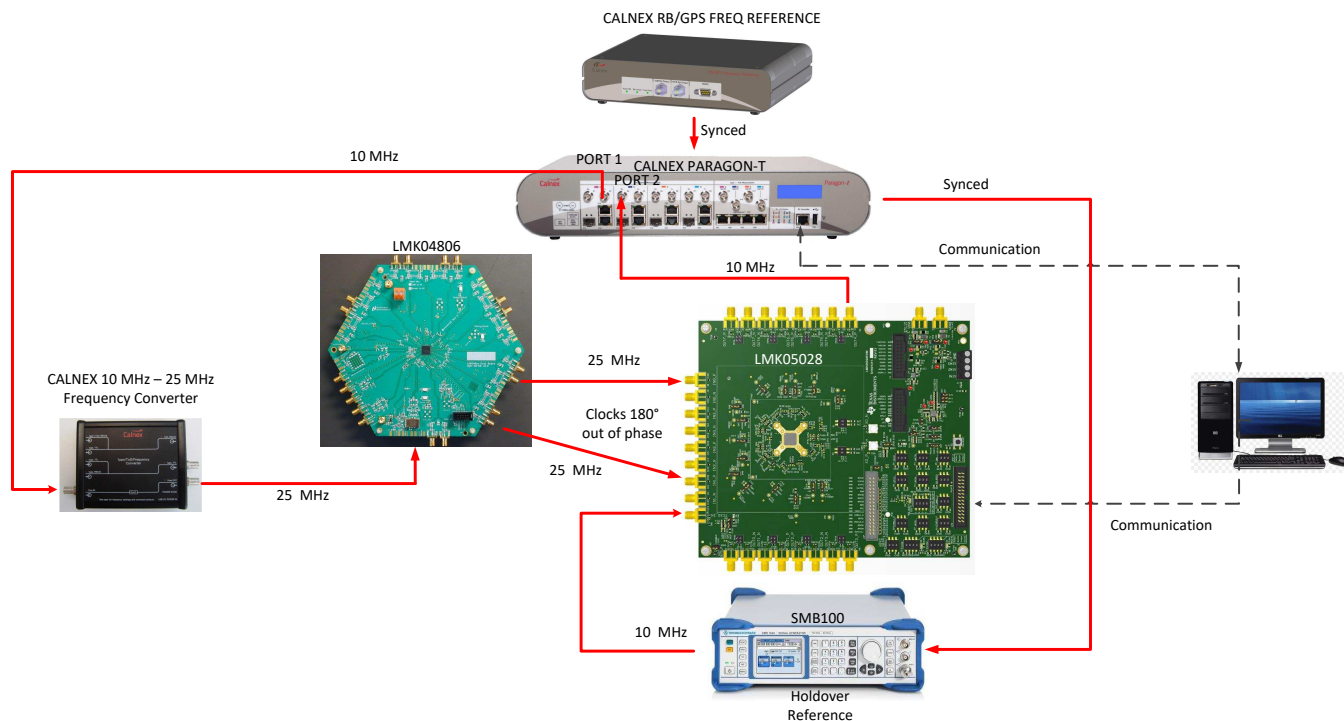


Figure 30. Test Setup for Phase Discontinuity


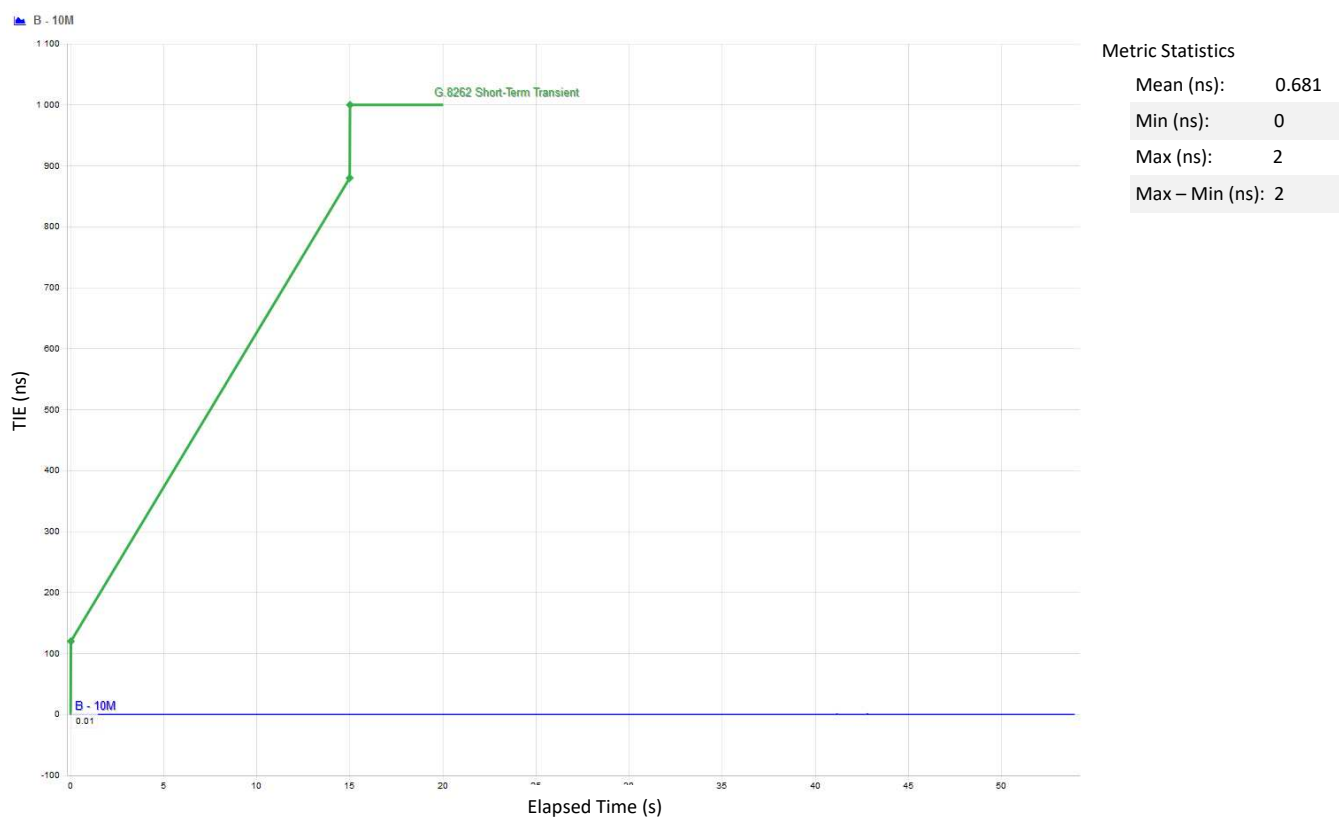


Figure 31. Phase Discontinuity Results

## 6.5 Phase Discontinuity G.8262 Option 2

For this test, the requirement is that switching between two input clocks of the same frequency but with different phase will not exceed the MTIE mask of Figure 26 (Figure 14 and Table 15 in the G.8262 spec). Refer to Section 11 for an alternate setup to measure the phase transient response of LMK05028 accurately during reference switchover events.

The LMK05028 met this requirement, as shown in Figure 32.

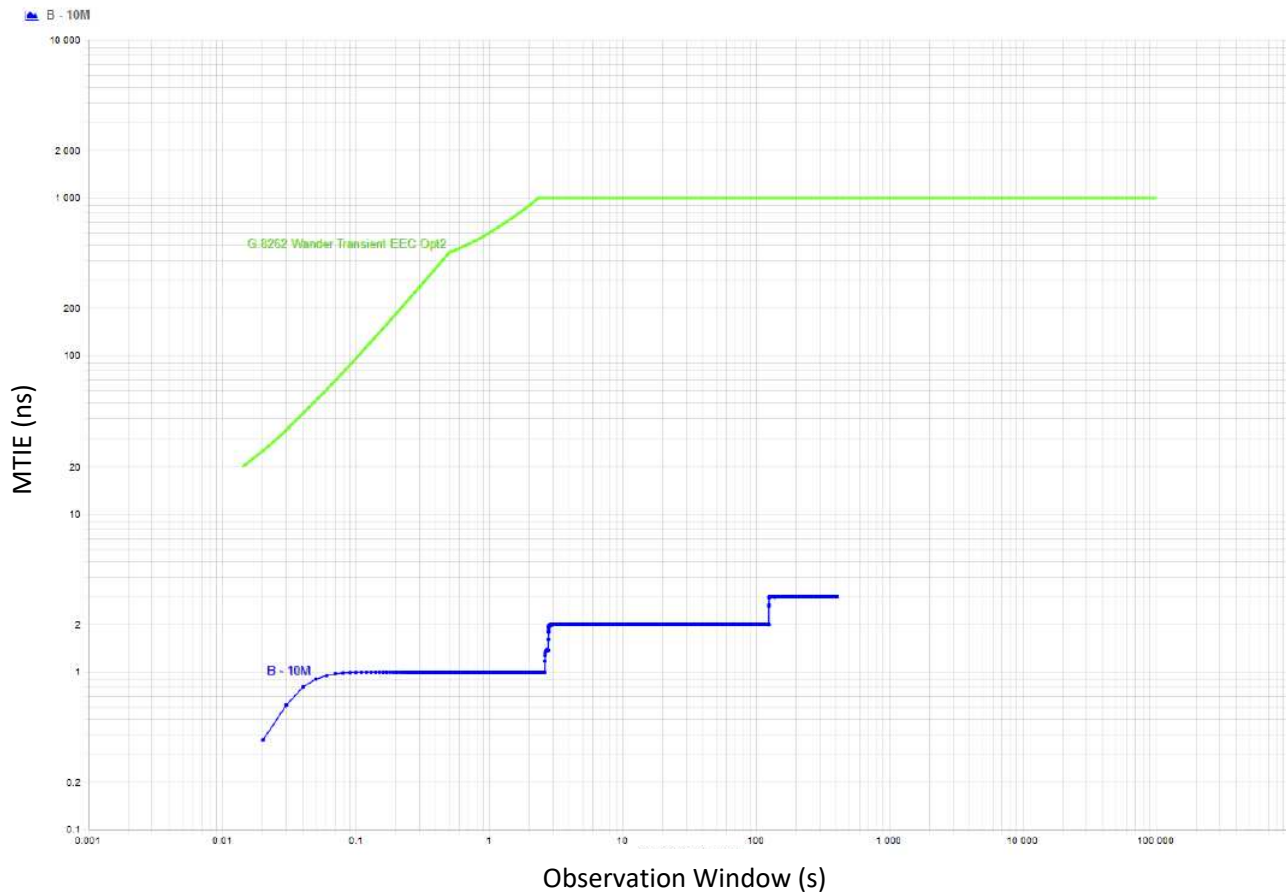


**Figure 32. Phase Discontinuity Option 2 Results**

## 7 Holdover


### 7.1 Holdover G.8262 Option 1

To meet this specification, a PLL in holdover must meet the requirements in Figure 33 (Figure 13 in the G.8262 specification). The procedure for this test is that the LMK05028 DUT will lock to IN0, which contains a valid input clock. Then the input is switched to IN1, which contains no valid input, thereby causing the device to enter holdover and remain in holdover for the remainder of the test. The LMK05028 device was set up in 3-loop mode, 5-Hz loop bandwidth and forced into holdover. The LMK05028 met this specification. The TIE plot shown in Figure 34 demonstrates compliance to the standard in green.

$$\Delta T(S) = \left( a_1 S + \frac{b}{2} S^2 + c \right) \quad [ns]$$

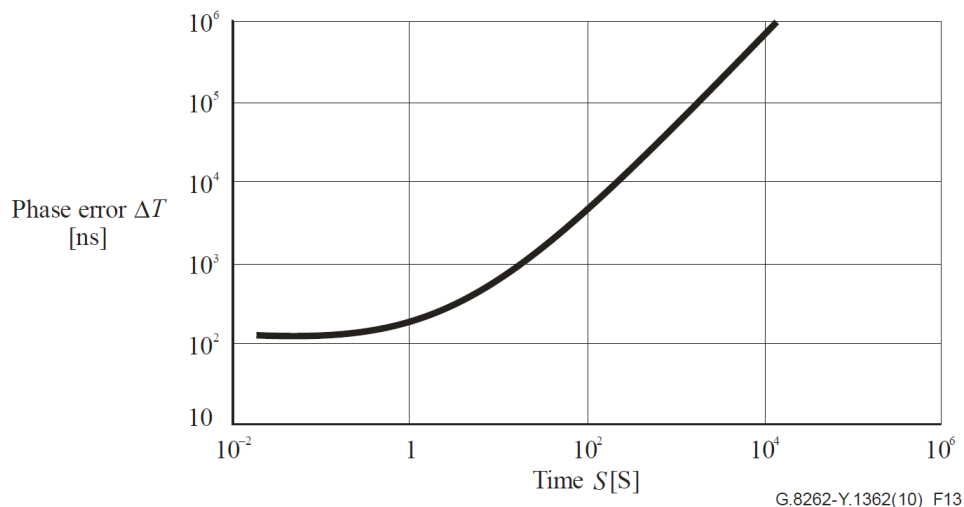

**Figure 33. Permissible Phase Error for an EEC-Option 1 Under Holdover Operation at Constant Temperature**

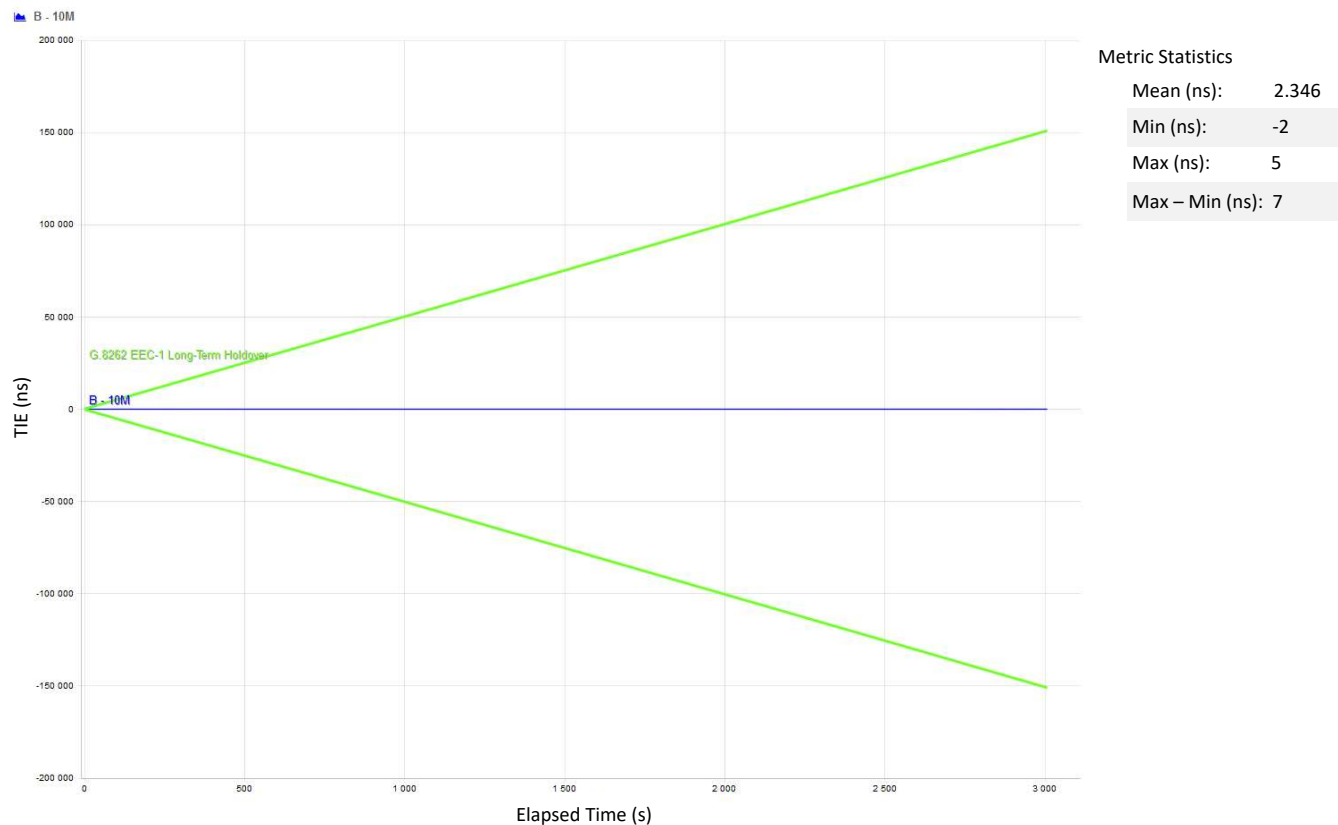

**Figure 34. Holdover Option 1 Result**


## 7.2 Holdover G.8262 Option 2

To meet this specification, a PLL in holdover must meet the requirements in [Table 10](#) (Table 14 in the G.8262 specification). The procedure for this test is that the DUT obtains lock from IN0, which contains a valid input clock. Then the input is switched to IN1, which contains no valid input, thus entering holdover and remains in holdover for the remainder of the test. The LMK05028 met this specification. The TIE plot shown in [Figure 35](#) demonstrates compliance to the standard in green.

**Table 10. Transient Response Specifications During Holdover**

| EEC Option 2                            |                        |
|-----------------------------------------|------------------------|
| Applies For                             | $S > \text{TBD}^{(6)}$ |
| $a_1$ (ns/s) <sup>(1)</sup>             | 50                     |
| $a_2$ (ns/s) <sup>(2)</sup>             | 300                    |
| $b$ (ns/s <sup>2</sup> ) <sup>(3)</sup> | $4.63 \times 10^{-4}$  |
| $c$ (ns) <sup>(4)</sup>                 | 1000                   |
| $d$ (ns/s <sup>2</sup> ) <sup>(5)</sup> | $4.63 \times 10^{-4}$  |

- (1)  $a_1$  represents an initial frequency offset under constant temperature conditions ( $\pm 1$  K)
- (2)  $a_2$  accounts for temperature variations after the clock went into holdover. If there are no temperature variations, the term  $a_2 S$  should not contribute to the phase error.
- (3)  $b$  represents the average frequency drift caused by aging. This value is derived from typical aging characteristics after 60 days of continuous operation. It is not intended to measure this value on a per day basis, as the temperature effect will dominate.
- (4) The phase offset  $c$  takes care of any additional phase shift that may arise during the transition at the entry of the holdover state.
- (5)  $d$  represents the maximum temporary frequency drift rate at constant temperature allowed during holdover. However, it is not required that  $d$  and  $b$  be equal.
- (6) TBD: To be defined.

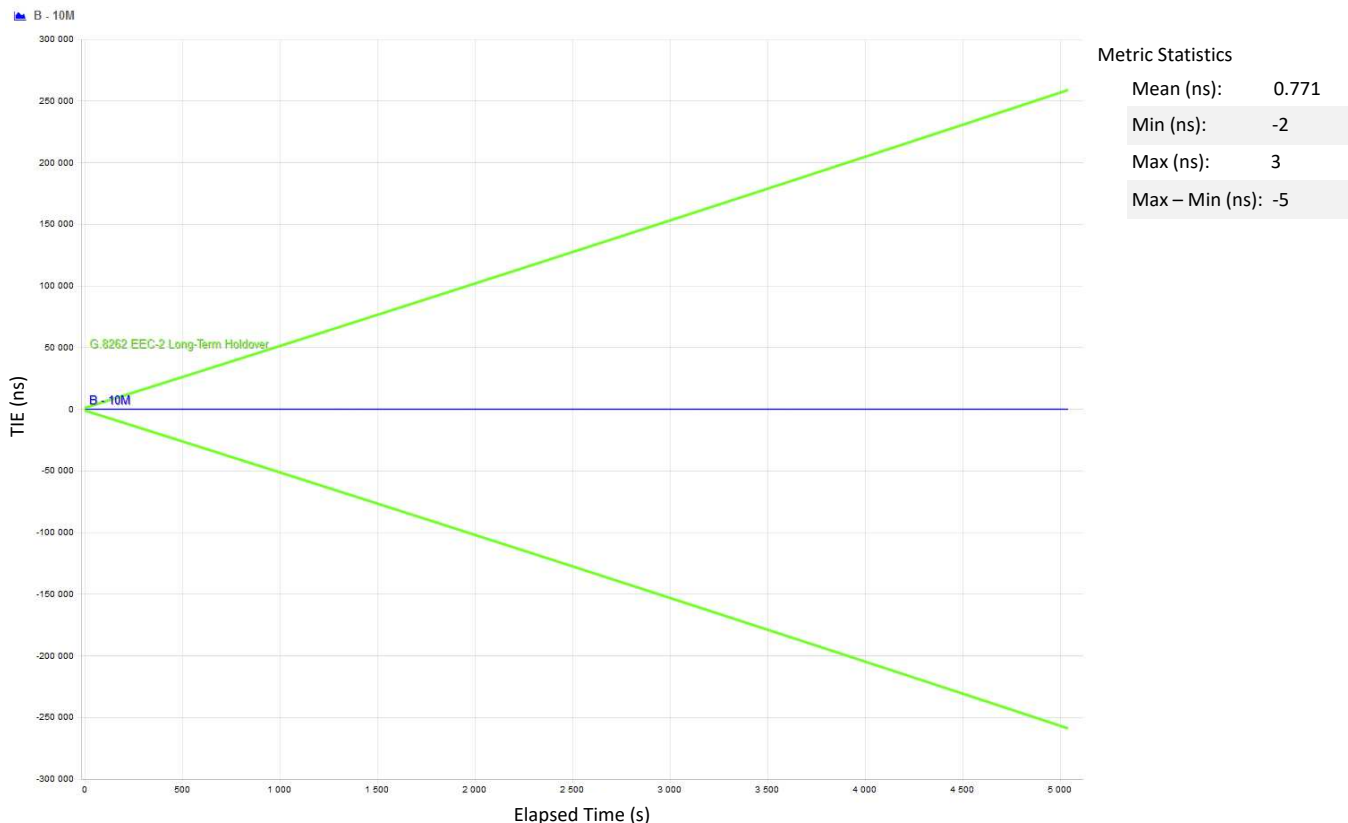

**Figure 35. Holdover Option 2 Result**

## 8 Free-Run Accuracy

### 8.1 Free-Run Accuracy G.8262 Option 1 and Option 2

To meet this requirement, the free-run frequency will never exceed  $\pm 4.6$  ppm with reference to a traceable Stratum-1 reference. This includes initial power-up or wherever there isn't sufficient holdover history accumulated.

With the LMK05028 reference removed, the device was locked to the holdover reference upon power on reset until holdover history was available. The holdover reference selected was within  $\pm 4.6$  ppm. The output clock from LMK05028 followed the holdover reference.

## 9 Pull-In and Hold-In

### 9.1 Pull-In Range G.8262 Option 1 and Option 2

To meet this requirement, a PLL which is in free-run or holdover within its  $\pm 4.6$  ppm frequency range (based on its TCXO/OCXO) must be able to pull-in to a reference that is within  $\pm 4.6$  ppm frequency (traceable to Stratum-1). In other words, the PLL should be able to pull-in a minimum of  $\pm 9.2$  ppm and no alarms should be asserted during this process. Hold-in range is defined as the largest offset between a slave clock's reference frequency and a specified nominal frequency, within which the slave clock maintains lock as the frequency varies over the frequency range. The hold-in range for EEC-Option 2 should be  $\pm 4.6$  ppm, whatever the internal oscillator frequency offset may be. The minimum pull-in range for Option 1 and Option 2 should be  $\pm 4.6$  ppm, whatever the internal oscillator frequency offset may be.

The LMK05028 meets the specification for pull-in and hold-in range as shown in [Table 11](#) and [Table 12](#).

**Table 11. Pull-In Results**

| REFERENCE TO DPLL | TCXO             | OUTPUT           | NOTES                               |
|-------------------|------------------|------------------|-------------------------------------|
| 25 MHz - 4.6 ppm  | 10 MHz + 4.6 ppm | 10 MHz - 4.6 ppm | Lock from POR with FASTLOCK Enabled |
| 25 MHz - 4.6 ppm  | 10 MHz - 4.6 ppm | 10 MHz - 4.6 ppm |                                     |
| 25 MHz + 4.6 ppm  | 10 MHz + 4.6 ppm | 10 MHz + 4.6 ppm |                                     |
| 25 MHz + 4.6 ppm  | 10 MHz - 4.6 ppm | 10 MHz + 4.6 ppm |                                     |

**Table 12. Hold-In Results**

| REFERENCE TO DPLL    | TCXO                 | OUTPUT               | NOTES                                                                                                         |
|----------------------|----------------------|----------------------|---------------------------------------------------------------------------------------------------------------|
| 25 MHz - 4.6 ppm     | 10 MHz $\pm$ 4.6 ppm | 10 MHz - 4.6 ppm     | '±' here refers to reference frequency (TCXO or Reference to DPLL) being swept from '-' to '+' and vice-versa |
| 25 MHz + 4.6 ppm     | 10 MHz $\pm$ 4.6 ppm | 10 MHz + 4.6 ppm     |                                                                                                               |
| 25 MHz $\pm$ 4.6 ppm | 10 MHz - 4.6 ppm     | 10 MHz $\pm$ 4.6 ppm |                                                                                                               |
| 25 MHz $\pm$ 4.6 ppm | 10 MHz + 4.6 ppm     | 10 MHz $\pm$ 4.6 ppm |                                                                                                               |

## 10 Conclusion


The LMK05028 Network Synchronizer device, along with a compliant TCXO or OCXO, meets or exceeds the requirement set in ITU-T G.8262/Y.1362 (07/2010) and Amendment 2 (10/2012).

Notable features of this high performance device includes:

- Hitless Switching with minimal phase transients (<100 ps)
- Unique Triple Loop Architecture allowing use of a low-cost holdover reference without sacrificing performance
- Two high-performance DPLL Channels with Programmable loop bandwidth for jitter and wander filtering suitable for EEC Option 1 and EEC Option 2
- Reference Priority Selection, Gapped Clock and Runt Pulse Detectors, Automatic/Manual Switchover, Holdover, Tuning Word History, and Zero Delay mode

## 11 Appendix

This section describes the alternate test setup to measure phase transient response accurately.

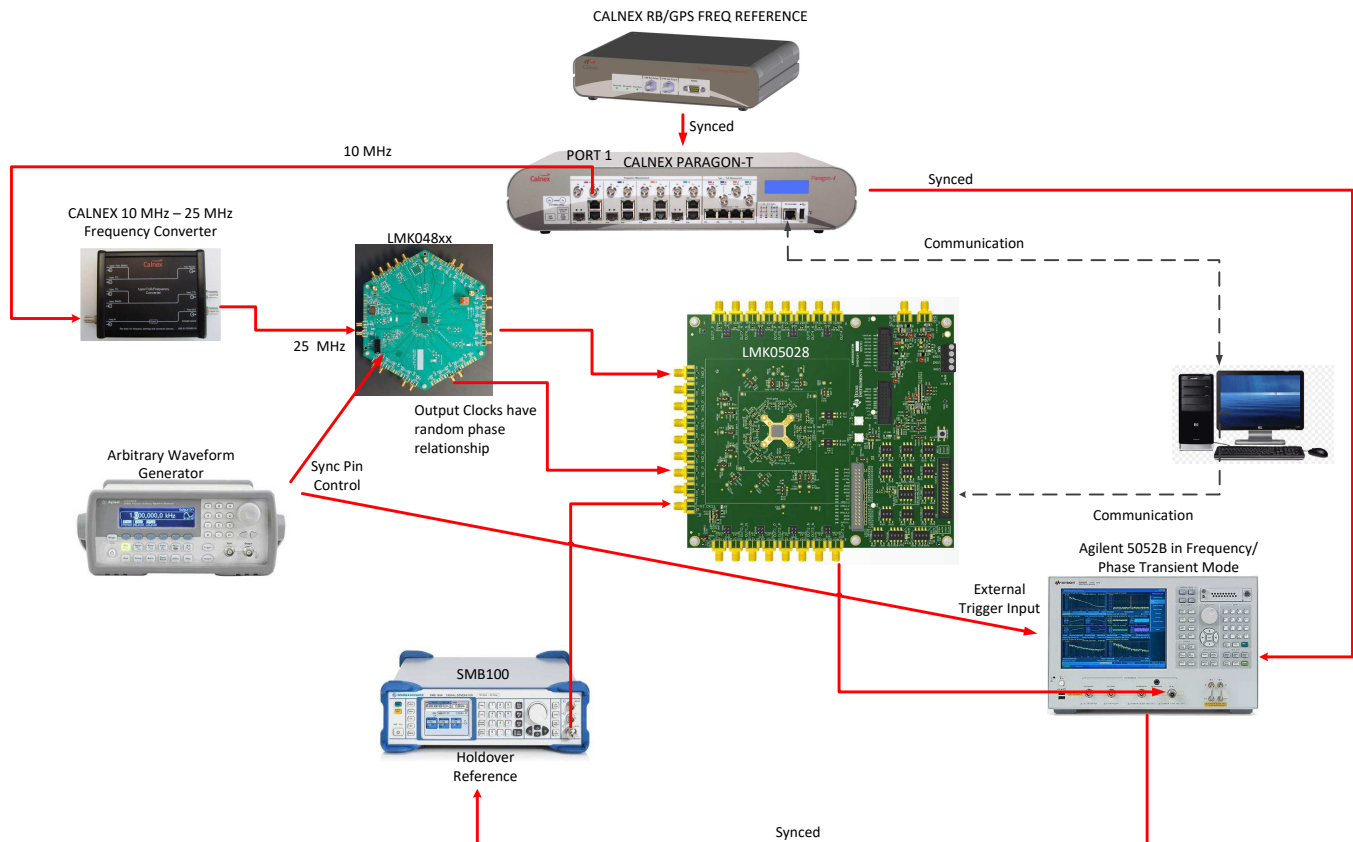


**Figure 36. Alternate Test Setup to Measure Phase Transient Response Accurately**


The Arbitrary Waveform Generator (ARB) is configured to generate a pulse that controls the SYNC input of the LMK04806 Texas Instruments High Performance Jitter Cleaner device. The SYNC input control toggles one of two active output channels on LMK04806 between ON/OFF states periodically. The LMK04806 is configured in single-loop (PLL2 only) mode to convert a 25-MHz input to two 25-MHz outputs. Every time the SYNC control toggles, the phase relationship between the 25-MHz outputs from the LMK04806 is random. The LMK05028 selects between the 25-MHz reference inputs. When one of the input channels to the LMK05028 is disabled through SYNC control on the LMK04806, the device automatically switches to operate from the other valid reference clock. The phase and frequency transient during this switchover event is captured on an Agilent 5052B as shown in [Figure 36](#).

The LMK05028 was configured to generate a 10-MHz output in this setup. The phase/frequency transient after 100 switchover events is shown in [Figure 37](#), where the x-axis represents a total span of 5 seconds and the y-axis represents the phase transient in degrees, and in [Figure 38](#) where the x-axis represents a total span of 5 seconds and the y-axis represents the frequency transient in Hz. The switchover event occurs at the center of the plot. From these plots, it can be seen that approximately 200-mdeg phase transient corresponds to approximately 55 ps for 10 MHz and that approximately 200-mHz frequency transient corresponds to approximately 0.02 ppm = 20 ppb for 10 MHz.

This alternate measurement setup allows us to visualize the true phase transient of <100 ps observed during reference switchover events. This measurement approach does not suffer from equipment limitations as observed earlier when using the Calnex hardware.

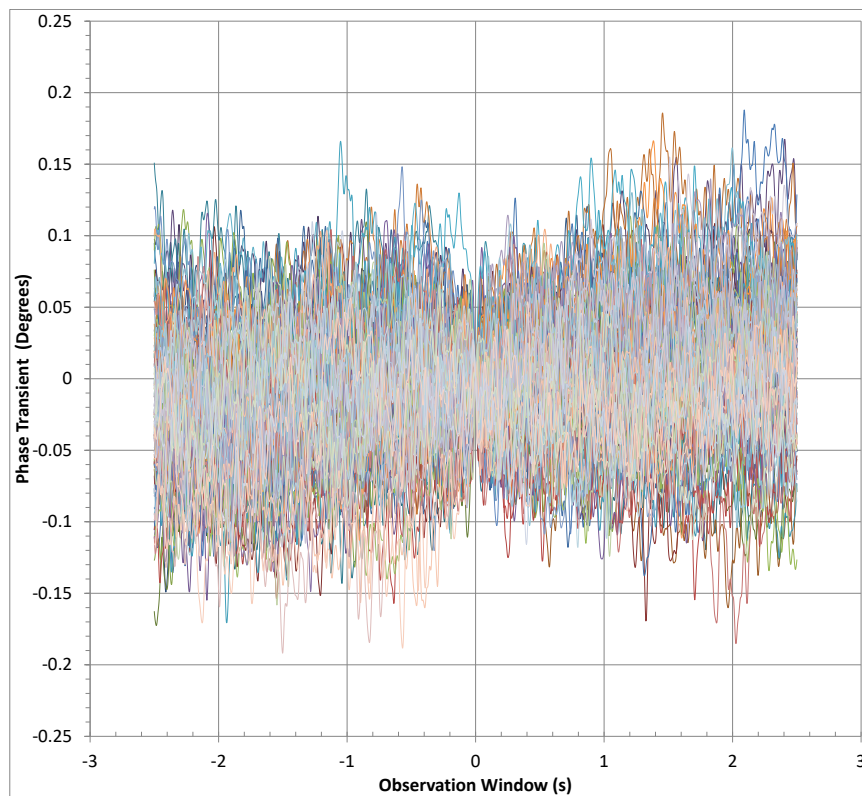

**Figure 37. Phase Transient Result**

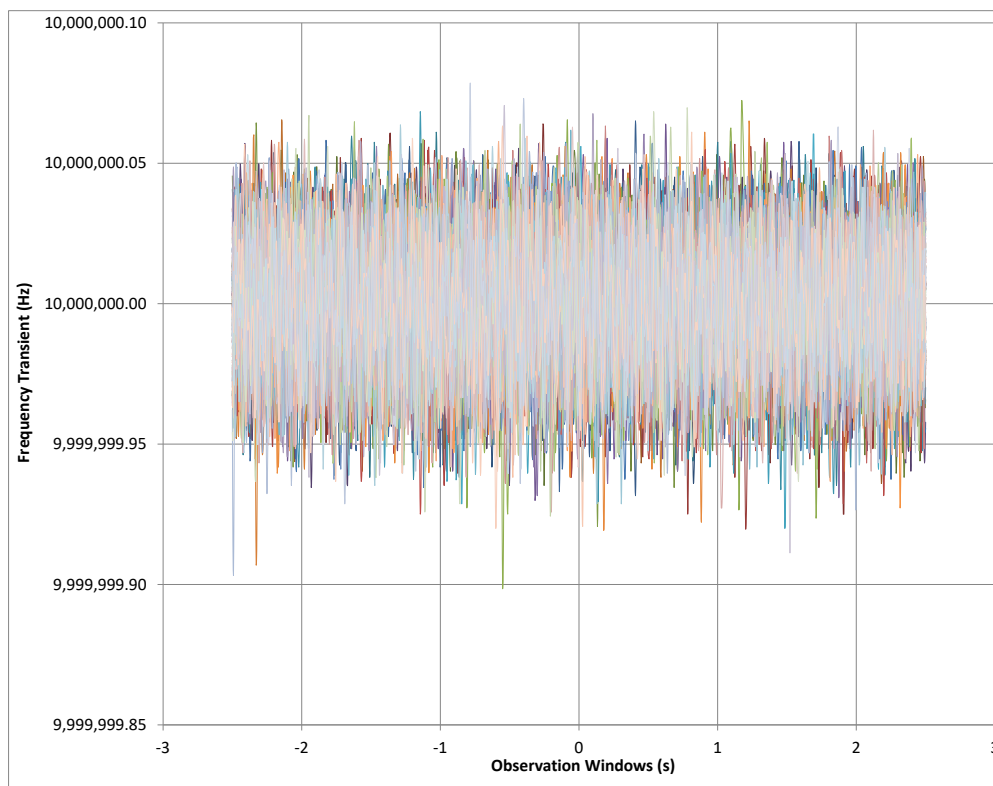

**Figure 38. Frequency Transient Result**

## 12 References

For reference, see the following:

- ITU-T G.8262 Standard

## IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2018, Texas Instruments Incorporated