

# Working With QFN Power Modules

---



---



---

## ABSTRACT

Texas Instruments Quad Flatpack No-lead (QFN) power modules allow for board miniaturization, and hold several advantages over other power module packages. The QFN packages have higher power density, a smaller routing area, improved thermal performance, and improved electrical parasitics. Additionally, the absence of external leads eliminates bent-lead concerns. These QFN packages have reliable solderability with either SnPb or Pb-free solder paste and are packaged to industry-standard tape-and-reel specifications.

---

## Contents

1	Prototyping.....	2
2	Probing .....	2
3	Handling.....	2
4	Thermal Performance .....	2
5	Mechanical.....	2
6	Removal and Rework .....	2
7	MSL Compliance.....	3
8	Surface-Mount Soldering Qualification.....	3

## List of Figures


1	Sample PCB Board.....	2
2	Quad Flat Pack Nozzle .....	3

## Trademarks

All trademarks are the property of their respective owners.

## 1 Prototyping

Prototyping is made easy using TI QFN power modules with standard pin size and pitch. Test boards can be built for evaluation using a standard rework station. The exposed QFN pads on the side of the device make it easy to visually inspect the pin connection to the PCB as shown in [Figure 1](#).

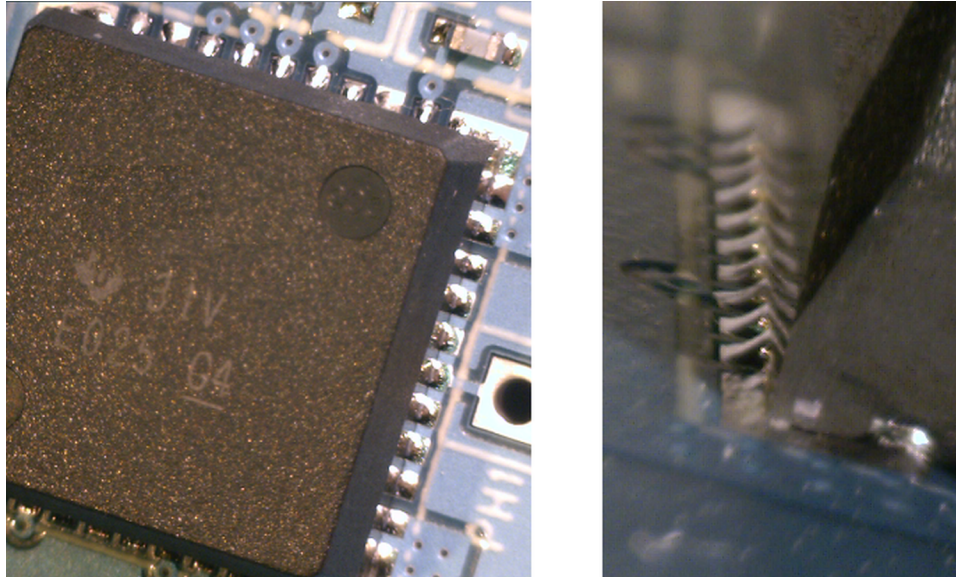

**Figure 1. Sample PCB Board**

## 2 Probing

TI QFN power modules have been engineered to have all internal electrical signals accessible from the perimeter of the device. This feature allows for easy probing of any signal or waveform during evaluation. The exposed QFN pads on the side of the device make it easy to probe and access all internal points.

## 3 Handling

The absence of protruding leads in QFN package devices eliminate the risk of bent leads during shipping or manufacturing. However, standard IC handling procedures are still required to be followed.

## 4 Thermal Performance

The QFN package has superior thermal performance compared to alternative package solutions. The exposed pads on the bottom of the device provide enhanced thermal performance, reducing theta junction-to-ambient thermal impedance. The internal copper lead-frame of the QFN power module provides an exceptional thermal path to the host PCB. This provides a more direct heat-sink path from the die to the board. The addition of thermal vias from the thermal pad to an internal ground plane will dramatically lower the package temperature.

## 5 Mechanical


Mechanical integrity of the mounted QFN package is greatly enhanced by the soldered exposed pads beneath the device. Shock and vibration susceptibility is reduced by soldering these pads to the PCB.

## 6 Removal and Rework

Removal of a QFN device requires heating the component and printed circuit board in order to reflow the solder attaching the component to the printed circuit board. Apply hot air directly to the component pins and top of the component by using a dedicated quad flat pack nozzle (see [Figure 2](#)) to concentrate the heat directly on the device. To accelerate the heating process, the board can be heated from the bottom using a hot air pre-heater.

Once the solder has reflowed the device can be lifted using an IC vacuum. Once the component has been removed the solder must be removed using a conductive tool and de-soldering braid. Once the solder is removed the pad must be cleaned using appropriate flux remover.

To re-attach a new device, solder paste must be re-applied as described in the Soldering Requirements section of [SLTA069](#). The solder must then be reflowed either as described in the Developing a Reflow Profile section of [SLTA069](#), or in the same manner as was used to remove the device.

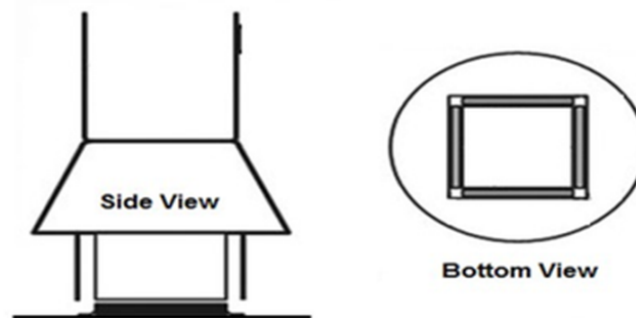

**Figure 2. Quad Flat Pack Nozzle**

## 7 MSL Compliance

QFN devices are classified to MSL levels per JEDEC standard J-STD-020. See the product datasheet for MSL classification.

## 8 Surface-Mount Soldering Qualification

QFN devices are qualified to have no degradation from reflow/IR soldering and aqueous washing by verification through rigorous testing. Sample batches are subjected to reflow through a convection reflow oven and an aqueous wash cleaner. The convection reflow oven is set to achieve maximum peak temperature on any pin or component. These parts are subsequently used for thermal shock, humidity, and life qualification testing. All products must pass this initial qualification testing with zero failures before being released to production.

For QFN soldering requirements, see *Soldering Requirements for BQFN Packages* ([SLTA069](#)).

---

## Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from Original (July 2015) to A Revision</b>	<b>Page</b>
• Reworded the solder qualification section .....	3

---

## IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2017, Texas Instruments Incorporated