
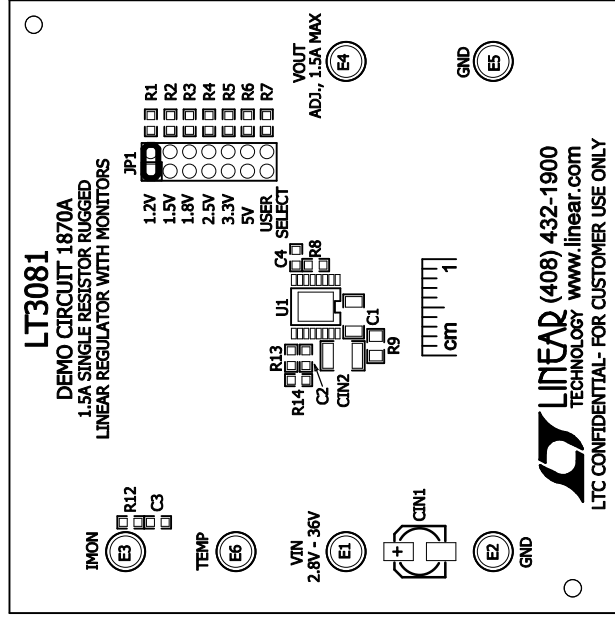


REVISION HISTORY				
ECO	REV	DESCRIPTION	APPR	DATE
—	1	1ST PROTOTYPE	EDWIN LI	08/03/11
—	2	PRODUCTION	EDWIN LI	May 06, 2013

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 deg C.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNT AS SHOWN ON ASSY DRAWING.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

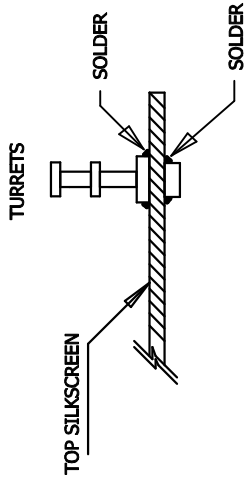

LINEAR (408) 432-1900
 TECHNOLOGY www.linear.com
 LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY

LINEAR TECHNOLOGY
 1630 MCCARTHY BLVD
 MILPITAS, CA 95035
 PH: (408)432-1900
 www.linear.com
 LTC CONFIDENTIAL-
 FOR CUSTOMER USE ONLY

APPROVALS	
PCB DES.	RB
APP ENG	EDWIN LI
TITLE: TOP ASSEMBLY DRAWING	
1.5A SINGLE RESISTOR RUGGED LINEAR REGULATOR WITH MONITORS	
SIZE	IC NO. LT3081EFE
N/A	REV. 2
SCALE = NONE	FILENAME: 1870A-Rev2.PCB
	SHT 1 OF 1