

# Signal Integrity vs. Transmission Rate and Cable Length for RS-485 Transceivers

Cristian Soltero

## ABSTRACT

This application note contains lab data on the signal integrity of the THVD1550 RS-485 transceiver device at various cable lengths and data rates. Jitter measurements were gathered with the results tabulated and plotted.

## Contents

|   |                         |    |
|---|-------------------------|----|
| 1 | Introduction .....      | 1  |
| 2 | Jitter .....            | 2  |
| 3 | Measurement Setup ..... | 3  |
| 4 | Lab Results .....       | 4  |
| 5 | Summary .....           | 14 |

## List of Tables

|   |   |   |
|---|---|---|
| 1 | Total Jitter of Differential Receiver Input A-B Eye Diagram ..... | 4 |
| 2 | Total Jitter of Receiver Output .....                             | 5 |

## Trademarks

All trademarks are the property of their respective owners.

## 1 Introduction

The THVD15xx family of transceivers is designed to operate at a single supply voltage of 5 V and ensure robust system operation in noisy environments. This family contains multiple devices that vary in signaling rate and pin-out as well as duplex type, node capacity, and options to enable. For this document, the focus will be on one particular version, the THVD1550.

Applications in which the transceivers are used involve factory automation, building automation, and many other areas where robust serial communications over a multipoint network are crucial. These THVD1550 RS-485 transceivers provide a balanced interface for multipoint, bi-directional communication with large differential signal and common-mode range and data rates reaching up to 50 Mbps. The TIA and EIA “Recommended Standard” specifies several features including the signal amplitude, input sensitivity, and input impedance; however, cabling (type and link distance), connectors, data rate protocol, and bus topology are not defined, which requires users to choose these appropriately to support the needs of their applications. This application note runs through the cabling aspect by analyzing signal integrity data gathered at various cable lengths and data rates.

## 2 Jitter

For many, it is commonly misconceived that driver strength (i.e., output resistance) leads to better transmission of data over longer lengths of cable. In fact, driver behavior is one of the lesser factors when trying to transmit data over long distances of cable. Receiver performance is also less of a factor in comparison to the performance of the cable. When running through long distances of cable, the low pass effect of the cabling causes the rising and falling edges to deviate in time. This leads to what is called jitter and tends to be the limiting factor of signal integrity as cable length and data rate increase. Many factors affect the amount of jitter and the overall quality of a signal including termination schemes, amount of crosstalk, and of course, cable length. Jitter can be inherently random as well. Eye diagrams provide a quick and accurate way to visually analyze and evaluate the quality of a transmitted signal. Typically, an eye diagram appears as shown in Figure 1. A healthy eye diagram on the bus of an RS-485 interface circuit is shown in Figure 2. The minor roll off seen on the edges is due to the capacitance present when a node is tied to the bus

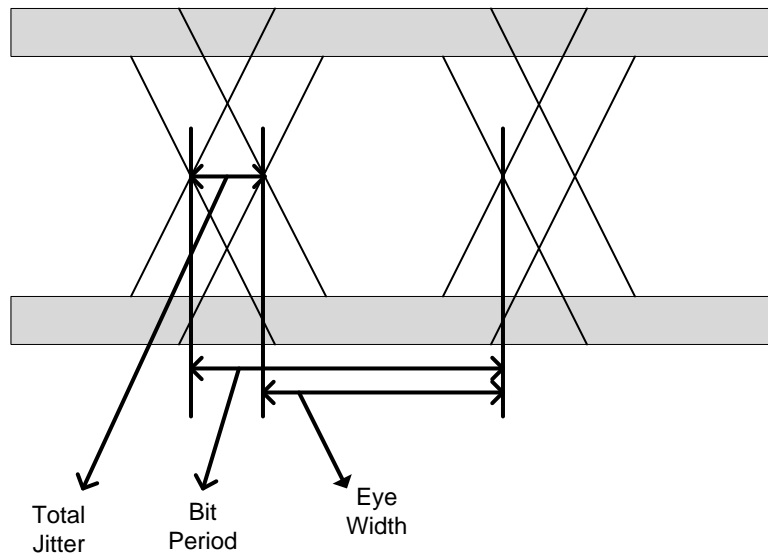


Figure 1. Typical Eye Diagram

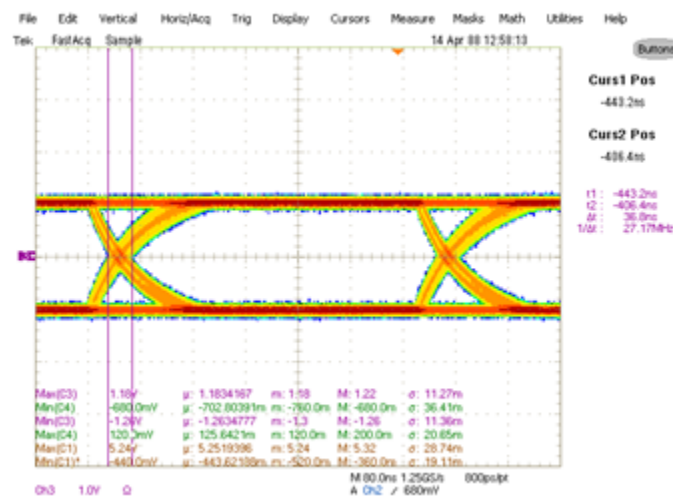
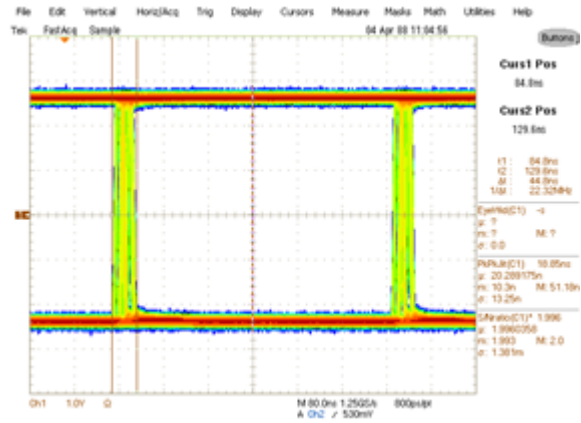


Figure 2. Actual Differential Receiver Input A-B after 1000 ft at 3 Mbps

The look of an eye diagram at the receiver output will be different, too, with the rise and fall of the signal taking on a fairly vertical shape. This is inherent to the design of the receiver as it takes in a differential signal from the bus, attenuates the voltages, interprets that differential signal as a binary logic level, and outputs the signal as a high (near  $V_{CC}$ ) or low (near ground) state. Figure 3 shows a typical eye diagram at the receiver output.

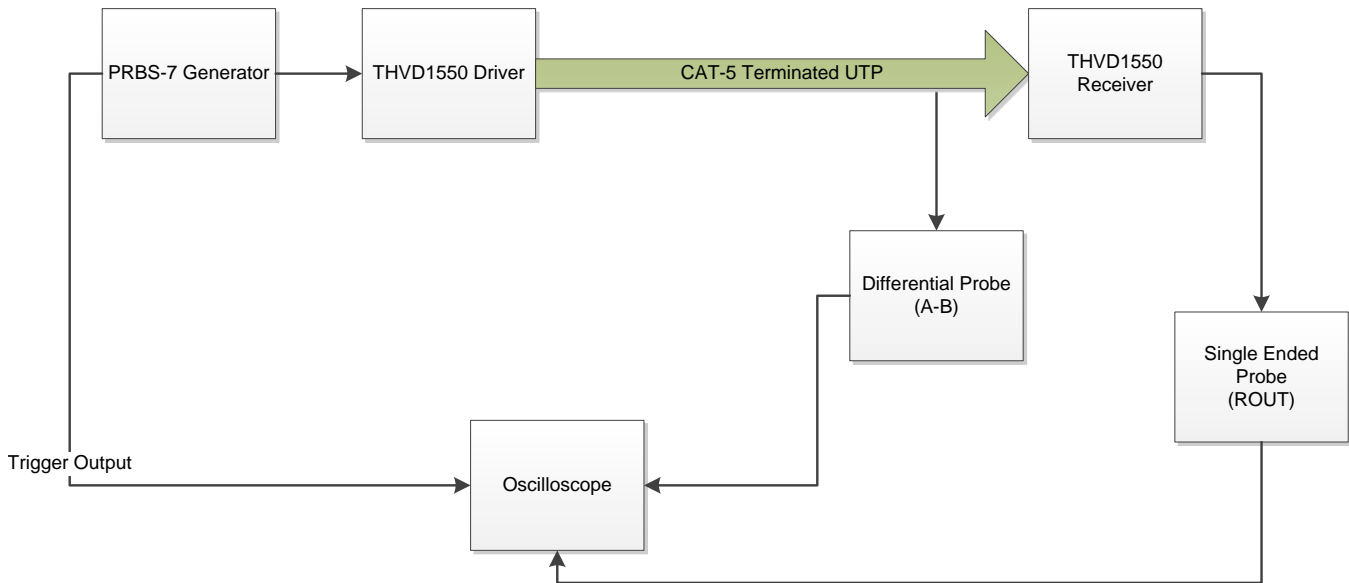


**Figure 3. Actual Receiver Output after 1000 ft at 3 Mbps**

When comparing the waveforms at the differential A-B receiver input and the receiver output, it should also be noted that the jitter is larger at the receiver output. This is due to the fact that the receiver itself implements failsafe biasing by intentionally offsetting the input thresholds from the 0-V crossing, so the rising and falling edges are instead received at a wider gap (about 50-100 mV).

### 3 Measurement Setup

Two THVD1550 devices were soldered on to two Texas Instruments RS-485 EVMs; one transmitting, one receiving. Using a data generator, PRBS-7 data was generated and used as the driver input to one device. In connecting the bus of the driving device to the receiving device, Unshielded Twisted Pair Ethernet Category 5 cable (low cost, generic cable commonly found in industry) was used with 120-Ω termination on either side of the cable. Cable lengths of 1000 ft., 2000 ft., 3000 ft., 4000 ft., and 5000 ft. were used during testing. A differential probe was placed on the receiving bus to gather A-B eye diagrams, while a single-ended probe was placed at the receiver output. Those probes were then connected to an oscilloscope. Rather than triggering off the PRBS-7 data itself, a trigger output from the data generator synchronized with the PRBS-7 data was supplied and input into the oscilloscope for synchronization. Figure 4 provides a flow chart of this setup.



**Figure 4. Lab Setup**

#### 4 Lab Results

For each different cable length, various data rates were transmitted ranging from 200 kbps up to 10 Mbps at certain lengths. Total jitter was recorded for each data point. Eye width was calculated by subtracting the total jitter from the bit duration (the period), and jitter percentage was obtained by dividing the total jitter by the bit duration and multiplying by 100. Due to the measurement limitations of the oscilloscope, jitter was measured by hand using the cursors.

Table 1 shows the differential receiver input A-B data collected at 5 different cable lengths with varying data rates, and Table 2 shows the data for the receiver output.

**Table 1. Total Jitter of Differential Receiver Input A-B Eye Diagram**

| Distance | Data Rate (Mbps) | Bit Duration (ns) | Eye Width (ns) | Jitter (ns) | Jitter Percentage |
|----------|------------------|-------------------|----------------|-------------|-------------------|
| 1000 ft. | 0.20             | 5000              | 4976           | 24          | 0.48              |
|          | 0.40             | 2500              | 2472           | 28          | 1.12              |
|          | 0.50             | 2000              | 1968           | 32          | 1.60              |
|          | 0.60             | 1666.67           | 1626.67        | 40          | 2.40              |
|          | 0.80             | 1250              | 1214           | 36          | 2.88              |
|          | 1                | 1000              | 964            | 36          | 3.60              |
|          | 2                | 500               | 463.20         | 36.80       | 7.36              |
|          | 4                | 250               | 196.40         | 53.60       | 21.44             |
|          | 5                | 200               | 144.80         | 55.20       | 27.60             |
|          | 7                | 142.86            | 82.06          | 60.80       | 42.56             |
| 2000 ft. | 0.20             | 5000              | 4880           | 120         | 2.40              |
|          | 0.40             | 2500              | 2380           | 120         | 4.80              |
|          | 0.50             | 2000              | 1880           | 120         | 6                 |
|          | 0.60             | 1666.67           | 1554.67        | 112         | 6.72              |
|          | 0.80             | 1250              | 1134           | 116         | 9.28              |
|          | 1                | 1000              | 892            | 108         | 10.80             |
|          | 2                | 500               | 338.40         | 161.60      | 32.32             |
|          | 3                | 333.33            | 134.93         | 198.40      | 59.52             |
|          | 4                | 250               | 13.20          | 236.80      | 94.72             |

**Table 1. Total Jitter of Differential Receiver Input A-B Eye Diagram (continued)**

| Distance | Data Rate (Mbps) | Bit Duration (ns) | Eye Width (ns) | Jitter (ns) | Jitter Percentage |
|----------|------------------|-------------------|----------------|-------------|-------------------|
| 3000 ft. | 0.20             | 5000              | 4820           | 180         | 3.60              |
|          | 0.40             | 2500              | 2316           | 184         | 7.36              |
|          | 0.50             | 2000              | 1824           | 176         | 8.80              |
|          | 0.60             | 1666.67           | 1482.67        | 184         | 11.04             |
|          | 0.80             | 1250              | 1054           | 196         | 15.68             |
|          | 0.90             | 1111.11           | 899.11         | 212         | 19.08             |
|          | 1                | 1000              | 772            | 228         | 22.80             |
|          | 2                | 500               | 133.60         | 366.40      | 73.28             |
| 4000 ft. | 2.50             | 400               | 0              | 400         | 100               |
|          | 0.20             | 5000              | 4760           | 240         | 4.80              |
|          | 0.25             | 4000              | 3740           | 260         | 6.50              |
|          | 0.40             | 2500              | 2228           | 272         | 10.88             |
|          | 0.50             | 2000              | 1744           | 256         | 12.80             |
|          | 0.60             | 1666.67           | 1378.67        | 288         | 17.28             |
|          | 0.65             | 1538.46           | 1226.46        | 312         | 20.28             |
|          | 0.75             | 1333.33           | 997.33         | 336         | 25.20             |
|          | 0.80             | 1250              | 890            | 360         | 28.80             |
| 1        | 1000             | 572               | 428            | 42.80       |                   |
| 5000 ft. | 1.50             | 666.67            | 38.67          | 628         | 94.20             |
|          | 0.20             | 5000              | 4680           | 320         | 6.40              |
|          | 0.30             | 3333.33           | 2973.33        | 360         | 10.80             |
|          | 0.35             | 2857.14           | 2457.14        | 400         | 14                |
|          | 0.40             | 2500              | 2084           | 416         | 16.64             |
|          | 0.45             | 2222.22           | 1774.22        | 448         | 20.16             |
|          | 0.50             | 2000              | 1552           | 448         | 22.40             |
|          | 0.60             | 1666.67           | 1170.67        | 496         | 29.76             |
|          | 0.80             | 1250              | 662            | 588         | 47.04             |
|          | 1                | 1000              | 312            | 688         | 68.80             |
| 1.50     | 666.67           | 0                 | 666.67         | 100         |                   |







**Table 2. Total Jitter of Receiver Output**

| Distance | Data Rate (Mbps) | Bit Duration (ns) | Eye Width (ns) | Jitter (ns) | Jitter Percentage |
|----------|------------------|-------------------|----------------|-------------|-------------------|
| 1000 ft. | 0.20             | 5000              | 4940           | 60          | 1.20              |
|          | 0.40             | 2500              | 2460           | 40          | 1.60              |
|          | 0.50             | 2000              | 1952           | 48          | 2.40              |
|          | 0.60             | 1666.67           | 1618.67        | 48          | 2.88              |
|          | 0.80             | 1250              | 1210           | 40          | 3.20              |
|          | 1                | 1000              | 960            | 40          | 4                 |
|          | 2                | 500               | 455.20         | 44.80       | 8.96              |
|          | 4                | 250               | 190            | 60          | 24                |
|          | 5                | 200               | 132.80         | 67.20       | 33.60             |
|          | 7                | 142.86            | 72.86          | 70          | 49                |
|          | 8                | 125               | 53             | 72          | 57.60             |
|          | 10               | 100               | 21.20          | 78.80       | 78.80             |

**Table 2. Total Jitter of Receiver Output (continued)**

| Distance | Data Rate (Mbps) | Bit Duration (ns) | Eye Width (ns) | Jitter (ns) | Jitter Percentage |
|----------|------------------|-------------------|----------------|-------------|-------------------|
| 2000 ft. | 0.20             | 5000              | 4900           | 100         | 2                 |
|          | 0.40             | 2500              | 2380           | 120         | 4.80              |
|          | 0.50             | 2000              | 1880           | 120         | 6                 |
|          | 0.60             | 1666.67           | 1546.67        | 120         | 7.20              |
|          | 0.80             | 1250              | 1126           | 124         | 9.92              |
|          | 1                | 1000              | 880            | 120         | 12                |
|          | 2                | 500               | 319.20         | 180.80      | 36.16             |
|          | 3                | 333.33            | 120.53         | 212.80      | 63.84             |
| 3000 ft. | 0.20             | 5000              | 4800           | 200         | 4                 |
|          | 0.40             | 2500              | 2308           | 192         | 7.68              |
|          | 0.50             | 2000              | 1784           | 216         | 10.80             |
|          | 0.60             | 1666.67           | 1442.67        | 224         | 13.44             |
|          | 0.80             | 1250              | 1050           | 200         | 16                |
|          | 0.90             | 1111.11           | 895.11         | 216         | 19.44             |
|          | 1                | 1000              | 764            | 236         | 23.60             |
|          | 2                | 500               | 90.40          | 409.60      | 81.92             |
| 4000 ft. | 0.20             | 5000              | 4740           | 260         | 5.20              |
|          | 0.25             | 4000              | 3740           | 260         | 6.50              |
|          | 0.40             | 2500              | 2220           | 280         | 11.20             |
|          | 0.50             | 2000              | 1736           | 264         | 13.20             |
|          | 0.60             | 1666.67           | 1386.67        | 280         | 16.80             |
|          | 0.65             | 1538.46           | 1226.46        | 312         | 20.28             |
|          | 0.75             | 1333.33           | 997.33         | 336         | 25.20             |
|          | 0.80             | 1250              | 886            | 364         | 29.12             |
|          | 1                | 1000              | 564            | 436         | 43.60             |
|          | 1.50             | 666.67            | 68.27          | 598.40      | 89.76             |
| 5000 ft. | 0.20             | 5000              | 4640           | 360         | 7.20              |
|          | 0.30             | 3333.33           | 2973.33        | 360         | 10.80             |
|          | 0.35             | 2857.14           | 2465.14        | 392         | 13.72             |
|          | 0.40             | 2500              | 2116           | 384         | 15.36             |
|          | 0.45             | 2222.22           | 1822.22        | 400         | 18                |
|          | 0.50             | 2000              | 1560           | 440         | 22                |
|          | 0.60             | 1666.67           | 1138.67        | 528         | 31.68             |
|          | 0.80             | 1250              | 634            | 616         | 49.28             |
|          | 1                | 1000              | 288            | 712         | 71.20             |

Figure 5, Figure 6, and Figure 7 plot the eye width, total jitter, and jitter percentage versus the data rate for A-B and the receiver plots are found in Figure 8, Figure 9, and Figure 10.

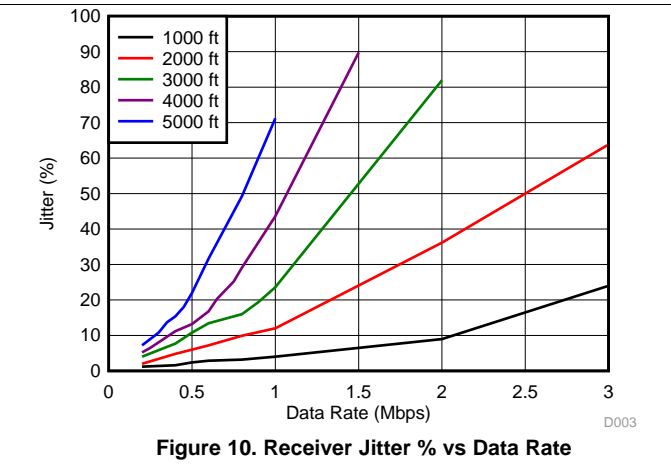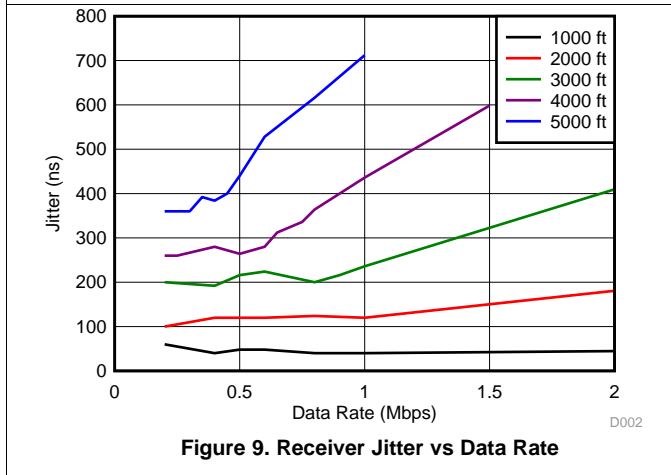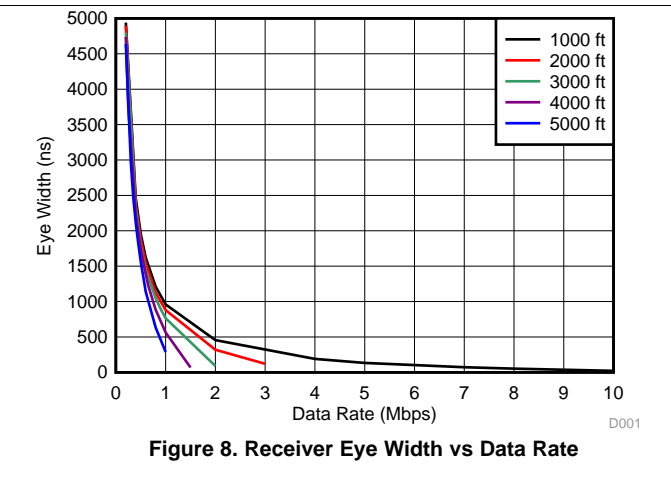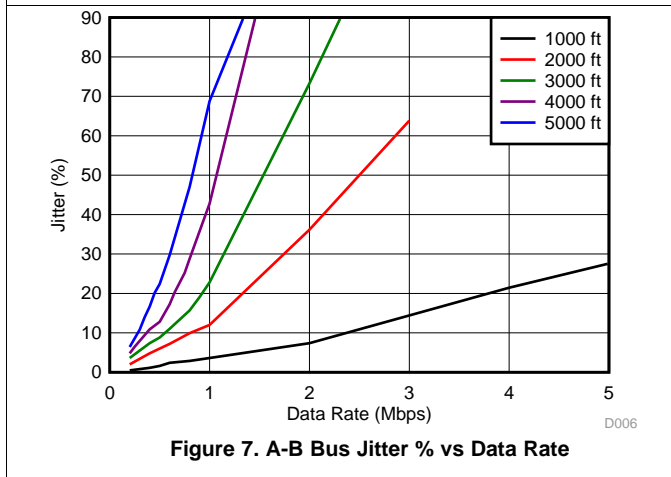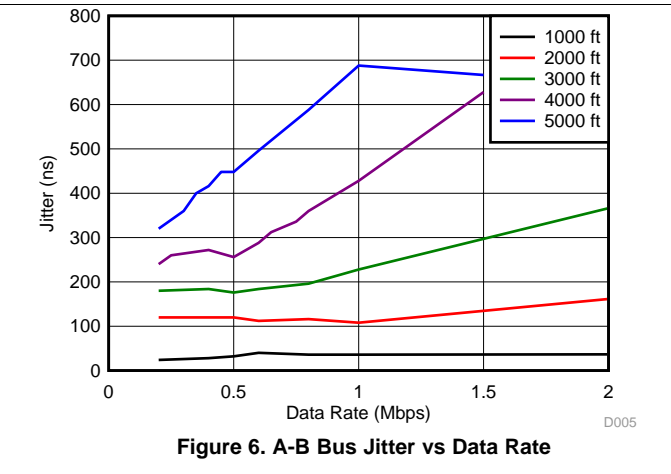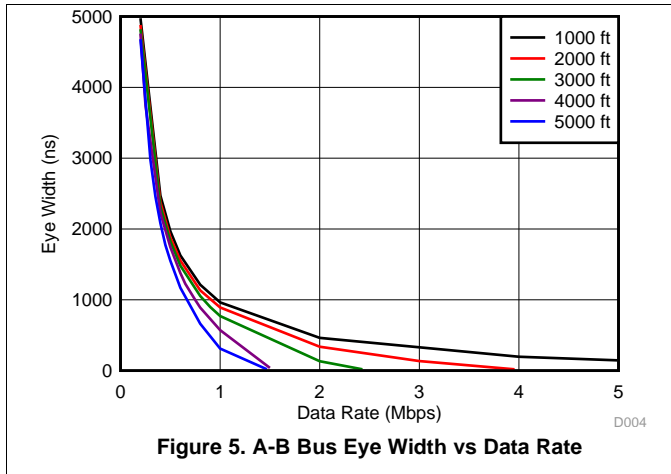







A few observations can immediately be made from these graphs. The rate of decrease in eye width is about the same for all cable lengths as the data rate approaches 1 Mbps. From that point forward, the slopes begin to change to a slower rate, more so for shorter cable lengths. For the total jitter graphs, the jitter amounts stay fairly stable until a point is reached where they begin to increase. The slopes are larger for greater cable lengths. The point where jitter begins to increase can be anywhere between 10% and 20% jitter, based on the provided jitter percentage graphs. The jitter percentage graphs show a similar trend in that for higher cable lengths, the slopes are larger.

Note how the slopes do not add linearly for increasing cable lengths (the slope at 2000 ft. is not twice the slope at 1000 ft.). This can be attributed to the fact that as data rate is increased, the driving signal amplitudes on the bus do not necessarily reach their desired maximum and minimum steady-state values. This occurrence is also dependent on the data pattern as well. Shorter consecutive bit runs will have a shorter settling time for maximum/minimum values than longer consecutive bit runs. This alone is not detrimental to the overall receiver output because the receiver threshold is narrowly set around 0 V, but more jitter may be observed due to the edge transitions varying in rising or falling times since smaller peak values will cross the receiver threshold earlier than larger peak values.







For many applications where RS-485 transceivers are used, the desired percentage of jitter to ensure signal reliability is usually no greater than 20%. Some systems may be able to allow up to 30% or even 40% jitter, but there will always be the risk of having bit errors. To get an idea of how a signal looks at different rates, cable lengths, and jitter percentages, The following eye diagrams are provided to illustrate signal quality.









### 4.1 Eye Diagrams, 1000 Feet

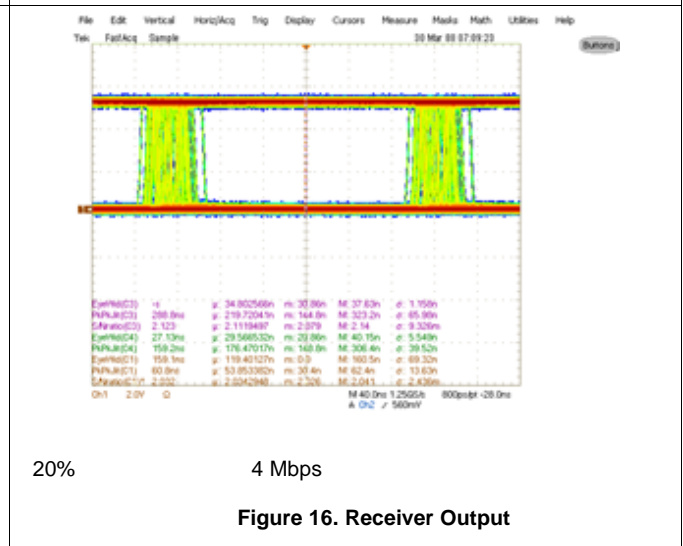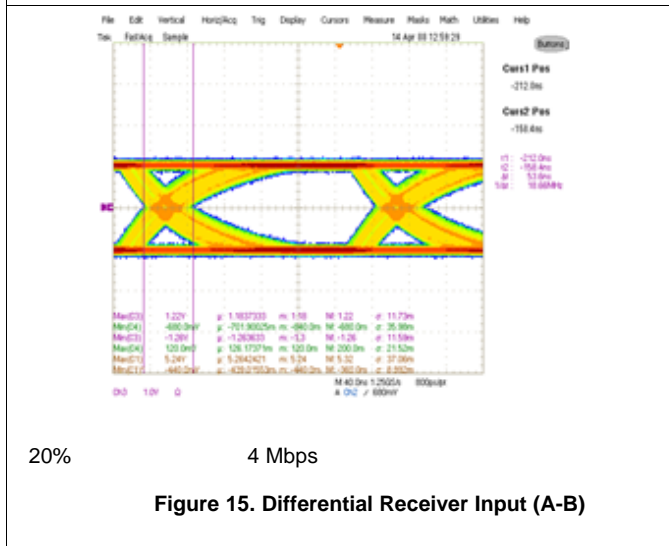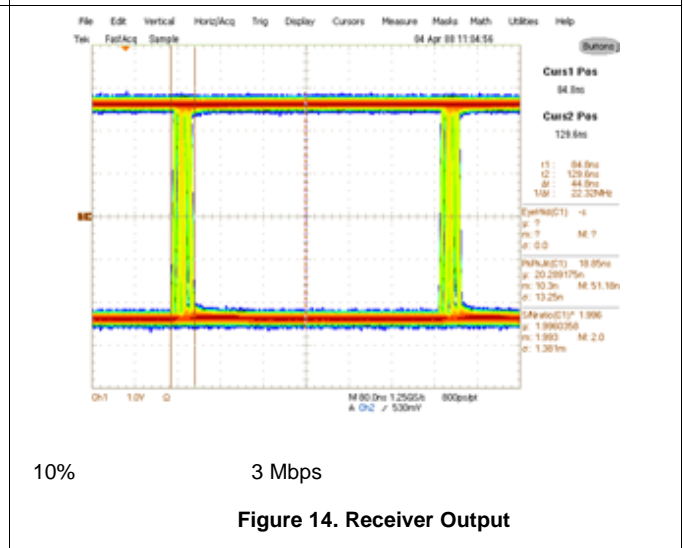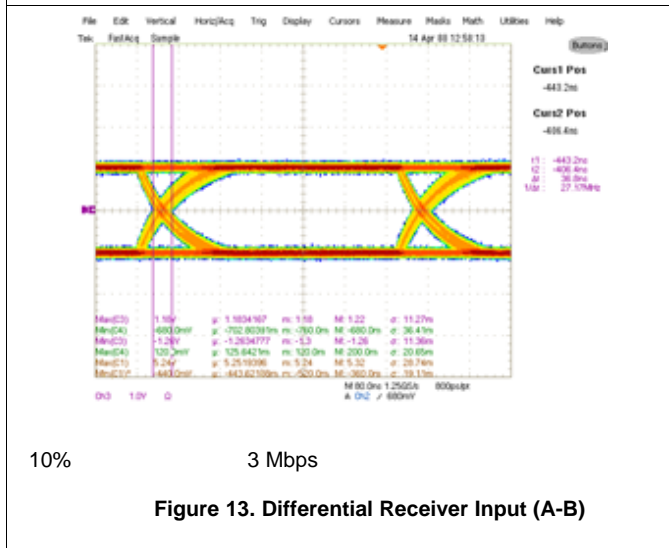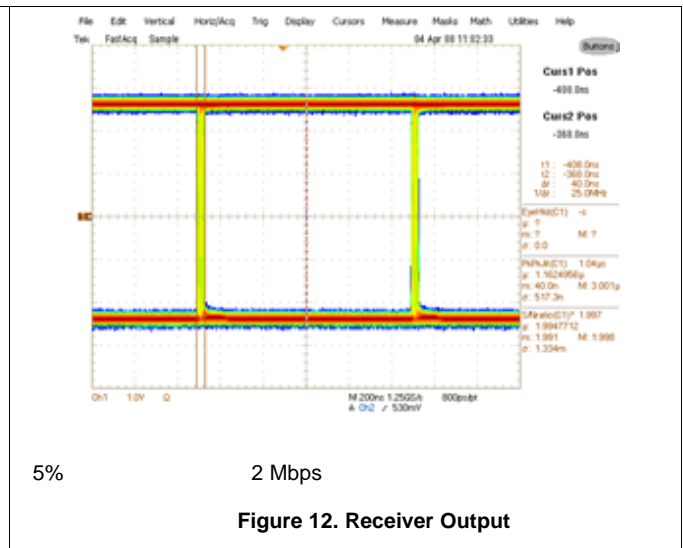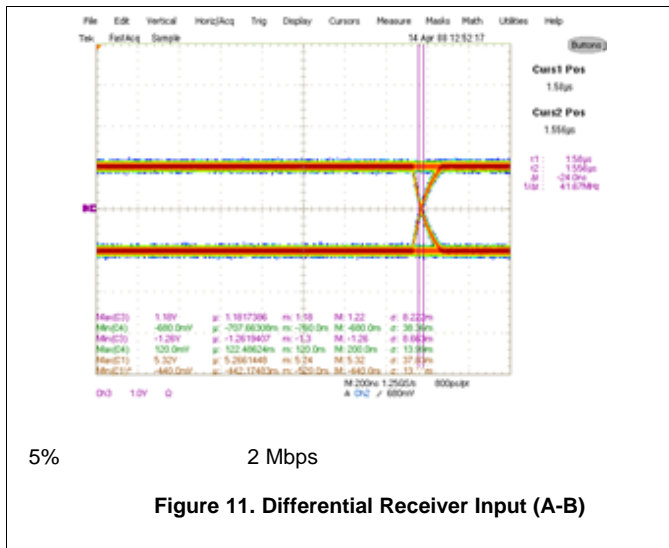







### 4.2 Eye Diagrams, 2000 Feet

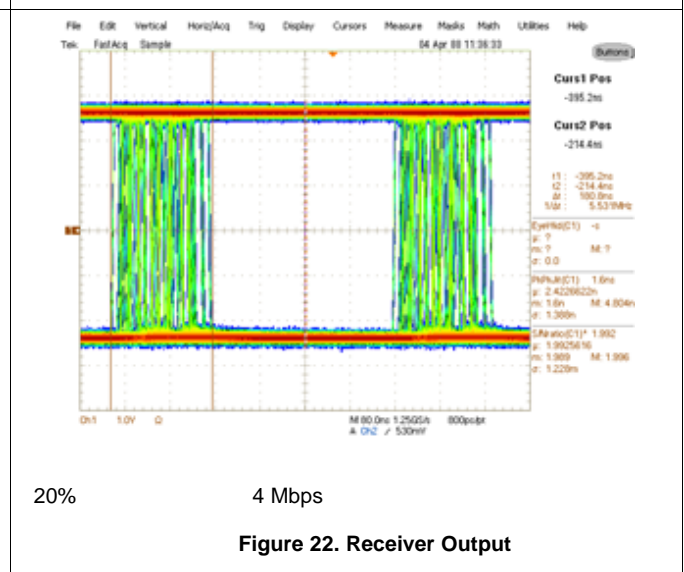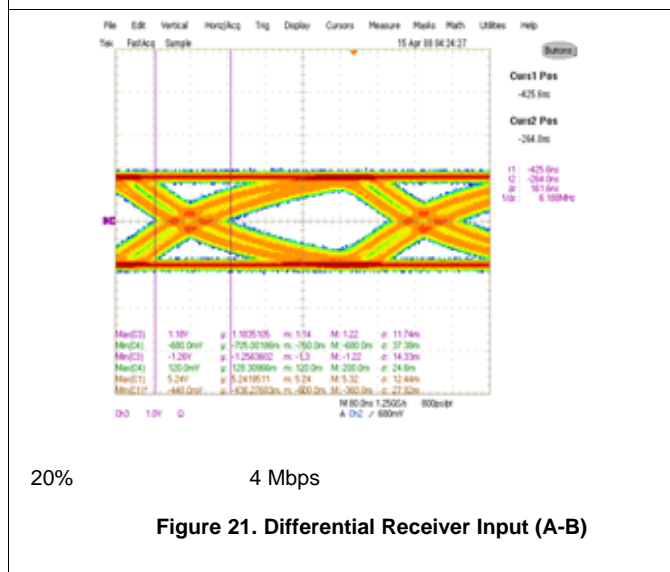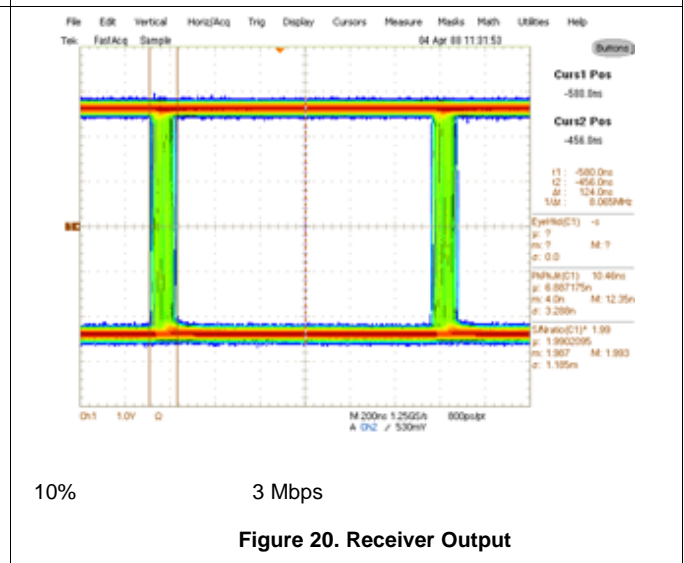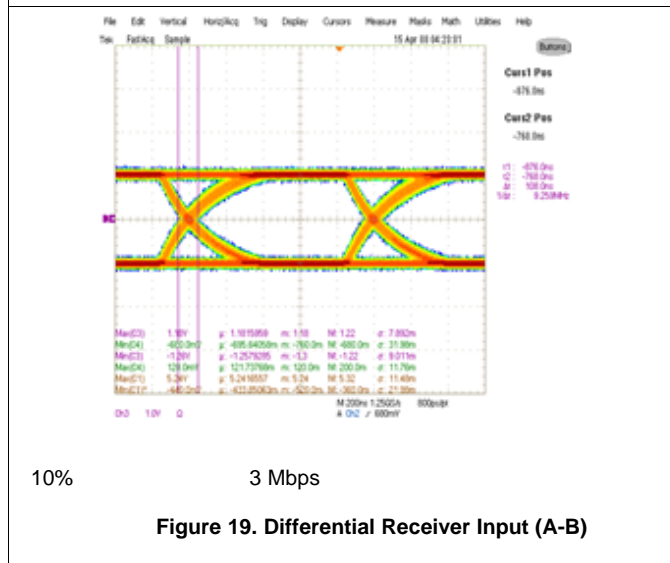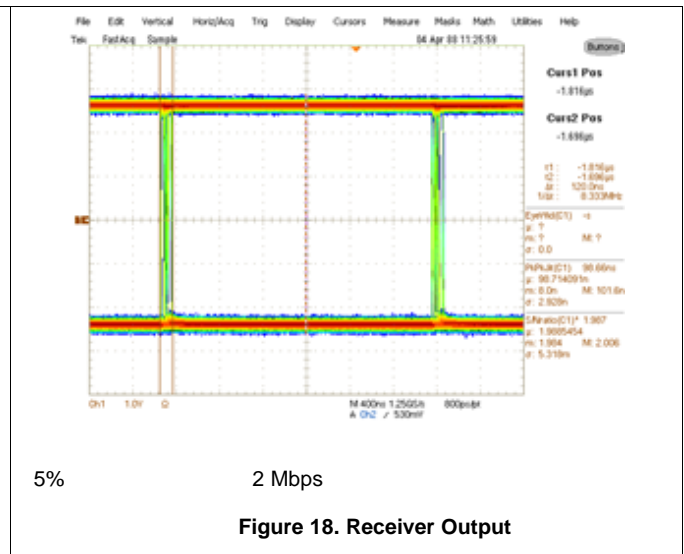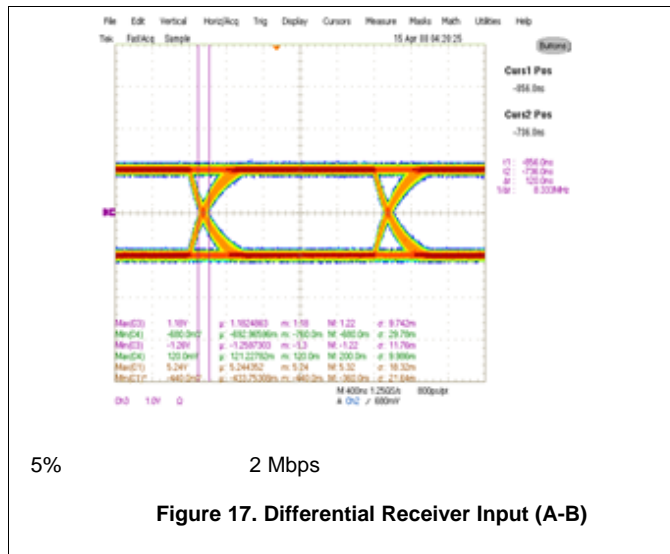

### 4.3 Eye Diagrams, 3000 Feet

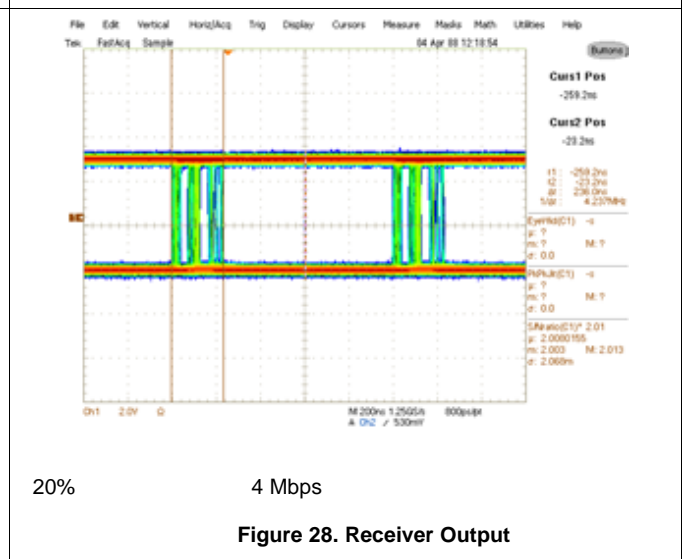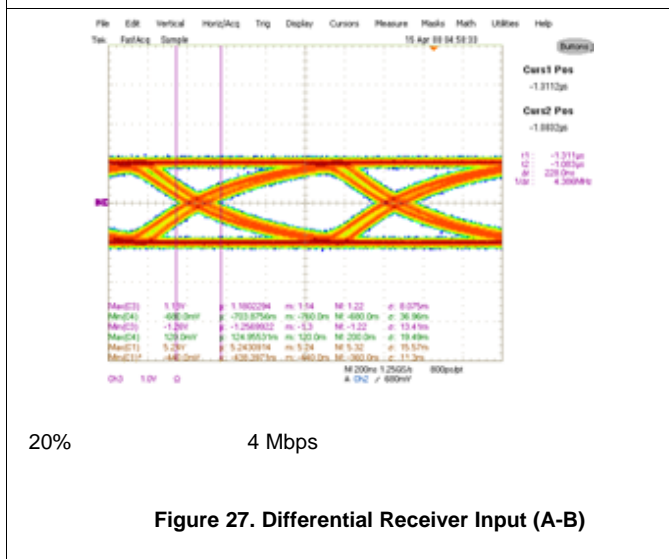
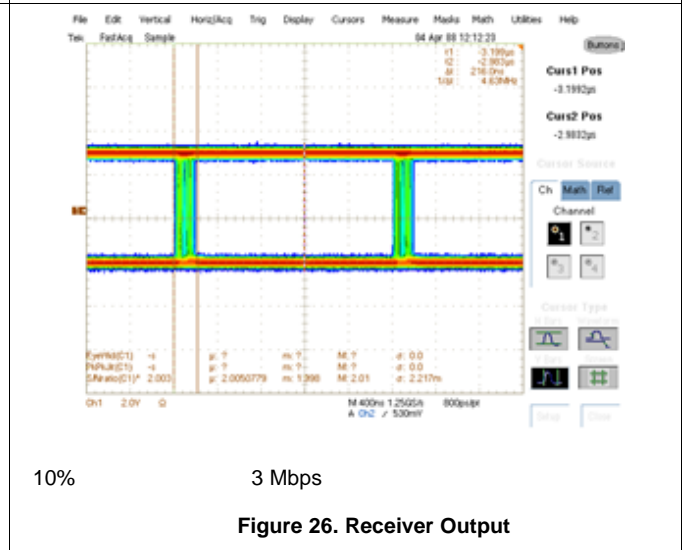
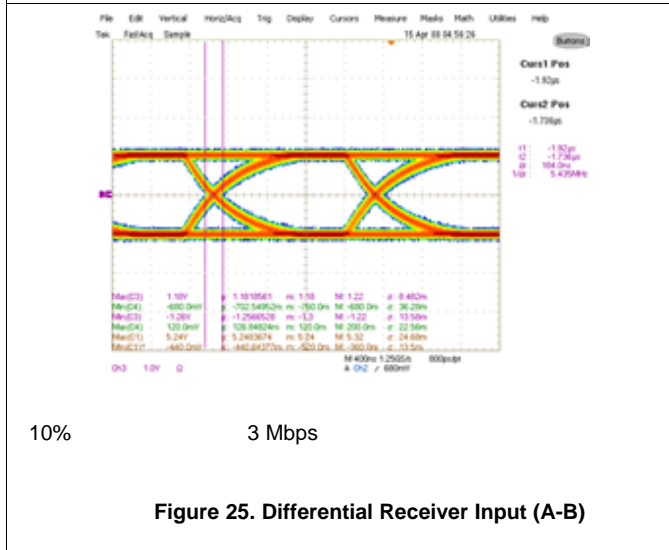
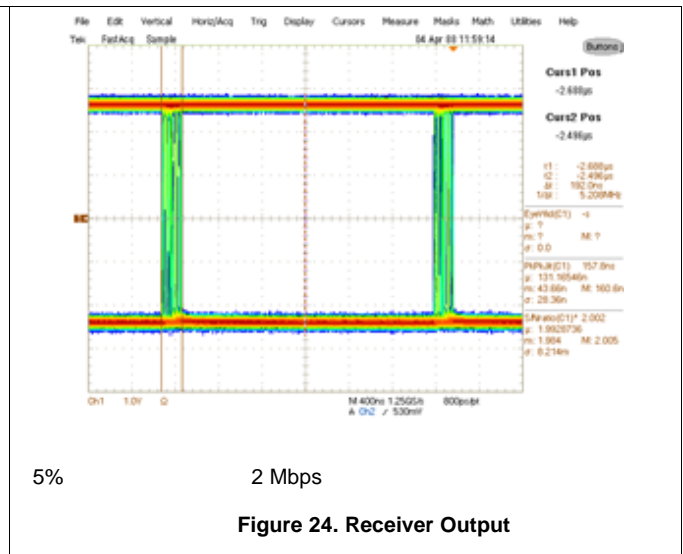
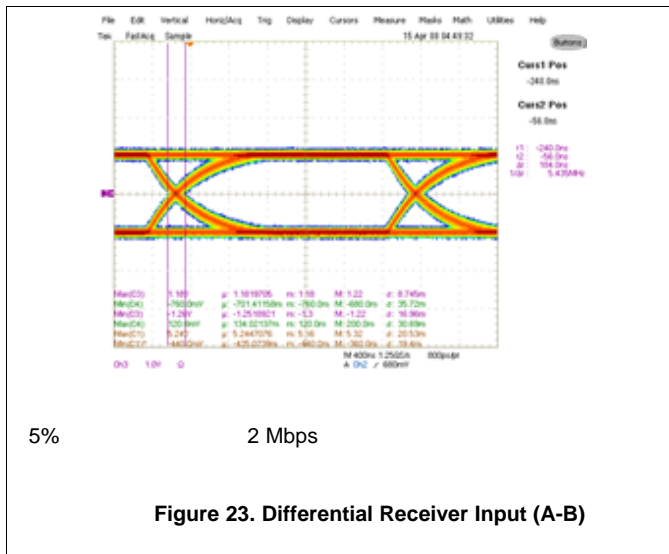


### 4.4 Eye Diagrams, 4000 Feet

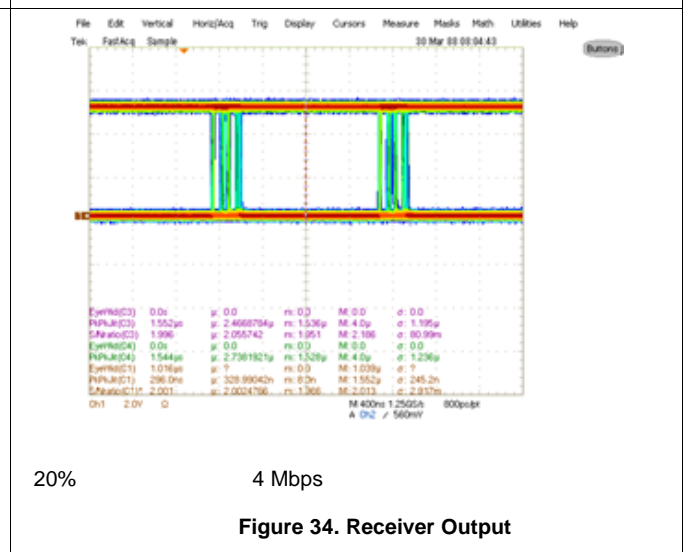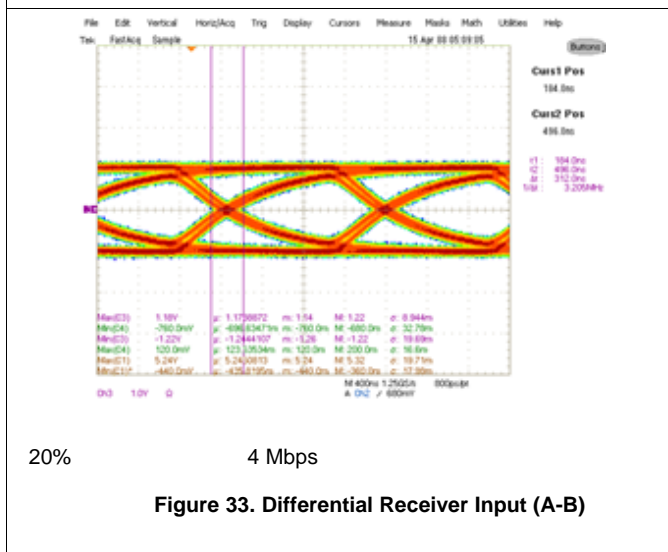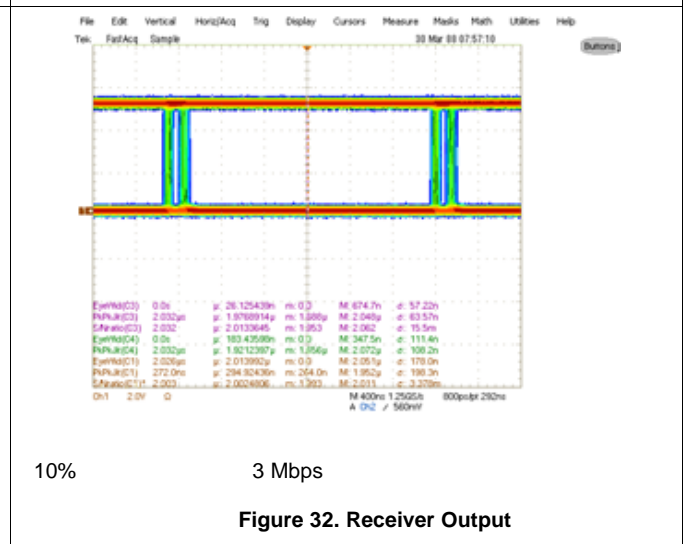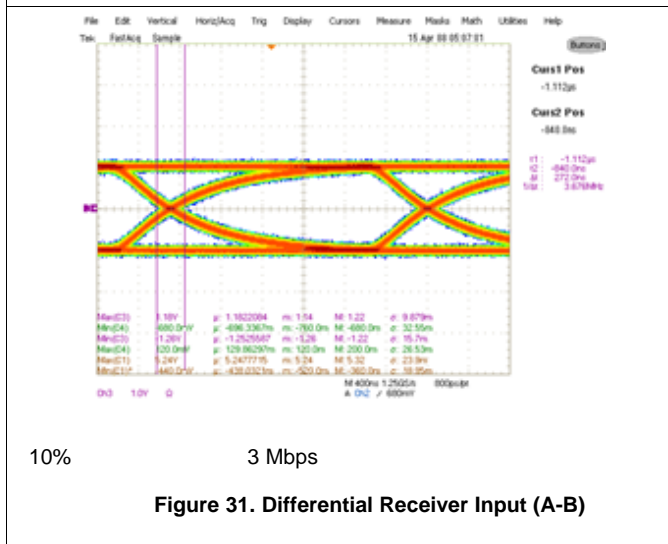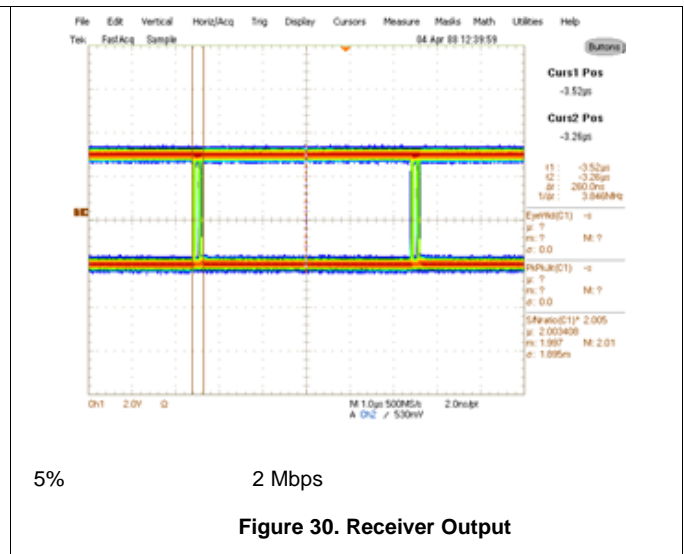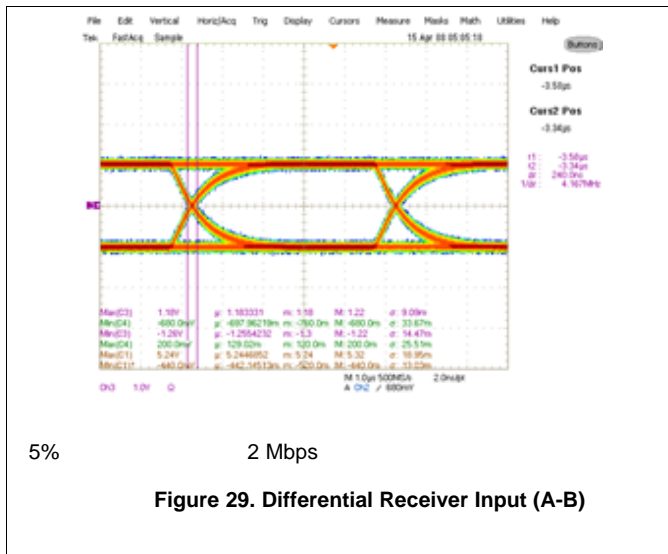



### 4.5 Eye Diagrams, 5000 Feet

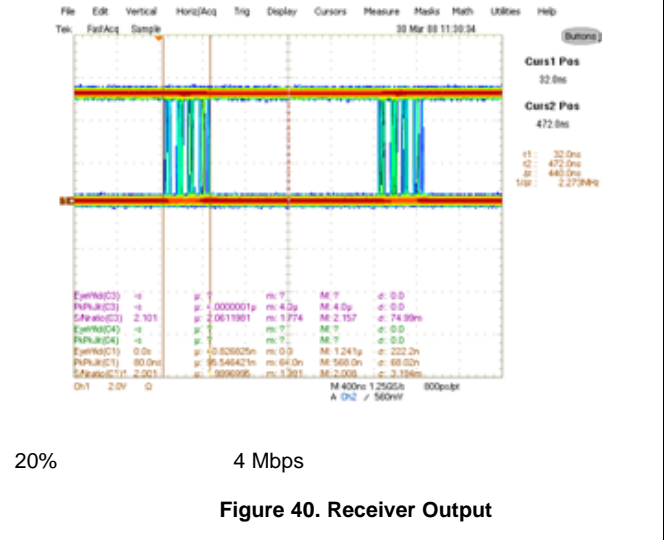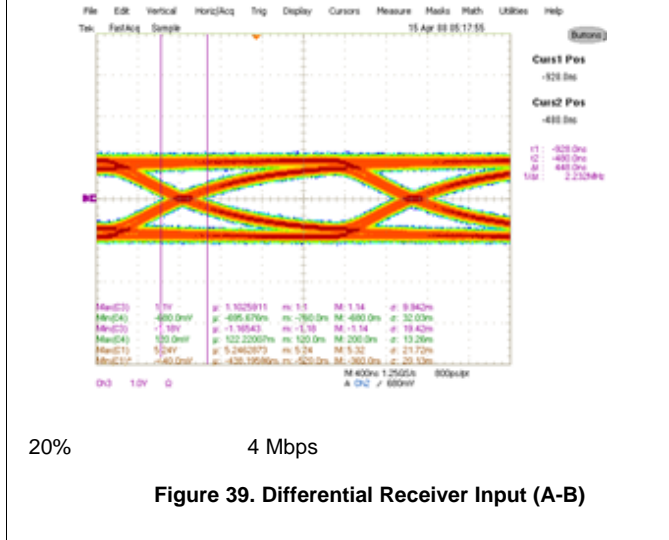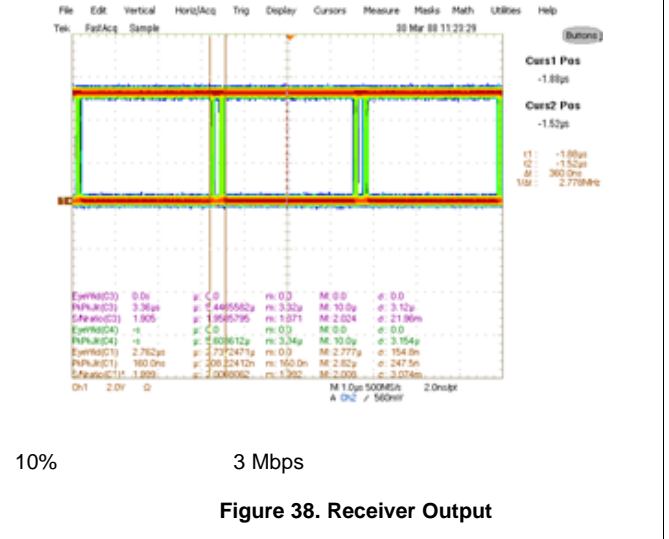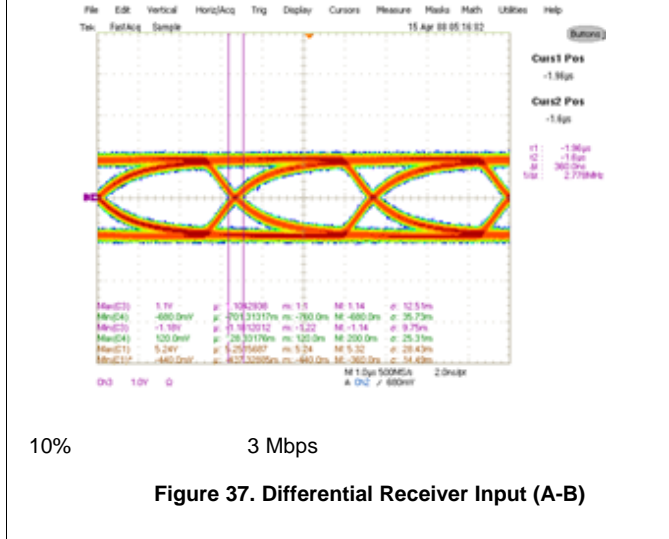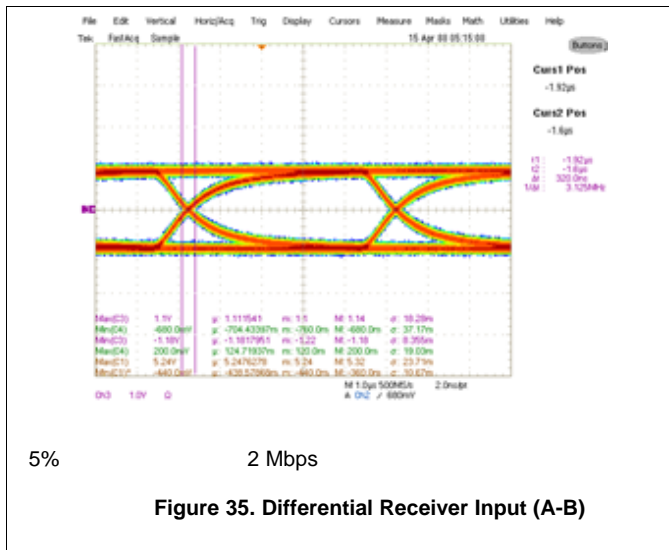

## 5 Summary

Jitter serves to be a direct indicator of signal quality largely determined by the characteristics of the cable used. The data presented in this report demonstrates that the THVD1550 device provides fairly long-reach data communication over low cost, common cabling. It also gives the user an idea of which data rates and cable lengths provide certain jitter percentages for their designs.

## IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2017, Texas Instruments Incorporated