



REVISIONS			
REV	DESCRIPTION	APPR	DATE

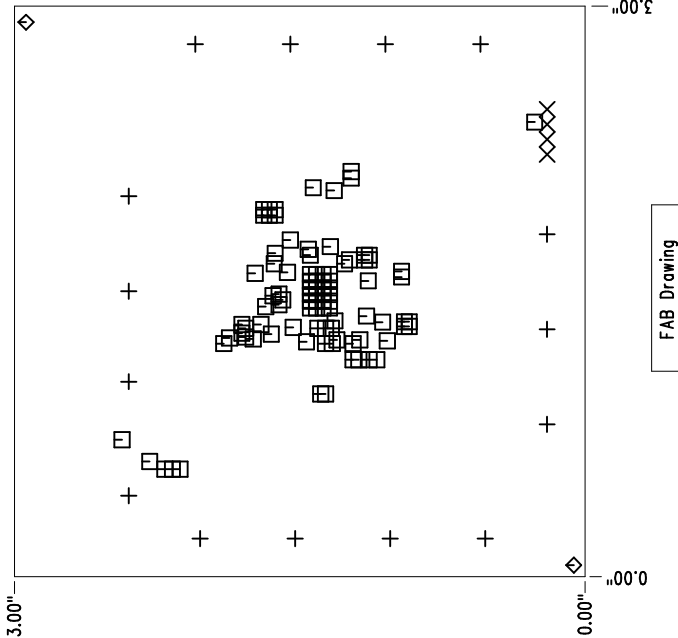

- NOTES : Unless Otherwise Specified**
1. FAB PER IPC-A-600. PCBs ARE TO BE ROHS COMPLIANT.
 2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON OUTER LAYERS.
1 OZ. COPPER FINISH ON INNER LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
 3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
0.000 ARE PRIMARY DATUMS.
 4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003
INCH IN RELATION TO CENTER
 5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
GOLD IMMERSION.

6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE
BUT YOU MAY MODIFY PAD SIZE TO MEET END FINISH.
8. SCORING:



SIZE	QTY	SYM	PLATED	TOL
95	15	+	YES	+/-0.0
35	4	X	YES	+/-0.0
10	95	□	YES	+/-0.0
70	2	◇	NO	+/-0.0

FAB DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ± 1
2 PLACE ± .01 3 PLACE ± .005
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994

APPROVALS		INIT		DATE	
DRAWN	CHECK				
DESIGN	ENG	JUNE WU	Kevin Huang	3/20/06	3/20/06
TITLE: LT3513EUHF, 2MHz High Current 5 Output Switching Regulator For TFT - LCD Panels		SIZE A		REV. A	
1630 McCarthy Blvd. Milpitas, CA 95035 LINEAR TECHNOLOGY Phi: (408)432-1900		DC1028A		SHT 1 of 1	