

LT3574

Isolated Monolithic Flyback Converter

DESCRIPTION

Demonstration circuit 1636A is an isolated flyback converter featuring the LT[®]3574. This demo circuit is designed for a 5.0V output from a 10V to 30V input. The maximum output current is 0.5A when the input voltage is higher than 20V. No third winding or opto-isolator is required for regulation. The part senses the isolated output voltage directly from the primary-side flyback waveform.

The LT3574 operates with input supply voltages from 3V to 40V, and can deliver an output power up to 3W with no external power switch. The LT3574 utilizes boundary mode operation to provide a small magnetic solution

with improved load regulation. The LT3574 can be used in industrial, automotive and medical applications where an isolated output is required.

The LT3574 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this quick start guide for demo circuit 1636A.

Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

PARAMETER	CONDITION	MIN	TYP	MAX	UNITS
Input Voltage		10		30	V
Output Voltage V _{OUT}	V _{IN} = 10V ~ 30V	4.75	5.0	5.25	V
Maximum Output Current I _{OUT}	V _{IN} = 10V ~ 20V	0.35			A
	V _{IN} = 20V ~ 30V	0.50			A
Switching Frequency	V _{IN} = 12V, I _{OUT} = 0.35A		200		kHz
	V _{IN} = 24V, I _{OUT} = 0.5A		270		kHz
Voltage Ripple V _{OUT}	V _{IN} = 24V, I _{OUT} = 0.5A		50		mV
Efficiency	V _{IN} = 24V, I _{OUT} = 0.5A		84		%

QUICK START PROCEDURE

Demo circuit 1636A is easy to set up to evaluate the performance of the LT3574. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

Note: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. See Figure 2 for proper scope probe technique.

1. With power off, connect the input power supply to VIN and GND.
2. Turn on the power at the input.

Note: Make sure that the input voltage does not exceed 30V.

3. Check for the proper output voltages.

Note: If there is no output, temporarily disconnect the load to make sure that the load current is not set too high.

4. Once the proper output voltage is established, adjust the load current within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

QUICK START PROCEDURE

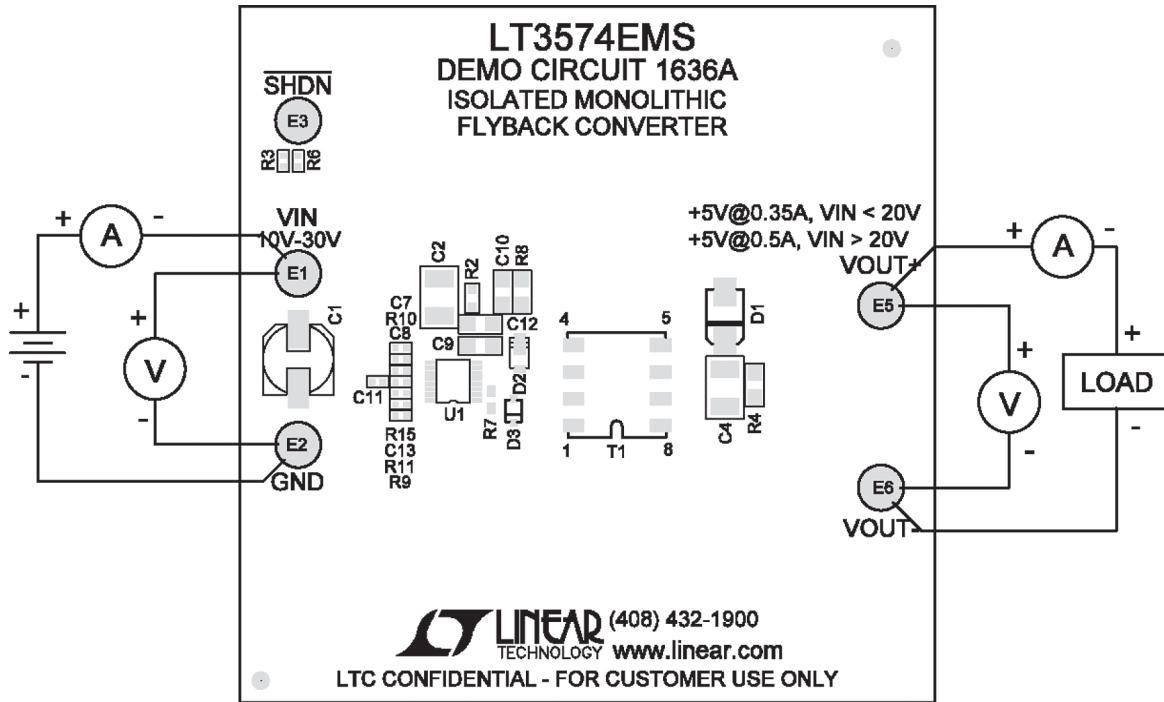


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple

DEMO MANUAL DC1636A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C2	CAP, 1210 4.7 μ F 10% 50V X7R	AVX 12105C475KAT2A
2	1	C4	CAP, 1210 47 μ F 10% 10V X7R	MURATA GRM32ER71A476K
3	1	C7	CAP, 0402 0.1 μ F 10% 25V X5R	TDK C1005X5R1E104K
4	1	C8	CAP, 0402 100pF 5% 50V NPO	AVX 04025A101JAT2A
5	2	C12, C9	CAP, 0805 1 μ F 10% 50V X7R	MURATA GRM21BR71H105K
6	1	C10	CAP, 0805 0.22 μ F 10% 50V X7R	TAIYO YUDEN UMK212BJ224KG-T
7	1	C11	CAP, 0402 4700pF 10% 50V X7R	TDK C1005X7R1H472K
8	1	C13	CAP, 0402 10pF 5% 50V NPO	MURATA1555C1H100JZ01D
9	1	D1	DIODE, SCHOTTKY, BARRIER RECTIFIER 2A	DIODES INC B240A-13-F
10	1	D2	DIODE, RECTIFIER, BARRIER, SCHOTTKY 1.0A	DIODES INC. DFLS1100
11	1	D3	DIODE, SCHOTTKY SOD323	CENTRAL SEMI CMDSH-3
12	1	R3	RES, 0402 357K OHMS 1% 1/16W	VISHAY CRCW0402357KFKED
13	1	R6	RES, 0402 93.1k 1% 1/16W	VISHAY CRCW040293K1FKED
14	1	R7	RES, 0402 84.5k 1% 1/16W	VISHAY CRCW040284K5FKED
15	1	R8	RES, 0805 4.02k 1% 1/8W	VISHAY CRCW08054K02FKEA
16	1	R9	RES, 0402 20k 1% 1/16W	VISHAY CRCW040220K0FKED
17	1	R10	RES, 0402 10k 1% 1/16W	VISHAY CRCW040210K0FKED
18	1	R11	RES, 0402 6.04k 1% 1/16W	NIC NRC04F6041TRF
19	1	R15	RES, 0402 12.4k 1% 1/16W	VISHAY CRCW040212K4FKED
20	1	T1	TRANSFORMER	WURTH 750370041
21	1	U1	IC, MONOLITHIC FLYBACK CONVERTER	LINEAR TECH LT3574EMS
Additional Demo Board Circuit Components				
1	1	C1	CAP, 22 μ F 20% 50V ELECT.	SANYO 50CE22BS
2	0	C5	CAP, 22 μ F 20% 50V ELECT. OPTION	SANYO 50CE22BS OPTION
3	0	C14	CAP, 1206 0.033 μ F 10% 50V X7R OPTION	AVX 12065C333KAT2A OPTION
4	0	C19	CAP, 1210 4.7 μ F 10% 50V X7R OPTION	MURATA GRM32ER71H475K OPTION
5	0	C20	CAP, 0603 0.01 μ F 10% 50V X7R OPTION	NIC NMC0603X7R104K50TRPF OPTION
6	0	FB1	FERRITE BEAD OPTION	TAIYO YUDEN FB MJ3216HS800 OPTION
7	0	L1	IND, 10 μ H OPTION	SUMIDA CDRH4D22/HP OPTION
8	0	R2	RES, 0603 OPTION	OPTION
9	1	R4	RES, 0805 1.4k 1% 1/8W	VISHAY CRCW08051K40FKEA
Hardware-For Demo Board Only				
1	5	E1, E2, E3, E5, E6	TURRET	MILL-MAX 2501-2-00-80-00-00-07-0

SCHEMATIC DIAGRAM

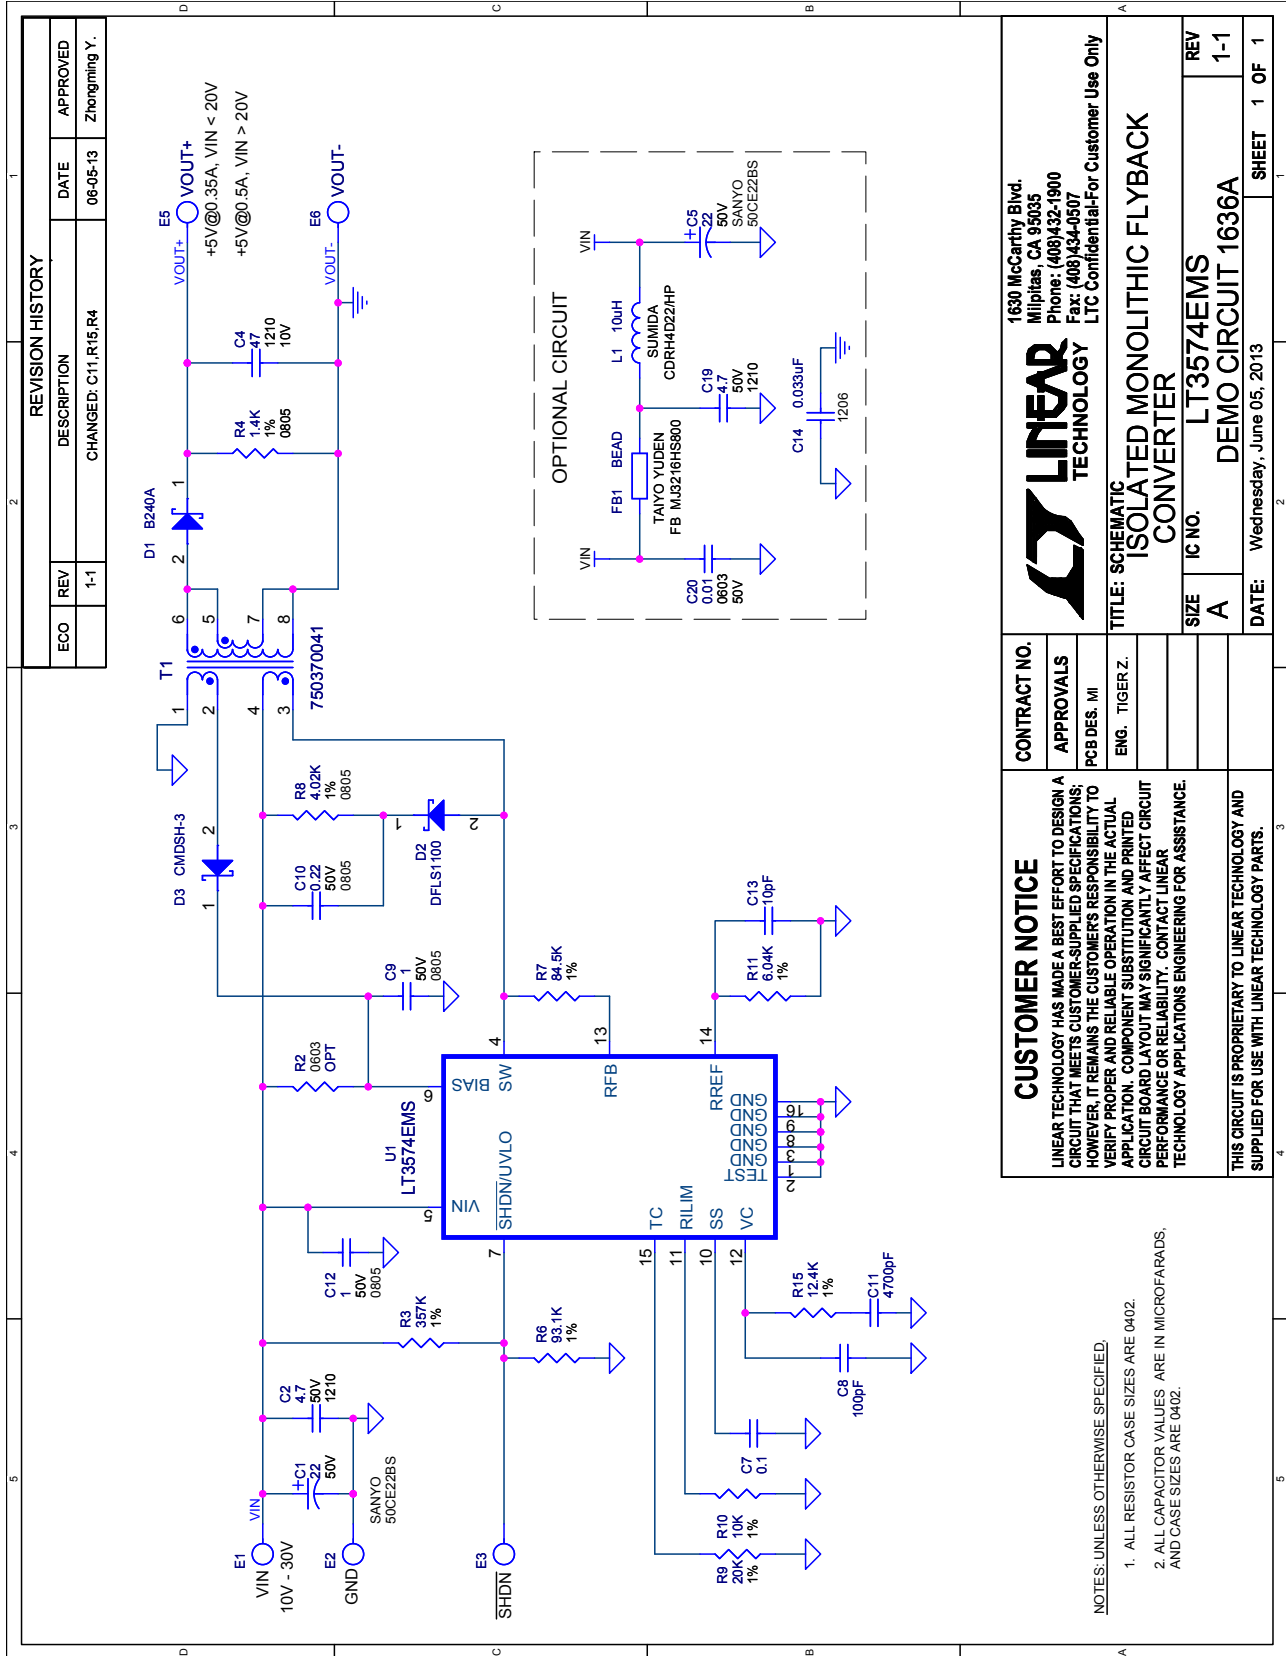

REVISION HISTORY			
ECO	REV	DESCRIPTION	DATE
	1-1	CHANGED: C11, R15, R4	06-05-13
			Zhongming Y.

LINEAR TECHNOLOGY
 1630 McCarthy Blvd.
 Milpitas, CA 95035
 Phone: (408)432-1900
 Fax: (408)434-0507
 LTC Confidential-For Customer Use Only

TITLE: SCHEMATIC ISOLATED MONOLITHIC FLYBACK CONVERTER

CONTRACT NO.	
APPROVALS	
PCB DES. M	
ENG. TIGER Z.	
SIZE	A
IC NO.	LT3574EMS
REV	1-1
DATE	Wednesday, June 05, 2013
SHEET	1 OF 1

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

- NOTES: UNLESS OTHERWISE SPECIFIED,
1. ALL RESISTOR CASE SIZES ARE 0402.
 2. ALL CAPACITOR VALUES ARE IN MICROFARADS, AND CASE SIZES ARE 0402.



Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

DEMO MANUAL DC1636A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation