




LAYER STRUCTURE

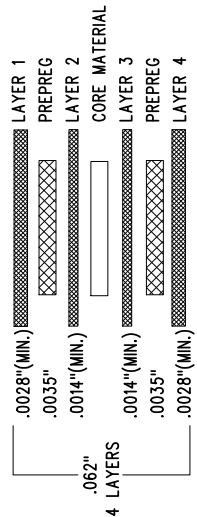

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. FAB PER IPC-A-600.
- 2. MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- 3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
- 4. DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- 5. FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
- 6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- 7. PCBs ARE TO BE RoHS COMPLIANT.

8. SCORING FOR PANELIZED PCB:

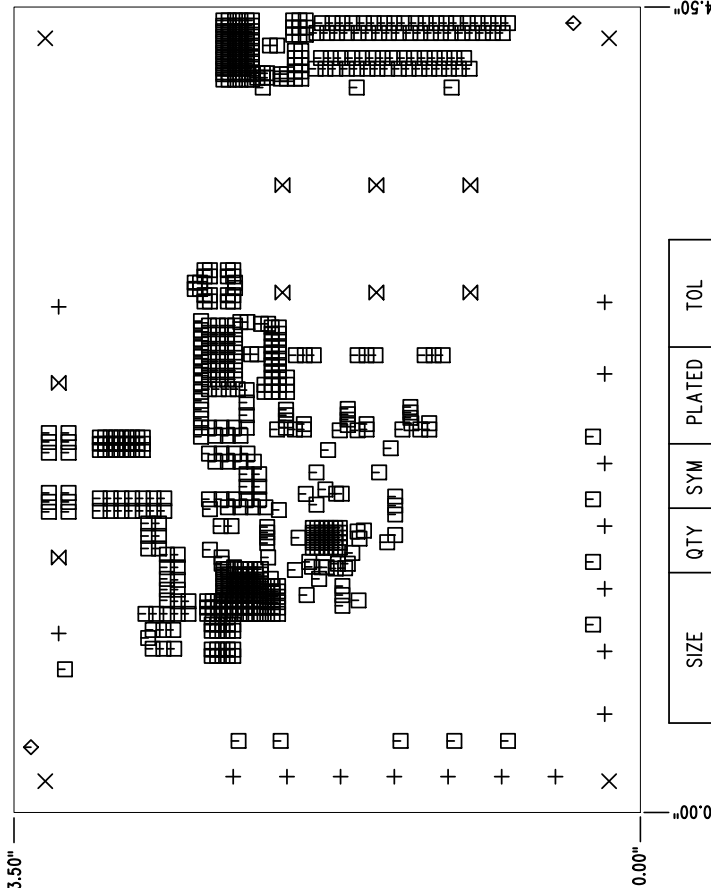

SIZE	QTY	SYM	PLATED	TOL
0.094	16	+	YES	+/-0.003
0.187	4	X	NO	+/-0.003
0.01	633	□	YES	+/-0.003
0.07	2	◇	NO	+/-0.003
0.205	8	⊗	YES	+/-0.003

- ADDITIONAL REQUIREMENT FOR PROTOTYPE FAB ONLY:
- 1. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
- ADDITIONAL REQUIREMENTS FOR PRODUCTION FAB ONLY:
- 1. PROVIDE COMPLIANCE CERTIFICATES FOR RoHS, REACH AND CONFLICT-FREE MINERALS.
 - 2. SOLDERABILITY BOARD WITH TEST RESULTS.
 - 3. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
 - 4. VACUUM PACKED WITH DESICCANT.
 - 5. FULL PANEL WITH NO REJECT.

1830 MCCARTHY BLVD
MILPITAS, CA 95035
PH: (408)432-1800
FAX: (408)432-1800
LTC CONFIDENTIAL -
FOR CUSTOMER USE ONLY

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES
TOLERANCES:
0.XX" = ±0.01"
0.XXX" = ±0.005"
INTERPRET DIM AND TOL
PER ASME Y14.5M-1994
THIRD ANGLE PROJECTION

TITLE: FABRICATION DRAWING
HIGH CURRENT SYNCHRONOUS
STEP-DOWN LED DRIVER

SIZE IC NO. REV
N/A LT3744EUHE 1

FILENAME: DC2339A-1.PCB SHT 1 OF 1