


Component Side

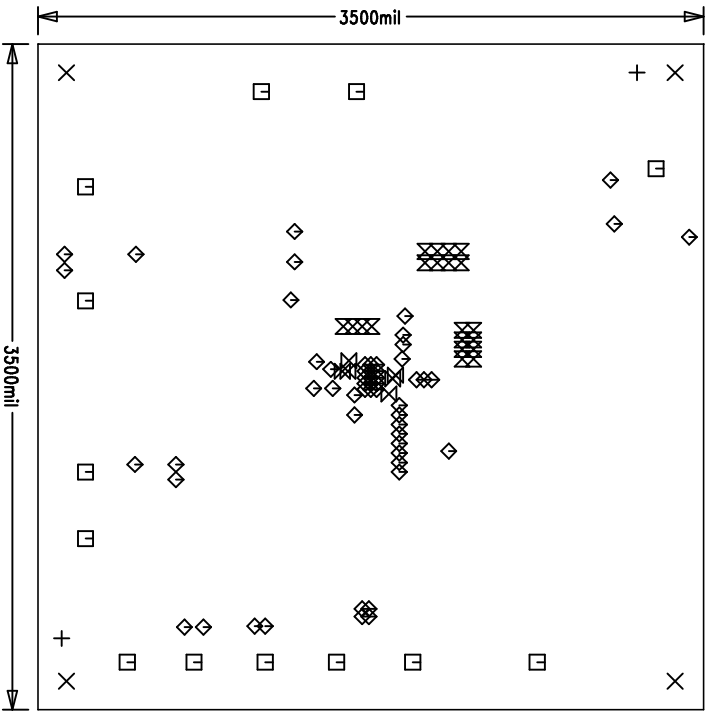


SIZE	QTY	SYM	PLATED	TOL
70	2	+	NO	+/-3mil
187	4	X	YES	+/-3mil
94	13	□	YES	+/-3mil
8	57	◇	YES	+/-3mil
6	6	⊗	YES	+/-3mil
25	20	⊗	YES	+/-3mil

REVISIONS			
REV	DESCRIPTION	APPR	DATE
0	1st Release		

NOTES: UNLESS OTHERWISE SPECIFIED:

- ARTWORK P/N DEMO CIRCUIT 1319B
- FAB PER IPC-A-600, 4-layers.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
.062 +/- .005 INCH THICKNESS WITH 2 OZ.
COPPER FINISH ON EXTERNAL LAYERS AND
1 OZ. COPPER ON TWO INTERNAL LAYERS.
FLAMMABILITY RATING: 94 V-2 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
- BOARD: SELECTIVE PLATED BOARD. SOLDER
MASK OVER BARE COPPER, COLOR, GREEN LPT.
GOLD IMMERSION BOTH SIDES.
SILKSCREEN COMPONENT SIDE WITH WHITE NON-
CONDUCTIVE INK.
PLATE THRU ALL HOLES WITH COPPER
MIN. PLATING THICKNESS: 1 OZ. EXCEPT
WHERE PLATING NOT REQUIRED
- DRILL: ALL HOLES SHALL BE DRILLED +/-3MIL
WITH RESPECT TO CTR. OF DRILLED PAD.
ALL HOLES FINISHED SIZE AFTER PLATING.
- DO NOT ALTER ARTWORK TO ADD LOGO OR DATE CODE BUT YOU MAY
MODIFY PAD SIZE TO MEET END FINISH.
- PCBs SHOULD BE RoHS COMPLIANT.
- SCORING:



Fabrication Drawing

APPROVALS		LINEAR TECHNOLOGY	
DRAWN	INTT	1630 McCarthy Blvd Milpitas, CA 95035 PH: (408)432-1900	
CHECK	Rudy B		
DESIGN			
ENGR	KSZ		
TITLE: L13756MSE/-1/-2		High Voltage LED Controller	
FD		Demo Circuit 1319B	REV. 0
SCALE = NONE		Sheet 1 of 1	