



REVISIONS			
REV	DESCRIPTION	APPR	DATE


NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600. PCBs ARE TO BE ROHS COMPLIANT.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON OUTER LAYERS.
1 OZ. COPPER FINISH ON INNER LAYERS.
THICKNESS .062 +/--.006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/--.003
INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
GOLD IMMERSION BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE
BUT YOU MAY MODIFY PAD SIZE TO MEET END FINISH.
8. SCORING: (FOR PRODUCTION RUN ONLY)

SIZE	QTY	SYM	PLATED	TOL
70	2	+	NO	+/-0.003
10	18	X	YES	+/-0.003
95	7	□	YES	+/-0.003
35	3	◇	YES	+/-0.003
15	56	⊗	YES	+/-0.003

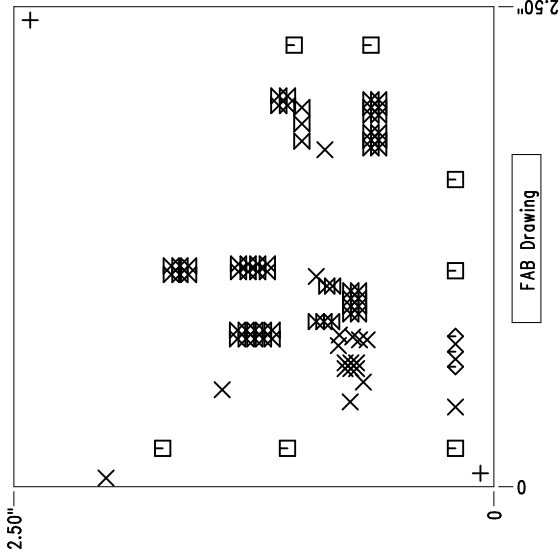

FAB DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ± 1 2 PLACE ± .01 3 PLACE ± .005 INTERPRET DIM AND TOL PER ASME Y14.5M - 1994	APPROVALS		 LINEAR TECHNOLOGY	1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900			
	PCB DESIGNER	DATE					
	J. WU	1/10/13					
	ENGINEER	W. Gu	1/10/13	TITLE: LT3758AEMSE High Efficiency SEPIC Converter			
	CHECK			SIZE	A	DC1342B	REV. 1
	SCALE = NONE				SHT 1 of 1		