


# Keysight Technologies

## Low Frequency RFID Tag Characterization

### Using the N9322C Basic Spectrum Analyzer (BSA)

Application Note

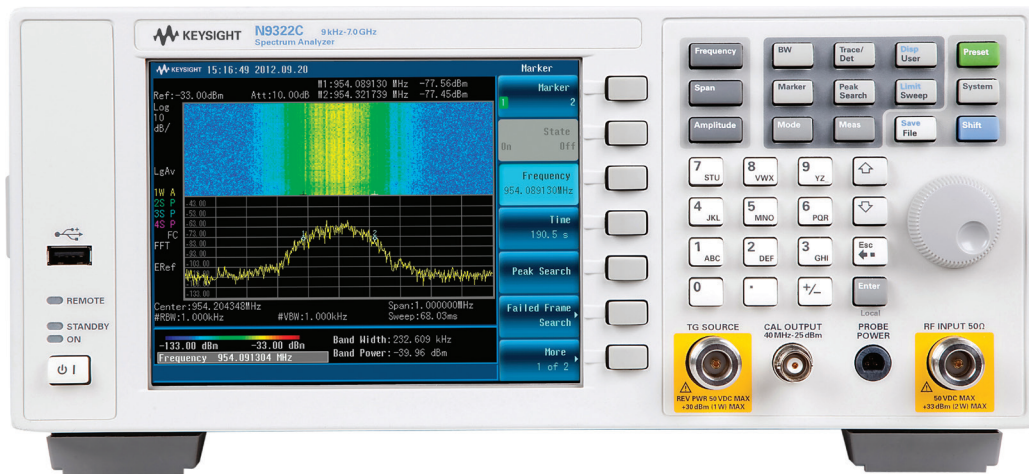

## Abstract

The resonance frequency of a radio frequency identification (RFID) tag is a key factor that determines the effective radio communication distance between the tag and the reader. Measuring the resonance frequency of an RFID tag is easy using the Keysight Technologies, Inc. N9322C basic spectrum analyzer (BSA).

## About RFID Tags

Radio frequency ID (RFID) systems rely on RFID tags, which are small transponders (a combined radio receiver and transmitter) that transmit identity information over a short distance when asked. Generally, an RFID tag contains two parts. One is an integrated circuit for storing and processing information, and modulating and de-modulating an RF signal. Another part is an antenna for receiving and transmitting signals to the reader (see Figure 1).

The resonance frequency of the RFID tag is one of the key factors that impact the effective communication distance between the reader and RFID tags. When RFID tags are packaged, a non-contact coupling method can be used to measure their resonance frequencies, which corresponds to the negative peak of its return loss characteristic curve.

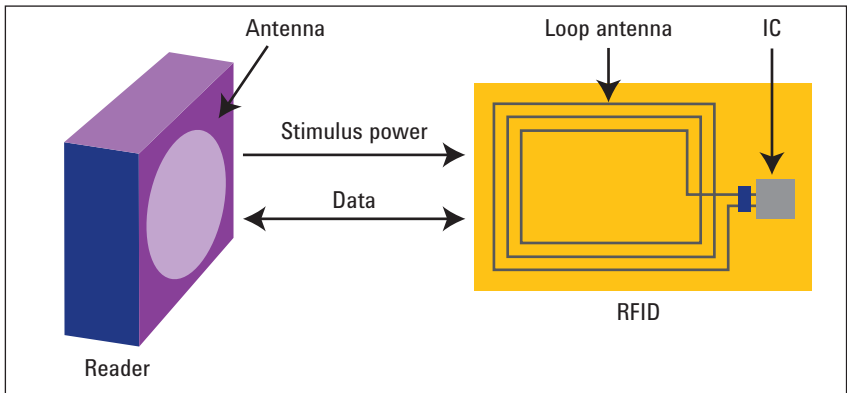


Figure 1. An overview of an RFID system

## Measuring a 13.56 MHz Passive RFID Tag with the N9322C Basic Spectrum Analyzer (BSA)

The N9322C is a multi-use RF analyzer that spans to spectrum analysis, transmission measurement, and reflection measurement. By simply adding the tracking generator (Option TG7) and the reflection measurement application (Option RM7), the N9322C BSA is capable of measuring the return loss of RFID tags:

- The Option TG7 tracking generator contains a built-in VSWR bridge, which makes the reflection measurement more convenient to perform using the N9322C BSA versus using other analyzers that require an external bridge.
- In addition, the N9322C's reflection measurement mode uses a high precision open-short-load (OSL) calibration procedure, which greatly reduces system errors.

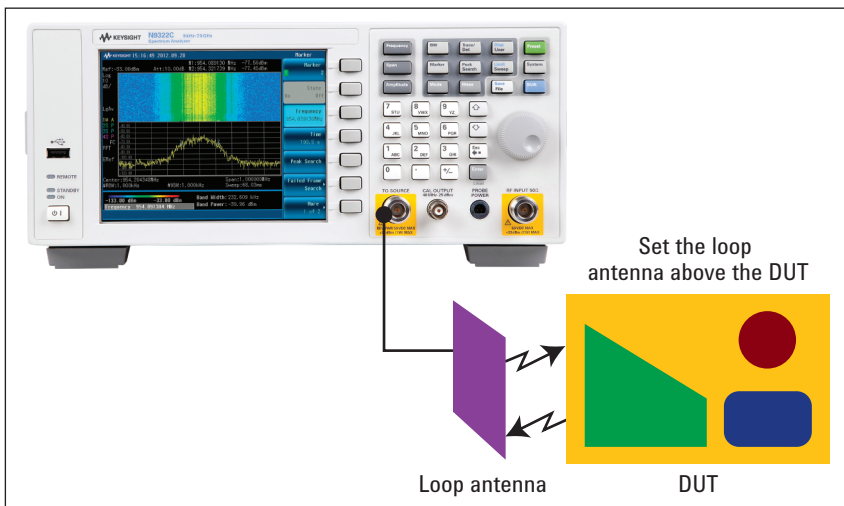


Figure 2. Simple test setup for reflection measurements

## Demonstration: Measuring an RFID Tag with the N9322C BSA

- In this demonstration, we utilized a 13.56 MHz RFID tag, which follows the ISO/IEC 14443 type A standard.
- In the following demonstration procedure, text in [ ] refers to a hardkey and { } refers to a softkey on the N9322C spectrum analyzer
- Instrument and accessories used in this demonstration include:
  - N9322C basic spectrum analyzer (BSA), with Options TG7 and RM7 enabled
  - N9311X-201 precision mechanical open-short-load (OSL) calibrator
  - Near field probe (used for radiating RF power from the tracking generator to activate the RFID tag)
  - A sample RFID tag (13.56 MHz)
  - E5071C ENA network analyzer (used to compare the measurement result to that obtained using the N9322C)

## Step 1. Set up the measurement parameters

- Press [Mode] > {Reflection measurement}
- Press [Frequency] > {Start Freq} > [12] > {MHz} to set the start frequency to 12 MHz
- Press [Frequency] > {Stop Freq} > [15] > {MHz} to set the stop frequency to 15 MHz
- Toggle the {Cal. Type} to {Selected} in order to achieve the highest calibration accuracy within the frequency range of interest

## Step 2. Calibrate the N9322C BSA

- Press {Calibrate} and follow the instructions on the BSA to calibrate with the OSL calibrator (product number: N9311X-201)
- When finished, a “Calibrated” mark displays in the left upper corner of the screen
- Press [Amplitude] > {Scale/DIV} > [2] > {dB} to display the amplitude scale for easier observation

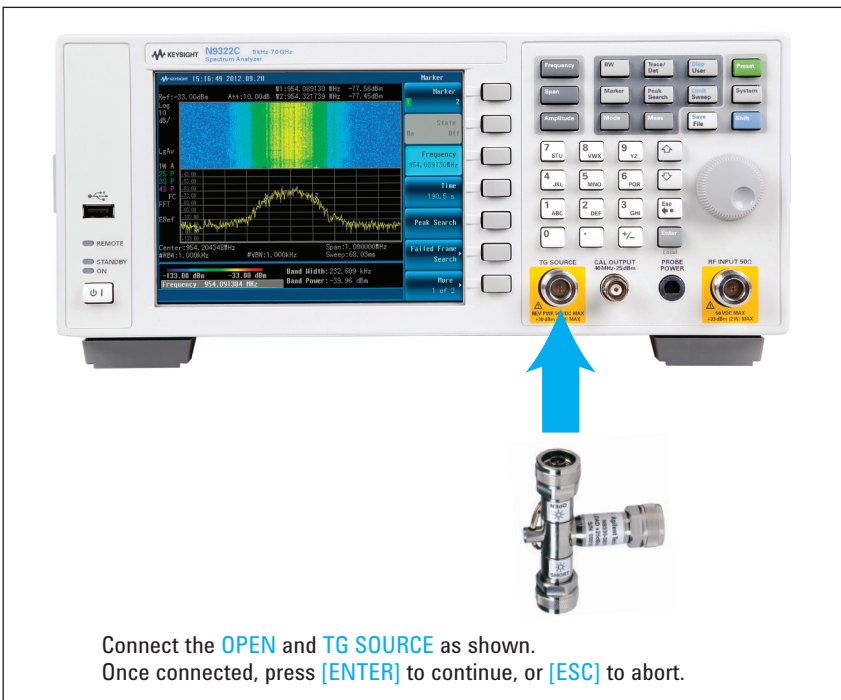


Figure 3. Performing OSL calibration on the N9322C BSA

### Step 3. Start measurement using a near field probe

- Connect the near field probe to the TG Output port of the N9322C BSA, and place the probe about 1 cm (0.4 in) above the sample RFID tag (see Figure 4)
- Use the Marker on the N9322C BSA to read the negative peak of the trace. You can also verify the measurement result using an E5071C ENA (see Figures 5 and 6)

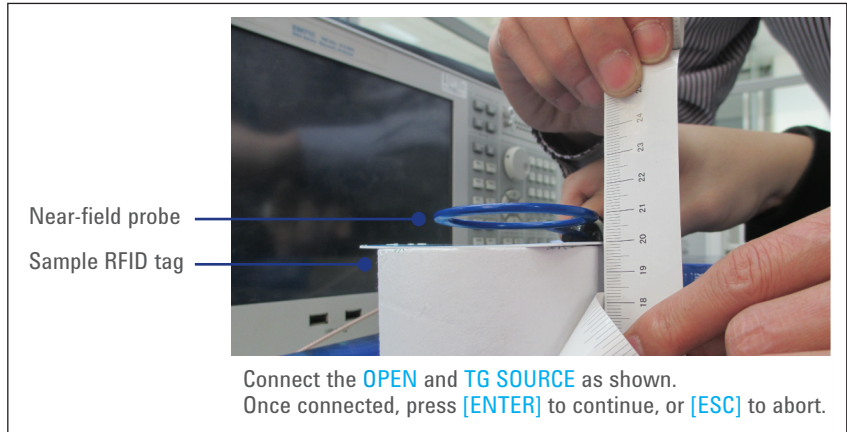


Figure 4. Use a close-field probe as the power radiator and collector

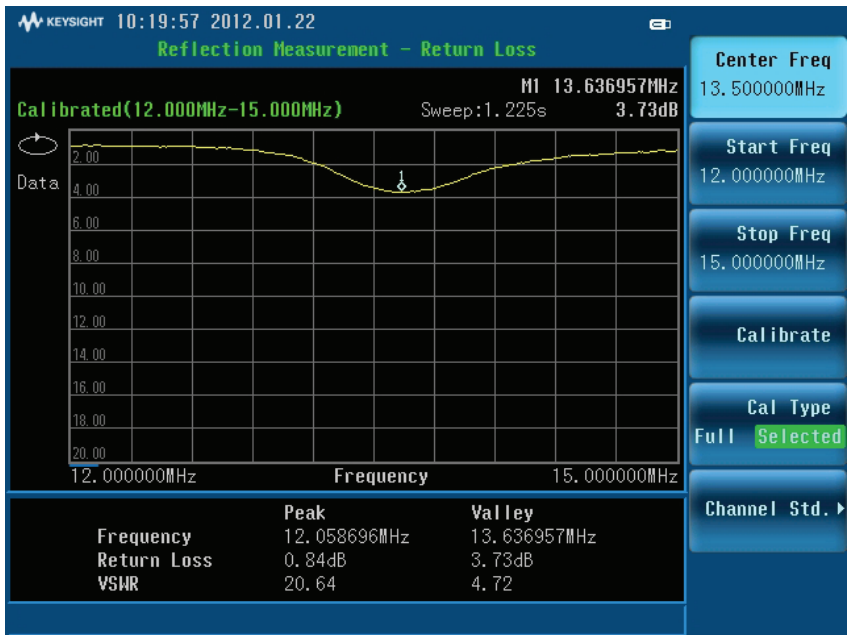


Figure 5. Return loss result measured with the N9322C BSA

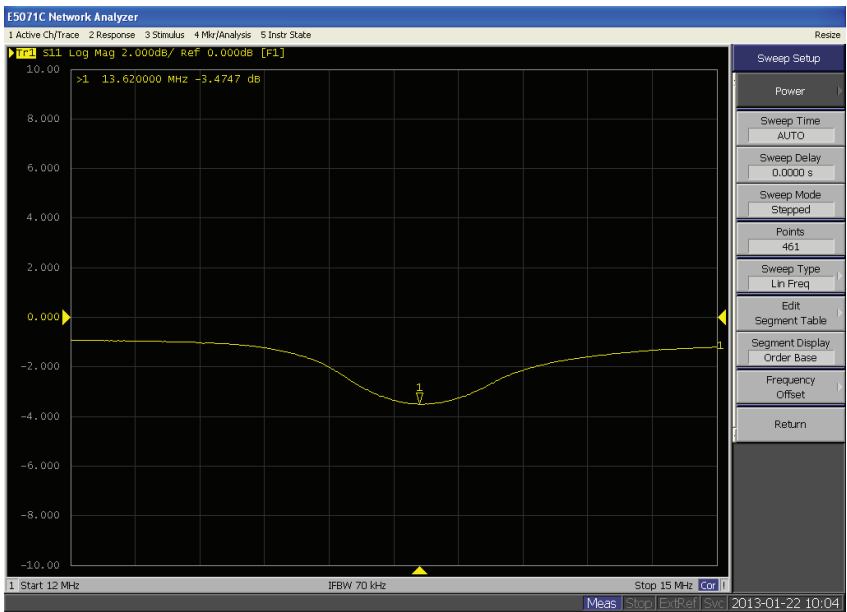


Figure 6. Return loss result measured with E5071C ENA

In order to get consistent measurement results between the N9322C BSA and E5071C ENA it is important the following items are set identically on both instruments:

- Output power level
- Number of trace points and amplitude scale
- Calibrator to implement the OSL calibration

## Summary

The N9322C basic spectrum analyzer (BSA) is a cost-effective and multi-use RF analyzer. It offers general purpose spectrum analysis, and also expands to one-port vector network analysis with the optional tracking generator and its built-in VSWR bridge.

In the RFID design process, you can easily measure the frequency and power output from the reader with the N9322C BSA. Using the tracking generator (Option TG7) and reflection measurement application (Option RM7), you can also address the return loss test needs of the tags.

## Ordering Information

| Product number | Description                             |
|----------------|---|
| N9322C         | Basic spectrum analyzer, 9 kHz to 7 GHz |
| N9322C-TG7     | Tracking generator, 5 MHz to 7 GHz      |
| N9322C-RM7     | Reflection measurement                  |
| N9311X-201     | 3-in-1 precision mechanic calibrator    |

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight’s commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/quality](http://www.keysight.com/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System



**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight’s measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/n9322c](http://www.keysight.com/find/n9322c)

For more information on Keysight Technologies’ products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

**Asia Pacific**

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

**Europe & Middle East**

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1800 832700   |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 0800 000154   |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-07-10-14)