


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A	PROTOTYPE RELEASE		

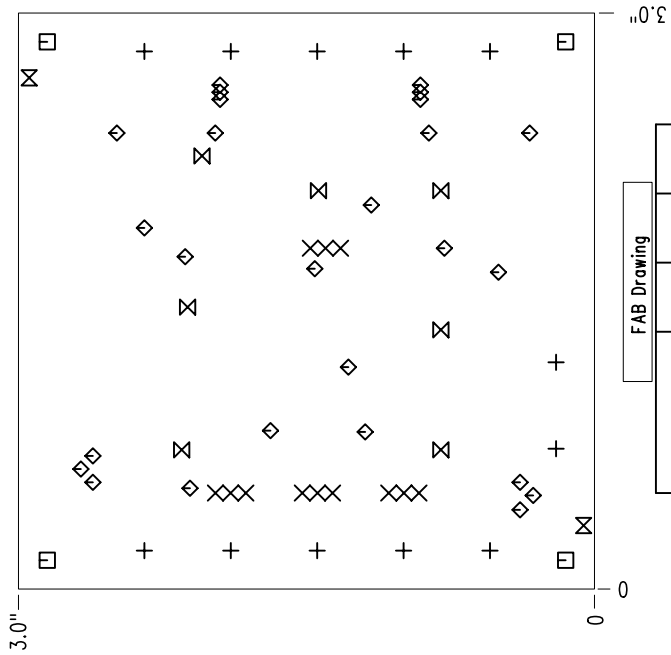


FAB Drawing


SIZE	QTY	SYM	PLTD
95	12	+	PLTD
35	12	X	PLTD
125	4	□	PLTD
15	26	◇	PLTD
65	7	⊗	PLTD
70	2	⊗	NPLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
.062 +/- .005 INCH THICKNESS WITH 2 OZ.  
COPPER FINISHED ON 2 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH  
HOLES WITH COPPER, .001 INCH THICK MIN. ALL  
HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003  
INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

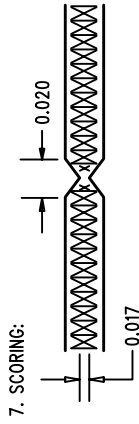

FAB DRAWING

<b>APPROVALS</b>		 <b>LINEAR TECHNOLOGY</b>		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	JUNE WU	3/27/03			
ENGR	V.Dworkin	3/27/03			
			TITLE:	LT4220EGN, +/-12V 2A Hot Swap Controller with External FETs	
			SIZE	A	REV. A
			DC665A		
SCALE = NONE			DES-250048		
			SHT 1 of 1		