



NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600.
2. MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
  - FINISHED THICKNESS TO BE 0.062 +/- .005
  - TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
  - FLAMMABILITY RATING: 94 V-0 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.  
0.00 ARE PRIMARY DATUMS.
4. DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.007" THICK MIN.
  - ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
  - HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
5. FINISH: -SNOBEC USING LPI BOTH SIDES, COLOR GREEN.
  - GOLD IMERSION BOTH SIDES.
  - FOR SILKSREENS: USE WHITE NON-CONDUCTIVE INK.
  - FOR NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. PCBs ARE TO BE RoHS COMPLIANT.
8. SCORING FOR PANELIZED PCB (PRODUCTION FAB ONLY):



SIZE	QTY	SYM	PLATED	TOL
0.187	4	+	YES	+/-0.003
0.095	11	X	YES	+/-0.003
0.035	8	□	YES	+/-0.003
0.035x43	6	◇	YES	+/-0.003
0.012	77	⋈	YES	+/-0.003


9. ADDITIONAL REQUIREMENT FOR PROTOTYPE FAB ONLY:
10. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
11. ADDITIONAL REQUIREMENTS FOR PRODUCTION FAB ONLY:
1. PROVIDE COMPLIANCE CERTIFICATES FOR ROHS, REACH AND CONFLICT-FREE MINERALS.
2. SOLDERABILITY BOARD WITH TEST RESULTS.
3. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
4. VACUUM PACKED WITH DESICCANT.
5. FULL PANEL WITH NO REJECT.

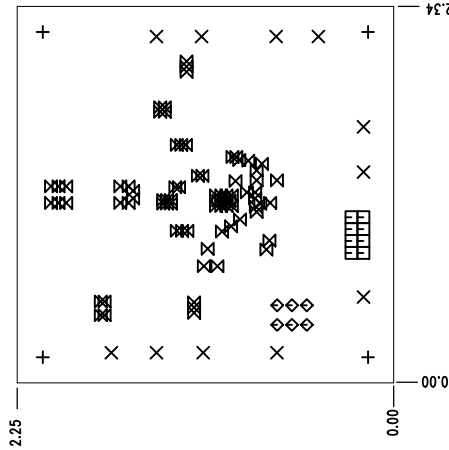

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
0.XX = ± 0.01  
0.XXX = ± 0.005  
INTERPRET DIM AND TOL  
PER ASME Y14.5M-1994  
THIRD ANGLE PROJECTION



APPROVALS	
PCB DES.	HZ
APP ENG.	Kurk M.
SCALE = NONE	

 <b>ANALOG DEVICES</b>	POWER BY: 1630 MCARTHY BLVD WILMINGTON, MA 01890 PH: (408) 435-3000 WWW.ANALOG.COM		
	FOR OUR CUSTOMER USE ONLY		
	TITLE: FABRICATION DRAWING		
	HIGH VOLTAGE LOW EM SYNCHRONOUS STEP-DOWN REGULATOR		
SIZE	IC NO.	L77101EUHE	REV
N/A	DCM CIRCUIT	2895A	1
FILENAME:	DC2895A.PCB		
SHT 1 OF 1			