



LAYER STRUCTURE

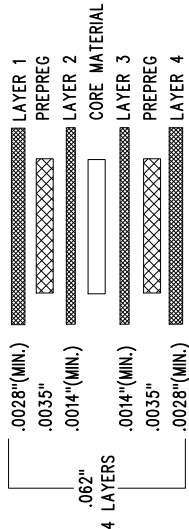

NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600.
2. MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS
AND 1 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
4. DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
-FOR VIAS SIZE > 0.01", VIAS HOLES NEED TO BE PLUGGED AND COVERED WITH SOLDERMASK.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
(LEAD FREE SOLDER CAN BE USED FOR PROTOTYPE)
5. FINISH: -SNOBC USING LPI BOTH SIDES, COLOR GREEN.
-DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
7. PCBs ARE TO BE ROHS COMPLIANT.
8. SCORING FOR PROTOTYPE AND PANELIZED PCB:




UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES:
0.XX" = +/-0.01"
0.XXX" = +/-0.005"
INTERPRET DIM AND TOL
PER ASME Y14.5M-1994
THIRD ANGLE PROJECTION



LINEAR TECHNOLOGY
4330 MCCARTHY BLVD
MURFreesboro, TN 37132
PH: (408) 432-8000
WWW.LINEARTECH.COM
E-MAIL: SALES@LINEARTECH.COM
FOR CUSTOMER USE ONLY

TITLE: FABRICATION DRAWING
LOW IQ BOOST/SEPIC/INVERTING
CONVERTER WITH 1A, 60V SWITCH

SIZE	IC NO.	REV
N/A	LT8330ES6	4
FILENAME:	DC2018A-4.PCB	SHT 1 OF 1

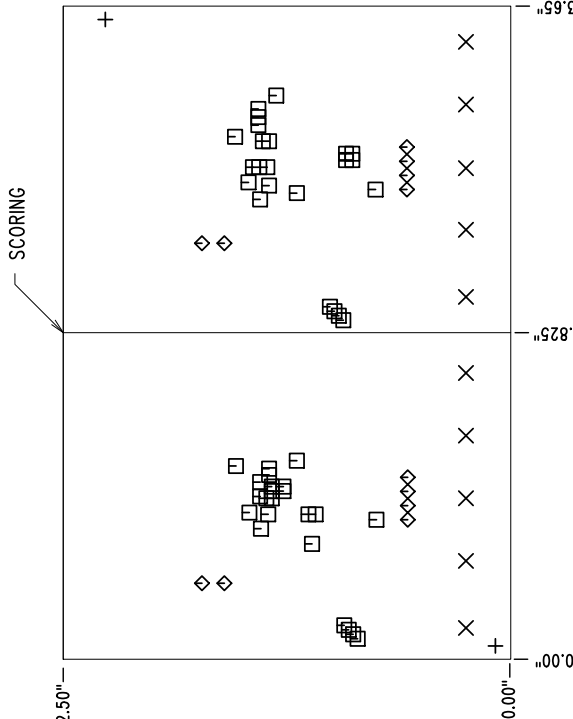

SIZE	QTY	SYM	PLATED	TOL
0.07	2	+	NO	+/-0.003
0.095	10	X	YES	+/-0.003
0.01	46	□	YES	+/-0.003
0.035	12	◇	YES	+/-0.003

- ADDITIONAL REQUIREMENT FOR PROTOTYPE FAB ONLY:
1. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
- ADDITIONAL REQUIREMENTS FOR PRODUCTION FAB ONLY:
1. PROVIDE COMPLIANCE CERTIFICATES FOR ROHS, REACH AND CONFLICT-FREE MINERALS.
 2. SOLDERABILITY BOARD WITH TEST RESULTS.
 3. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
 4. VACUUM PACKED WITH DESICCANT.
 5. FULL PANEL WITH NO REJECT.