

## LT3093 –20V, 200mA, Ultralow Noise, Ultrahigh PSRR Negative Linear Regulator

### DESCRIPTION

Demo circuit DC2952A features the [LT®3093](#), an ultralow noise, ultrahigh power supply rejection ratio (PSRR) negative low dropout (LDO) regulator. DC2952A operates over an input range of –3.8V to –20V, and can deliver up to 200mA output current. It features ultralow noise (0.8µVRMS from 10Hz to 100kHz) and very high PSRR (73dB at 1MHz).

The EN/UVLO of LT3093 is bidirectional and can be switched with either a positive or a negative voltage. LT3093 also offers programmable current limit functionality by connecting a resistor from ILIM to GND. The VIOC tracking function controls an up-stream switching converter to maintain a constant voltage across the regulator and hence minimize power dissipation. The power good feedback (PGFB) pin is used to set a programmable power good threshold, and activates the fast start-up circuitry. To

use the power good function, connect an external voltage source at VEXT. If power good and fast start-up functionality are not needed, tie PGFB to IN.

Built-in protection includes internal current limit with fold-back and thermal limit with hysteresis.

The LT3093 datasheet gives a complete description of the part, operation and applications information. The datasheet must be read in conjunction with this Demo Manual for demonstration circuit DC2952A. The LT3093 is assembled in 12-lead MSOP and 3mm x 3mm DFN packages with an exposed pad on the bottom-side of the IC. Proper board layout is essential for maximum thermal performance.

[Design files for this circuit board are available.](#)

All registered trademarks and trademarks are the property of their respective owners.

### PERFORMANCE SUMMARY Specifications are at T<sub>A</sub> = 25°C


| PARAMETER                                 | CONDITIONS                                         | MIN   | TYP   | MAX   | UNITS |
|-------------------------------------------|----------------------------------------------------|-------|-------|-------|-------|
| Input Voltage Range (V <sub>IN</sub> )    | I <sub>OUT</sub> = 100mA, V <sub>OUT</sub> = –3.3V | –20   |       | –3.8  | V     |
| Input Voltage Range (V <sub>IN</sub> )    | I <sub>OUT</sub> = 190mA, V <sub>OUT</sub> = –3.3V | –13*  |       | –3.8  | V     |
| Output Voltage (V <sub>OUT</sub> )        | V <sub>IN</sub> = –5V, I <sub>OUT</sub> = 190mA    | –3.39 | –3.32 | –3.25 | V     |
| Shutdown Input Current (I <sub>IN</sub> ) | V <sub>EN</sub> = 0V, V <sub>IN</sub> = –5V        |       | 3     |       | µA    |

\*The maximum input voltage for 100mA load current is set by a 60°C temperature rise of LT3093 on the demo circuit. Higher input voltage can be realized if larger copper area or forced-air cooling is applied. The output current is also limited by the input and output voltage differential; please refer to the datasheet for details.

## QUICK START PROCEDURE

Demonstration circuit DC2952A is easy to set up to evaluate the performance of the LT3093EDD. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect a load between the  $V_{OUT}$  and GND terminals.
  2. With power off, connect the input power supply to the  $V_{IN}$  and GND terminals.
  3. Apply  $-3.8V$  across  $V_{IN}$  to GND. The output voltage should be  $-3.32V \pm 3\%$  ( $-3.39V$  to  $-3.25V$ )
  4. Vary  $V_{IN}$  from  $-3.8V$  to  $-20V$  and vary the load from  $0mA$  to  $200mA$ .
- Note: The current limit may drop at high input-output differential voltage. Please refer to the datasheet for details. Make sure the power dissipation is below the thermal limit.
5. Apply a power source at VEXT. The PG pin voltage should be approximately equal to VEXT.
  6. Refer to Application Notes AN70 and AN159 for measuring output noise and PSRR.

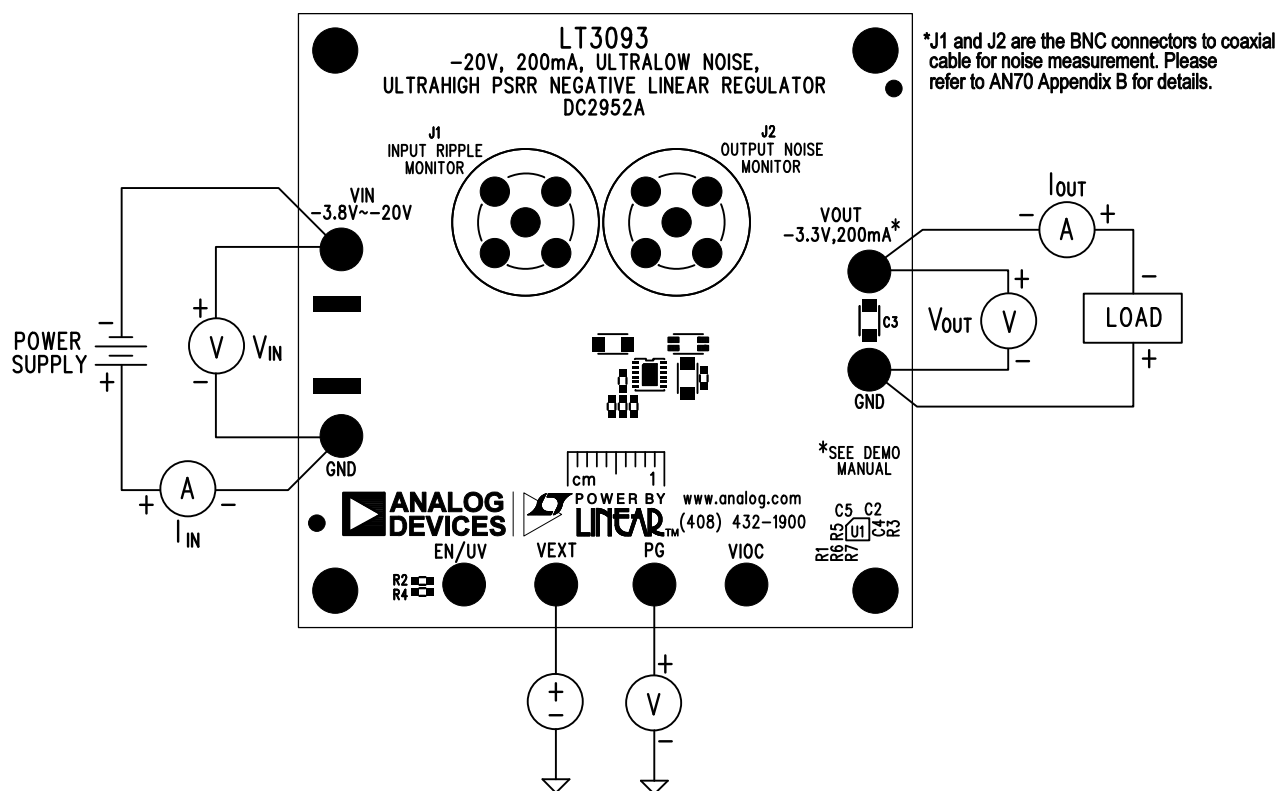

\*The maximum output current will be limited by internal current limit based on the input and output voltage differential. Please refer to the datasheet.

Figure 1. Test procedure setup drawing for DC2952A

## PCB LAYOUT

### PCB LAYOUT

#### 1. Best PSRR Performance: PCB Layout for Input Trace

For applications utilizing the LT3093 for post-regulating switching converters, placing a capacitor directly at the LT3093 input results in AC current (at the switching frequency) flowing near the LT3093. Without careful attention to PCB layout, this relatively high frequency switching current generates an electromagnetic field (EMF) that couples to the LT3093 output, thereby degrading its effective PSRR. While highly dependent on the PCB, the switching pre-regulator, and the input capacitor size among other factors, the PSRR degradation can easily be 30dB at 1MHz. This degradation is present even if the LT3093 is de-soldered from the board, because it effectively degrades the PSRR of the PC board itself. While negligible for conventional low PSRR LDOs, the LT3093's ultrahigh PSRR requires careful attention to higher order parasitics in order to realize the full performance offered by the regulator.

The LT3093 demo board alleviates this degradation in PSRR by using a specialized layout technique. In Figure 2, the input trace ( $V_{IN}$ ) is highlighted in red, and in Figure 3 the return path (GND) is also highlighted together with input capacitor C1. Normally when an AC voltage is applied to the input of the board, AC current flows along this path, thus generating EMF. This EMF couples to output capacitor C2 and the related traces, making the PSRR appear worse than it actually is. With the input trace directly above the return path, the EMFs are in opposite directions, and consequently cancel each other out. Make sure these traces exactly overlap each other to maximize the cancellation effect and thus provide the maximum PSRR offered by the regulator.

#### 2. Best AC Performance: PCB Layout for Output Capacitors C2

For ultrahigh PSRR performance, the LT3093 bandwidth is quite high (~1MHz), making it very close to the output capacitor's self-resonance frequency (~1.6MHz). Therefore, it is very important to avoid adding extra impedance (ESL & ESR) outside the feedback loop. To that end, minimize the effects of PCB trace and solder inductance by Kelvin connecting OUTS and SET pin capacitor GND directly to output capacitors (C2) terminals using split capacitor techniques. With only small AC current flowing through these connections, the impact of solder joint/

PCB trace inductance on stability is eliminated. While the LT3093 is robust enough not to oscillate if the recommended layout is not followed, phase/gain margin and stability will degrade.

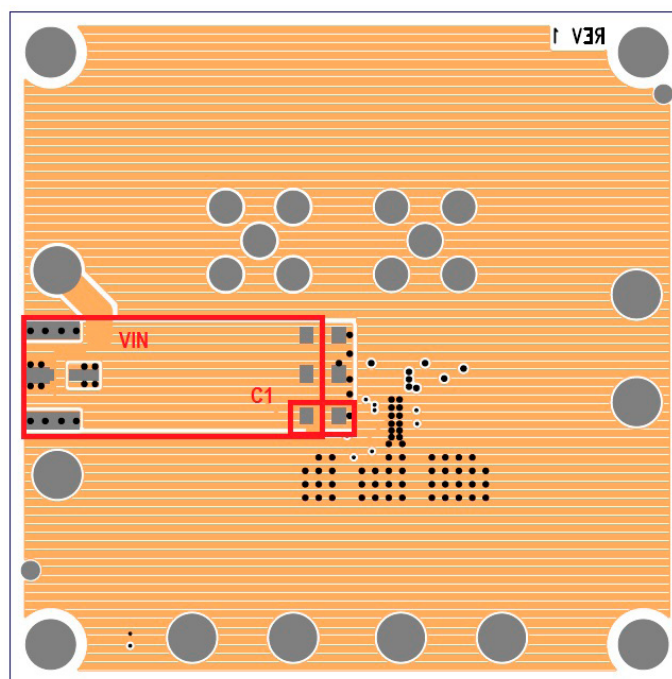


Figure 2. Bottom Layer of DC2952A

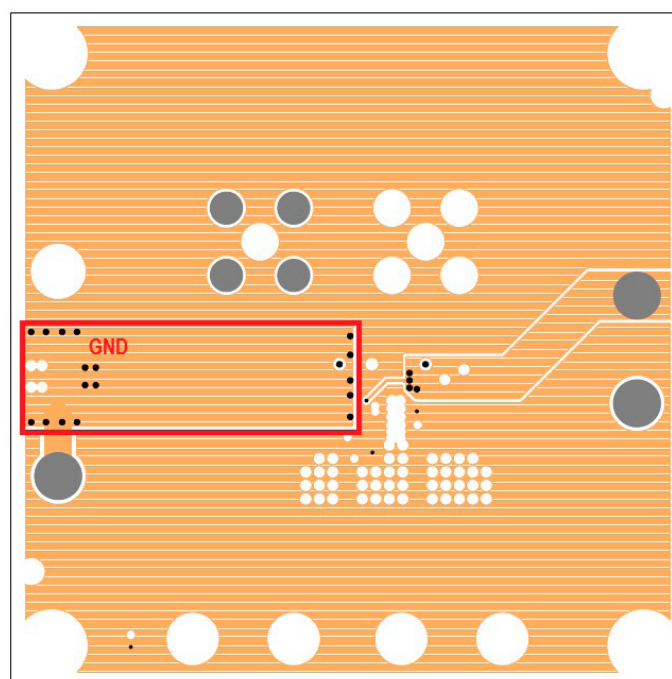


Figure 3. Layer 3 of DC2952A

PCB LAYOUT

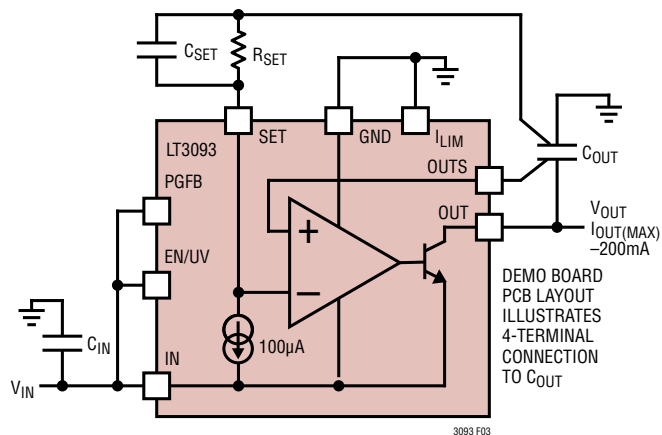


Figure 4. C2 and CSET connections for best performance


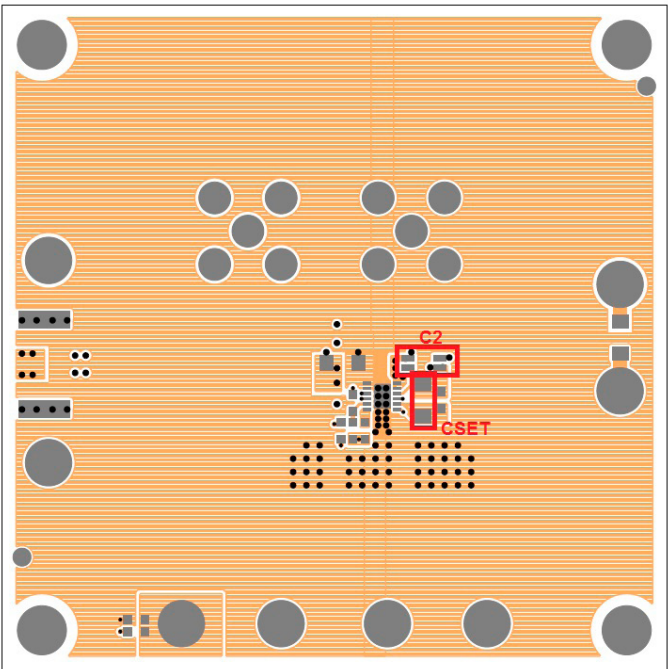


Figure 5. Split Pads for Output Capacitors on Top Layer of DC2952A

PARTS LIST

| ITEM                                     | QTY | REFERENCE    | PART DESCRIPTION                  | MANUFACTURER/PART NUMBER                  |
|------------------------------------------|-----|--------------|-----------------------------------|-------------------------------------------|
| Required Circuit Components              |     |              |                                   |                                           |
| 1                                        | 1   | CIN          | CAP, ALUM, 22µF, 35V, 5X5.4MM     | SUN ELECTRONIC INDUSTRIES CORP, 35CE22BSS |
| 2                                        | 3   | C1,C2,C4     | CAP, X7R, 4.7µF, 25V, 10% 1206    | MURATA, GRM31CR71E475KA88L                |
| 3                                        | 1   | R1           | RES, CHIP, 200k, 1/10W, 5% 0603   | VISHAY, CRCW0603200KJNEA                  |
| 4                                        | 1   | R2           | RES, CHIP, 100k, 1/10W, 1% 0603   | VISHAY, CRCW0603100KFKEA                  |
| 5                                        | 1   | R3           | RES, CHIP, 33.2k, 1/10W, 1% 0603  | VISHAY, CRCW060333K2FKEA                  |
| 6                                        | 1   | R5           | RES, CHIP, 453k, 1/10W, 1% 0603   | VISHAY, CRCW0603453KFKEA                  |
| 7                                        | 1   | R6           | RES, CHIP, 49.9k, 1/10W, 1% 0603  | VISHAY, CRCW060349K9FKEA                  |
| 8                                        | 1   | R7           | RES., CHIP, 9.76K, 1/10W, 1% 0603 | VISHAY, CRCW06039K76FKEA                  |
| 9                                        | 1   | U1           | IC, LT3093EDD, 12DFN              | ANALOG DEVICES, LT3093EDD#PBF             |
| Additional Demo Board Circuit Components |     |              |                                   |                                           |
| 1                                        | 0   | C3, C5 (OPT) | CAP, OPTION, 1206                 |                                           |
| 2                                        | 0   | R4 (OPT)     | RES, OPTION, 0603                 |                                           |
| Hardware: For Demo Board Only            |     |              |                                   |                                           |
| 1                                        | 8   | E1 TO E8     | TESTPOINT, TURRET, 0.094" pbf     | MILL-MAX, 2501-2-00-80-00-00-07-0         |
| 2                                        | 2   | J1, J2       | CONN, BNC, 5 PINS                 | CONNEX, 112404                            |
| 3                                        | 4   | MH1 TO MH4   | STAND-OFF, NYLON 6.4mm            | WURTH ELEKTRONIK, 702931000               |

SCHEMATIC DIAGRAM

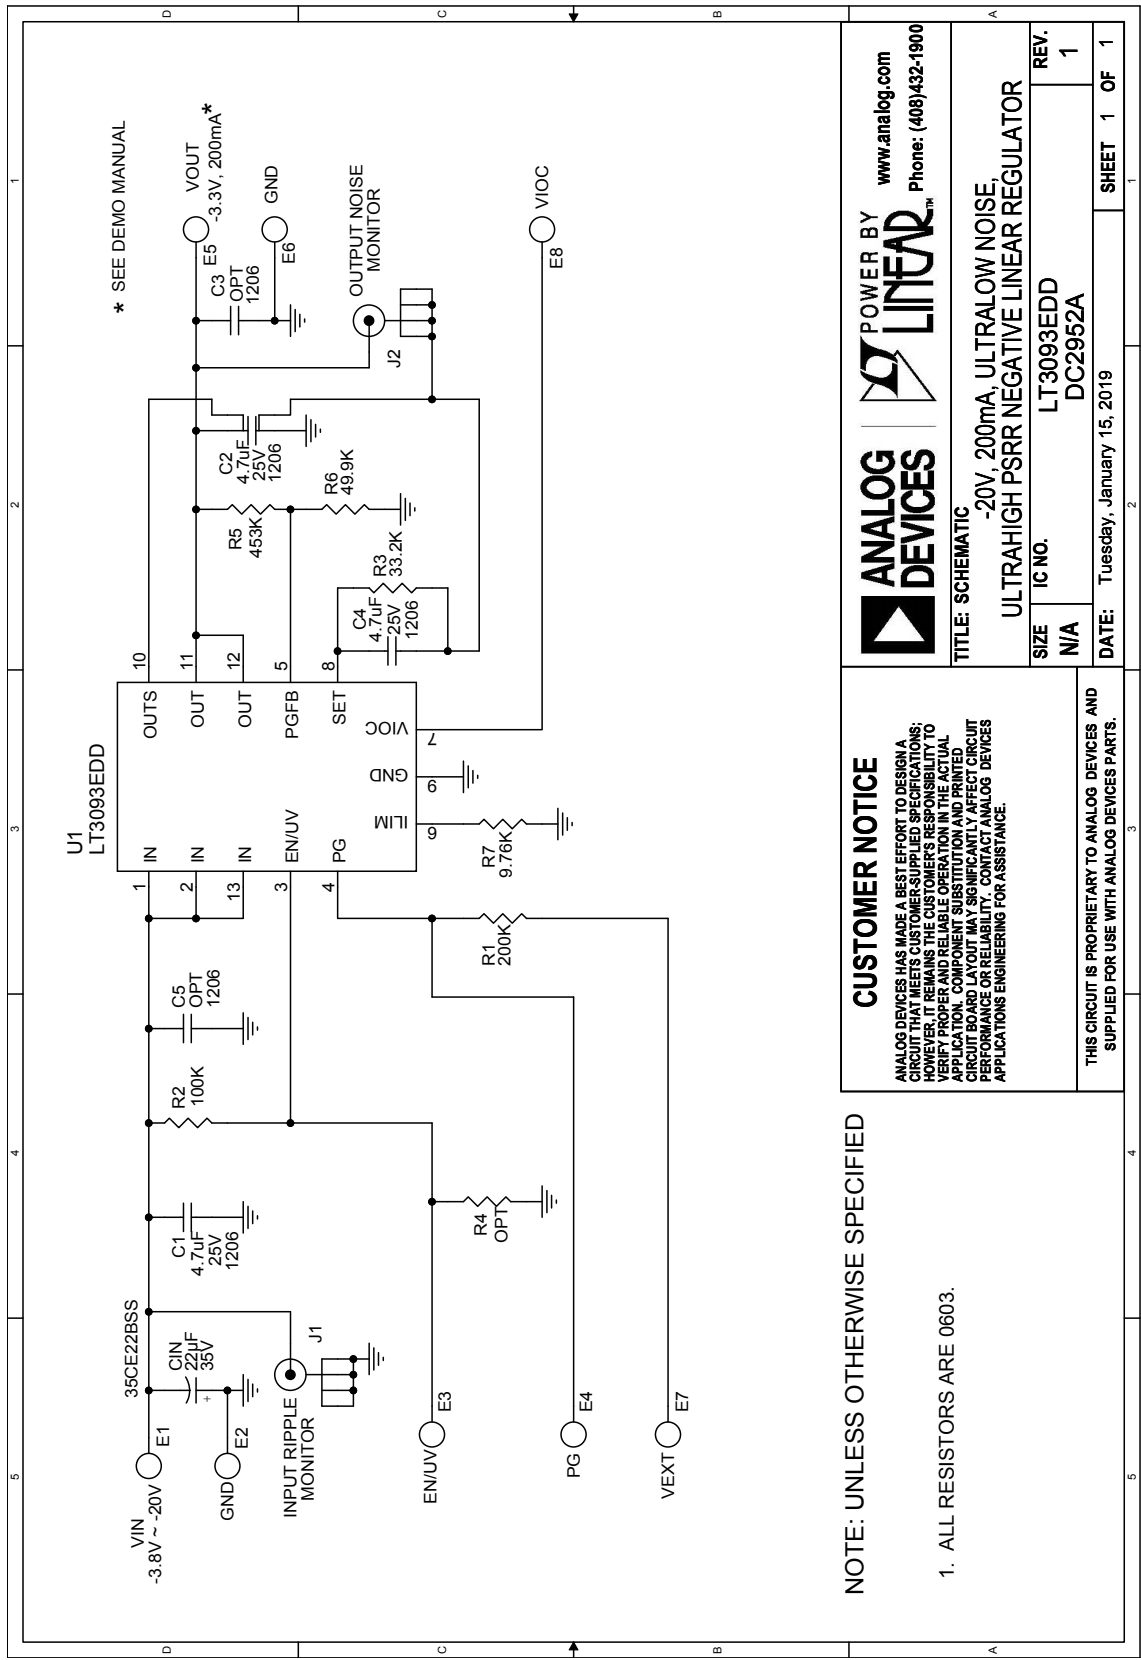

**ESD Caution**

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

**Legal Terms and Conditions**

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. **CONFIDENTIALITY.** This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. **ADDITIONAL RESTRICTIONS.** Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. **TERMINATION.** ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. **LIMITATION OF LIABILITY.** THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). **EXPORT.** Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. **GOVERNING LAW.** This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.