


DEMO CIRCUIT 1357A
Linear Tech. Corp.


Component Side

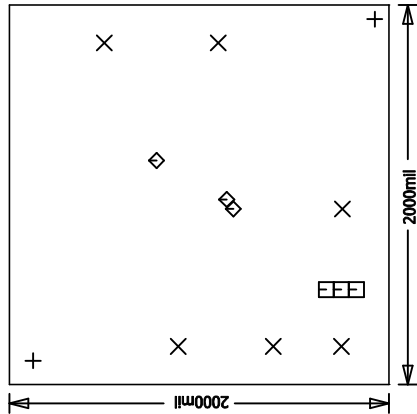


NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON EXTERNAL LAYER.
1 OZ. COPPER FINISH ON INTERNAL LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
0.00 ARE PRIMARY DATUMS.
3. SIZE: DIMENSIONS SHOWN AND TOLERANCES +/-0.010
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/-3MIL
INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
GOLD IMMERSION BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK TO ADD LOGO OR DATE CODE BUT YOU MAY
MODIFY PAD SIZE TO MEET END FINISH.
8. PCB'S SHOULD BE RoHS COMPLIANT.

9. SCORING:



FABRICATION DRAWING

APPROVALS		 LINEAR TECHNOLOGY 1630 McCardy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
		TITLE: LTC1422CS8 Hot Swap Controller	
DRAWN CHECK	INIT	DATE	
DESIGN	Ruby/B		
ENGR	Visd O.		
SCALE = NONE		FD	DEMO CIRCUIT 1357A
		REV.	1
		Sheet 1 of 1	