


REV	DESCRIPTION	APPR	DATE
REVISIONS			

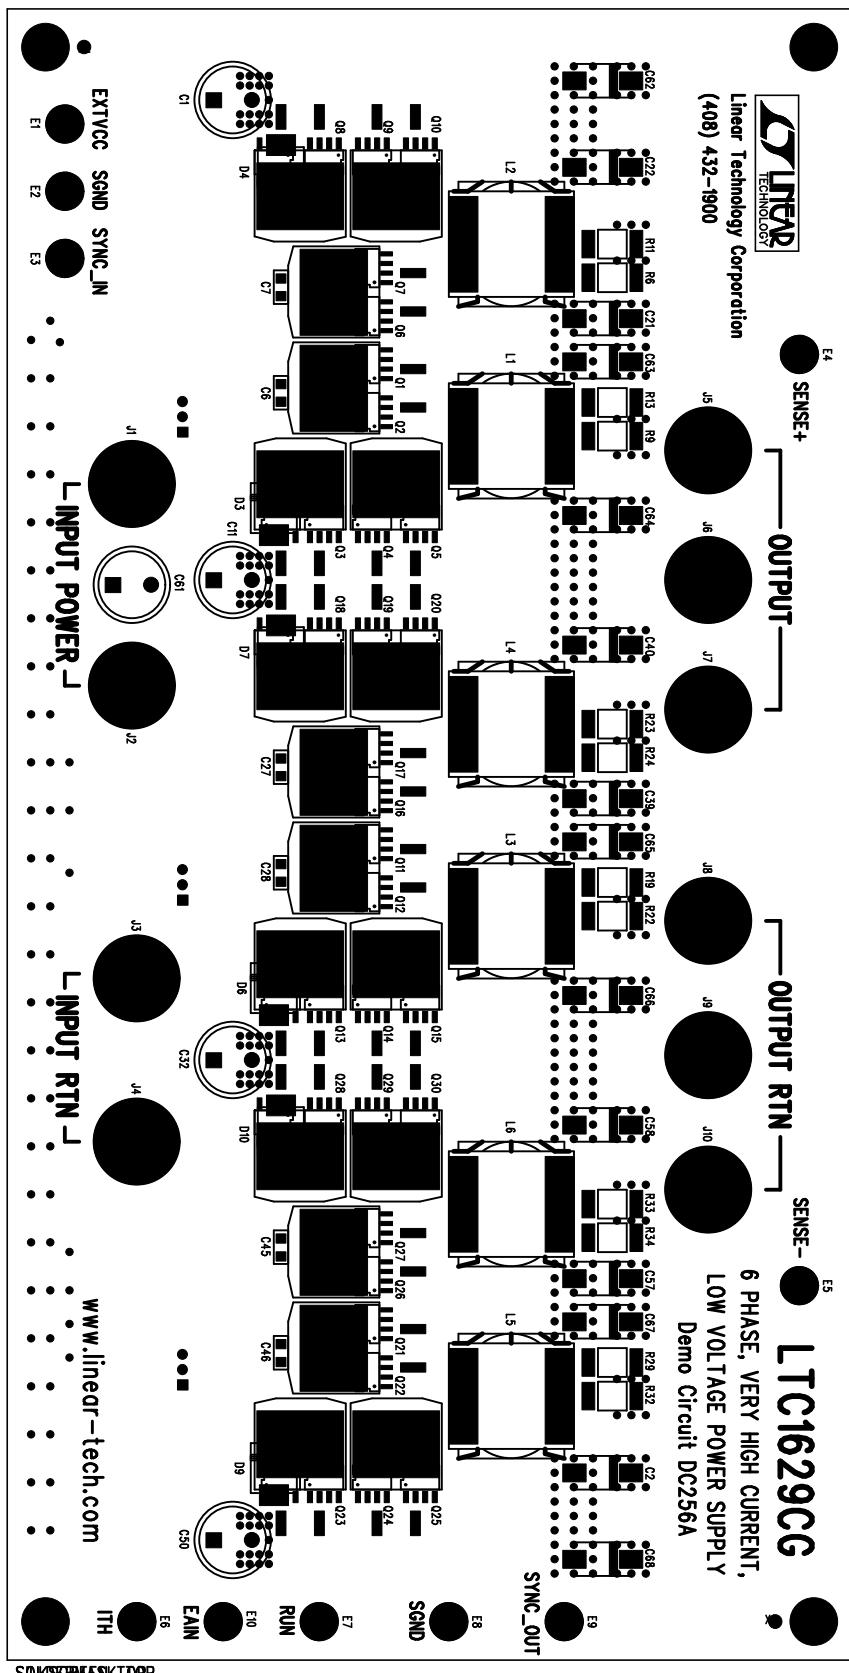

Assembly Top Drawing

- NOTES :
- Unused SMD components should be free of solder.
 - Fill up all vias with solder.

LTC1629CG DC256
6-PHASE VERY HIGH CURRENT,
LOW VOLTAGE POWER SUPPLY
REV. A

SIZE A DEMO BRD

REV. A

SHT 1 of 1

DES-0000

DATE

INIT

ENGR

CHECK

DRAWN

NAME

DESIGN

KM

DATE

INIT

ENGR

CHECK

DRAWN

NAME

DESIGN

KM