



REVISIONS			
REV	APPR	DATE	

NOTES: Unless Otherwise Specified


1. MATERIAL: 2 LAYERS, 0.062" THK. FR-4 GLASS EPOXY 2 OZ. COPPER CLAD.
2. ALL HOLE SHALL BE PLATED THRU.
3. PLATE THRU HOLES WITH COPPER .0014 MIN. THICKNESS. ALL HOLE SIZES IN HOLE TABLE ARE AFTER PLATING.
4. SILKSCREEN: WITH WHITE EPOXY NON-CONDUCTIVE INK.
5. NO SILKSCREEN ALLOWED ON PADS LANDS.
6. SOLDER MASK: LPI, GREEN.
7. NO BLOCK SOLDERMASKING OF PADS ROWS.
8. DO NOT MAKES CHANGES ON SILKSCREEN, SUCH AS COMPANY LOGO, QC STAMPS.
9. DO NOT PLATE TOOLING(3PLCS) AND SCORING(26PLCS) HOLES. ( Reference Drawing Dwg No. DC205A )
10. SCORING:



SIZE	QTY	SYM	PLTD
10	6	+	PLTD
70	2	□	NPLTD
63	4	Z	PLTD

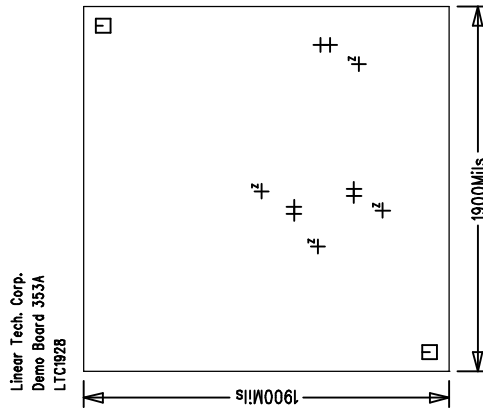

Fabrication Drawing

APPROVALS		 <b>LINEAR TECHNOLOGY</b> 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE	
CHECK			
DESIGN	Rmb		
ENGR			
TITLE:		Low Noise Boost DC/DC Converter	
SIZE	NONE	Demo Board 353	REV. A
SCALE = NONE		DES-230402 SHT 1 of 1	