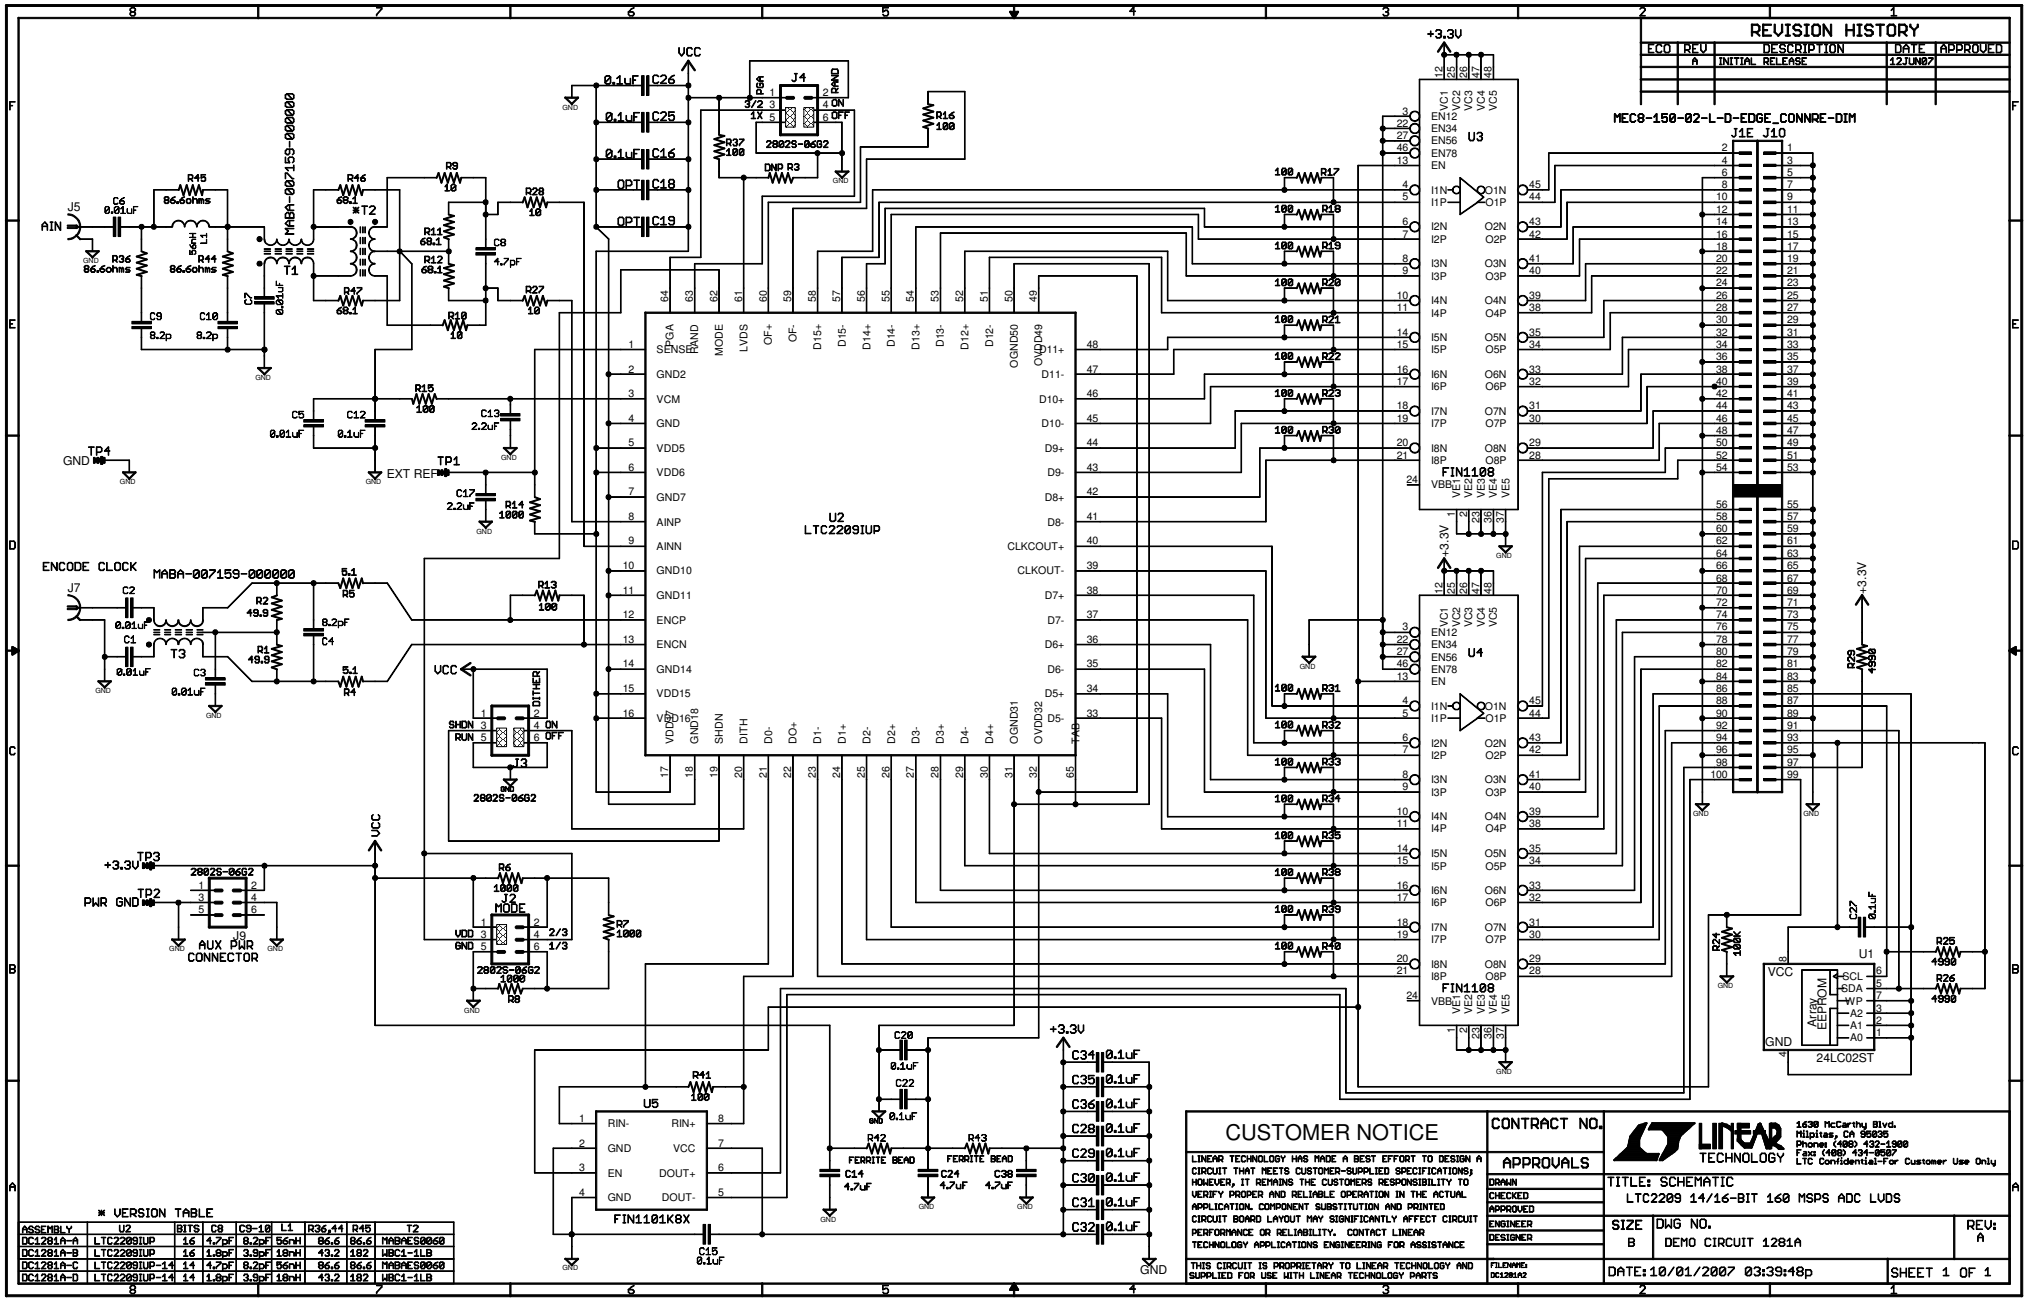

* VERSION TABLE

ASSEMBLY	U2	BITS	C8	C9-10	L1	R36,44	R45	T2
DC1281A-A	LTC2209IUP	16	4.7pF	8.2pF	56nH	86.6	86.6	MABAES0060
DC1281A-B	LTC2209IUP	16	1.8pF	3.9pF	18nH	43.2	182	WBC1-1LB
DC1281A-C	LTC2209IUP-14	14	4.7pF	8.2pF	56nH	86.6	86.6	MABAES0060
DC1281A-D	LTC2209IUP-14	14	1.8pF	3.9pF	18nH	43.2	182	WBC1-1LB

LINEAR TECHNOLOGY MAKES A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMERS RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS