



Demo Circuit 1057A

L1 - Component Side

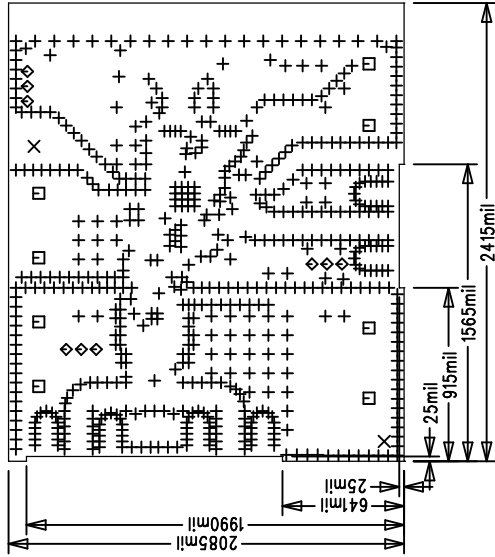

SIZE	QTY	SYM	PLATED	TOL
10	596	+	YES	+/-3Mil
70	2	X	NO	+/-3Mil
63	8	□	YES	+/-3Mil
31	9	◇	YES	+/-3Mil

8. SCORING:



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE 1 +
3 PLACE .005 +
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994

APPROVALS		INIT		DATE	
DRAWN	CHECK				
DESIGN	Eng'g	03/04/06	03/04/06		
ENGR	Cheng	03/04/06			
SCALE = NONE					



TITLE: ADC Driver and ADC

SIZE A Demo Circuit 1057A REV. 1

Sheet 1 of 1

REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

- FAB PER IPC-A-600.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON TOP LAYER.
1 OZ. COPPER FINISH ON REMAINING LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
- SIZE: DIMENSIONS SHOWN AND TOLERANCES +/- .010
0.00 ARE PRIMARY DATUMS.
- DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- 3MIL
INCH IN RELATION TO CENTER
- FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.
- SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- IMPEDANCE CONTROL : 25mils TRACE = 50 OHMS

FAB DRAWING