


## AN-2168 LMZ10501 and LMZ10500 SIMPLE SWITCHER® Nano Module EMI Performance

### 1 Introduction

The LMZ10501 and LMZ10500 nano modules offer excellent EMI performance. The evaluation board with the default components complies with the CISPR 22 Class B radiated emissions standard. Adding two small 0.1µF 0805 input capacitors results in CISPR 25 Class 5 radiated emissions standard compliance. The addition of a small LC filter (1µH and 1µF) to the input of the default evaluation board results in compliance with CISPR 22 Class B conducted emissions and allows for even larger margin of compliance in terms of radiated EMI.


### 2 Test Conditions

- $V_{IN} = 5V$
- $V_{OUT} = 1.8V$
- 1A load (LMZ10501)
- 650mA load (LMZ10500)
- 2MHz switching frequency
- 4 layer PCB with 1oz copper
- 4.3 x 4.3 cm (1700 x 1700 mil) PCB size
- CISPR 22 Class B Radiated EMI
- CISPR 22 Class B Conducted EMI
- CISPR 25 Class 5 Broadcast Radiated EMI

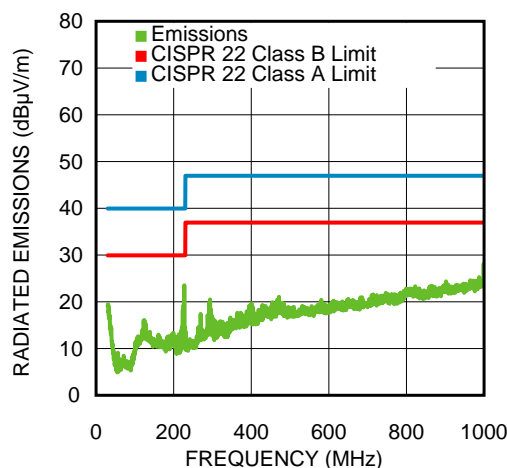


**Figure 1. CISPR 22 Radiated EMI 1A Load  
Default Evaluation Board BOM**

SIMPLE SWITCHER is a registered trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

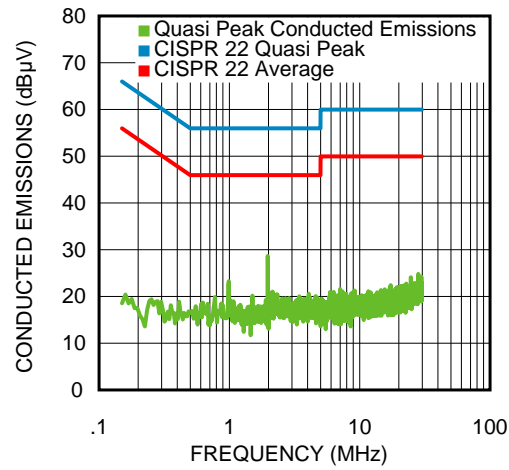

**Figure 2. CISPR 22 Conducted EMI 1A Load  
1µH 1µF Additional LC Input Filter**

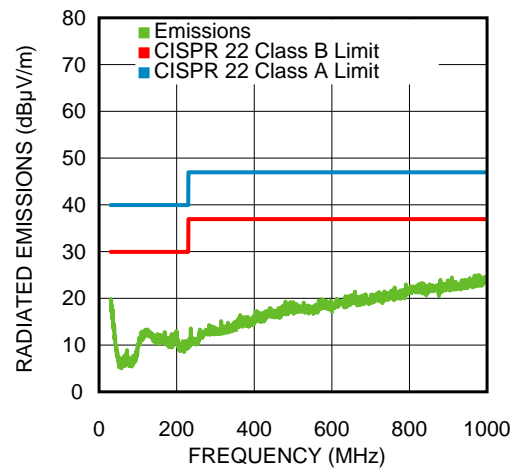

**Figure 3. CISPR 22 Radiated EMI 1A Load  
1µH 1µF Additional LC Input Filter**

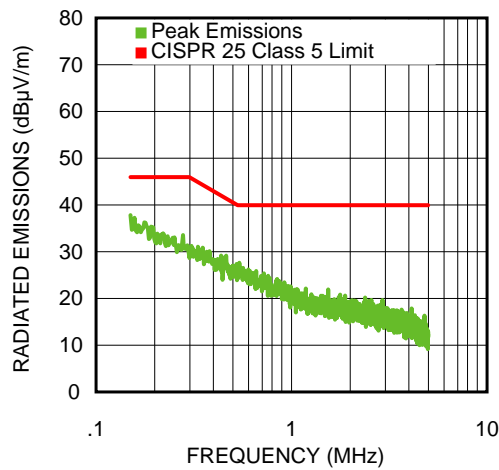


Figure 4. CISPR 25 Class 5 Radiated EMI 1A Load  
2 x 0.1µF Additional Input Capacitance

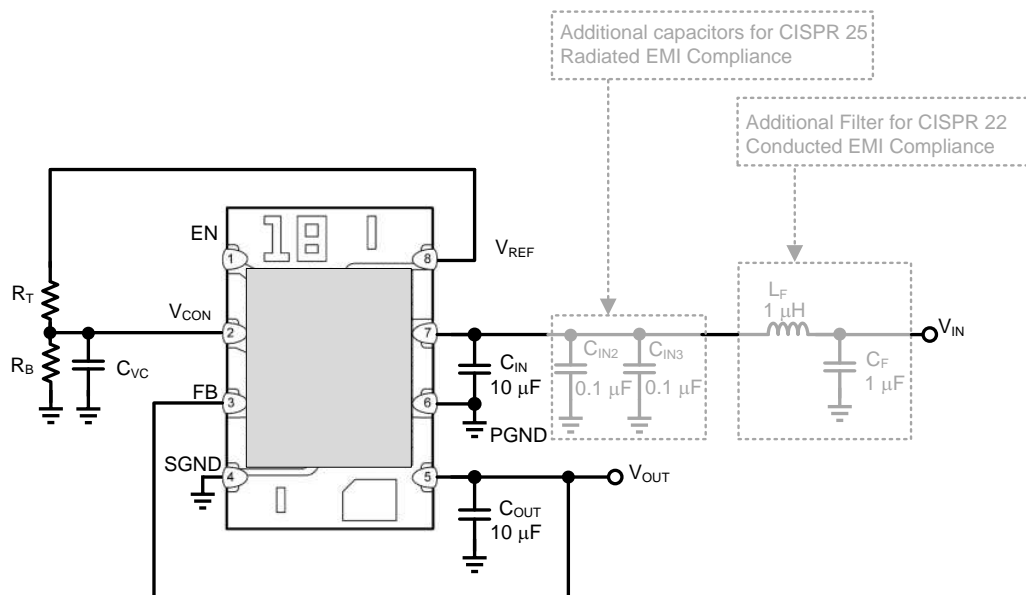


Figure 5. Evaluation Board Schematic

Table 1. LMZ10501 and LMZ10500 Bill of Materials

Designator	Description	Case Size	Manufacturer	Manufacturer P/N	Quantity
U1	SIMPLE SWITCHER® Nano Module	SE08A	Texas Instruments	LMZ10501SE or LMZ10500SE	1
C <sub>IN</sub> , C <sub>OUT</sub>	10 µF, X5R, 10V	0805	KEMET	C0805C106K8PACTU	2
C <sub>VC</sub>	1000 pF	0603	TDK	C1608C0G2A102J	1
R <sub>B</sub>	82.5 kΩ	0603	Vishay-Dale	CRCW060382K5FKEA	1
R <sub>T</sub>	187 kΩ	0603	Vishay-Dale	CRCW0603187KFKEA	1
C <sub>IN2,3</sub> (optional, add for CISPR 25 Radiated EMI)	0.1 µF	0805		CRCW06031K00FKEA	2

**Table 1. LMZ10501 and LMZ10500 Bill of Materials (continued)**


Designator	Description	Case Size	Manufacturer	Manufacturer P/N	Quantity
C <sub>F</sub> (optional, add for CISPR 22 Conducted EMI)	1 μF	0603	AVX	0603YD105MAT	1
L <sub>F</sub> (optional, add for CISPR 22 Conducted EMI)	1 μH	2.5x2.0x1.5 mm	TDK	VLS252015T-1R0N1R7	1

### 2.1 Board Layout and Components Information

The default evaluation board was used in all tests. Refer to *AN-2166 LMZ10501 and LMZ10500 SIMPLE SWITCHER Nano Module Evaluation Board (SNVA491)* for details on the board layout and specifications. The optional components C<sub>F</sub> and L<sub>F</sub> are needed for compliance with CISPR 22 Conducted EMI specifications. This LC filter also improves the CISPR 22 Radiated EMI compliance margin as illustrated in Section 3. The optional components C<sub>IN2</sub> and C<sub>IN3</sub> are necessary for compliance with CISPR 25 Class 5 Broadcast specifications.

### 3 CISPR 22 Class B Radiated and Conducted Emissions

Unless otherwise specified, the following conditions apply: V<sub>IN</sub> = 5V, V<sub>OUT</sub> = 1.8V.

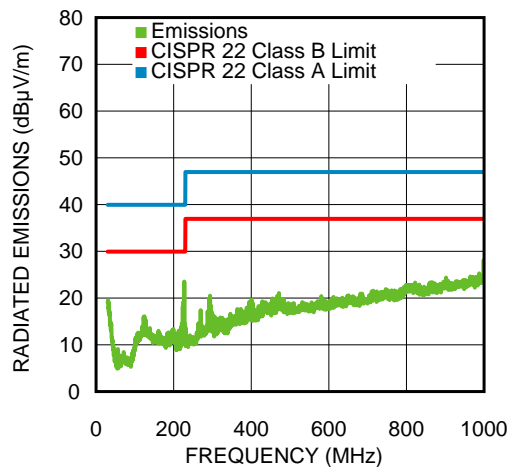

**Figure 6. Radiated EMI 1A Load**

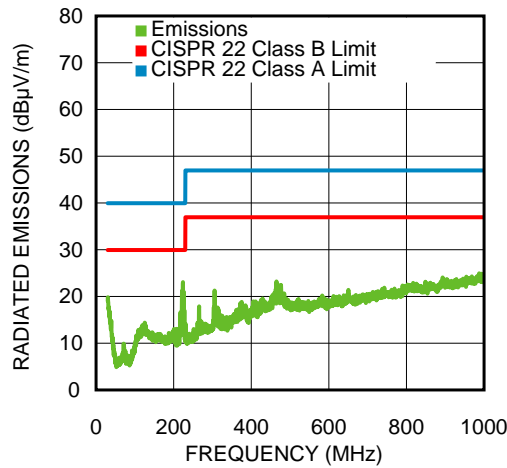


Figure 7. Radiated EMI 650mA Load

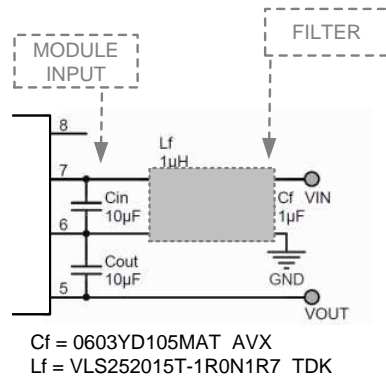


Figure 8. LC Input Filter for Conducted EMI

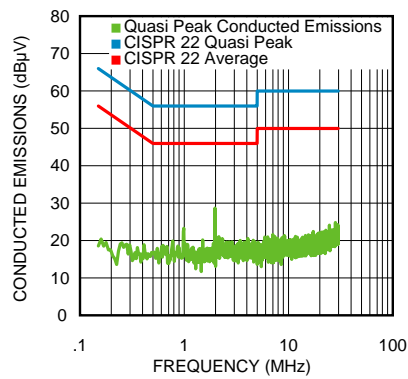


Figure 9. Conducted EMI with the LC Input Filter 1A Load

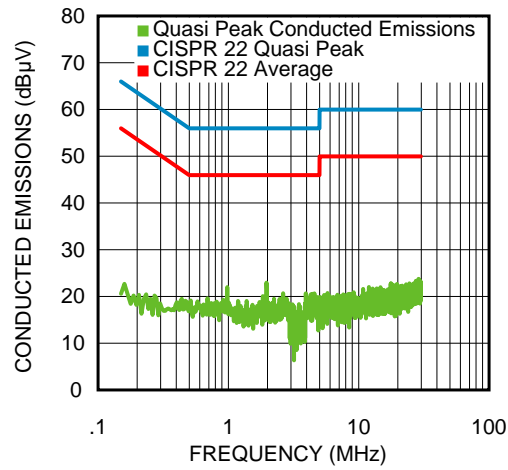


Figure 10. Conducted EMI With the LC Input Filter 650mA Load


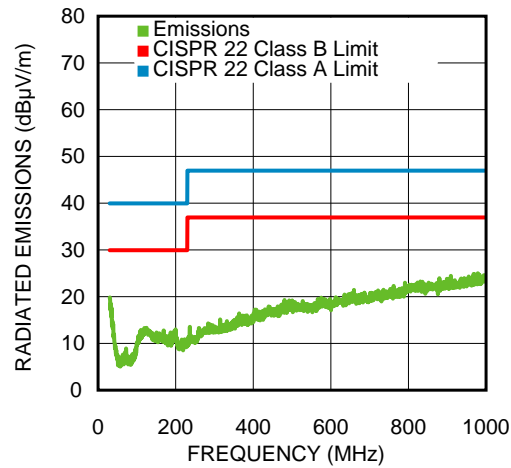



Figure 11. Radiated EMI With the LC Input Filter 1A Load

#### 4 CISPR 25 Class 5 Broadcast Radiated Emissions


Unless otherwise specified, the following conditions apply:  $V_{IN} = 5V$ ,  $V_{OUT} = 1.8V$ .

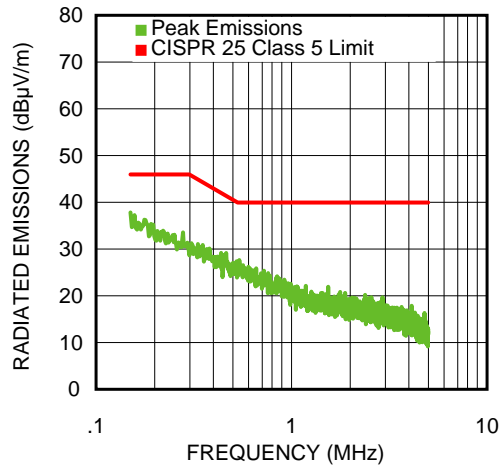


**Figure 12. 0.15 MHz-5 MHz 1A Load**

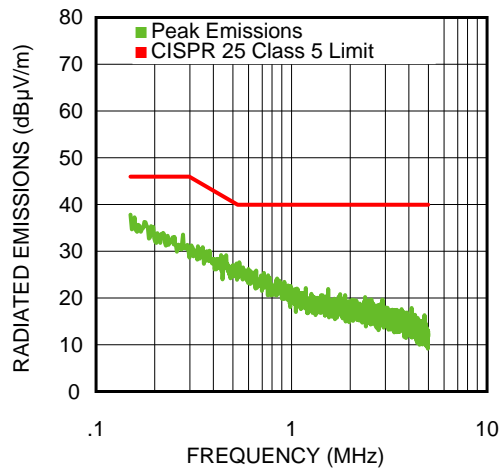


**Figure 13. 0.15 MHz-5 MHz 650 mA Load**

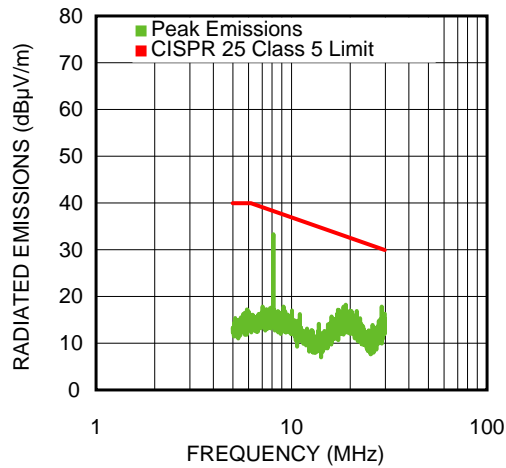

**Figure 14. 5 MHz-30 MHz 1A Load**

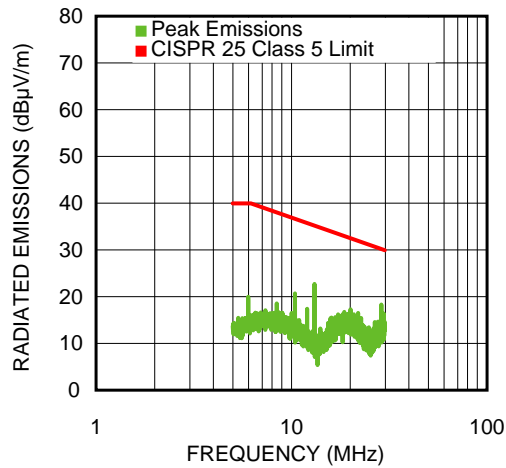


**Figure 15. 5 MHz-30 MHz 650 mA Load**

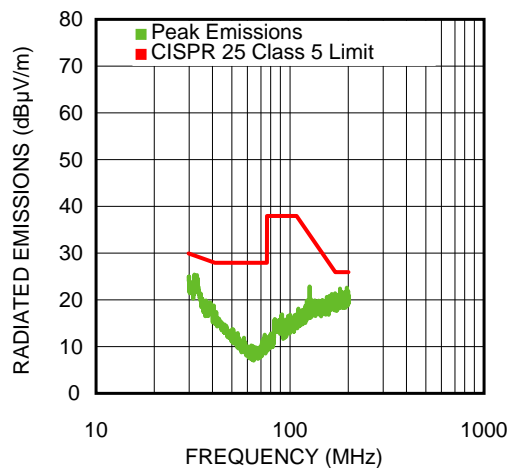


**Figure 16. 30 MHz-200 MHz Horizontal 1A Load**




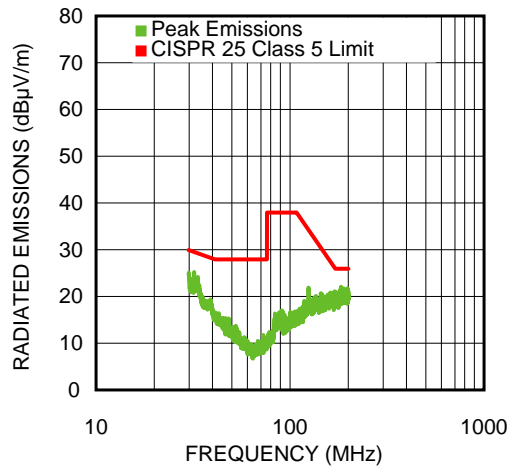


**Figure 17. 30 MHz-200 MHz Horizontal 650 mA Load**

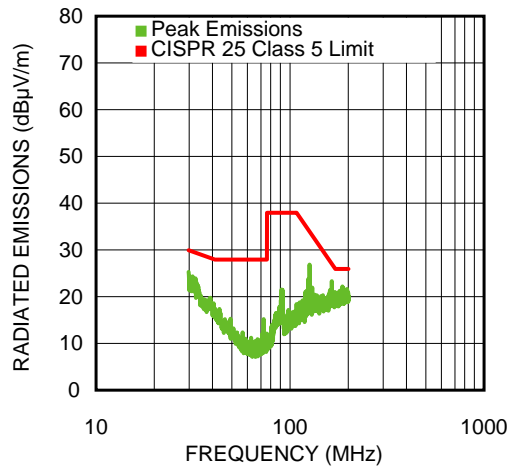


**Figure 18. 30 MHz-200 MHz Vertical 1A Load**

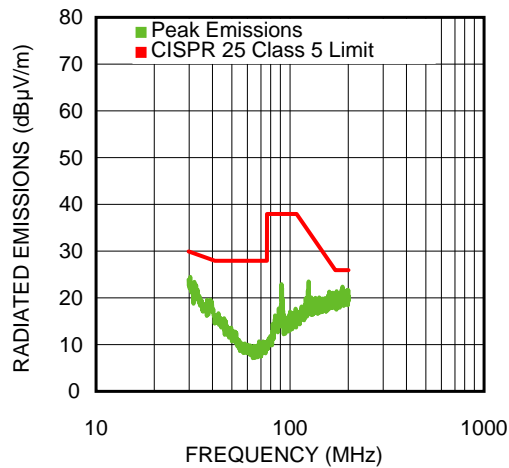


**Figure 19. 30 MHz-200 MHz Vertical 650 mA Load**

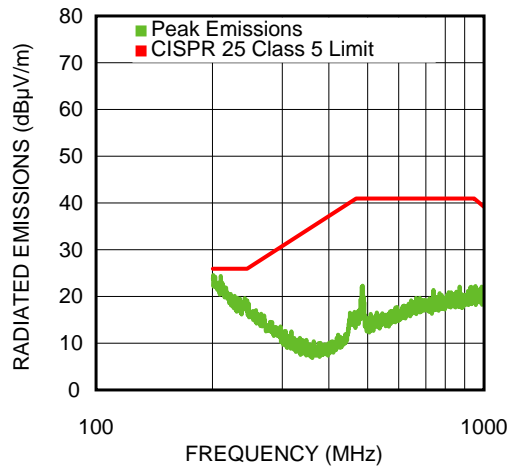


**Figure 20. 200 MHz-1000 MHz Horizontal 1A Load**

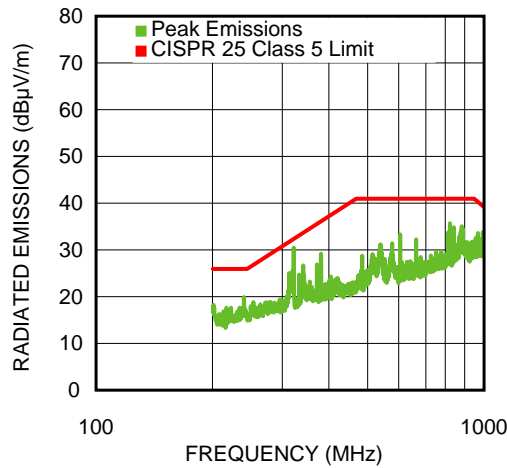

**Figure 21. 200 MHz-1000 MHz Horizontal 650 mA Load**

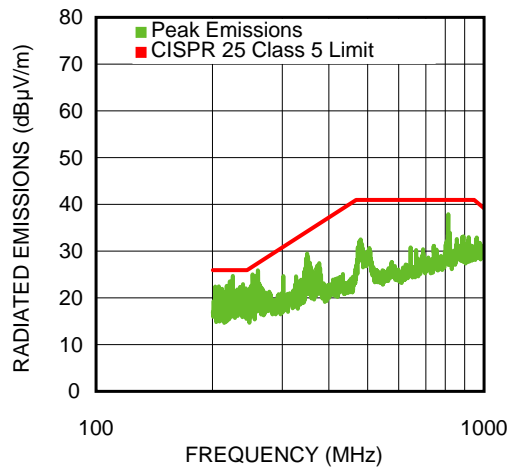

**Figure 22. 200 MHz-1000 MHz Vertical 1A Load**

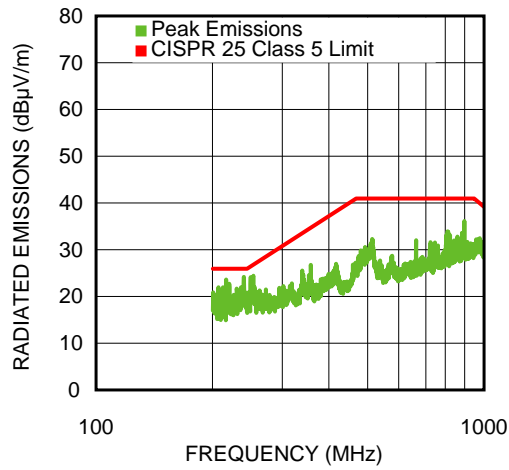

**Figure 23. 200 MHz-1000 MHz Vertical 650 mA Load**

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)