


REVISIONS		
REV	APPR	DATE

NOTES: UNLESS OTHERWISE SPECIFIED:

- ARTWORK P/N Demo Circuit 814A Rev3
- FAB PER IPC-A-600. 4-Layers.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4 .062 +/- .005 INCH THICKNESS WITH 2 OZ. COPPER FINISH ON TWO OUTER LAYERS AND 1 OZ. COPPER ON TWO INTERNAL LAYERS. FLAMABILITY RATING: 94 V-2 MINIMUM .
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN. 0.00 ARE PRIMARY DATUMS.
- BOARD: SELECTIVE PLATED BOARD. SOLDER MASK OVER BARE COPPER, COLOR, GREEN LPL, WHITE TIN IMMERSION (OMIKRON) BOTH SIDES. SILKSCREEN COMPONENT SIDE WITH WHITE NON-CONDUCTIVE INK.
 - PLATE THRU ALL HOLES WITH COPPER
 - MIN. PLATING THICKNESS: 1 OZ. EXCEPT WHERE PLATING NOT REQUIRED
- DRILL: ALL HOLES SHALL BE DRILLED +/- .003 INCH WITH RESPECT TO CTR. OF DRILLED PAD. ALL HOLES FINISHED SIZE AFTER PLATING.
- DROP ALL UNUSED PADS ON INNER LAYERS.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- SCORING:




Fabrication Drawing

APPROVALS		TITLE:	
DRAWN	INT	DATE	
CHECK	Rmb		
ENGR	ErnieG		
		Resistor Set Oscillator in SOT-23	
		SIZE NONE	Demo Circuit 814A
		DES-24xxx	REV. 3
		SCALE = NONE	SHT 1 of 1

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
Ph: (408)432-1900

Linear Tech. Corp.
Demo Circuit 814A Rev3

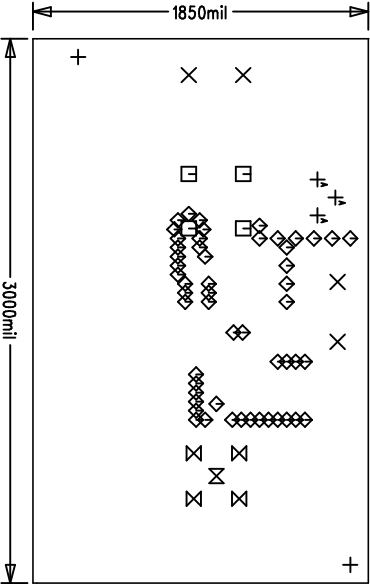

SIZE	QTY	SYM	PLTD	TOL
70	2	+	NO	+/-3Mil
94	4	X	YES	+/-3Mil
35	4	□	YES	+/-3Mil
10	53	◇	YES	+/-3Mil
52	4	⊗	YES	+/-3Mil
59	1	⊗	YES	+/-3Mil
25	3	+	YES	+/-3Mil