


REVISIONS			
REV	DATE	APPR	DATE

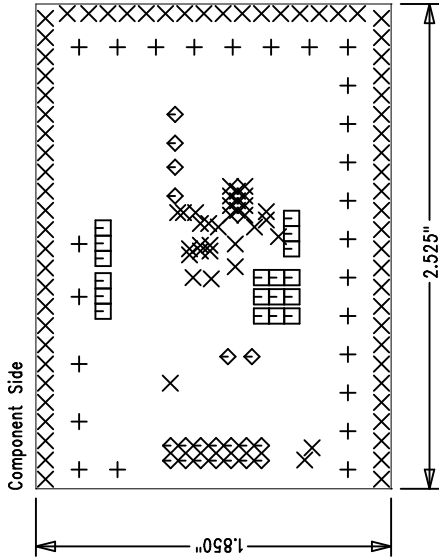


- ART01 = LAYER 1 (COMPONENT SIDE)
- ART02 = LAYER 2 (GND)
- ART03 = LAYER 3 (GND)
- ART04 = LAYER 4 (SOLDER SIDE)

NOTES : Unless Otherwise Specified

- MATERIAL : FR4 OR EQUIVALENT EPOXY, 2 OZ. COPPER CLAD
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS
- FINISH : ALL PLATED HOLES .001 MIN. / .0015 MAX. COPPER PLATE
WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.
BEFORE REFLOW , SOLDER MASK OVER BARE COPPER (SMOBC)
- SOLDER MASK : BOTH SIDES USING GREEN LPI
- SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK
- ALL DIMENSIONS ARE IN INCHES

SIZE	QTY	SYM	PLTD	TOL
65	25	+	YES	+/-0.0
10	100	X	YES	+/-0.0
40	18	□	YES	+/-0.0
35	20	◇	YES	+/-0.0

Fabrication Drawing

APPROVALS		 LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN CHECK DESIGN ENGR	INIT DATE	Title: 24-/16-Bit Easy Drive 8-/16-Channel Delta Sigma ADC with I2C Interface	
Scale = None	Design #	Size: None Demo Board: DC1012A-A/B/C	Rev. A
Sht: 1 of 1		Sht: 1 of 1	