


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A	FINAL FABRICATION	LEO C.	07-29-09

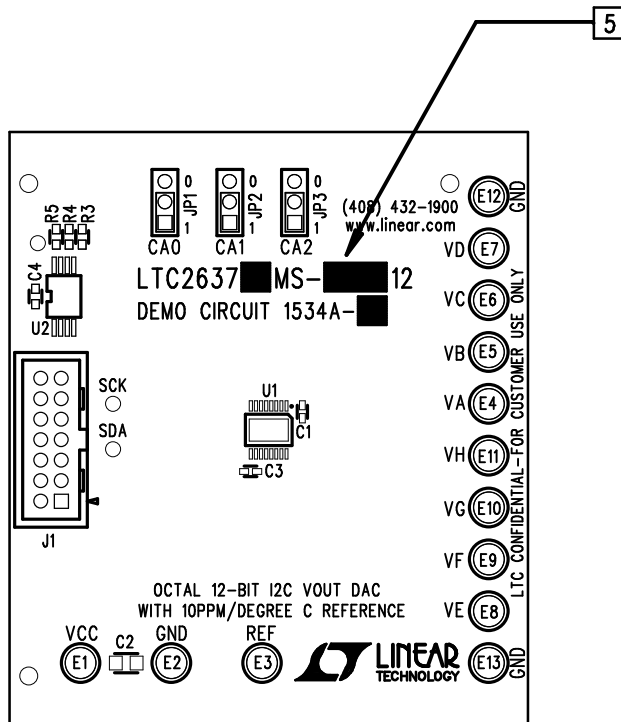

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. INSTALL SHUNT AS SHOWN.
3. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
4. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD.
5. MARK EACH LTC PART NUMBER AND ASSEMBLY TYPE WITH BLACK PERMANENT MARKER AS SHOWN IN TABLE BELOW:

ASSY	U1
-A	LTC2637IMS-LZ12
-B	LTC2637HMS-LM12
-C	LTC2637CMS-HZ12
-D	LTC2637HMS-HM12

APPROVALS

	INIT	DATE
DRAWN		
CHECK		
DESIGN	KIM T.	07-29-09
ENGR	LEO C.	07-29-09



TITLE: TOP ASSEMBLY DRAWING
OCTAL 12-BIT I2C VOUT DAC
WITH 10PPM/DEGREE C REFERENCE

SIZE	REV.
A	A

SCALE = NONE

SHT 1 of 1