


REVISION HISTORY			
ECO	REV	DESCRIPTION	DATE
-	2	1ST PROTOTYPE	9-17-12

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER SMD SIDES. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN ON ASSY DRAWING.
5. DEPANALIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

7. INSTALL 4 STANDOFFS AT 4 LOCATIONS AS SHOWN.

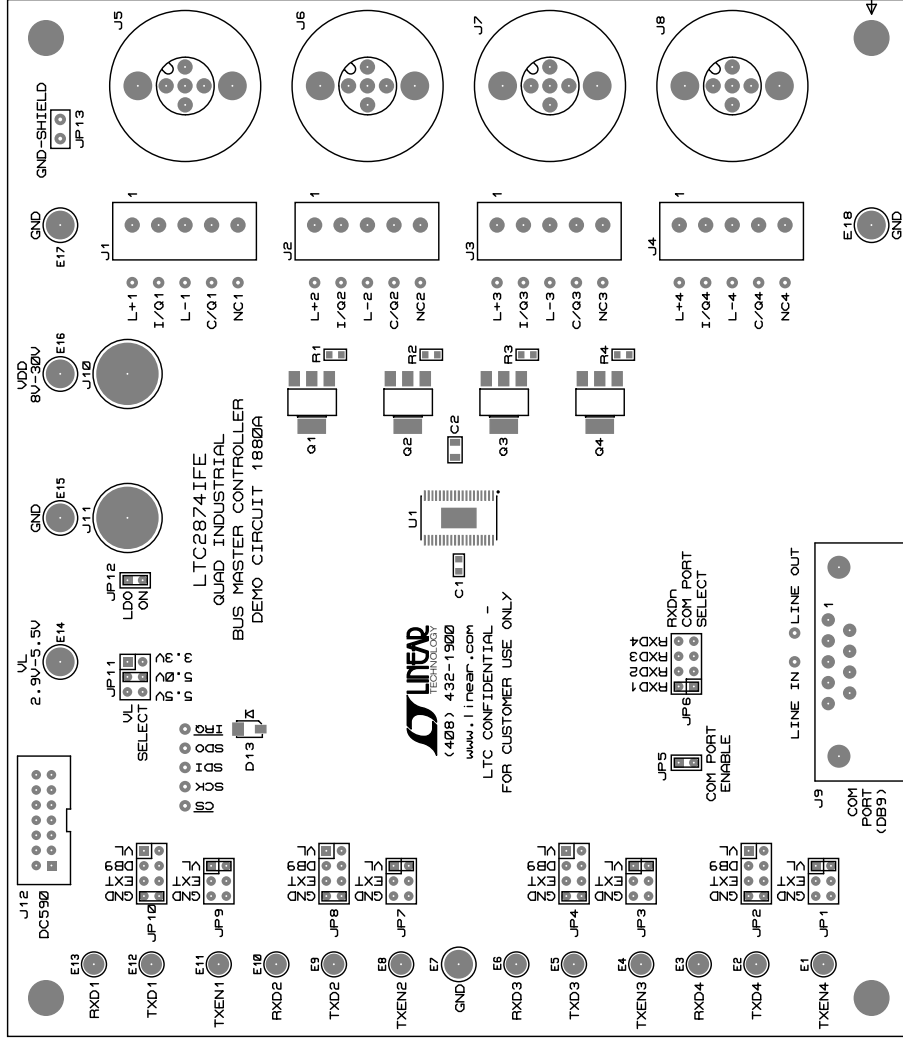

TOP SILKSCREEN
 LINEAR TECHNOLOGY
 DC1880A-2 * LTC2874
 QUAD INDUSTRIAL BUS MASTER CONTROLLER
 DATE: 9-17-12

APPROVALS				1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408) 432-1900 Fax: (408) 434-0507 www.linear.com	
PCB DES.	KEITH B.			LTC CONFIDENTIAL FOR CUSTOMER USE ONLY	
APP ENG.	KEITH B.				
		TITLE: TOP ASSEMBLY DRAWING QUAD INDUSTRIAL BUS MASTER CONTROLLER			
		SIZE	IC NO.	LTC2874IFE	REV. 2
		N/A		DEMO CIRCUIT 1880A	
SCALE = 1:1		DATE: Monday September 17, 2012		SHEET 1 OF 1	