
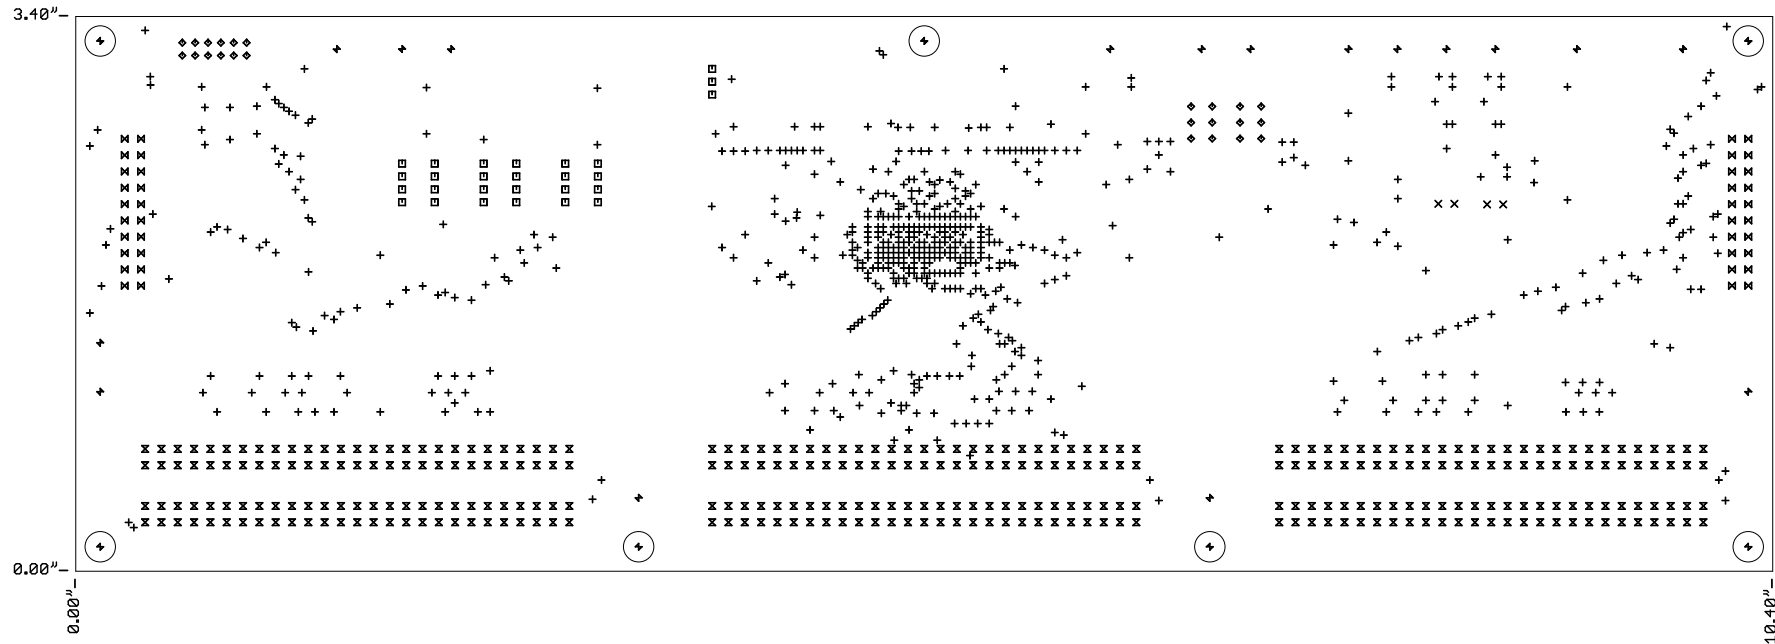


NOTES: UNLESS OTHERWISE SPECIFIED


1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
FINISHED THICKNESS TO BE 0.062" +/-0.005"
4-LAYER BOARD, 1 OZ. CU ON OUTER LAYERS,
1 OZ. CU ON INNER LAYERS,
FLAMMABILITY RATING: 94 V-2 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
4. FINISH: SMOBC USING LPI BOTH SIDES, COLOR BLACK.
ENIG FINISH. LEAD FREE SOLDER CAN BE USED
FOR PROTOTYPE BOARDS.
HIGH DEFINITION WHITE SILKSCREEN.

5. DRILL: PLATE THRU ALL HOLES WITH COPPER, 0.001"
THICK MIN. ALL HOLES SHALL BE DRILLED
+/-0.003" WITH RESPECT TO CTR. OF DRILLED
PAD. ALL HOLES FINISHED SIZE AFTER PLATING.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
7. PCBs ARE TO BE RoHS COMPLIANT.
8. SCORING FOR PANELIZED PCB:
0.017"



LAYER STRUCTURE

TOP



BOTTOM

- LAYER 1- TOP
- PREPREG
- LAYER 2
- CORE
- LAYER 3
- PREPREG
- LAYER 4 - BOTTOM

DRILL TABLE

Sym	No	Mils	MM	Qty	Plated
+	1	8	0.20	689	YES
x	2	15	0.38	4	YES
□	3	31	0.80	27	YES
◇	4	34	0.86	24	YES
x	5	35	0.90	324	YES
⊞	6	40	1.02	40	YES
+	7	94	2.39	17	YES
+	8	187	4.75	7	NOT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE +/- 1° 0.001" = +/- 0.001" 0.0005" = +/- 0.0005" INTERPRET DIM AND TOL PER ASME Y14.5-2014	APPROVALS		 1630 MCCARTHY BLVD. MILPITAS, CA 95035 PH: (408) 432-1900 www.analog.com
	PCB DES: MIKE P. APP ENG: MIKE P.	NAME DATE	
THIRD ANGLE PROJECTION			TITLE: FABRICATION DRAWING 24-CHANNEL Digital PSM Board that Manages 3 DC1361B Boards
DO NOT SCALE DRAWING	SCALE: NONE	FILENAME: DC3094A_Rev1	SHEET 3 OF 13