


Demo Circuit 1326A

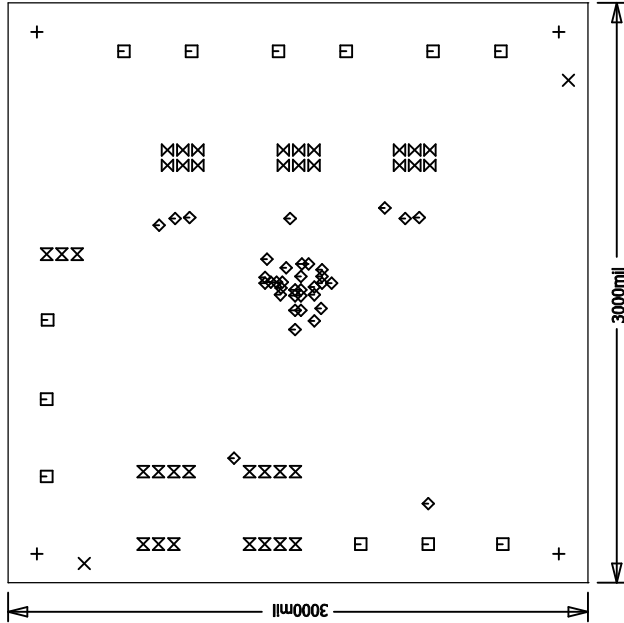


SIZE	QTY	SYM	PLATED	TOL
187	4	+	YES	+/-3mil
70	2	X	NO	+/-3mil
94	12	□	YES	+/-3mil
10	36	◇	YES	+/-3mil
34	18	⊗	YES	+/-3mil
31	18	⊗	YES	+/-3mil

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON EXTERNAL LAYERS.
1 OZ. COPPER FINISH ON INTERNAL LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS SHOWN AND TOLERANCES +/-0.010
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/-3mil
INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
GOLD IMMERSION BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK TO ADD LOGO OR DATE CODE BUT YOU MAY
MODIFY PAD SIZE TO MEET END FINISH.
8. PCB's SHALL BE RoHS COMPLIANT.

9. SCORING:



FABRICATION DRAWING

APPROVALS		LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	RudyB				
ENGR	Fran Hoffert				
TITLE: LTC3100EUD, Synchronous Step-Up and Step-Down Converters and LDO Regulator					
FD			Demo Circuit 1326A		
			REV. 1		
SCALE = NONE			Sheet 1 of 1		