



## NOTES: UNLESS OTHERWISE SPECIFIED

1. ENSURE HEADER KEY FOR J1 IS INSTALLED AND LOCATED AS SHOWN BELOW:

### FRONT VIEW OF SMT HEADER

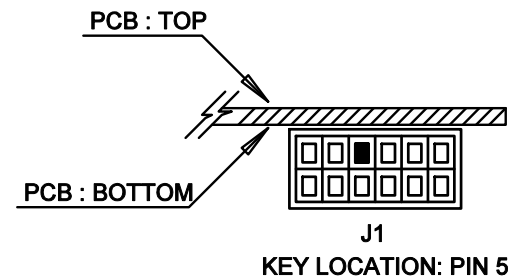

APPROVALS		 <b>LINEAR TECHNOLOGY</b> 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
PCB DES.	NC		
APP ENG.	JIM N.	<b>TITLE: BOTTOM ASSEMBLY DRAWING</b> 300mA, LOW VOLTAGE BUCK-BOOST CONVERTER WITH POWERPATH and 1.6uA QUIESCENT CURRENT	
		SIZE N/A	IC NO. LTC3106 DEMO CIRCUIT 2255A
		REV 2	
SCALE = NONE		FILENAME: DC2255A-2.PCB	SHT 2 of 2