



REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISHED ON OUTER LAYERS.
1 OZ. COPPER FINISHED ON INNER LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER. .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER

WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.

6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
8. SCORING:

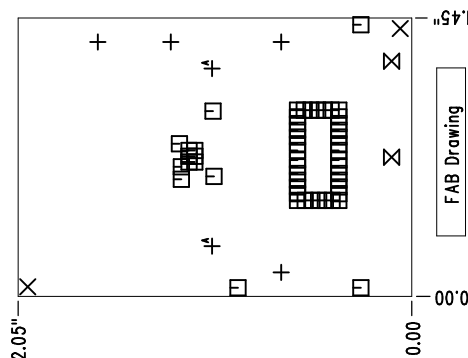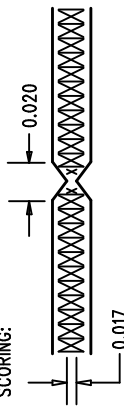

SIZE	QTY	SYM	PLTD
65	4	+	PLTD
70	2	X	NPLTD
10	52	□	PLTD
40	2	⊗	PLTD
86.61	2	A	NPLTD

FAB DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 2 PLACE ±.01 3 PLACE ±.005 INTERPRET DIM AND TOL PER ASME Y14.5M - 1994	APPROVALS	LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900		
	DRAWN	INIT	DATE	TITLE: LTC3215EDD, Low Noise, High Current LED Flash Charge Pump
CHECK	JUNE WU	12/2/04		SIZE A DEMO DC871A REV. A
DESIGN	Keith S.	12/2/04		DES-230733 SHT 1 of 1
ENGR				