


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A	PROTOTYPE RELEASE		

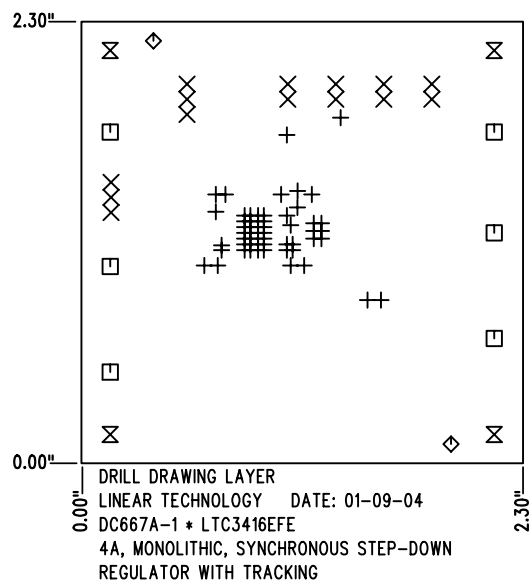


SHOWN FROM COMPONENT SIDE


SIZE	QTY	SYM	PLTD
0.01	57	+	PLTD
0.035	14	X	PLTD
0.094	6	□	PLTD
0.07	2	◇	NPLTD
0.125	4	⊗	PLTD

#### NOTES : Unless Otherwise Specified

1. MATERIAL : FR4 OR EQUIVALENT EPOXY, 2 OZ. COPPER CLAD  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
2. FINISH : ALL PLATED HOLES .001 MIN. / .0015 MAX. COPPER PLATE  
ELECTRODEPOSITED TIN-LEAD COMPOSITION  
BEFORE REFLOW , SOLDER MASK OVER BARE COPPER (SMOBC).
3. SOLDER MASK : BOTH SIDES USING LPI OR EQUIVALENT.
4. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
5. SCORING:



6. PLEASE LOOK AT THE README FILE FOR THE OTHER REQUIREMENTS.

APPROVALS			 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE		
CHECK			TITLE: FABRICATION DRAWING 4A, MONOLITHIC, SYNCHRONOUS STEP-DOWN REGULATOR WITH TRACKING	
DESIGN	KIM T.	01-09-04		
ENGR	RAYMOND Z.	01-09-04	SIZE A DEMO DC667A-1 * LTC3416EFE REV. A	
SCALE = NONE			DES- 0000	SHT 1 of 1