
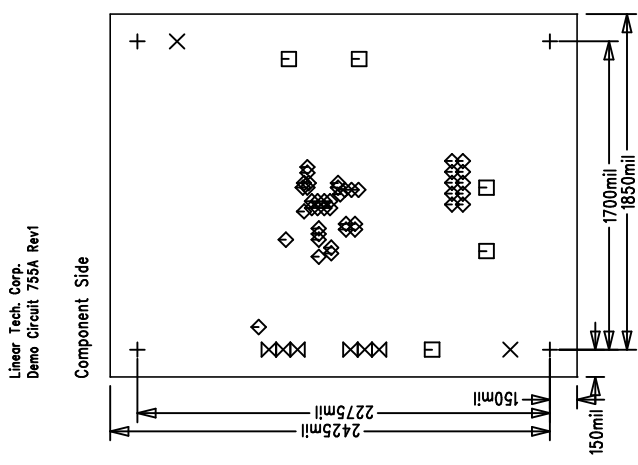


REVISIONS			
REV	APPR	DATE	

NOTES: UNLESS OTHERWISE SPECIFIED:

- ARTWORK P/N DC755A REV 1.
- FAB PER IPC-A-600. 4-Layers.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4 .062 +/- .005 INCH THICKNESS WITH 2 OZ. COPPER FINISH ON TWO OUTER LAYERS AND 1 OZ. COPPER ON TWO INTERNAL LAYERS. FLAMABILITY RATING: 94 V-2 MINIMUM .
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN. 0.00 ARE PRIMARY DATUMS.
- BOARD: SELECTIVE PLATED BOARD. SOLDER MASK OVER BARE COPPER, COLOR, GREEN LPI. WHITE TIN IMMERSION (OMIKRON) BOTH SIDES. SILKSCREEN COMPONENT SIDE WITH WHITE NON-CONDUCTIVE INK. PLATE THRU ALL HOLES WITH COPPER MIN. PLATING THICKNESS: 1 OZ. EXCEPT WHERE PLATING NOT REQUIRED
- DRILL: ALL HOLES SHALL BE DRILLED +/--.003 INCH WITH RESPECT TO CTR. OF DRILLED PAD. ALL HOLES FINISHED SIZE AFTER PLATING.
- DROP ALL UNUSED PADS ON INNER LAYERS.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- SCORING:

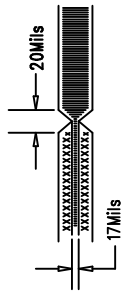

SIZE	QTY	SYM	PLTD	TOL
125	4	+	YES	+/-0.0
70	2	X	NO	+/-0.0
94	5	□	YES	+/-0.0
10	43	◇	YES	+/-0.0
31	6	⊗	YES	+/-0.0

Fabrication Drawing

		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
APPROVALS		TITLE: LTC3443EDE 600kHz, 1A, Synchronous Buck-Boost Converter	
DRAWN CHECK DESIGN ENGR	INIT RmB DongyanZ	SIZE NONE	Demo Circuit 755A REV. 1
SCALE = NONE		DES-230596 SHT 1 of 1	