


REV	APPR	DATE
-----	------	------

NOTES: UNLESS OTHERWISE SPECIFIED:


1. ARTWORK P/N Demo Circuit 1468A
2. FAB PER IPC-A-600. 4-Layers.
3. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
.062 +/- .005 INCH THICKNESS WITH 2 OZ.
COPPER FINISH ON TWO OUTER LAYERS AND
2 OZ. COPPER ON TWO INTERNAL LAYERS.
FLAMMABILITY RATING: 94 V-2 MINIMUM .
4. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
5. BOARD: SELECTIVE PLATED BOARD. SOLDER
MASK OVER BARE COPPER, COLOR, GREEN LPI.
SILKSCREEN COMPONENT SIDE WITH WHITE NON-
CONDUCTIVE INK.
ENG (IMMERSION NICKEL GOLD)
PLATE THRU ALL HOLES WITH COPPER
MIN. PLATING THICKNESS: 1 OZ. EXCEPT
WHERE PLATING NOT REQUIRED
6. DRILL: ALL HOLES SHALL BE DRILLED +/- .003 INCH
WITH RESPECT TO CTR. OF DRILLED PAD.
ALL HOLES FINISHED SIZE AFTER PLATING.

7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

B. SCORING:



9. DO NOT ALTER SOLDER MASK MAINTAIN .0018" OVERSIZE ON SMT PADS. A .005" WEBBING IS REQUIRED BETWEEN SMD PADS.
10. PCB'S ARE TO BE ROHS COMPLIANT.
11. BOARDS WILL BE SERIALIZED USING BOTTOM SILKSCREEN DIGITS 8888.

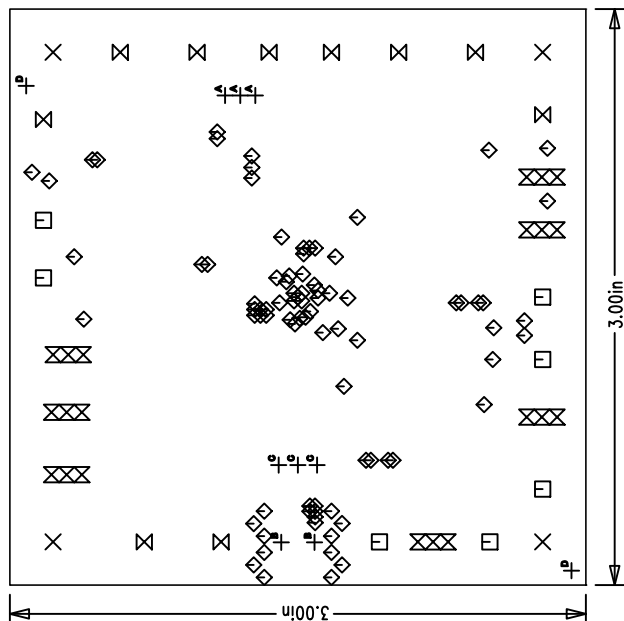


Linear Tech. Corp.
Demo Circuit 1468A

Fibrinolytic Dosing

SIZE	QTY	SYM	PLATED	TOL
190	4	×	YES	+/-0.003
63	7	□	YES	+/-0.003
10	85	◇	YES	+/-0.003
94	10	⊗	YES	+/-0.003
31	21	⊗	YES	+/-0.003
31.1	3	⊗ ^A	YES	+/-0.003
35	2	⊕ ^B	NO	+/-0.003
35	3	⊕ ^C	YES	+/-0.003
35	3	⊕ ^D	NO	+/-0.0

Fabrication Drawing

APPROVALS				1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900					
									
DRAWN	INIT	DATE	TITLE: LTC3554EPD Micropower USB Pwr Mgr with Two Step-Down Regulators						
CHECK	N/C	11/3/08							
DESIGN	N/C								
ENGR	GB								
			SIZE	NONE	REV. A				
			DC1468A						
SCALE = NONE			DES-23xxxx			SHT 1 of 1			