



REVISIONS		
REV	DESCRIPTION	DATE

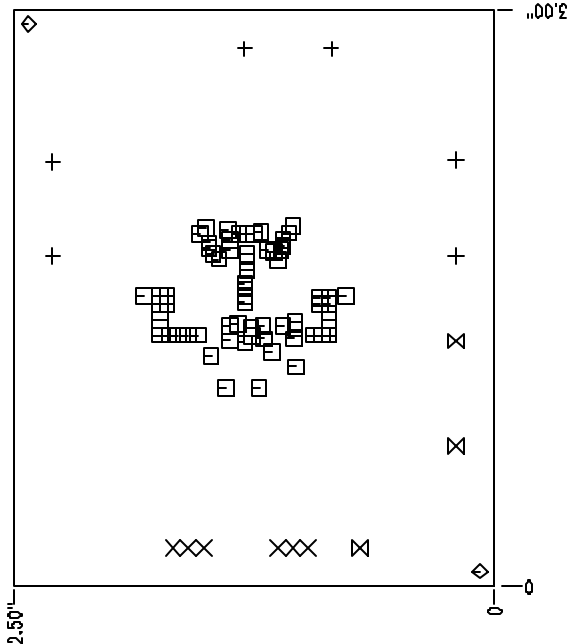


NOTES : Unless Otherwise Specified

- 1. FAB PER IPC-A-600
- 2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 2 OZ. COPPER
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS
FLAMABILITY RATING: 94 V-0 MINIMUM .
- 3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003
INCH IN RELATION TO CENTER
- 4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
- 5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK
- 6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- 7. SCORING.

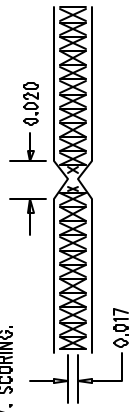

SIZE	QTY	SYM	PLTD
95	6	+	PLTD
35	6	X	PLTD
15	69	□	PLTD
70	2	◇	NPLTD
65	3	⊗	PLTD

FAB DRAWING

APPROVALS		 LINEAR TECHNOLOGY 1830 McCarthy Blvd Milpitas, CA 95035 PH: (408)432-1800	
DRAWN	DATE		
CHECK			
DESIGN	JUNE WU 4/24/01	TITLE: IC3701, 2-Phase Dual Step-Down Converter	
ENGR			
		SIZE	A
		DEMO	DC424A
		REV.	A
SCALE = NONE		SHT 1 of 1	