


# "L1" Footprints is for CEP125. BOM (CDEP105-0R4MC-50)


Demo Board 464 Rev A  
LTC3718EG

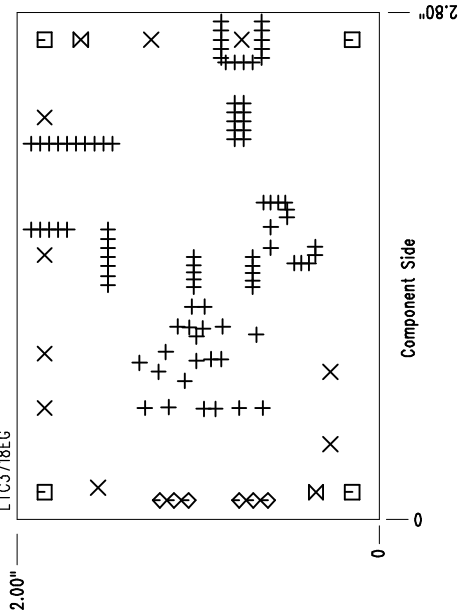

SIZE	QTY	SYM	PLTD
15	90	+	PLTD
95	9	X	PLTD
125	4	□	PLTD
31	6	◇	PLTD
70	2	⊗	NPLTD

## NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 2 OZ. COPPER THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

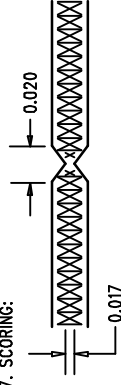

## FAB DRAWING

<b>APPROVALS</b> DRAWN CHECK DESIGN ENGR		INIT DATE Rudy B	
TITLE: LTC3718EG, Low Input Voltage, High Current DDR Termination Supply			
SIZE	A	DEM0	REV. A
SCALE = NONE		DES-230486	
		SHT 1 of 1	

