



REVISIONS		
REV	DESCRIPTION	DATE

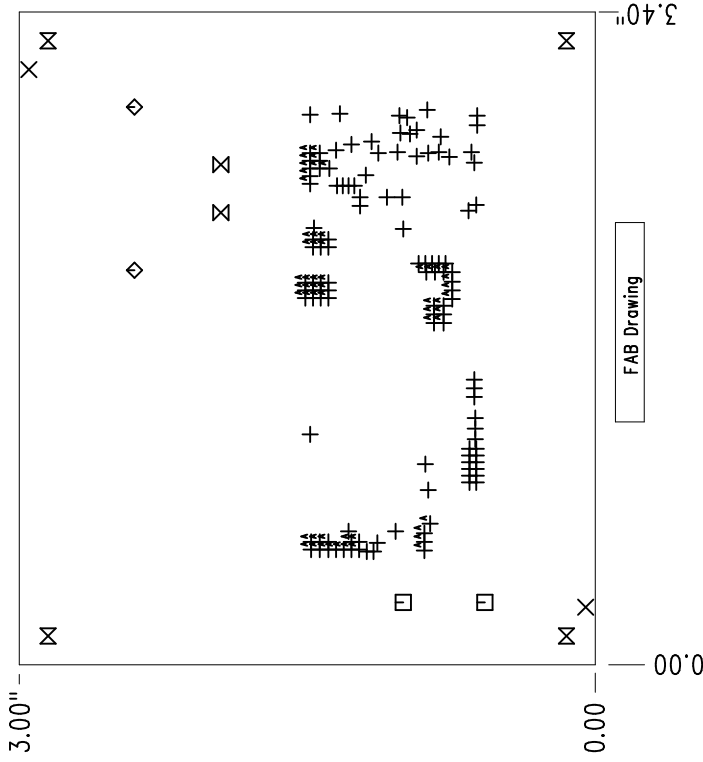

SIZE	QTY	SYM	PLTD
15	66	+	PLTD
70	2	X	NPLTD
95	2	□	PLTD
195	2	◇	PLTD
65	2	⊗	PLTD
187	4	⊠	PLTD
25	56	A	PLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600. PCBs Are To Be RoHS Compliant.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4. 4 OZ. COPPER ON OUTER LAYER, 2 OZ. COPPER ON INNER LAYER, THICKNESS .062 +/- .006 TOTAL OF 6 LAYERS. FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN. 0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING. HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN. GOLD IMMERSION BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE. But You May Modify Pad Size To Meet End Finish.
8. SCORING:

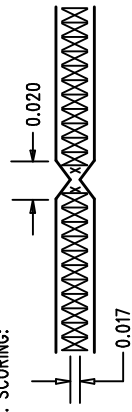

FAB DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ±1
2 PLACE ±.01 3 PLACE ±.005
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994

APPROVALS		LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900			
DRAWN	INIT	DATE	TITLE: LTC3725EMSE, LTC3726EGN 100W, 36V-72Vin to12V/12A Isolated Forward Converter				
CHECK			SIZE A DEMO DC1032A REV. A				
DESIGN	JUNE WU 12/5/06		SHT 1 of 1				
ENGR	K. Mathews 12/5/06		SCALE = NONE				



TITLE: LTC3725EMSE, LTC3726EGN
100W, 36V-72Vin to12V/12A
Isolated Forward Converter

SIZE A DEMO DC1032A REV. A

SHT 1 of 1