
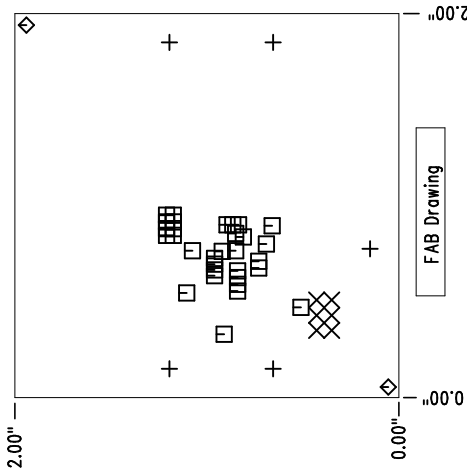


REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified


1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISHED ON OUTER LAYERS.
1 OZ. COPPER FINISHED ON INNER LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER. .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

8. SCORING:

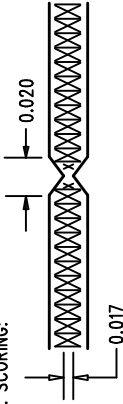

SIZE	QTY	SYM	PLTD
95	5	+	PLTD
35	6	×	PLTD
10	31	□	PLTD
70	2	◇	NPLTD

FAB DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 2 PLACE ±.01 3 PLACE ±.005 INTERPRET DIM AND TOL PER ASME Y14.5M – 1994	APPROVALS				 LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900				
		INIT	DATE						
	DRAWN								
	CHECK								
	DESIGN	JUNE WU	9/23/04						
	ENGR	Walker Bai	9/23/04						
SCALE = NONE				DES-230715		SHT 1 of 1			
				SIZE A		DC836A		REV. A	
				TITLE: LTC3772EDDB, 550kHz Step-Down DC/DC Converter					