



1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON OUTER LAYERS.
1 OZ. COPPER FINISH ON INNER LAYERS.
THICKNESS .062 +/--.006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
0.00 ARE PRIMARY DATUMS.
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/--.003
INCH IN RELATION TO CENTER

5. FINISH: SMOBC USING LPI BOTH SIDES COLOR RED
GOLD IMMERSION OR LEAD FREE SOLDER BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

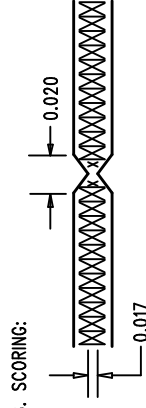

FAB DRAWING

| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ± 1 | | | | | |
|---|------------|--------|------------|--|--|
| 2 PLACE ± .01 3 PLACE ± .005 INTERPRET DIM AND TOL PER ASME Y14.5M - 1994 | | | | | |
| APPROVALS | | | | | |
| | INIT | DATE | | | |
| DRAWN | | | | | |
| CHECK | | | | | |
| DESIGN | J. WU | 4/3/07 | | | |
| ENGR | M. Gurries | 4/3/07 | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| SCALE = NONE | | | | | |
| | | | SHT 1 of 1 | | |

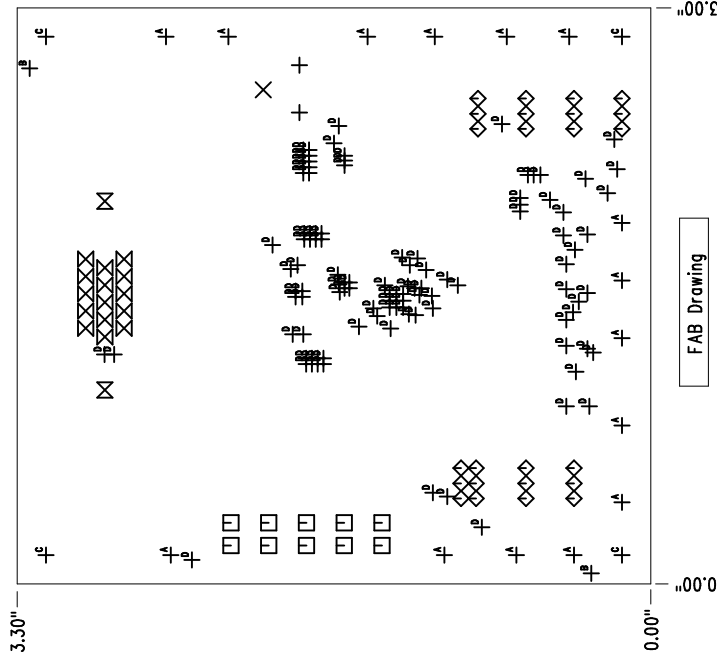

| SIZE | QTY | SYM | PLATED | TOL |
|------|-----|----------------|--------|--------|
| 120 | 2 | + | YES | +/-0.0 |
| 100 | 1 | X | YES | +/-0.0 |
| 40 | 10 | □ | YES | +/-0.0 |
| 35 | 24 | ◇ | YES | +/-0.0 |
| 47 | 15 | ⊠ | YES | +/-0.0 |
| 125 | 2 | ⊠ | YES | +/-0.0 |
| 65 | 15 | ⊠ ^A | YES | +/-0.0 |
| 70 | 2 | ⊠ ^B | NO | +/-0.0 |
| 187 | 4 | ⊠ ^C | YES | +/-0.0 |
| 10 | 109 | ⊠ ^D | YES | +/-0.0 |