


REVISION HISTORY				
ECO	REV	DESCRIPTION	APPROVED	DATE
	02	PRODUCTION FAB	S.BAI	05-16-22

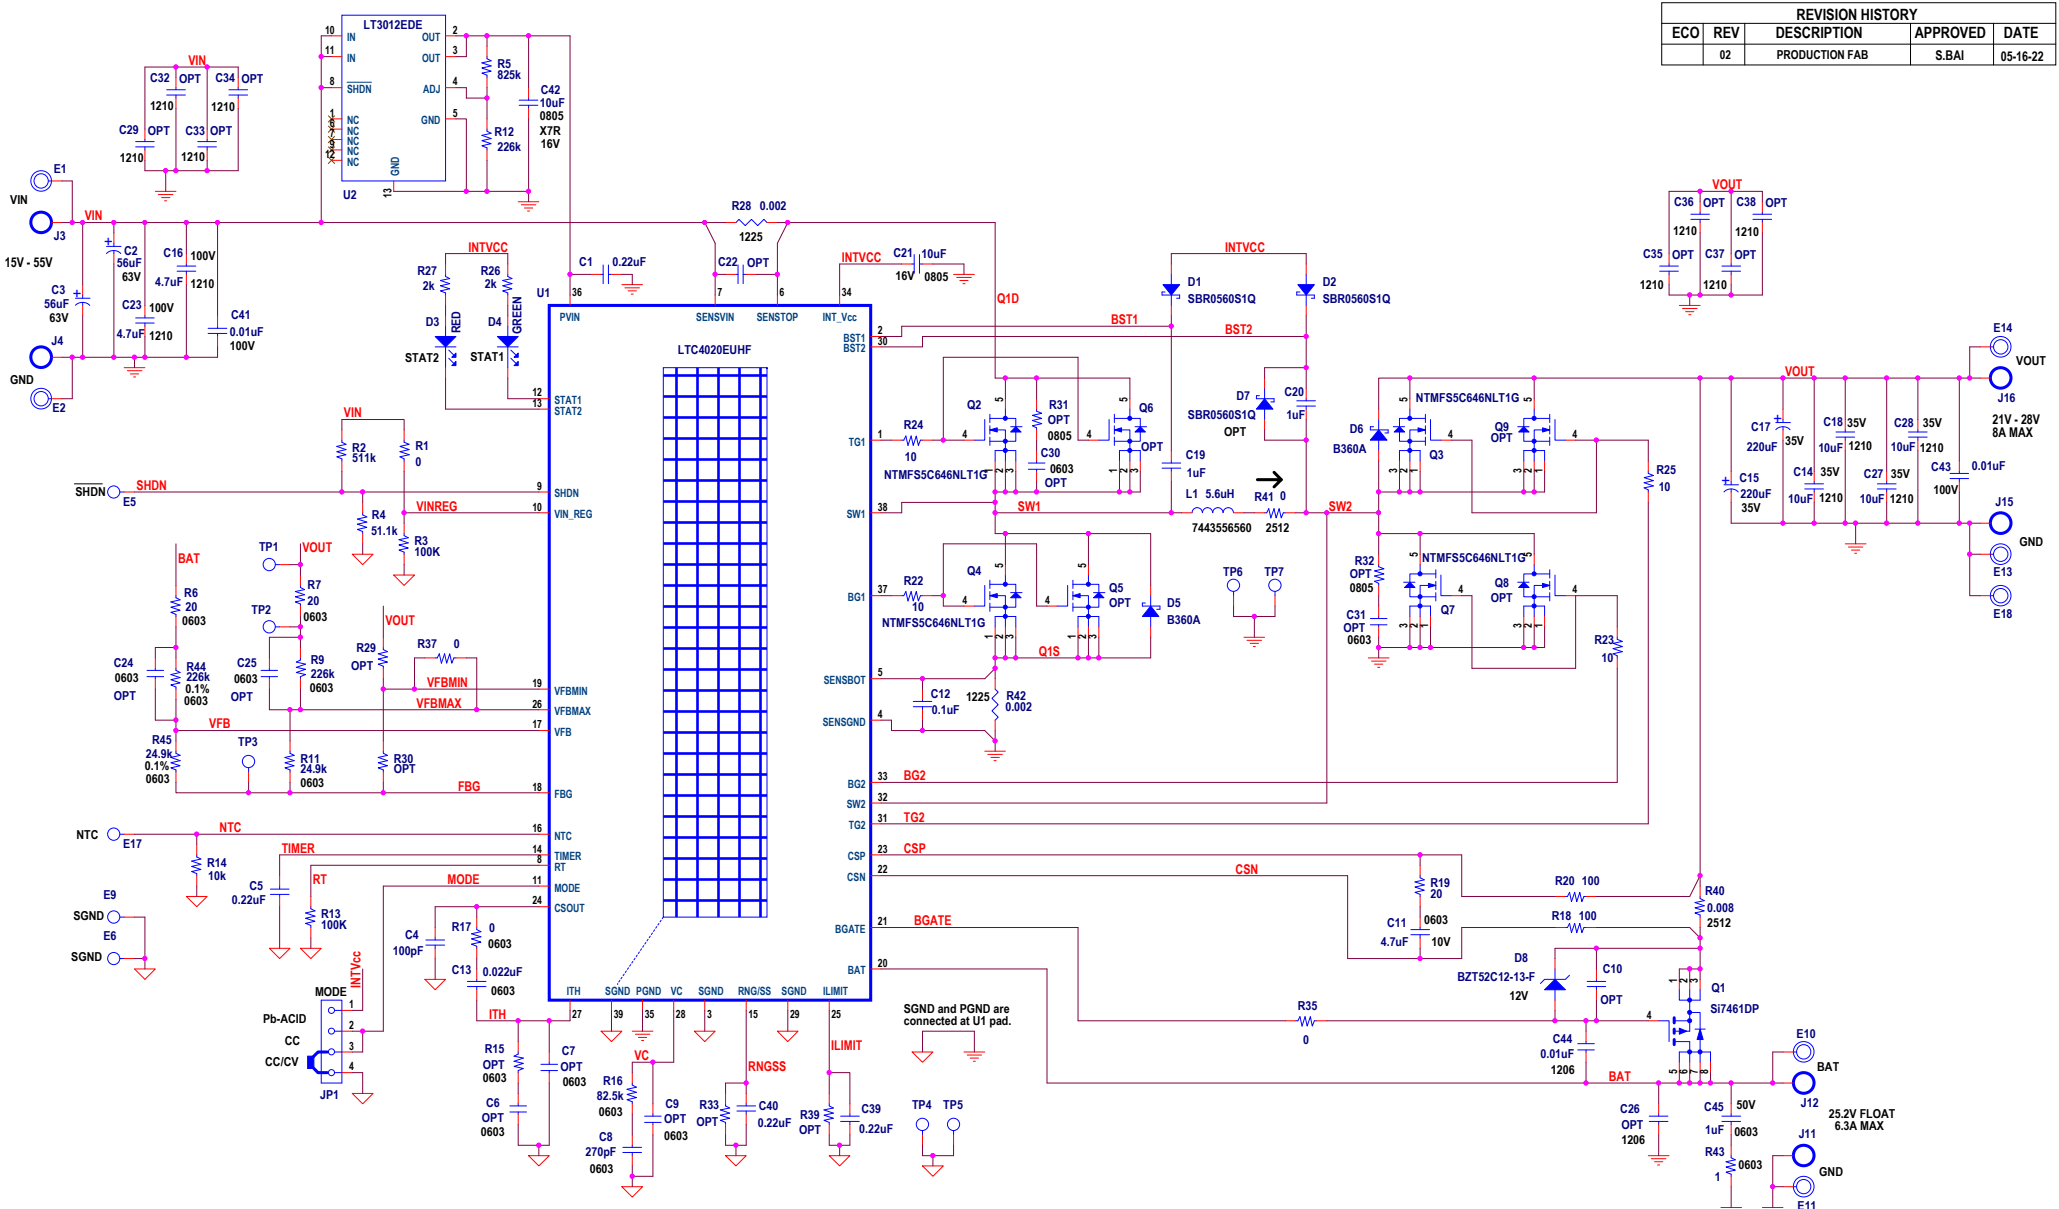

**NOTE: UNLESS OTHERWISE SPECIFIED**  
 1. ALL RESISTORS ARE IN OHMS, 0402.  
 ALL CAPACITORS ARE IN MICROFARADS, 0402.

**PCA ADDITIONAL PARTS**

MP1	STANDOFF,NYLON,SNAP-ON,0.50"
MP2	STANDOFF,NYLON,SNAP-ON,0.50"
MP3	STANDOFF,NYLON,SNAP-ON,0.50"
MP4	STANDOFF,NYLON,SNAP-ON,0.50"
LB1	PCB S/I LABEL
PCB1	PCB, DC2134B REV02

CUSTOMER NOTICE		APPROVALS		ANALOG DEVICES		POWER BY LINEAR	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.				PCB DES: NC		www.analog.com	
APP ENG: SBAI				IC NO. LTC4020		TITLE: DEMO CIRCUIT SCHEMATIC, HIGH POWER BUCK/BOOST MULTI-CHEMISTRY BATTERY CHARGER	
SKU NO. DC2134B		PCA BOM: 700-DC2134B_REV02		SCHEMATIC NO. AND REVISION: 710-DC2134B_REV02			
SIZE: N/A SCALE: NONE		DATE: 05-16-22		SHEET 1 OF 1			