



REVISIONS			
REV	DESCRIPTION	APPR	DATE
A	PROTOTYPE RELEASE		

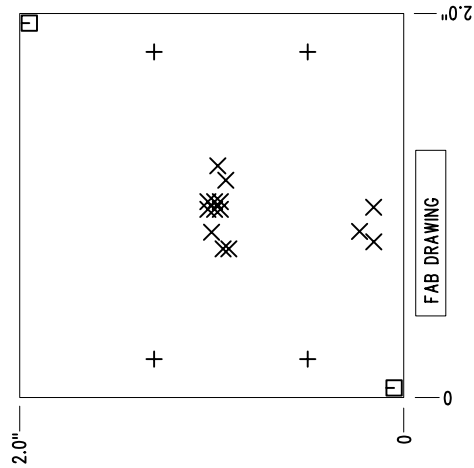

FAB DRAWING

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
.062 +/- .005 INCH THICKNESS WITH 2 OZ.
COPPER FINISHED ON 2 LAYERS.
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:



FAB DRAWING

APPROVALS		LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE	
CHECK			
DESIGN	JUNE WU	5/7/02	
ENGR	From H.	5/7/02	
TITLE: LTC4052EMS8E Li-Ion Battery Pulse Charger		SIZE	REV.
		A	A
SCALE = NONE		DES-230550	SHT 1 of 1

SIZE	QTY	SYM	PLTD
95	4	+	PLTD
10	14	X	PLTD
70	2	□	NPLTD