



REVISIONS		
REV	APPR	DATE

NOTES: UNLESS OTHERWISE SPECIFIED:

- ARTWORK P/N Demo Circuit 904A Rev1
- FAB PER IPC-A-600. 4-Layers.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4 .062 +/- .005 INCH THICKNESS WITH 2 OZ. COPPER FINISH ON TWO OUTER LAYERS AND 1 OZ. COPPER ON TWO INTERNAL LAYERS. FLAMABILITY RATING: 94 V-2 MINIMUM .
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN. 0.00 ARE PRIMARY DATUMS.
- BOARD: SELECTIVE PLATED BOARD. SOLDER MASK OVER BARE COPPER, COLOR, GREEN LPL. WHITE TIN IMMERSION (OMIKRON) BOTH SIDES. SILKSCREEN COMPONENT SIDE WITH WHITE NON-CONDUCTIVE INK. PLATE THRU ALL HOLES WITH COPPER MIN. PLATING THICKNESS: 1 OZ. EXCEPT WHERE PLATING NOT REQUIRED
- DRILL: ALL HOLES SHALL BE DRILLED +/- .003 INCH WITH RESPECT TO CTR. OF DRILLED PAD. ALL HOLES FINISHED SIZE AFTER PLATING.
- DROP ALL UNUSED PADS ON INNER LAYERS.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- SCORING:




Fabrication Drawing

APPROVALS		 <div>LINEAR TECHNOLOGY</div> <div>1630 McCarthy Blvd. Milpitas, CA 95035 Ph: (408)432-1900</div>		
	INT			DATE
DRAWN				
CHECK				
DESIGN	Rmb			
ENGR	Fronh			
SCALE = NONE				

TITLE:			
USB /Adapter Li-Ion Charger			
SIZE		Demo Circuit 904A	
NONE			
DES-23xxxx		REV. 1	
		SHT 1 of 1	

Linear Tech. Corp.
Demo Circuit 904A

Component Side

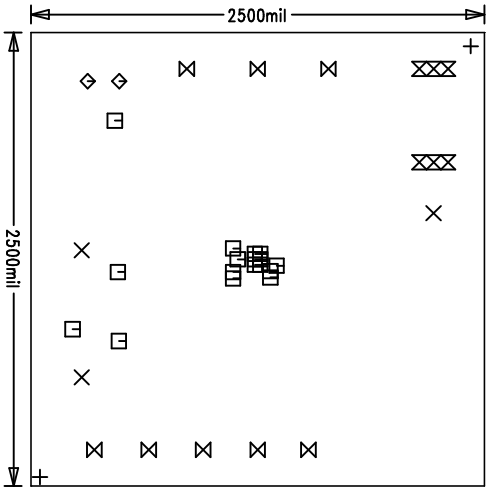

SIZE	QTY	SYM	PLTD	TOL
70	2	+	NO	+/-0.0
63	3	X	YES	+/-0.0
10	17	□	YES	+/-0.0
35	2	◇	NO	+/-0.0
94	8	⊗	YES	+/-0.0
31	6	⊗	YES	+/-0.0