



REVISION HISTORY				
ECO	REV	DESCRIPTION	APPR	DATE
-	4	PRODUCTION		06-17-19

LAYER STRUCTURE

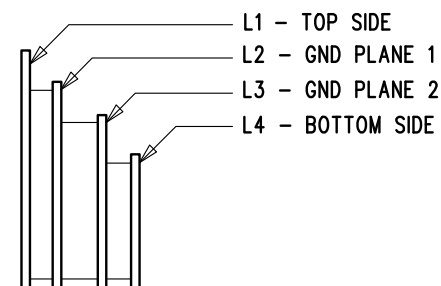

NOTES: UNLESS OTHERWISE SPECIFIED


- FAB PER IPC-A-600, CLASS 2.
- MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
-FINISHED THICKNESS TO BE 0.031" +/- .005"
-TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 2 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN, TENT BOTH SIDES.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.

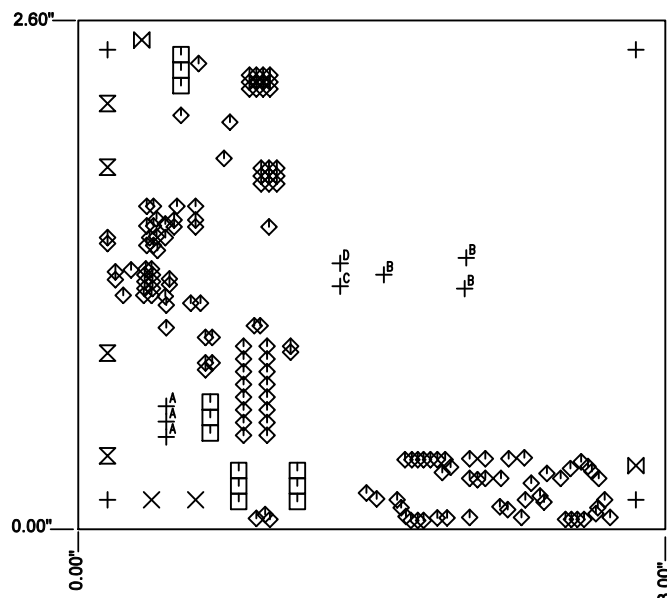

SIZE	QTY	SYM	PLATED	TOL
0.01	145	◇	YES	+/-0.003"
0.015	3	⊕ ^B	YES	+/-0.003"
0.025	1	⊕ ^D	YES	+/-0.003"
0.0311	3	⊕ ^A	YES	+/-0.003"
0.035	1	⊕ ^C	YES	+/-0.003"
0.04	12	□	YES	+/-0.003"
0.065	2	⊗	YES	+/-0.003"
0.07	2	⊗	NO	+/-0.003"
0.094	4	⊗	YES	+/-0.003"
0.187	4	⊕	YES	+/-0.003"

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ±1
0.XX" = ±0.01"
0.XXX" = ±0.005"
INTERPRET DIM AND TOL
PER ASME Y14.5M-1994

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

APPROVALS

PCB DES	NC
APP ENG	WL
SCALE = NONE	



FOR ADI CUSTOMER USE ONLY

TITLE: TOP ASSEMBLY DRAWING
SINGLE 3.6V/4.2V, 650mA
WIRELESS BATTERY CHARGER

SIZE N/A	IC NO. LT3652HV DC2555A-A/B	REV. 04
-------------	--------------------------------	------------

SHT 1 OF 1