

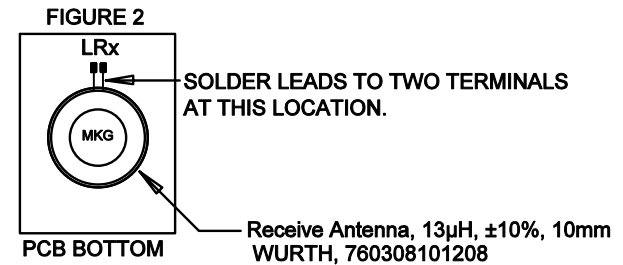


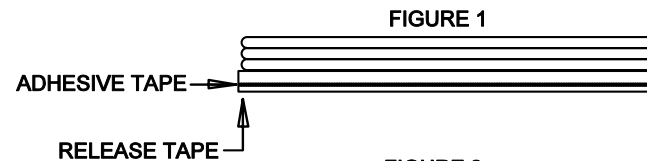

# NOTES: UNLESS OTHERWISE SPECIFIED

1. MOUNT COIL LRx AS SHOWN BELOW. REFER TO FIGURES BELOW FOR INSTRUCTION.  
STEP 1: PEEL RELEASE TAPE PER FIG. 1 AND MOUNT TO LOCATION SHOWN PER FIG. 2  
STEP 2: LRx COIL LEADS ARE 8mm  $\pm$ 2mm IN LENGTH, THE LAST 4mm ARE TO BE TINNED, NO TWIST.

DRAWINGS NOT TO SCALE

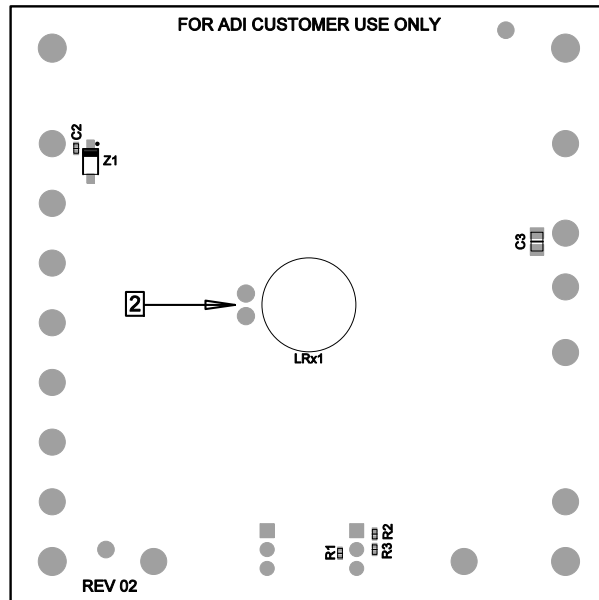

APPROVALS		  FOR ADI CUSTOMER USE ONLY	
PCB DES.	NC	TITLE: BOTTOM ASSEMBLY DRAWING 10mA WIRELESS LI-ION CHARGER WITH 1.2V STEP-DOWN DC/DC AND TRICKLE CHARGE CONTROLLER	
APP ENG.	WL		
		SIZE IC NO. LTC4126-ADJ N/A DEMO CIRCUIT 3078A	REV 02
SCALE = NONE		SHT 2 of 2	