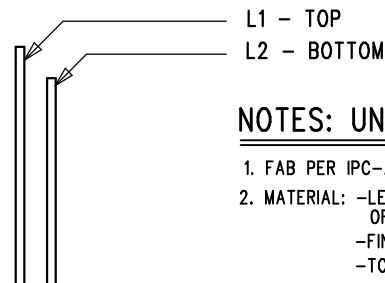


DRILL DRAWING LAYER
ANALOG DEVICES DATE 11-06-2017
DC2792A * LTC6820
DUAL MASTER isoSPI ADAPTER

SIZE	QTY	SYM	PLATED	TOL
12	30	+	YES	+/-0.003
35	14	X	YES	+/-0.003
187	4	□	NO	+/-0.003
40	48	◇	YES	+/-0.003
65	2	⊗	YES	+/-0.003
66	4	⊗	YES	+/-0.003
128	4	+ ^A	NO	+/-0.003


LAYER STRUCTURE





NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600.
- MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 2 LAYERS WITH 2 OZ. CU ON THE OUTER

-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSCREENS: USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE. PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.
- SCORING FOR PANELIZED PCB (PRODUCTION FAB ONLY):



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: 0.XX" = ±0.01" 0.XXX" = ±0.005" INTERPRET DIM AND TOL PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION	APPROVALS		 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 CONFIDENTIAL- FOR CUSTOMER USE ONLY
	PCB DES.	AK.	
	APP ENG.	JON M.	
	TITLE: FABRICATION DRAWING		DUAL MASTER isoSPI ADAPTER
	SIZE	IC NO.	
	N/A	LTC6820 DC2792A	
	SCALE = NONE	FILENAME: DC2792A-1.PCB	
		SHT 1 OF 1	REV 1